ATASY TWO DEPARTURE (RNAV) (OBSTACLE)

SEATTLE CENTER
124.2 317.6

TAKEOFF OBSTACLE NOTES

Rwy 6: Antenna 9′ from DER, 344′ left of centerline, 16′ AGL/390′ MSL.
Numerous trees beginning 190′ from DER, 12′ right of centerline, up to 27′ AGL/397′ MSL.

Rwy 24: Numerous trees, bldgs, and airport beacon on tower beginning 53′ from DER, 72′ right of centerline, up to 127′ AGL/482′ MSL.
Tree 434′ from DER, 267′ left of centerline, 26′ AGL/381′ MSL.
Vehicle on road 529′ from DER, 82′ left of centerline, 13′ AGL/370′ MSL.

TAKEOFF MINIMUMS

Rwy 6, Standard with minimum climb of 240 feet per NM to 3400.
Rwy 24, Standard with minimum climb of 250 feet per NM to 4400.

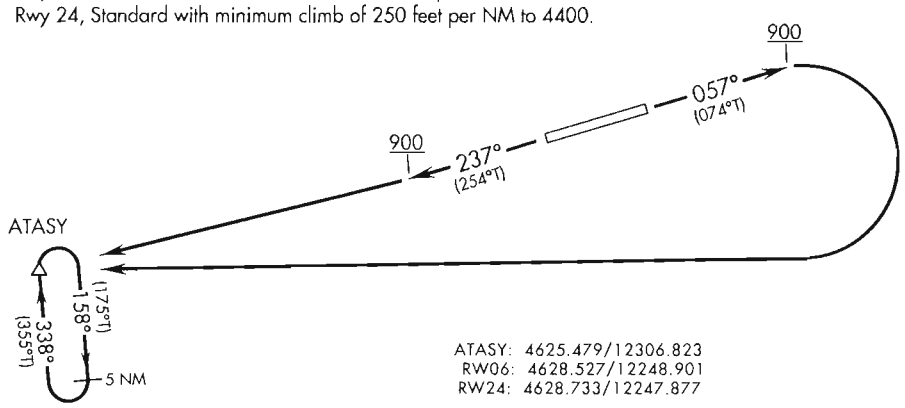

ATASY: 4625.479/12306.823
RW06: 4628.527/12248.901
RW24: 4628.733/12247.877

PROTOTYPE-NOT FOR NAVIGATION

NOTE: RNAV 1.

NOTE: GPS required.

NOTE: RADAR required for non-GPS equipped aircraft.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6: Climb heading 057° to 900, then climbing right turn to 5000 direct ATASY and hold, continue climb-in-hold to 5000. When authorized by ATC, continue climb-in-hold to 6000, thence. . . .

TAKEOFF RUNWAY 24: Climb heading 237° to 900, then climb to 5000 direct ATASY and hold, continue climb-in-hold to 5000. When authorized by ATC, continue climb-in-hold to 6000, thence. . . .

. . . .expect filed altitude 10 minutes after departure.