


SEATTLE SEAPLANES SPB (ØWØ) 1 N UTC-8(-7DT) N47°37.66' W122°19.91'
 14 NOTAM FILE SEA
WATERWAY 18W-36W: 9500X300 (WATER)
SERVICE: S2
SEAPLANE REMARKS: Attended 1600Z±-dusk. Small watercraft act on lake.
AIRPORT MANAGER: 206-329-9638
COMMUNICATIONS: CTAF 122.9
CLEARANCE DELIVERY PHONE: For CD ctc Seattle Apch at 206-214-4722.

SEATTLE

SEATTLE-TACOMA INTL (SEA)(KSEA) 10 S UTC-8(-7DT) N47°26.99' W122°18.71'

SEATTLE
H-1B, L-1D
IAP, AD

432 B LRA Class I, ARFF Index E NOTAM FILE SEA
RWY 16L-34R: H11901X150 (CONC-GRVD) S-120, D-250, 2D-550, 2D/2D2-1120 PCR 1147 R/B/W/T HIRL CL
RWY 16L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 76'. RVR-TMR 0.6% down.
RWY 34R: MALSR. TDZL. PAPI(P4L)—GA 2.75° TCH 81'. RVR-TMR 0.8% up.
RWY 16C-34C: H9426X150 (CONC-GRVD) S-120, D-250, 2S-175, 2D-550, 2D/2D2-1111 PCR 1002 R/B/W/T HIRL CL
RWY 16C: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 71'. RVR-TMR 0.6% down.
RWY 34C: MALSR. PAPI(P4L)—GA 3.0° TCH 73'. RVR-TMR 0.8% up.
RWY 16R-34L: H8500X150 (CONC-GRVD) S-120, D-250, 2D-482, 2D/2D2-1007 PCR 866 R/B/W/T HIRL CL
RWY 16R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 69'. RVR-TMR 0.6% down.
RWY 34L: MALSR. PAPI(P4L)—GA 3.0° TCH 75'. RVR-TMR 0.8% up.

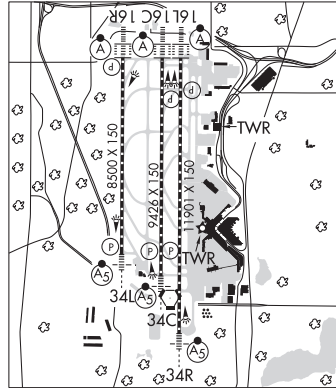

RUNWAY DECLARED DISTANCE INFORMATION

RWY 16C: TORA-9426	TODA-9426	ASDA-9426	LDA-9426
RWY 16L: TORA-11901	TODA-11901	ASDA-11901	LDA-11901
RWY 16R: TORA-8500	TODA-8500	ASDA-8500	LDA-8500
RWY 34C: TORA-9426	TODA-9426	ASDA-9426	LDA-9426
RWY 34L: TORA-8500	TODA-8500	ASDA-8500	LDA-8500
RWY 34R: TORA-11901	TODA-11901	ASDA-11901	LDA-11901

SERVICE: FUEL JET A, A1
NOISE: The use of reverse thrust by what is nec for opnl or safety reasons is discouraged at all times. Noise Abatement ft procedures in effect btn 0600-1400Z±. For further info ctc SEA Noise Abatement office at 206-787-5393. Cons taxi to tkofs at sea. When practical, safe and avbl, cons taxi to tkofs are encouraged. Cons taxi to tkofs may rdc acft noise w nearby communities.

AIRPORT REMARKS: Attended continuously. Bird flocks within arpt vcntry, check lcl advisories. Rprt bird strikes to 206-787-7233. 100LL fuel not avbl. Helicopters ldg and dep avoid overflying fuel farm lctd at the southeast corner of the arpt. ASDE-X in use. Opr transponders with altitude reporting mode and ADS-B (if equipped) enabled on all arpt surfaces. Do not mistake Twy T for ldg sfc. Twy A south of Twy G rstd to acft with wingspan 225 ft or less. Taxilane on N side of N stlt rstd to acft with wingspan 118 ft or less. Tri-taxilanes at N stlt: Cntr (Green) taxilane rstd to acft with wingspan of 135 ft or less. When an acft is on the cntr (Green) or otr (Orange/Blue) taxilanes, no otr acft can simul use the adj taxilane(s). Orange and Blue taxilanes are rstd to acft with wingspan 118 ft or less. Two acft can simul use the outer taxilanes. Taxilane W rstd to acft with wingspan of 135 ft or less N of Twy N and 167 ft or less south to Twy N. Seattle ramp twr provides adzy ctl only. Aces to air cargo 4 prkg and cargo areas rstd to acft with wingspan of 170 ft or less. Twy for corporate hngr ramp rstd to acft with wingspan 62 ft or less for taxi ops. GA cust pkgng is very ltd. Acft with wingspans of 171 ft or more parked at PAX gates or cargo 7 must provide 30 min PPR prior to pushback to Seattle ramp twr when vsby less than 2400 RVR. Twys J and H E of Twy T rstd to acft with wingspan 167 ft or less. Rwy 16L-34R rstd to acft with wingspan 260' or less. Twy H E of Rwy 16L-34R rstd to acft with wingspan 118 ft or less when exiting Rwy 16L-34R. Twy B S of Twy Q rstd to acft with wingspan 260 ft or less. Twy B south of air cargo 7 ramp rstd to acft with wingspan 260 ft or less. Air cargo 5 ramp dual eng tax only. PPR for all GA prkg and svcs, ctc 206-433-5481. Op hrs 1330-0500Z±, with a call out avbl upon req. 6 hr PPR for AVGas fueling, ctc 206-433-5481. Rwy status lgts are in operation. Ldg fee. General aviation ldg fees payable by major credit cards only. Flight Notification Service (ADCUS) avbl. NOTE: See Special Notices—Seattle-Tacoma Intl Gatehold Procedures, Oceanic Departures.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

AIRPORT MANAGER: (206) 787-5229

WEATHER DATA SOURCES: ASOS (206) 214-2592 WSP.

COMMUNICATIONS: D-ATIS 118.0 206-241-6025 UNICOM 122.95

Ⓡ **SEATTLE APP CON** 119.2 (028°-160° SEA Rwy 16) (017°-079° SEA Rwy 34) 120.1 (223°-289° SEA, Rwy 16) (223°-301° SEA, Rwy 34) 120.4 (301°-340° SEA, Rwy 34) 125.6 (Arr West) 125.9 (290°-315° SEA, Rwy 16) (080°-125° SEA Rwy 34) 126.5 (161°-222° SEA, Rwy 16) (126°-222 SEA, Rwy 34) 128.5 (316°-027° SEA, Rwy 16) (302°-016° SEA, Rwy 34) 133.65 (Rwy 16-34) 123.9

SEATTLE TOWER 119.9 (Rwy 16L-34R, Rwy 16C-34C) 120.95 (Rwy 16R-34L)

GND CON 121.7 **CLNC DEL** 128.0

Ⓡ **SEATTLE DEP CON** 119.2 (028°-160° SEA Rwy 16) (017°-079° SEA Rwy 34) 120.1 (223°-289° SEA, Rwy 16) (223°-301° SEA, Rwy 34) 120.4 (301°-340° SEA, Rwy 34) 125.6 (Arr West) 125.9 (290°-315° SEA, Rwy 16) (080°-125° SEA Rwy 34) 126.5 (161°-222° SEA, Rwy 16) (126°-222° SEA, Rwy 34) 128.5 (316°-027° SEA, Rwy 16) (302°-016° SEA, Rwy 34) 123.9

RAMP CTL 126.25 (Gate Hold) 126.875 (North Ramp) 122.275 (South Ramp)

CPDLC (LOGON KUSA)

PDC

AIRSPACE: CLASS B See VFR Terminal Area Chart.

VOR TEST FACILITY (VOT) 117.5

RADIO AIDS TO NAVIGATION: NOTAM FILE SEA.

(VH) (H) VORTACW 116.8 SEA Chan 115 N47°26.12' W122°18.58' at fld. 348/19E.

VOR unusable:

002°-010° byd 40 NM
 008°-023° byd 20 NM blo 3,500'
 008°-023° byd 30 NM blo 4,100'
 037°-047° byd 40 NM blo 12,000'
 037°-047° byd 46 NM blo 18,000'
 048°-066° byd 40 NM
 067°-077° byd 40 NM blo 12,000'
 067°-077° byd 56 NM blo 18,000'
 078°-110° byd 40 NM
 125°-130° byd 40 NM
 233°-273° byd 20 NM blo 8,000'
 233°-273° byd 30 NM blo 10,000'
 233°-273° byd 35 NM blo 11,000'
 233°-273° byd 8 NM blo 5,500'
 250°-275° byd 40 NM
 276°-286° byd 40 NM blo 10,000'
 276°-286° byd 60 NM
 287°-292° byd 40 NM
 303°-333° byd 20 NM blo 2,900'
 303°-333° byd 30 NM blo 4,000'
 305°-315° byd 40 NM blo 5,000'

DME unusable:

008°-028° byd 20 NM blo 4,500'
 008°-028° byd 30 NM blo 7,000'
 203°-219° byd 27 NM
 220°-225° byd 20 NM
 226°-239° byd 27 NM
 240°-253° byd 15 NM
 303°-008° byd 30 NM blo 3,500'

TACAN AZIMUTH unusable:

008°-163°
 303°-008° byd 30 NM blo 3,500'

VOR unusable:

305°-315° byd 47 NM blo 5,400'
 305°-315° byd 55 NM
 316°-327° byd 40 NM blo 18,000'
 328°-359° byd 40 NM
 333°-353° byd 15 NM blo 3,500'
 353°-008° byd 20 NM blo 2,900'

ILS/DME 111.7 I-SZI Chan 54 Rwy 16C. Class IIIE. DME also serves Rwy 34C.

ILS/DME 110.3 I-SNQ Chan 40 Rwy 16L. Class IIIE. DME also serves ILS Rwy 34R. Possible Rwy 16L glideslope fluctuation on final when weather is 800/2 or better. Possible Rwy 16L glideslope fluctuation prior to DGLAS when weather is less than 800/2. Localizer unusable byd 15° left of course.

ILS/DME 110.75 I-CJL Chan 44(Y) Rwy 16R. Class IIIE. DME also serves ILS Rwy 34L.

ILS/DME 111.7 I-TUC Chan 54 Rwy 34C. Class IIIE. DME also serves ILS Rwy 16C.

ILS/DME 110.75 I-BEJ Chan 44(Y) Rwy 34L. Class IIIE.

ILS/DME 110.3 I-SEA Chan 40 Rwy 34R. Class IID. DME also serves ILS Rwy 16L. Poss Rwy 34R glideslope flctn on fa when wx is 800/2 or btr. Poss Rwy 34R glideslope flctn prior to BUCKK when wx is less than 800/2.

COMM/NAV/WEATHER REMARKS: Freq sectors float depending on rwy in use and sectors generally apply to Seattle TCA.