VFR TERMINAL AREA CHART
SALT LAKE CITY

VFR FLYWAY — SALT LAKE CITY

Airports having Control Towers are shown in Blue, all others in Magenta. Consult Chart Supplement for details involving airport lighting, navigation aids, and services. All times are local. For additional symbol information refer to the Chart User's Guide.

AIRPORTS

Other than hard-surfaced runways — Seaplane Base

Hard-surfaced runways 1500 ft. or greater

Open dot within hard-surfaced runway configuration indicates approximate VOR, VOR-DME, or VORTAC location.

All recognizable hard-surfaced runways, including those closed, are shown for visual identification. Airports may be public or private.

ADDITIONAL AIRPORT INFORMATION

Private "(Pvt)" - Non-public use having emergency or landmark value

Military - Other than hard-surfaced; all military airports are identified by abbreviations AFB, NAS, AAF, etc. DoD users, for complete airport information consult DoD FLIP.

Heliport Selected — Unverified — Abandoned - paved having landmark value, 3000 ft. or greater — Ultralight Flight Park Selected

Fuel - available Mon thru Fri 10:00 A.M. to 4:00 P.M. depicted by use of ticks around basic airport symbol. Consult Supplement for details and for availability at airports with hard-surfaced runways 1500 ft. or greater.

Rotating airport beacon in operation Sunset to Sunrise

OBJECTIONABLE - Airport may adversely affect airspace use.

AIRPORT DATA

Box indicates FAR 93 Special Air Traffic Rules & Airport Traffic Patterns. — FSS — NO SVFR — FAR 91 — Location Identifier — NAME (NAM) (PNAM) — ICAO Location Indicator shown outside contiguous U.S.

Runways with Right Traffic Patterns (public use) — CT - 118.3 ★ Ⓒ ATIS 123.8 — 285 L 72 122.95 — RP 23, 34 — UNICOM

RP ★ Special conditions exist - see Supplement. — VFR Advsy 125.0 — AOE — Airport of Entry

FSS - Flight Service Station

NO SVFR - Fixed-wing special VFR flight is prohibited.

CT - 118.3 - Control Tower (CT) - primary frequency

★ - Star indicates operation part-time. See tower frequencies tabulation for hours of operation.

Ⓒ - Follows the Common Traffic Advisory Frequency (CTAF)

ATIS 123.8 - Automatic Terminal Information Service

ASOS/AWOS 135.42 - Automated Surface Weather Observing Systems (shown where full-time ATIS not available). Some ASOS/AWOS facilities may not be located at airports.

UNICOM - Aeronautical advisory station

VFR Advsy - VFR Advisory Service shown where full-time ATIS not available and frequency is other than primary CT frequency.

285 - Elevation in feet

L - Lighting in operation Sunset to Sunrise

*L - Lighting limitations exist; refer to Supplement.

72 - Length of longest runway in hundreds of feet; usable length may be less.

When information is lacking, the respective character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.

AIRPORT TRAFFIC SERVICE AND AIRSPACE INFORMATION

Only the controlled and reserved airspace effective below 18,000 ft. MSL are shown on this chart.

Class B Airspace

Class C Airspace (Mode C - see FAR 91.215/AIM.)

Class D Airspace

Ceiling of Class D Airspace in hundreds of feet (A minus ceiling value indicates surface up to but not including that value.)

Class E (sfc) Airspace

Class E Airspace with floor 700 ft. above surface that laterally abuts Class G Airspace.

Class E Airspace with floor 700 ft. above surface that laterally abuts 1200 ft. or higher Class E Airspace

Class E Airspace with floor 1200 ft. or greater above surface that laterally abuts Class G Airspace

2400 MSL / 4500 MSL — Differentiates floors of Class E Airspace greater than 700 ft. above surface.

Class E Airspace exists at 1200' AGL unless otherwise designated as shown above.

Class E Airspace low altitude Federal Airways are indicated by center line.

Intersection - Arrows are directed towards facilities which establish intersection.

Total mileage between NAVAIDs on direct Airways

Class E Airspace low altitude RNAV 2 Routes are indicated by center line.

(Helicopter Only) — RNAV Waypoint

Prohibited, Restricted, and Warning Areas; Canadian Advisory, Danger, and Restricted Areas

Alert Area and MOA - Military Operations Area

Special Airport Traffic Area (See FAR 93 for details.)

ADIZ - Air Defense Identification Zone

MODE C (See FAR 91.215/AIM.)

National Security Area

Terminal Radar Service Area (TRSA)

MTR - Military Training Route

IFR Departure Route

IFR Arrival Route

IFR Arrival/Departure Route

COMMUNICATION BOXES

122.1R 122.6 123.6 — OAKDALE — 362 ★ 116.8 OAK — 122.1R — CHICAGO CHI

Underline indicates no voice on frequency.

- Crosshatch indicates Shutdown status.

★ - Operates less than continuous or On-Request.

Ⓐ - ASOS/AWOS

Ⓗ - HIWAS

Heavy line box indicates Flight Service Station (FSS). Frequencies 121.5, 122.2, 243.0 and 255.4 (Canada - 121.5, 126.7 and 243.0) are available at many FSSs and are not shown above boxes. All other frequencies are shown.

Certain FSSs provide Airport Advisory Service, see Supplement.

R - Receive only

FSS radio providing voice communication — 122.1R — MIAMI

Frequencies above thin line box are remoted to NAVAID site. Other FSS frequencies providing voice communication may be available as determined by altitude and terrain. Consult Supplement for complete information.

RADIO AIDS TO NAVIGATION

VHF OMNI RANGE (VOR) — VOR-DME — VORTAC — Other facilities, i.e., FSS Outlet, RCO, etc. — Non-Directional Radio Beacon (NDB) — NDB - DME

OBSTRUCTIONS

1000 ft and higher AGL — Below 1000 ft AGL — Wind Turbine — Wind Turbine Farm — 2894' UC

Group Obstruction

Elevation of the top above mean sea level — 2049

Height above ground — (1149)

Under construction or reported; position and elevation unverified — UC

Obstruction with high-intensity lights; may operate part-time

NOTICE: Guy wires may extend outward from structures.

MISCELLANEOUS

A - Aerobatic Practice Area (See Supplement.)

G - Glider Operations

H - Hang Glider Activity

U - Ultralight Activity

UA - Unmanned Aircraft Activity

Parachute Jumping Area (See Supplement.)

Space Launch Activity Area (See Supplement.)

VPXYZ — VFR Waypoints (See chart tabulation for latitude/longitude.)

NAME (VPXYZ)

Marine Light

−1°E− Isogonic Line (2015 VALUE)

TOPOGRAPHIC INFORMATION

Power Transmission Line

Aerial Cable

Lookout Tower 618 (Elevation Base of Tower)

Mountain Pass 11823 (Elevation of Pass)

Pass symbol does not indicate a recommended route or direction of flight and pass elevation does not indicate a recommended clearance altitude. Hazardous flight conditions may exist within and near mountain passes.

GROUND ELEVATIONS IN FEET — 11749 — CONTOUR INTERVAL 500'

Published by the U.S. Department of Transportation
Federal Aviation Administration
Aeronautical Information Services
http://faa.gov/go/ais

Lambert Conformal Conic Projection Standard Parallels 33° and 45°
Horizontal Datum: North American Datum of 1983 (World Geodetic System 1984)

CONVERSION OF ELEVATIONS — FEET (Thousands) 0–30 — METERS (Thousands) 0–9

Features normally used as checkpoints for controlling VFR traffic are emphasized on this series of charts so they may be readily identified.

Example: POWER PLANT

The name shown is that used by the controlling personnel and is not necessarily the official name of the feature.

VFR TRANSITION ROUTE
(ATC CLEARANCE REQUIRED)
ALTITUDE ASSIGNED BY ATC

Entire area of this chart is within the Mountain Standard Time Zone +7 (+6 DT) = UTC.

SALT LAKE CITY CLASS B AIRSPACE

See back of this chart for procedural information within the Salt Lake City Class B Airspace

EXAMPLES OF CLASS B ALTITUDES

70 - - - Ceiling in hundreds of feet MSL
30 - - - Floor in hundreds of feet MSL

Flight Following Services are available on request and highly recommended in and around Class B, C, and TRSA areas.

MILITARY TRAINING ROUTES (MTRs)

All IR and VR MTRs are shown, and may extend from the surface upwards. Only the route centerline, direction of flight along the route, and the route designator are depicted - route widths and altitudes are not shown.

Since these routes are subject to change every 56 days, you are cautioned and advised to contact Flight Service for route dimensions and current status for those routes affecting your flight.

Routes with a change in the alignment of the charted route centerline will be indicated in the Aeronautical Chart Bulletin of the Chart Supplement.

DoD users refer to Area Planning AP/1B Military Training Routes North and South America for current routes.

CAUTION: This chart is primarily designed for VFR navigational purposes and does not purport to indicate the presence of all power transmission and telecommunication lines, terrain or obstacles which may be encountered below reasonable and safe altitudes.

CAUTION: Severe turbulence may occur over rugged terrain. See AIM.

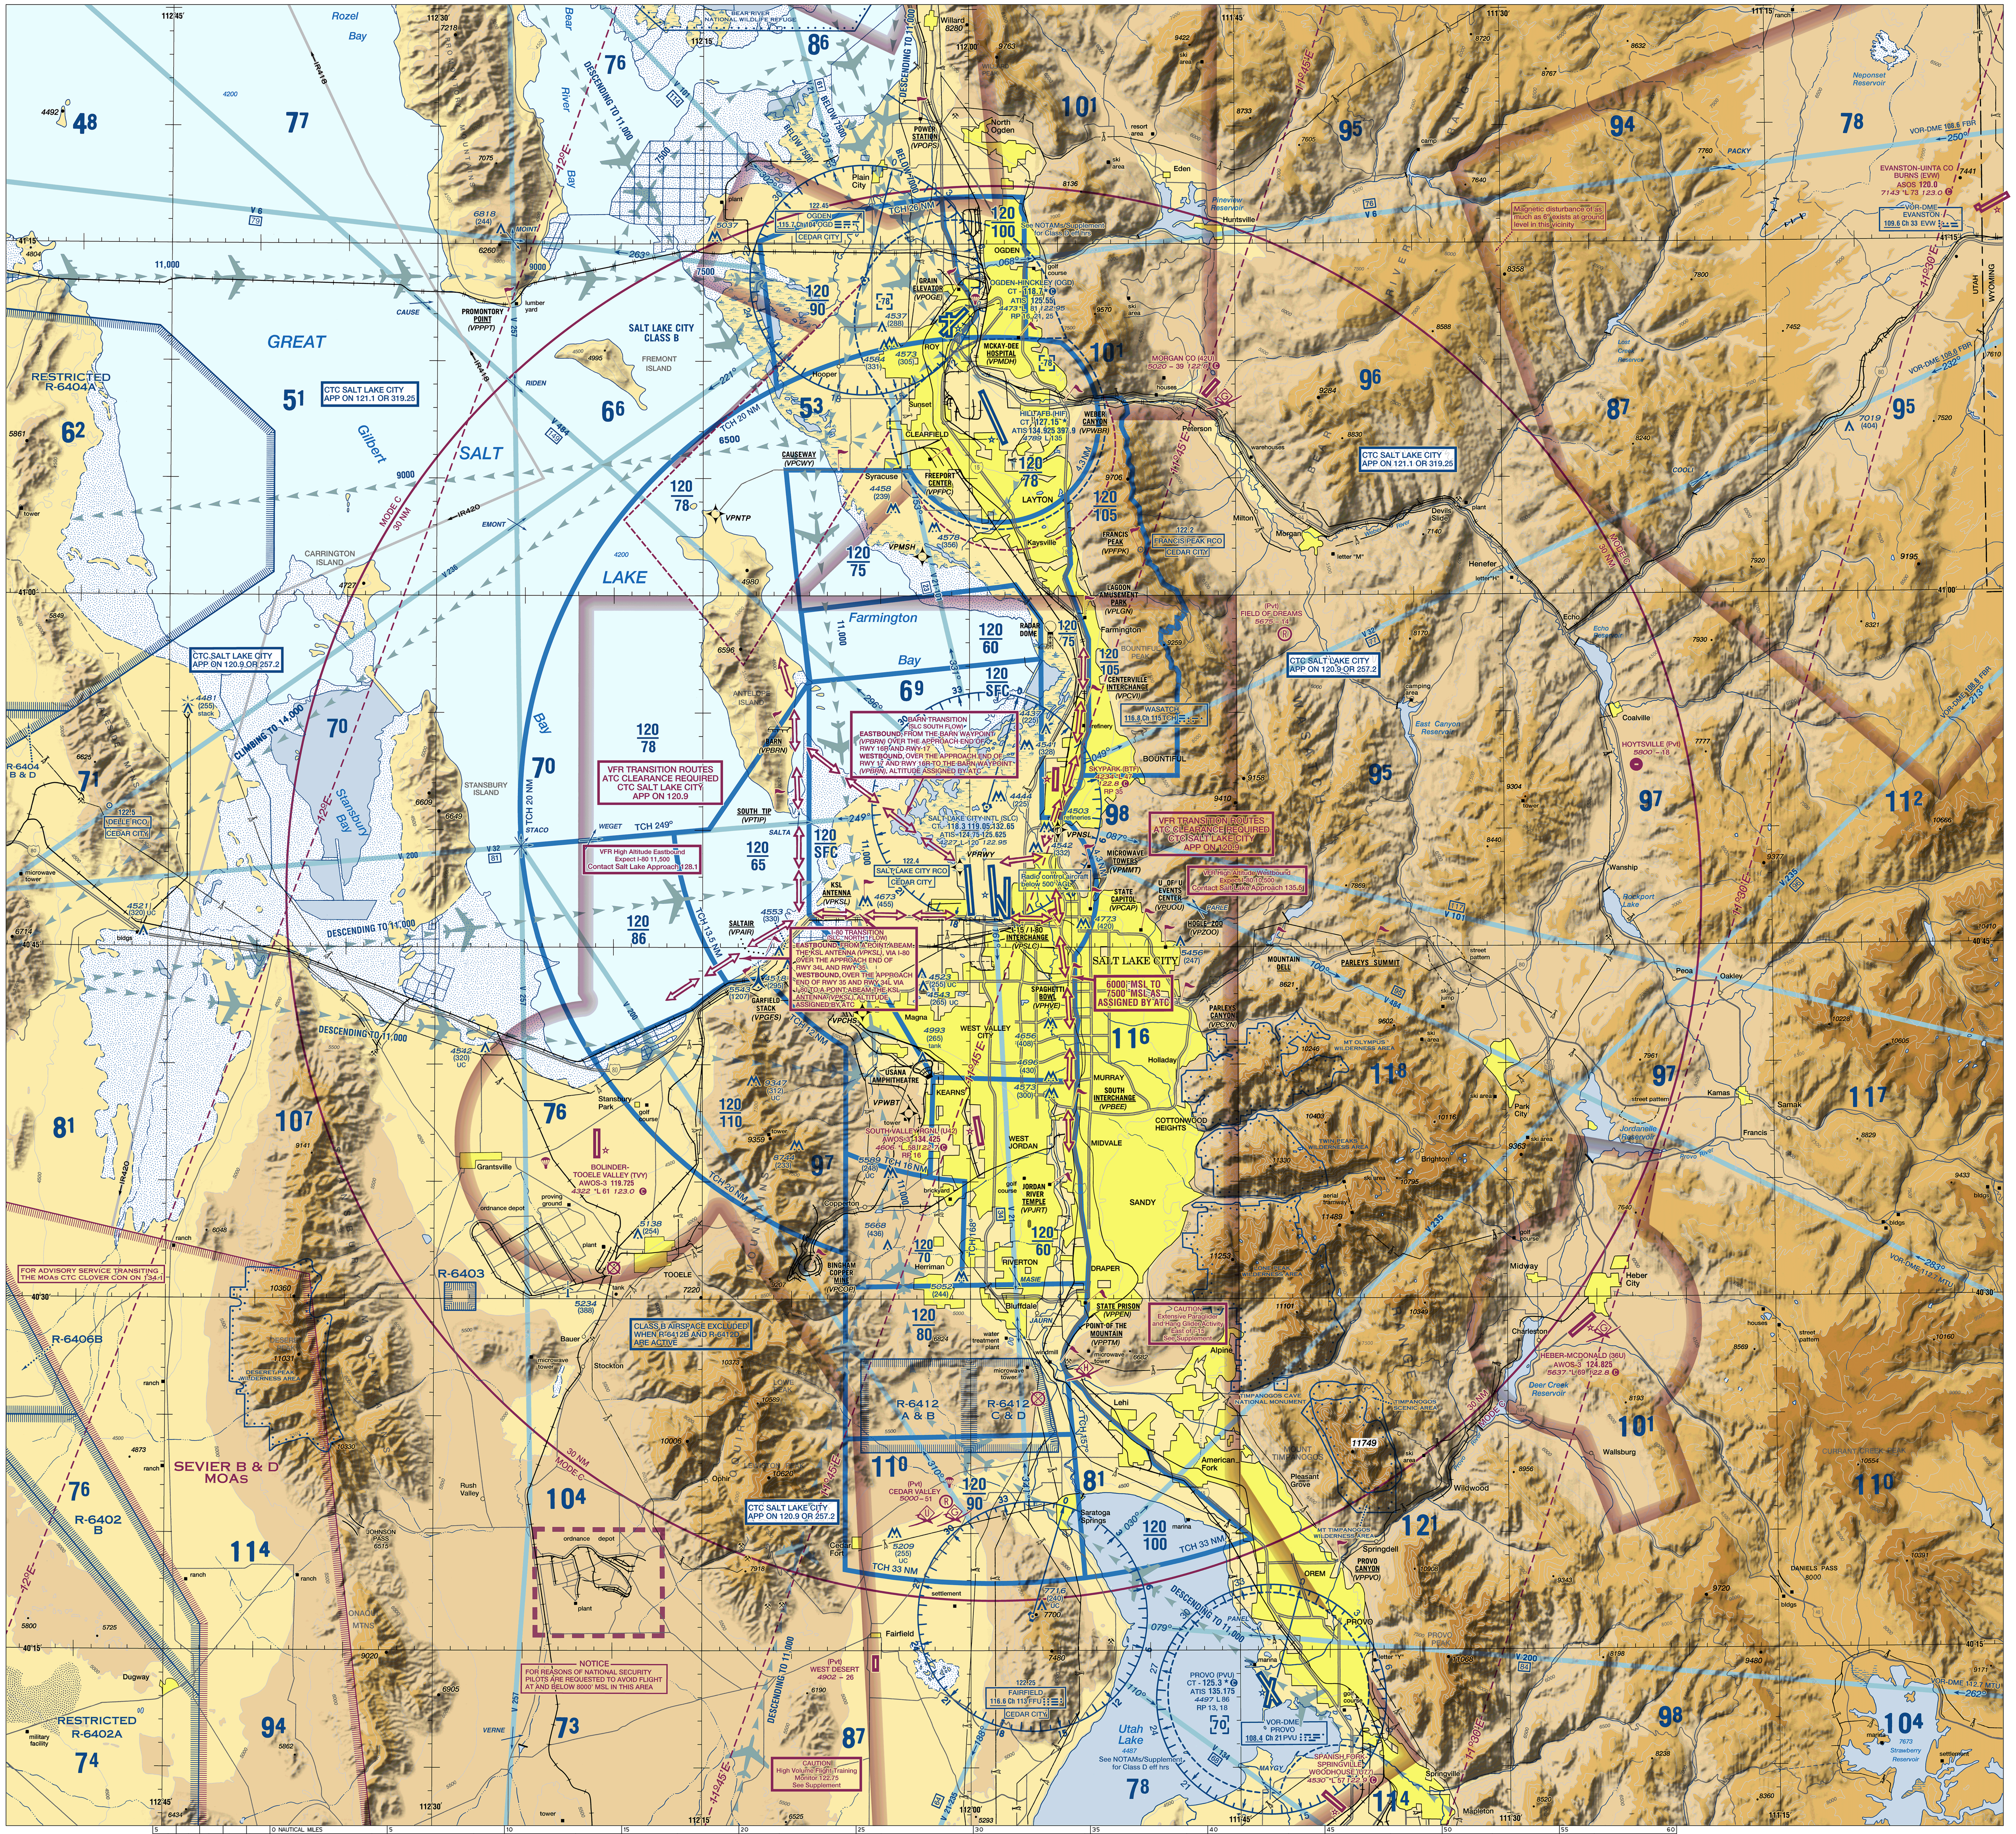

SALT LAKE CITY

SALT LAKE CITY TAC
VFR TERMINAL AREA CHART SCALE 1:250,000

Federal Aviation Administration

54TH EDITION EFFECTIVE 0901Z **31 MAR 2016**
TO 0901Z **13 OCT 2016**

Includes airspace amendments effective **31 MAR 2016**
and all other aeronautical data received by **4 FEB 2016**

Information on this chart will change; consolidated major updates of chart changes are available every 56 days in the CHART SUPPLEMENT Aeronautical Chart Bulletin section (online at http://faa.gov/ais). Also consult appropriate NOTICES TO AIRMEN (NOTAMs) and other FLIGHT INFORMATION PUBLICATIONS (FLIPs) for the latest changes.

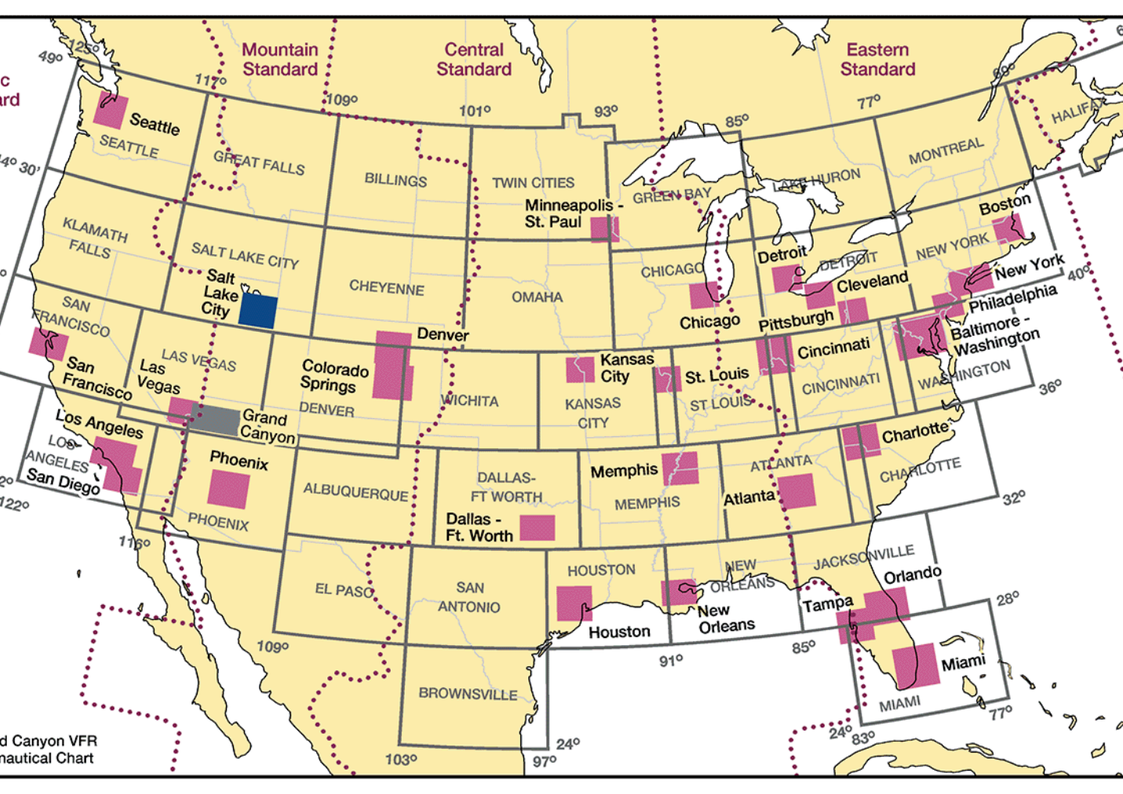

PUBLISHED IN ACCORDANCE WITH INTERAGENCY AIR CARTOGRAPHIC COMMITTEE SPECIFICATIONS AND AGREEMENTS, APPROVED BY: DEPARTMENT OF DEFENSE * FEDERAL AVIATION ADMINISTRATION

Warning: Refer to current foreign charts and flight information publications for information within foreign airspace.

FAA Product ID: TSLC
NSN 7641014099654
NGA REF. NO. VFRTASALTLAKECY
EFF. DATE 16091

NORTH AMERICAN AEROSPACE DEFENSE COMMAND (NORAD) PROCEDURES

All aircraft operating in the U.S. national airspace, if capable, will maintain a listening watch on guard frequencies VHF 121.5 or UHF 243.0. It is incumbent upon all aviators to know and understand their responsibilities if intercepted. Review "AIM" section 5-6-2 for intercept procedures. Additionally, if U.S. military fighter jets intercept an aircraft and flares are dispensed in the area of that aircraft, aviators will pay strict attention, contact air traffic control immediately on the local frequency or on VHF guard 121.5 or UHF 243.0 and follow the interceptor visual ICAO signals. Be advised that non-compliance may result in the use of force.

FOR PROCUREMENT:

Contact an Authorized FAA Chart Sales Agent.
Visit our website http://faa.gov/go/ais and click on "Chart Agent Locator."
For digital products, visit http://faacharts.faa.gov

REPORTING CHART ERRORS

You are requested to inform us of chart errors and/or additions that come to your attention while using this chart. Frequently asked questions (FAQs) are answered on our website at http://faa.gov/go/ais. See the FAQs prior to contact via toll free number or email. Telephone toll free at 1-800-638-8972, or email us at 9-AMC-Aerochart@faa.gov or mail to: FAA, Aeronautical Information Services, Customer Operations Team, 1305 East-West Highway, SSMC 4, Suite 4400, Silver Spring, MD 20910-3281.

ATTENTION

THIS CHART CONTAINS MAXIMUM ELEVATION FIGURES (MEF). The Maximum Elevation Figures shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The MEF is based on information available concerning the highest known feature in each quadrangle, including terrain and obstructions (trees, towers, antennas, etc.).

Example: 12,500 feet 12⁵

CONTROL TOWER FREQUENCIES ON SALT LAKE CITY TERMINAL AREA CHART

Airports with control towers are indicated on the face of the chart by the letters CT followed by the primary VHF local control frequency (ies). Information for each tower is listed in the table below. Operational hours are local time. The primary VHF and UHF local control frequencies are listed. An asterisk (*) indicates the part-time tower frequency is remoted to a collocated full-time FSS for use as Airport Advisory Service (AAS) during hours the tower is closed. The primary VHF and UHF ground control frequencies are listed.

Automatic Terminal Information Service (ATIS) frequencies shown on the face of the chart are primary arrival VHF/UHF frequencies. All ATIS frequencies are listed in the table below. ATIS operational hours may differ from tower operational hours.

ASR and/or PAR indicate Radar Instrument Approach available.

"MON-FRI" indicates Monday through Friday.

O/T indicates other times.

CONTROL TOWER	OPERATES	TWR FREQ	GND CON	ATIS	ASR/PAR
HILL AFB	0800-2400 MON-FRI 0900-1700 SAT-SUN	127.15 263.15	121.6 275.8	134.925 397.9	
OGDEN-HINCKLEY	0700-2000	118.7 253.5	121.7	125.55	
PROVO	0700-2100	125.3	119.4	135.175	
SALT LAKE CITY INTL	CONTINUOUS	118.3 257.8 (RWYS 17/35 & 14/32) 119.05 257.8 (RWY 16L/34R) 132.65 336.4 (RWY 16R/34L)	121.9 348.6 (RWYS 17/35 & 14/32) 123.775 348.6 (RWYS 16R/34L & 16L/34R)	124.75 125.625	

CLASS B, CLASS C, TRSA, AND SELECTED APPROACH CONTROL FREQUENCIES

FACILITY	FREQUENCIES	SERVICE AVAILABILITY
SALT LAKE CITY CLASS B	121.1 319.25 (N OF 41° LAT) 120.9 257.2 (S OF 41° LAT)	CONTINUOUS

SPECIAL USE AIRSPACE ON SALT LAKE CITY TERMINAL AREA CHART

Unless otherwise noted altitudes are MSL and in feet. Time is local.
"TO" an altitude means "To and including."
FL – Flight Level
NO A/G – No air to ground communications.
Contact Flight Service for information.

† Other times by NOTAM.
NOTAM – Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

U.S. P–PROHIBITED, R–RESTRICTED, W–WARNING, A–ALERT, MOA–MILITARY OPERATIONS AREA

NUMBER	ALTITUDE	TIME OF USE	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES
R-6402 A	TO FL 580	CONTINUOUS	SALT LAKE CITY CNTR	128.55 269.175
R-6402 B	100 AGL TO FL 580	CONTINUOUS	SALT LAKE CITY CNTR	128.55 269.175
R-6403	TO 9000	0800-2000 MON-THU	NO A/G	
R-6404 A	TO FL 580	CONTINUOUS	SALT LAKE CITY CNTR	128.55 269.175
R-6404 B	TO 13,000	CONTINUOUS	SALT LAKE CITY CNTR	128.55 269.175
R-6404 D	13,000 TO FL 250	BY NOTAM	SALT LAKE CITY CNTR	128.55 269.175
R-6406 B	100 AGL TO FL 580	CONTINUOUS	SALT LAKE CITY CNTR	128.55 269.175
R-6412 A, C	TO 9000	BY NOTAM	SALT LAKE CITY TRACON	
R-6412 B, D	9000 TO 10,000	BY NOTAM	SALT LAKE CITY TRACON	

MOA NAME	ALTITUDE*	TIME OF USE†	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES
SEVIER B	100 AGL TO 9500	0700-2400 MON-FRI 0800-1700 SAT	SALT LAKE CITY CNTR	128.55 269.175 (N) 127.825 284.675 (E) 133.45 317.625 (W)
SEVIER D	9500	BY NOTAM 6 HRS IN ADVANCE	SALT LAKE CITY CNTR	128.55 269.175 (N) 127.825 284.675 (E) 133.45 317.625 (W)

*Altitudes indicate floor of MOA. All MOAs extend to but do not include FL 180 unless otherwise indicated in tabulation or on chart.
†Other times by DoD NOTAM.

SALT LAKE CITY VFR WAYPOINTS

VFR Waypoint names consist of five letters beginning with "VP". Stand-alone VFR Waypoints are portrayed on VFR Charts using the same four-point star symbol currently used for Instrument Flight Rules (IFR) Waypoints.

VFR Waypoints collocated with Visual Checkpoints (Visual Reporting Points) are portrayed with a Checkpoint flag. The VFR Waypoint name is shown in parentheses adjacent to the Visual Checkpoint name.

VFR Waypoint names are not intended to be pronounceable and shall not be used in ATC Communications.

VPAIR	SALTAIR	N40°44.85' / W112°11.22'
VPBEE	SOUTH INTERCHANGE	N40°38.18' / W111°54.23'
VPBRN	BARN	N40°54.28' / W112°10.15'
VPCAP	STATE CAPITOL	N40°46.67' / W111°53.25'
VPCHS		N40°42.28' / W112°05.92'
VPCOP	BINGHAM COPPER MINE	N40°31.38' / W112°09.00'
VPCVI	CENTERVILLE INTERCHANGE	N40°55.30' / W111°53.43'
VPCWY	CAUSEWAY	N41°05.37' / W112°07.17'
VPCYN	PARLEYS CANYON	N40°42.67' / W111°48.10'
VPFPC	FREEPORT CENTER	N41°05.92' / W112°02.27'
VPFPK	FRANCIS PEAK	N41°01.98' / W111°50.30'
VPGFS	GARFIELD STACK	N40°43.28' / W112°11.88'
VPHVE	SPAGHETTI BOWL	N40°43.50' / W111°54.22'
VPJRT	JORDAN RIVER TEMPLE	N40°35.02' / W111°55.58'
VPKSL	KSL ANTENNA	N40°46.80' / W112°05.80'
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08' / W111°53.57'
VPMDH	MCKAY-DEE HOSPITAL	N41°11.00' / W111°57.22'
VPMMT	MICROWAVE TOWERS	N40°48.50' / W111°53.37'
VPMSH		N41°01.67' / W112°02.47'
VPNSL		N40°50.15' / W111°54.90'
VPNTP		N41°03.57' / W112°14.23'
VPOGE	GRAIN ELEVATOR	N41°13.13' / W112°00.45'
VPOPS	POWER STATION	N41°20.38' / W112°02.78'
VPPEN	STATE PRISON	N40°29.88' / W111°53.62'
VPPPT	PROMONTORY POINT	N41°12.28' / W112°25.73'
VPPTM	POINT OF THE MOUNTAIN	N40°27.42' / W111°54.83'
VPPVO	PROVO CANYON	N40°18.77' / W111°39.45'
VPRWY		N40°48.48' / W112°00.33'
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83' / W111°54.85'
VPTIP	SOUTH TIP	N40°50.93' / W112°10.92'
VPUOU	U OF U EVENTS CENTER	N40°45.73' / W111°50.28'
VPWBR	WEBER CANYON	N41°08.17' / W111°54.83'
VPWBT		N40°38.00' / W112°03.33'
VPZOO	HOGLE ZOO	N40°45.00' / W111°48.95'

REGULATIONS REGARDING FLIGHTS OVER CHARTED NATIONAL PARK SERVICE AREAS, U.S. FISH AND WILDLIFE SERVICE AREAS, AND U.S. FOREST SERVICE AREAS

The landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service or U.S. Forest Service without authorization from the respective agency. Exceptions include: 1) when forced to land due to an emergency beyond the control of the operator, 2) at officially designated landing sites, or 3) on approved official business of the Federal Government.

All aircraft are requested to maintain a minimum altitude of 2,000 feet above the surface of the following: National Parks, Monuments, Seashores, Lakeshores, Recreation Areas and Scenic Riverways administered by the National Park Service; National Wildlife Refuges, Big Game Refuges, Game Ranges and Wildlife Ranges administered by the U.S. Fish and Wildlife Service; and Wilderness and Primitive areas administered by the U.S. Forest Service. FAA Advisory Circular (AC) 91-36, "Visual Flight Rules (VFR) Flight Near Noise-Sensitive Areas," defines the surface as: the highest terrain within 2,000 feet laterally of the route of flight, or the upper-most rim of a canyon or valley.

Federal regulations also prohibit airdrops by parachute or other means of persons, cargo, or objects from aircraft on lands administered by the three agencies without authorization from the respective agency. Exceptions include: 1) emergencies involving the safety of human life, or 2) threat of serious property loss.

Boundary of National Park Service areas, U.S. Fish and Wildlife Service areas, and U.S. Forest Service Wilderness and Primitive areas.

Class G Airspace within the United States extends up to 14,500 feet MSL. At and above this altitude all airspace is within Class E Airspace, excluding the airspace less than 1500 feet above the terrain and certain special use airspace areas.