VOR/DME LWM	APP CRS	Rwy ldg	5106
112.5	223°	THRE	128
Chan 72		Apt Elev	132

VOR RWY 23

BEDFORD/LAURENCE G. HANSCOM FIELD (BED)

ADF Required. Visibility reduction by helicopters NA. When VGSI inop, Straight-in/Circling Rwy 23 procedure NA at night. When local altimeter setting not received, use Boston altimeter setting and increase all MDA 60 feet; increase S-23 Cats C and D and Circling Cat C visibility ⅜ mile and Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 direct BEDDS LOM and hold.

ATIS	BOSTON APP CON	HANSCOM TOWER*	GND CON	CLNC DEL	UNICOM
124.6	124.4 279.6	118.5 (CTAF) L 257.2	121.7	121.85	122.95

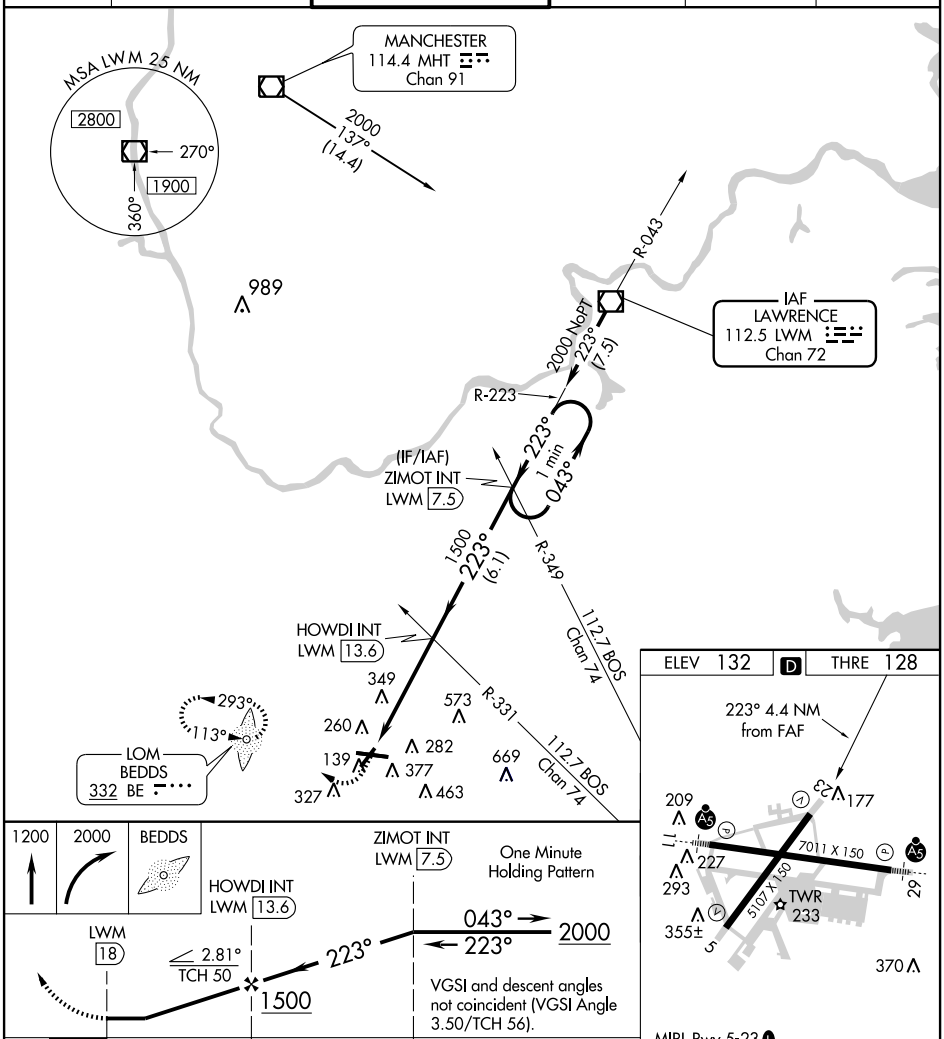

CATEGORY	A	B	C	D
S-23	740-1	612 (700-1)	740-1¾	612 (700-1¾)
CIRCLING	740-1	608 (700-1)	740-1¾ 608 (700-1¾)	780-2 648 (700-2)

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

NE-1, 18 OCT 2012 to 15 NOV 2012

NE-1, 18 OCT 2012 to 15 NOV 2012