


|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>97501</b><br><b>W02A</b> | APP CRS<br><b>026°</b> | Rwy Idg <b>9002</b><br>TDZE <b>4744</b><br>Apt Elev <b>4744</b> |
|--|------------------------|---|

RNAV (GPS) Y RWY 3

IDAHO FALLS RGNL (IDA)

|   |  |   |  |
|---|--|---|--|
| RNP APCH.   |  | MISSED APPROACH: Climb to 5200 then climbing left turn to 7500 direct TERRE and hold. |  |
| For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 49°C (121 °F). |  |   |  |

|                        |  |   |                         |                          |                       |                         |
|------------------------|--|---|-------------------------|--------------------------|-----------------------|-------------------------|
| ATIS<br><b>135.325</b> | SALT LAKE CENTER<br><b>128.35 239.25</b> | IDAHO FALLS TOWER*<br><b>118.5 (CTAF) 0 257.8</b> | GND CON<br><b>121.7</b> | CLNC DEL<br><b>121.7</b> | GCO<br><b>121.725</b> | UNICOM<br><b>122.95</b> |
|------------------------|--|---|-------------------------|--------------------------|-----------------------|-------------------------|

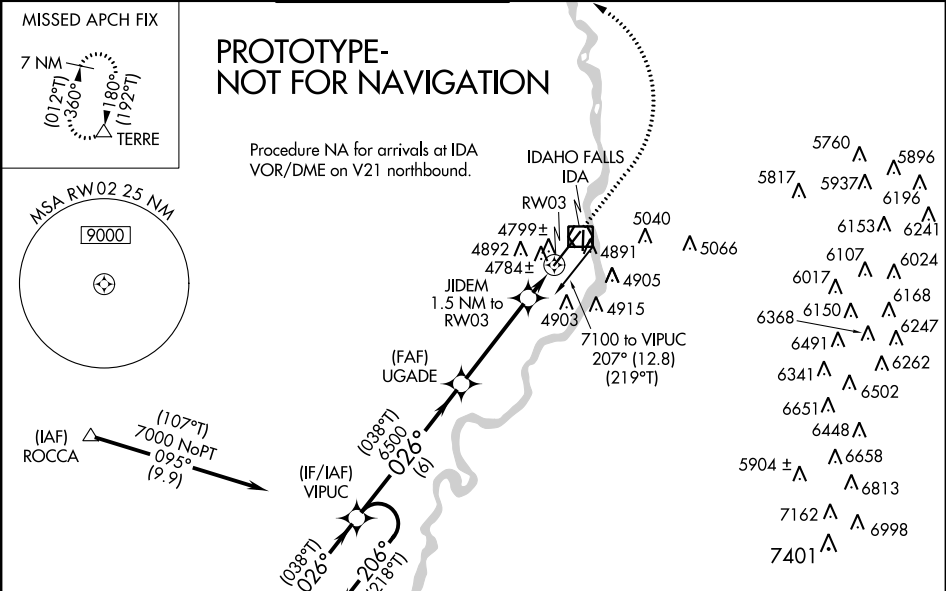

|                      |  |   |  |
|----------------------|--|---|--|
| ELEV 4744            |  | TDZE 4744   |  |
| 7 NM Holding Pattern |  | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).                            |  |
| 14000 7000           |  | *LNNAV only   |  |
| GP 3.00° TCH 50      |  | *1 NM to RW03   |  |
| 6 NM                 |  | 3.9 NM  |  |
| CATEGORY             |  | D   |  |
| LPV DA               |  | 4944-3/4 200 (200-3/4)  |  |
| LNAV/VNAV DA         |  | 5138-1 394 (400-1 1/8)  |  |
| LNNAV MDA            |  | 5100-1 356 (400-1)  |  |
| CIRCLING             |  | 5200-1 456 (500-1) 5300-1 556 (600-1) 5400-1 3/4 656 (700-1 3/4) 5420-2 1/4 676 (700-2 1/4) |  |