


Flight Procedure Tracking Form		Action: FLIGHT CHECK	Task Type: IAP	Date Open: 04/20/2016	Task #: 2015101428270615001	Request #: 20151014282706
Procedure: ILS OR LOC RWY 9R AMDT 13			Airport ID: KPTK	Airport: OAKLAND COUNTY INTL		Reimbursable #: NO
City: PONTIAC	ST: MI	GPS #:	Estimated Chart Date: 05/24/2018		FICO #:	
Fac ID: PTK		Fac. Type: ILS			Specialist: JAMES ROGERS	
Procedure Review						
	Rec'd	Rel'd	Full Name	Comments		
Lead:	11/20/2017					
QA:						
Liaison:						
Procedure Comments:			Remark Type: INFORMATION			
<p>FULL AMENDMENT: UPDATE TCH, MOVE PFAF AND UPDATE AIRPORT AND FACILITY MAGVAR.</p> <p>PENDING DATA USED FOR KPTK AIRPORT AND RUNWAYS.</p> <p>KPTK AND PTK ILS MAGVAR CHANGED FROM 4W/EPOCH YEAR 1980 TO 7W/EPOCH YEAR 2020.</p> <p>CONTACT: STEVE VARGAS, 405.954.0695, AJV-5421 LEAD.</p>						

ILS or LOC RWY 9R
OAKLAND COUNTY INTL (PTK)




MAISR



MISSED APPROACH:
Climb to 1600 then
climbing right turn
to 3000 direct SVM
VORTAC and hold

UNICOM
122.95

PROTOTYPE-NOT FOR NAVIGATION

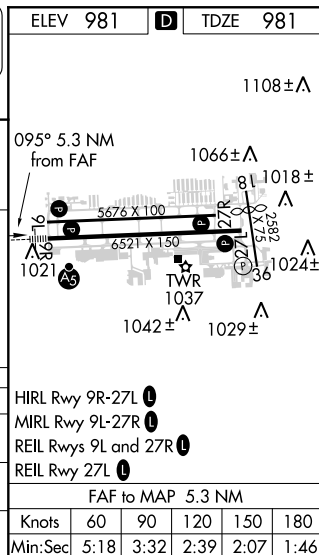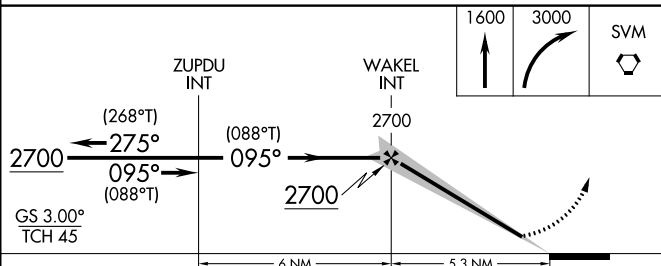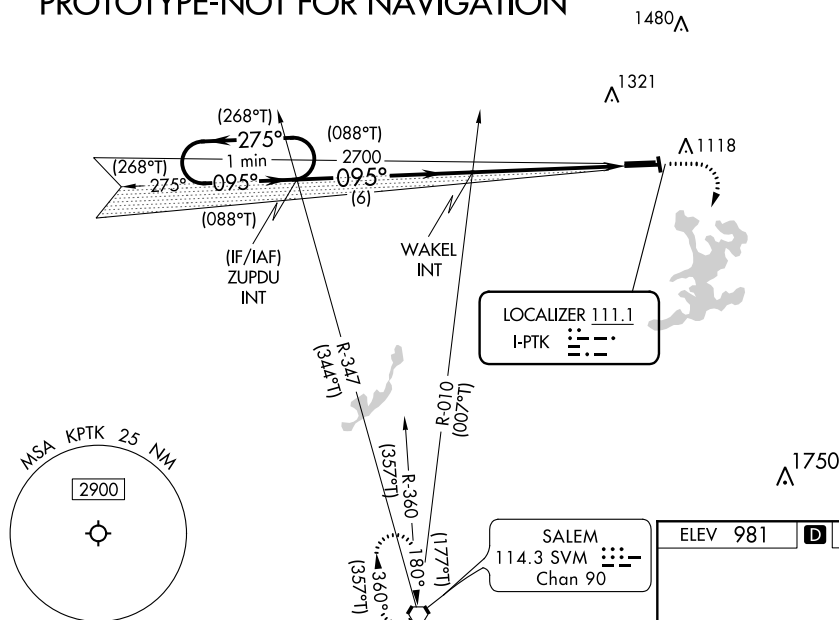

42°40'N-83°25'W

OAKLAND COUNTY INTL (PTK)
ILS or LOC RWY 9R

AL-5052 (FAA)

ILS or LOC RWY 9R
PONTIAC/OAKLAND COUNTY INTL (PTK)

LOC I-PTK 111.1	APP CRS 092°	Rwy Idg 6520 TDZE 980 Apt Elev 980
---------------------------	------------------------	---

V *RVR 1800 authorized with the use of FD or AP or HUD to DA.
A When local altimeter setting not received, use Coleman A. Young Muni altimeter setting and increase DA 105 feet and all MDA 120 feet, increase S-LOC 9R Cats C and D visibility ½ mile, circling Cat B visibility ¼ mile. Cats C and D visibility ½ mile.


MALSR



MISSED APPROACH: Climb to 1600, then climbing right turn to 3000 direct SVM VORTAC and hold.

ATIS 125.025	DETROIT APP CON 127.5 363.2	PONTIAC TOWER* 120.5 (CTAF)	GND CON 121.9	CLNC DEL 118.25	UNICOM 122.950
-----------------	--------------------------------	--	------------------	--------------------	-------------------



ALTERNATE
MISSED APCH FIX

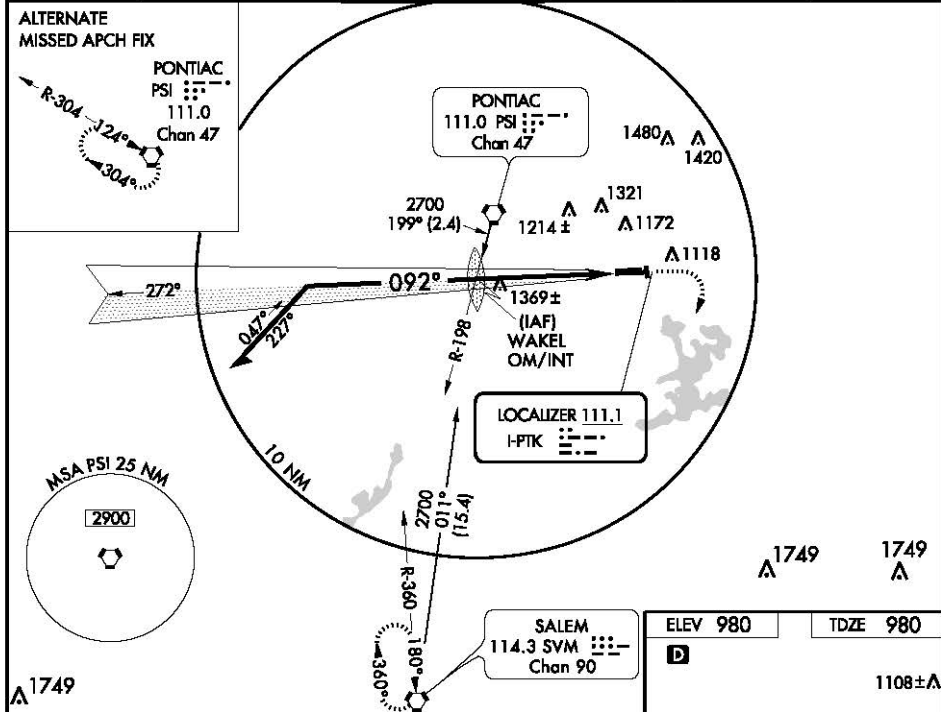

VGSI and ILS glidepath not coincident.
(VGSI Angle 3.00/TCH 45)

Remain
within 10 NM

GS 3.00°
TCH 55



CATEGORY	A	B	C	D
S-ILS 9R		*1180/24	200 (200-½)	
S-LOC 9R	1620/24	640 (700-½)	1620/60 640 (700-¼)	1620-1½ 640 (700-½)
CIRCLING	1620-1	640 (700-1)	1620-1¾ 640 (700-1¾)	1640-2 660 (700-2)

HIRL Rwy 9R-27L ①
MIRL Rwy 9L-27R
REIL Rwys 9L and 27L ①
REIL Rwy 27R ①

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

PONTIAC, MICHIGAN
Amdt 12 11125

PONTIAC/OAKLAND COUNTY INTL (PTK)
ILS or LOC RWY 9R

42°40'N - 83°25'W

EC-1, 17 NOV 2011 to 15 DEC 2011

EC-1. 17 NOV 2011 to 15 DEC 2011

TERMINAL AIRSPACE DATA REQUIREMENTS

CITY: **PONTIAC**

STATE: **MI**

AIRPORT NAME: **OAKLAND COUNTY INTL**

ID: **KPTK**

PROCEDURE: **ILS OR LOC RWY 9R**

AMDT: **13**

DOCKET#: **NOT REQUIRED**
(96-AXX-X/Required/Not Required)

ALL DIST TO 1/100 NM; ELEV TO NEAREST FT; COORD TO 1/100 SEC; DEG TO 1/100 DG.


- | | | | |
|--|---------------------------------|--------------------------------|---------------|
| 1. Distance from | <u>THLD</u> | to 1000' point | <u>3.69</u> |
| (Enter THLD, FAF, ARP, FACILITY, as appropriate) | | | |
| 2. Width of | <u>FINAL</u> | segment at 1000' point | <u>1.02</u> |
| (Enter appropriate segment, final, intermediate, etc.) | | | |
| 3. True Course of | <u>FINAL</u> | segment containing 1000' point | <u>087.63</u> |
| 4. High Terrain in | <u>FINAL</u> | segment containing 1000' point | <u>1169</u> |
| 5. Distance from | <u>THLD</u> | to 1500' point | <u>5.26</u> |
| (If 1500' point in PT maneuvering area or holding pattern note in remarks) | | | |
| 6. Width of | <u>FINAL</u> | segment at 1500' point | <u>1.35</u> |
| 7. True Course of | <u>FINAL</u> | segment containing 1500' point | <u>087.63</u> |
| 8. High Terrain in | <u>FINAL</u> | segment containing 1500' point | <u>1169</u> |
| 9. Threshold Coordinates (if straight-in) ... | <u>423952.61N / 0832603.53W</u> | | |
| 10. ARP Coordinates | <u>423956.29N / 0832513.82W</u> | | |
| 11. Runway Approach End and distance furthest from ARP | RWY | <u>9L</u> | |
| | Distance | <u>0.62</u> | NM |
| 12. FAF Coordinates | <u>423939.34N / 0833310.73W</u> | | |


REMARKS: Approach/Drawing attached.

NM 7 14 21 28 35 42 49
FT 42000 84000 126000 168000 210000 252000 294000

fpojxr | ptkil9r (PROD) | 11 Dec 2017 11:57:23 | 1" = 41666.7 feet (MAP)

KPTK - OAKLAND COUNTY INTL
PONTIAC, MI
SCALE: 1:500,000
ILS OR LOC RWY 9R, AMDT 13

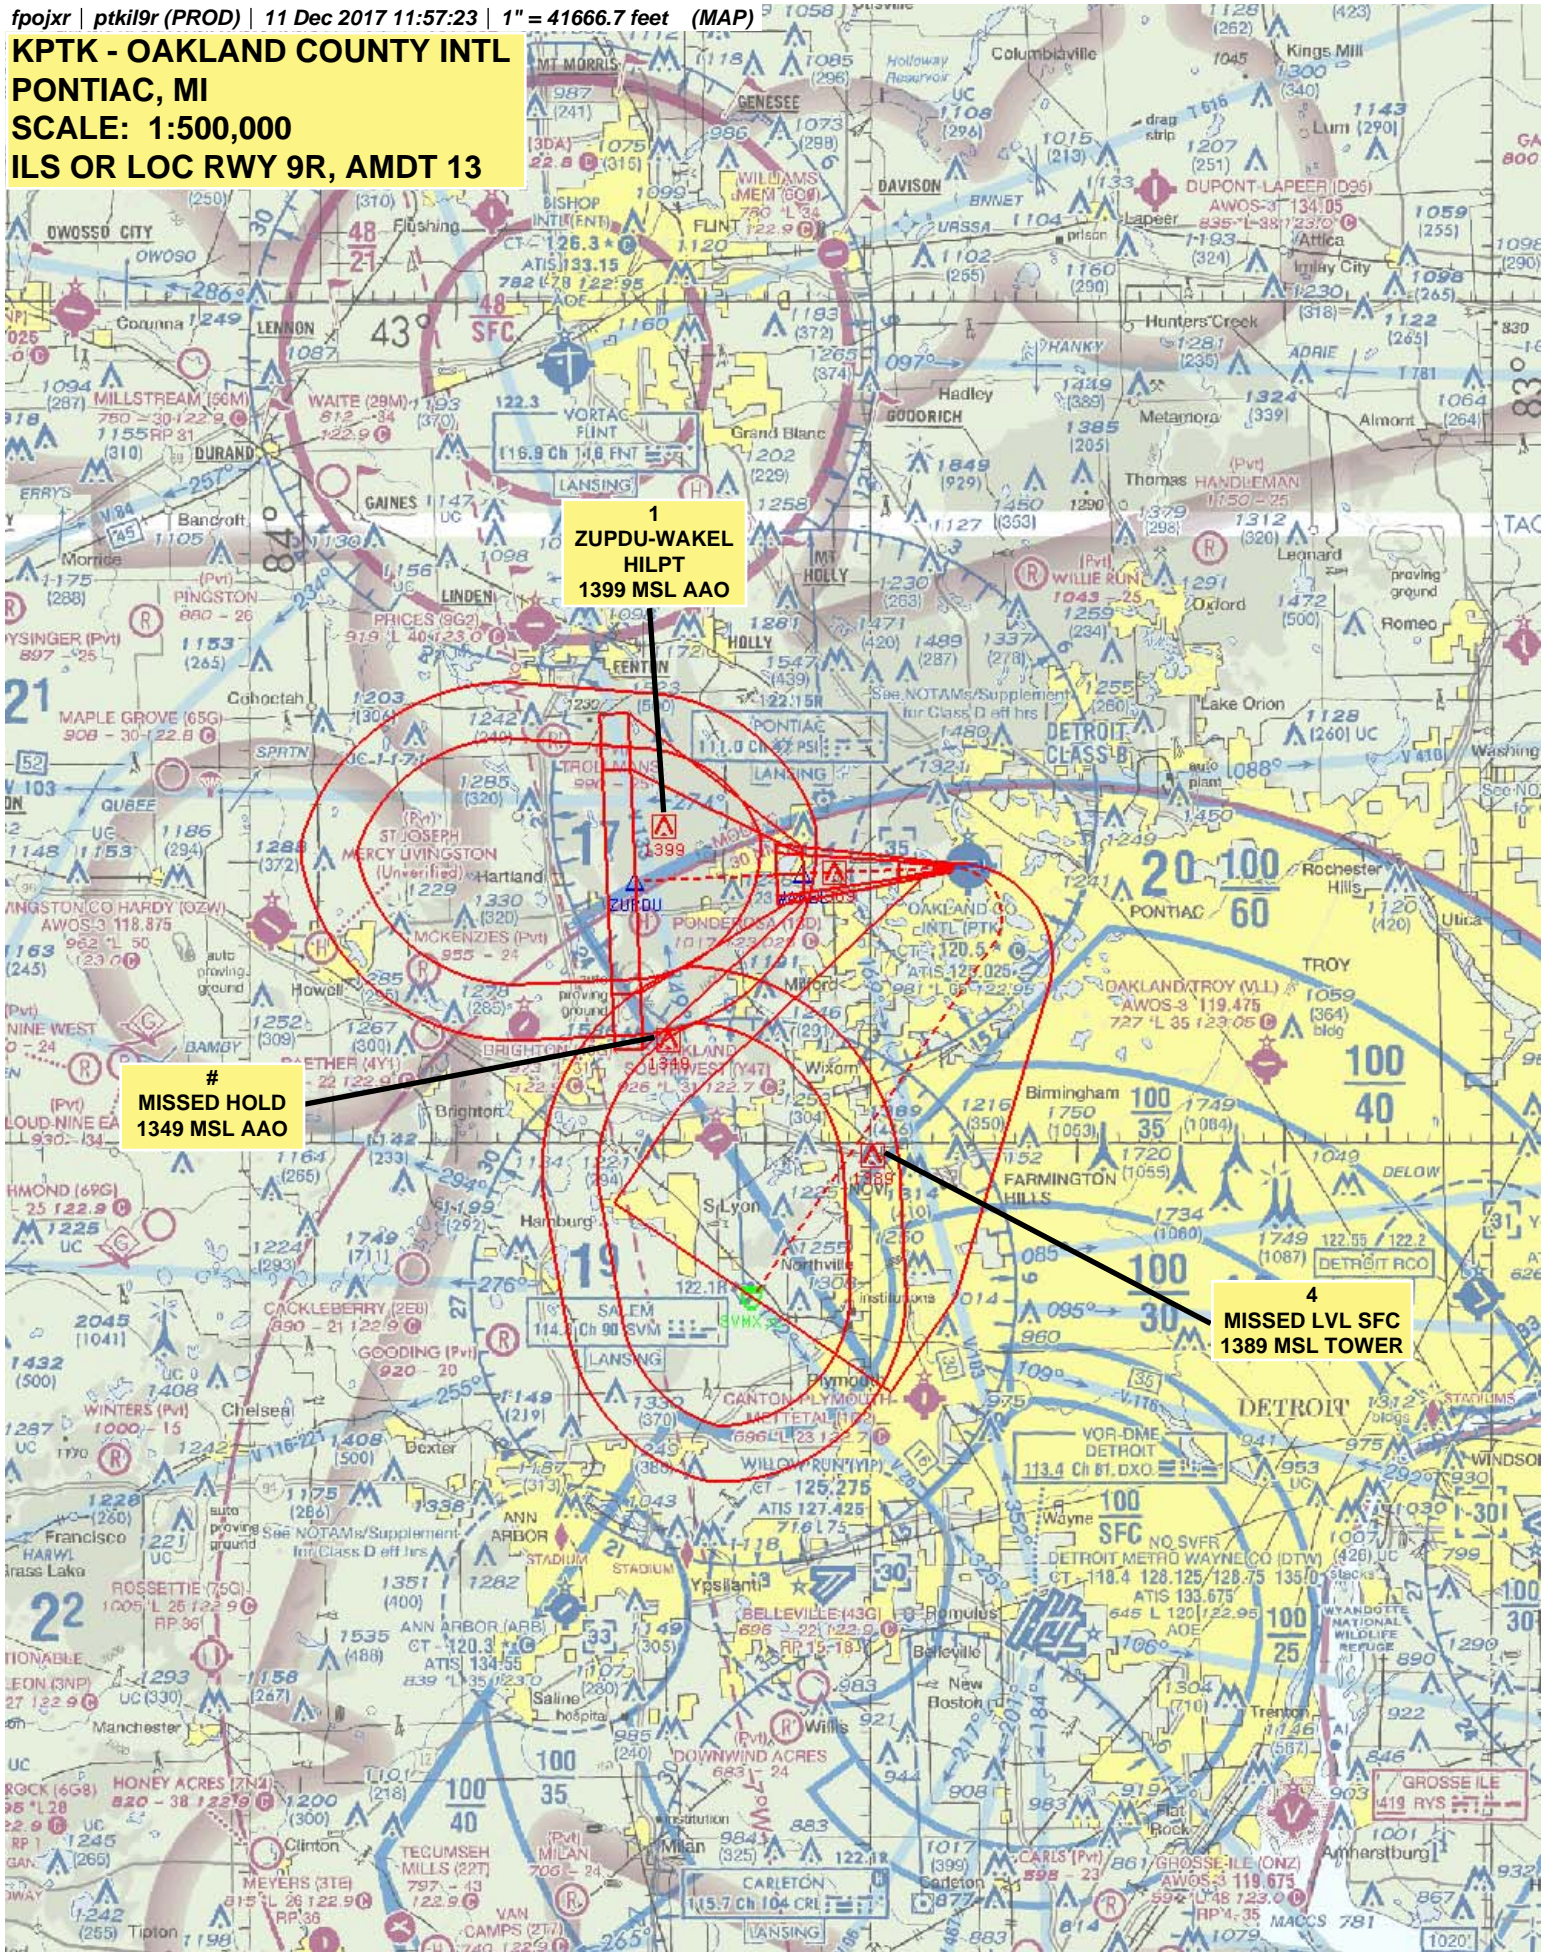

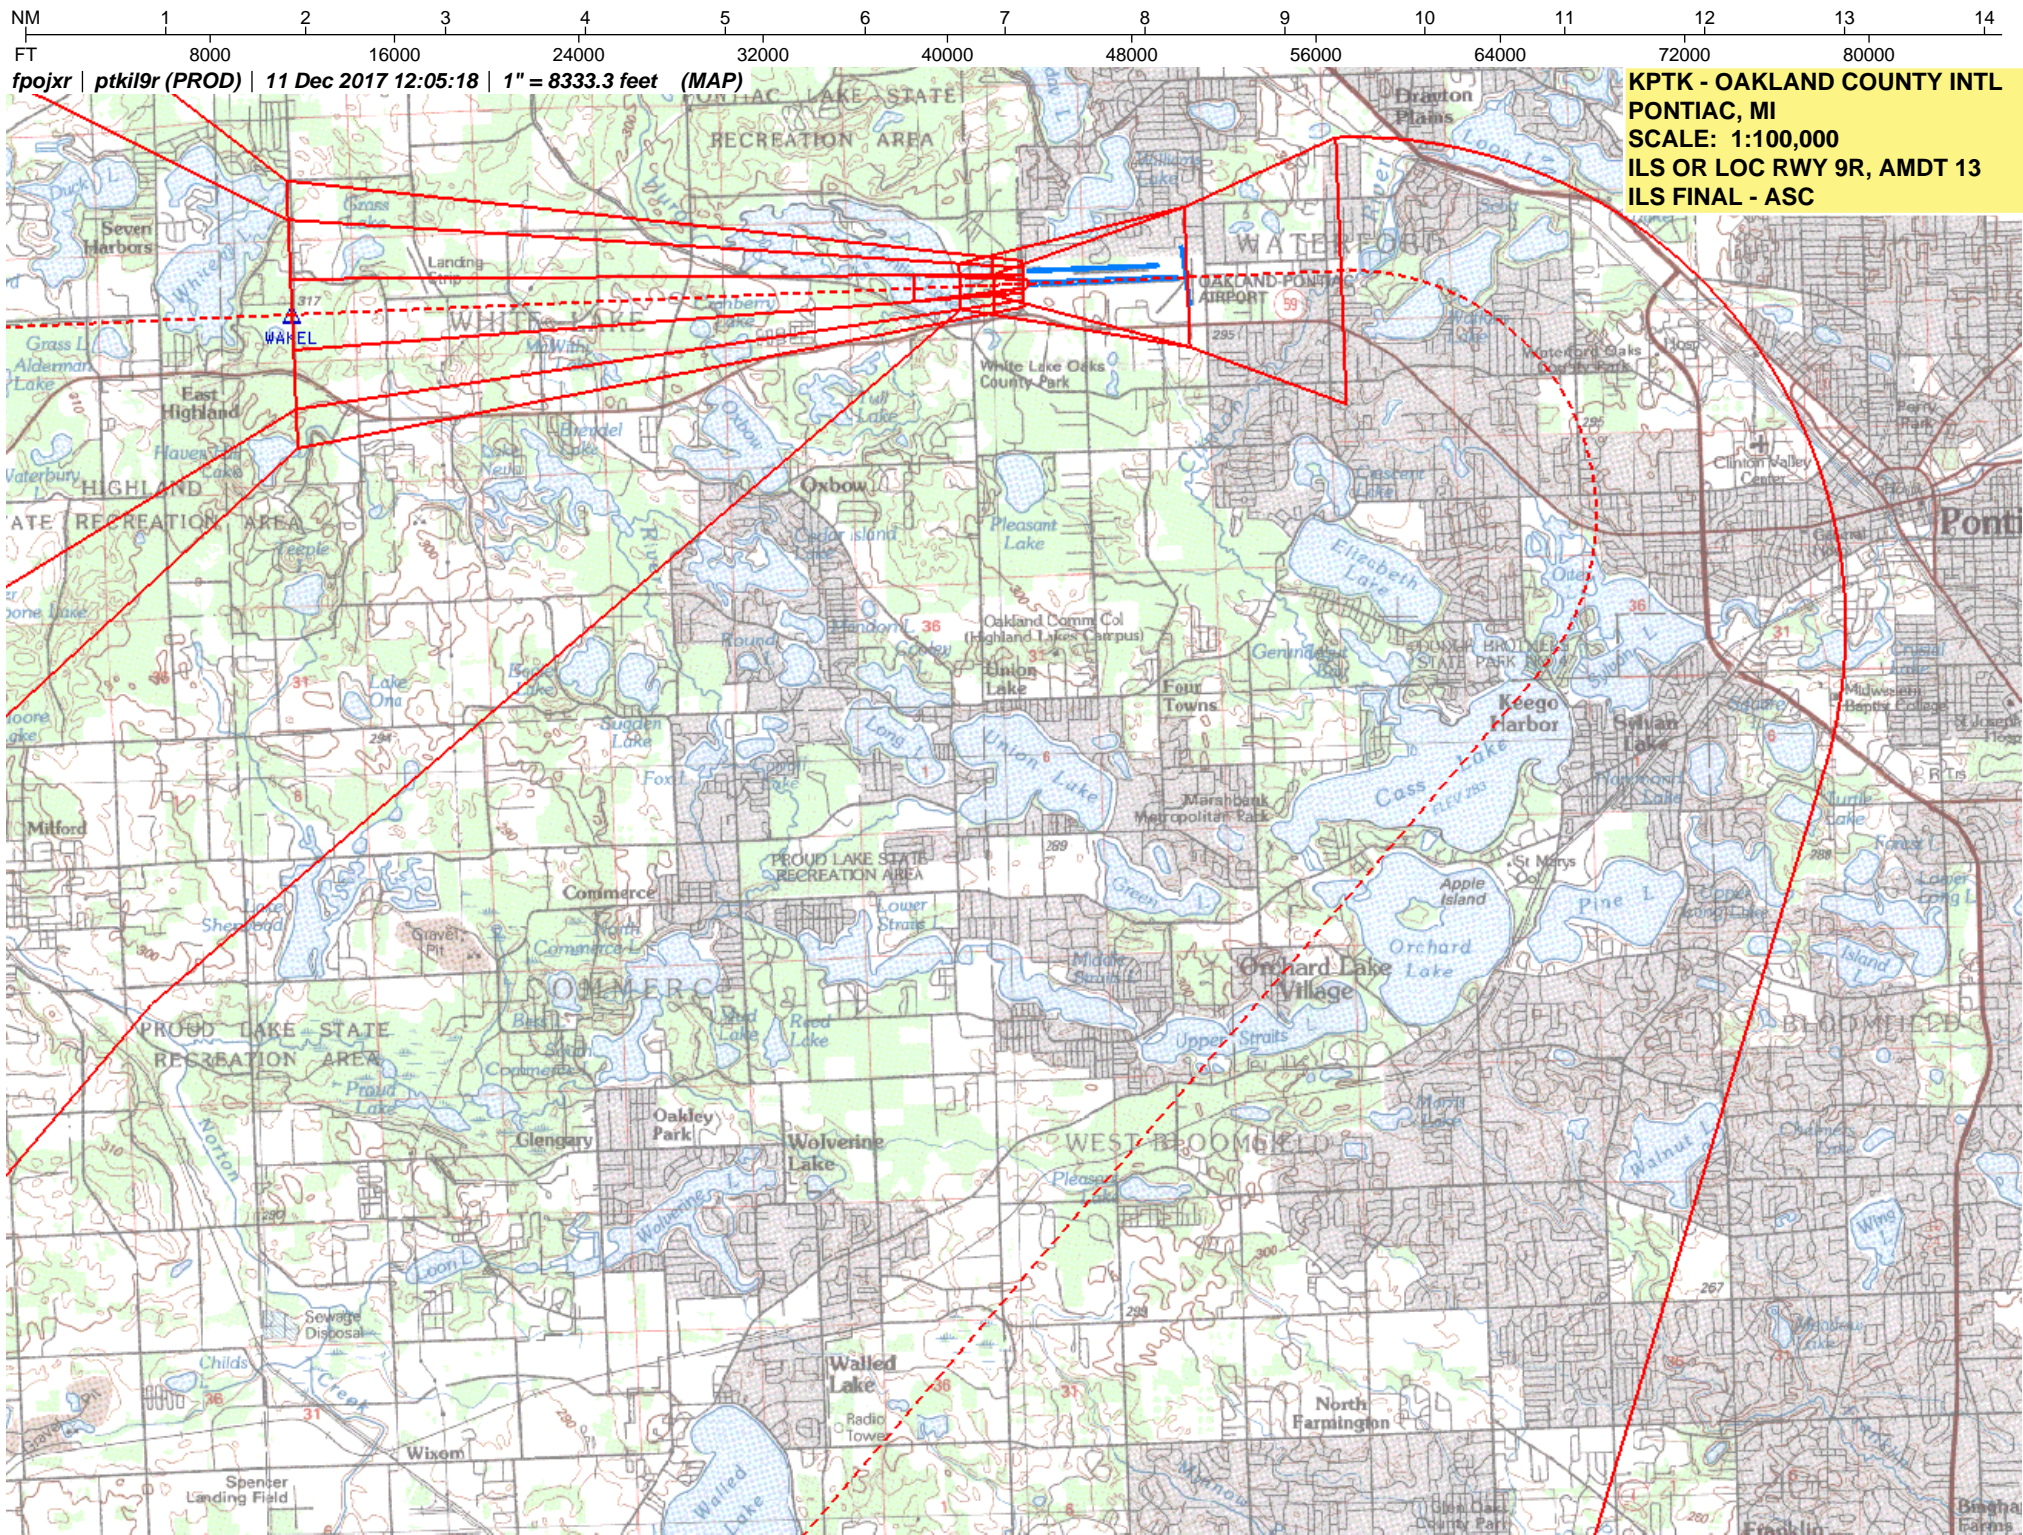

KPTK - OAKLAND COUNTY INTL
PONTIAC, MI
SCALE: 1:100,000
ILS OR LOC RWY 9R, AMDT 13
ILS FINAL - ASC

NM	1	2	3	4	5	6	7	8	9	10	11	12	13	14
----	---	---	---	---	---	---	---	---	---	----	----	----	----	----

fpojxr | *ptkil9r (PROD)* | 11 Dec 2017 12:08:29 | 1" = 8333.3 feet (MAP)

**KPTK - OAKLAND COUNTY INTL
PONTIAC, MI
SCALE: 1:100,000
ILS OR LOC RWY 9R, AMDT 13
LOC FINAL / NEW CIRCLING**

9
CIRCLING CAT B

10
CIRCLING
CAT C AND D
1321 MSL TOWER

8
CIRCLING CAT A
1189 MSL TREE

3
LOC FINAL
1369 MSL AAO

