


Name: Paul Jackson
Project Name: KCLE ROKNN STAR
Output File: KCLE ROKNN1 DEVOH
MICKJ 20171030_1110
Procedure Name: ROKNN1
Software: RNAV-Pro™
Version: 2.39
Date/Time: 10/30/2017 11:11:55 AM
Input File: [KCLE ROKNN1 STAR
DEVOH MICKJ
20170829_1013.txt](#)
Databases: AIRNAV Date: 9/17/2017
CIFP Date: 7/20/2017
DTED® (MAX) Date: 2002

Results Summary:


Flyability	✓	
DME/DME	✓	No Critical DMEs Exist
Radars	?	
Comms	?	
TERPS	?	

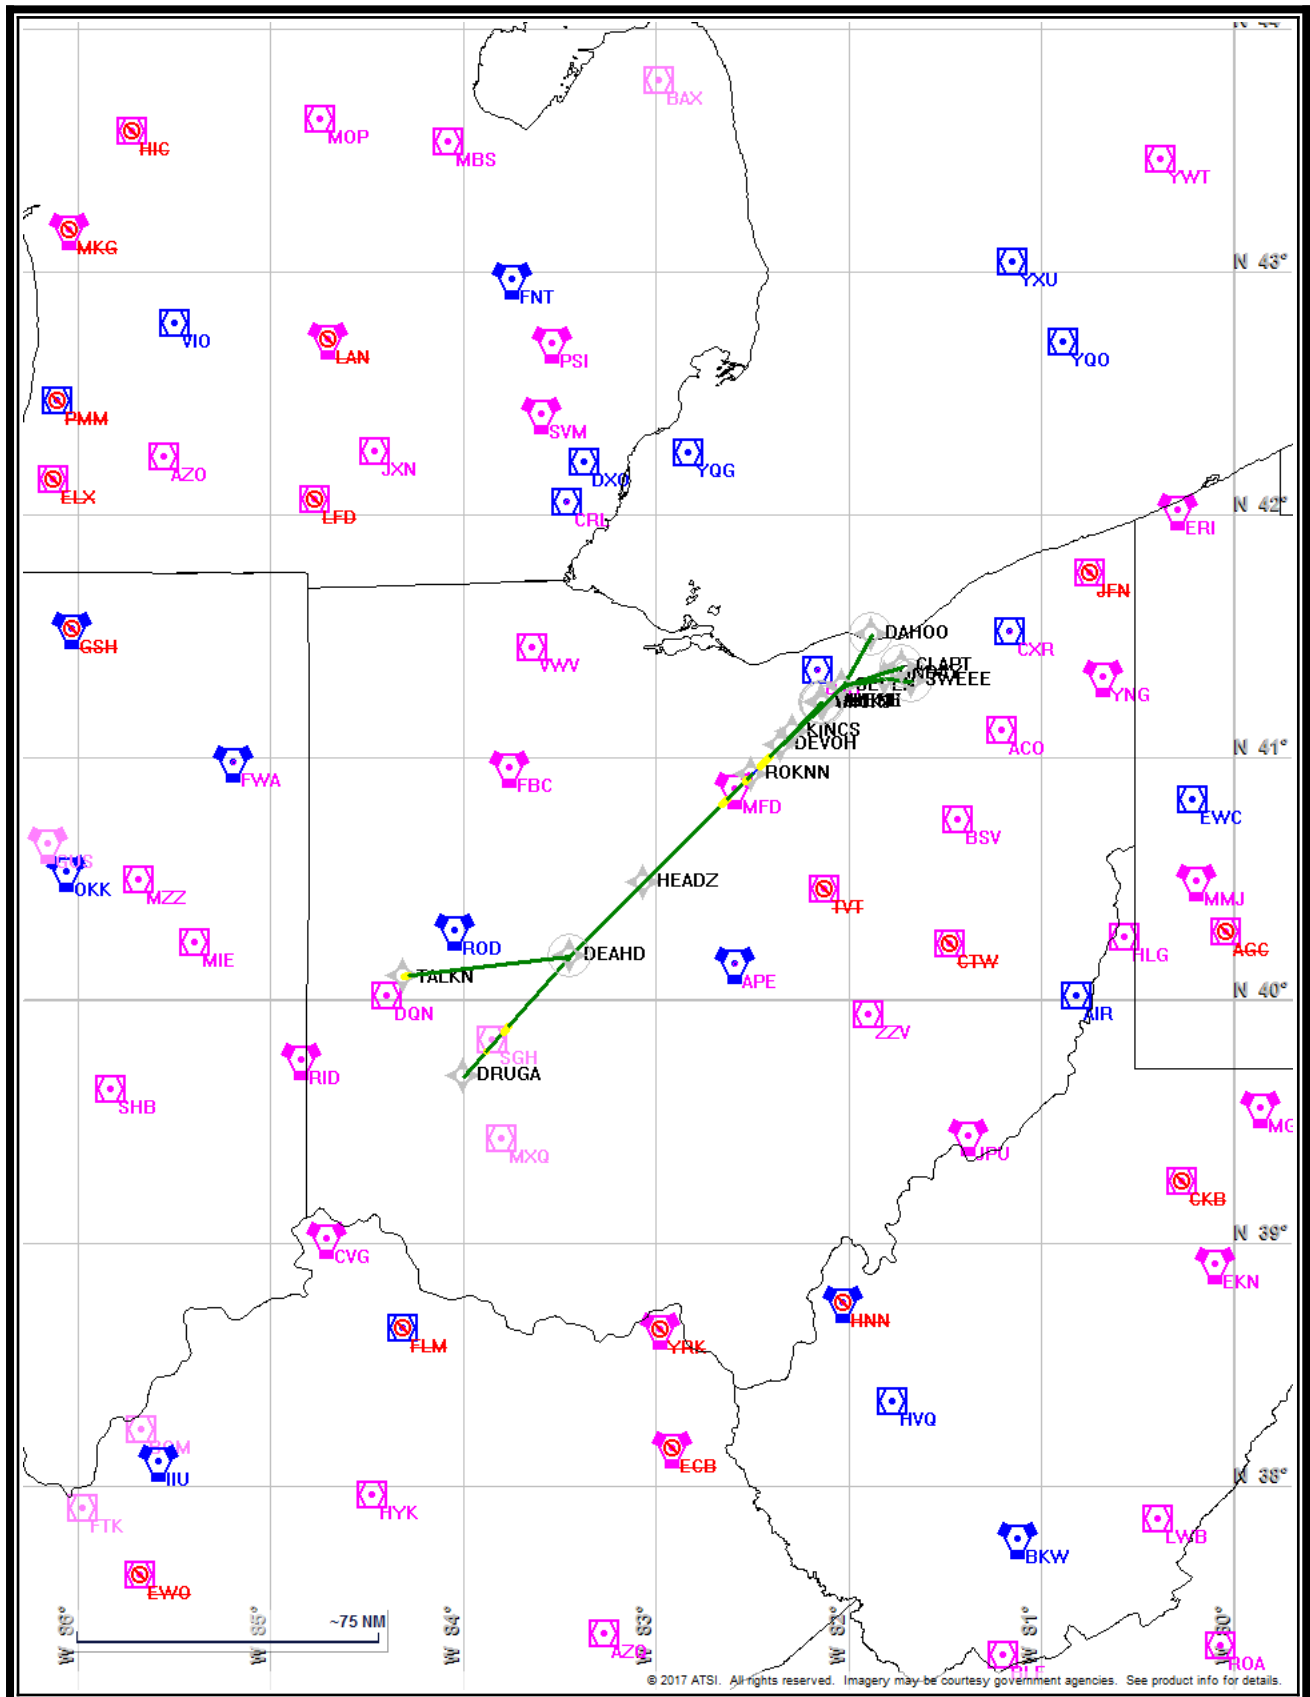

Flight Plan					Return To Summary		
Name	Type	Lat/Lon	Alt [ft]	VNAV Mode	IAS [Kts]	Turn Type	Leg Type
DEVOH	WP	N 41° 3' 3.73" W 82° 21' 3.41"	7000.0	Step	180.0	Fly By	TF
MICKJ	WP	N 41° 13' 5.78" W 82° 7' 46.97"	7000.0	Step	180.0	Fly Over	TF

Flyability		Return To Summary
Settings:	<div>Flight Type:</div> <div>Selected Airport: KCLE</div> <div>Aircraft Category: Cat D</div> <div>Climb Gradient: <i>None assigned</i></div> <div>Ground Speeds:</div> <div>Table:</div> <div><div>200.0 Kts up to 11000.0 ft</div><div>240.0 Kts up to 18000.0 ft</div><div>260.0 Kts up to 24000.0 ft</div><div>340.0 Kts up to 99900.0 ft</div></div> <div>Wind Settings: <i>None assigned</i></div> <div>Descent During a Turn: Allowed</div> <div>VNAV Mode: Flight Plan</div>	
	Entire track is fly-able	

DME/DME	Return To Summary
Settings:	<p> RNP: 2.0 Flight Mode: Manual Line of Sight (DTED Level 0 Max): Evaluated DME Restrictions: Evaluated Inertial Drift: Enabled Initial Drift: 0.558 NM INS Drift Rate: 8.000 NM/Hour Range Mode: OSV Co-Frequencies: Evaluated RNP Edges: Evaluated Min DME Range: 3.0 NM Allowed Gap Length: 4.0 NM DME Types: VOR/DME, VORTAC, Standalone, and User DME Include Angles: 30 to 150 Critical DMEs: Allowed DoD Facilities: Not included Foreign Facilities: Not included Low DMEs: Included Terminal DMEs: Included Flight Check DMEs: Selected Higher Altitudes: Evaluated Near Maximum Altitude: Evaluated </p>
<p>Total Number of DMEs Used: 3</p> <p>Maximum DME Error: 0.287 NM.</p> <p>No Critical DMEs were found.</p> <p>Available DMEs: DJB, CXR, BSV, MFD</p> <p>Disabled DMEs: LAN, LFD, ELX, GIJ, PMM, MKG, HIC, PLN, MNM, CTW, JFN, TVT, BDF, DNV, EON, PLL, PNT, RBS, SAM, UIN, VLA, BVT, GSH, ECB, EWO, FLM, YRK, BRD, DWN, HML, ODI, RST, CMK, DNY, GFL, GGT, HNK, HUO, LGA, HTO, MSS, PWL, RKA, SLK, UCA, ULW, CRI, AGC, BFD, CIP, ETG, FJC, FQM, IHD, LVZ, MIP, MXE, REC, SFK, SLT, TDT, THS, AUW, JVL, LNR, STE, CKB, ESL, HNN, and GRV</p> <p>Foreign DMEs within range: YEE, YQG, YQO, YVV, YWT, YXU, YYZ</p>	

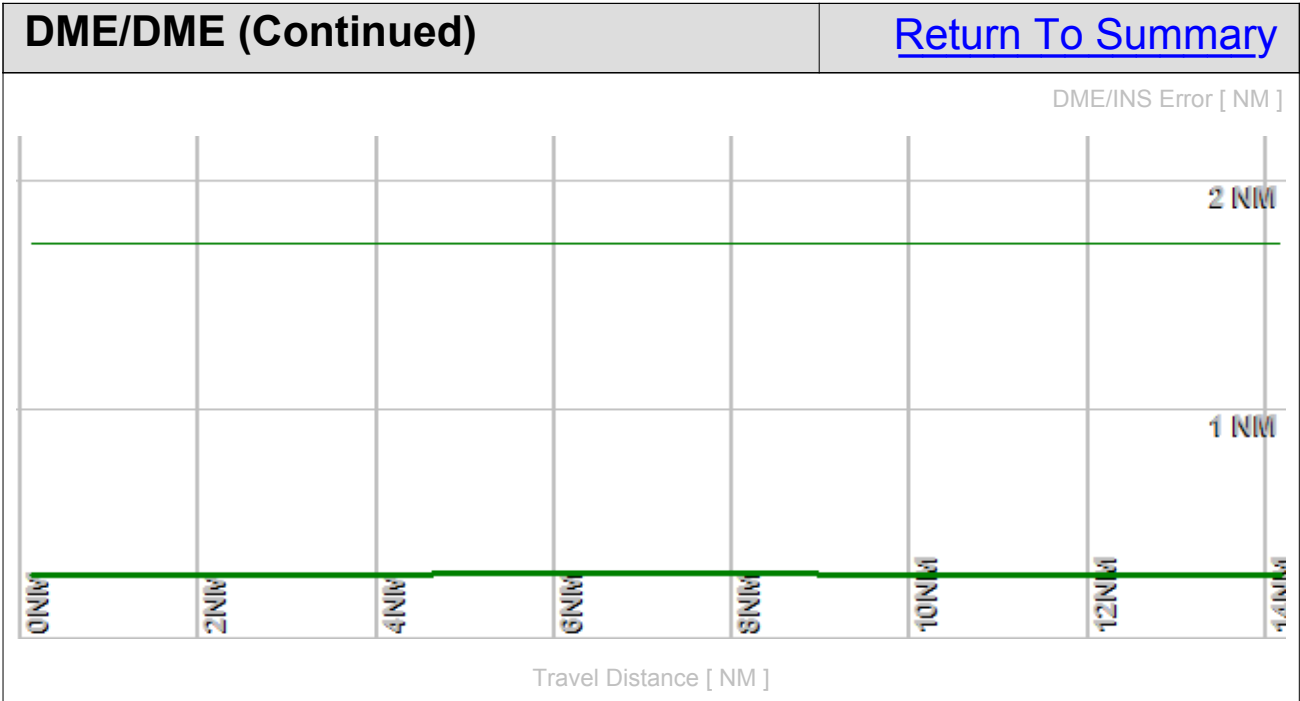

DME/DME (Continued)						Return To Summary			
DMEs Used									
#	Name	Lat/Lon/MAGVAR	Range	Source	Critical	Err. [NM]	Status	Time	Distance
1	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H + ESV	User	NO	0.299	Enabled	42.0%	42.0%
2	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L + ESV	User	NO	0.461	Enabled	100.0%	100.0%
3	MFD	N 40° 52' 7.00" W 82° 35' 27.46" 03 W	L	Database	NO	0.319	Enabled	58.0%	58.0%
	Total Coverage							100.0%	100.0%
Flight Check DME Selection									
Distance [NM]		Selected DMEs						Alternate	
0.0		BSV	MFD	DJB	CXR				

Available DMEs by Waypoints		Return To Summary
Waypoint Before	Waypoint After	DME List
DEVOH	MICKJ	BSV, CXR, DJB, and MFD

User Data					Return To Summary		
User Data Files							
#	File Name						
1	ROKKN1 NEW.udt						
User DMEs							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
1	LAN	N 42° 43' 2.62" W 84° 41' 51.03" 05 W	L	887.4	110.80	LAN	Disabled
2	LFD	N 42° 3' 44.96" W 84° 45' 54.48" 05 W	L	1040.0	111.20	LFD	Disabled
Restriction:		Bearing [True]: 105.0° to 160.0° Bearing [Mag]: 110.0° to 165.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
3	ELX	N 42° 8' 39.88" W 86° 7' 21.74" 00 E	L	793.7	116.60	ELX	Disabled
4	GIJ	N 41° 46' 7.00" W 86° 19' 6.42" 00 E	H	802.7	115.40	GIJ	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
5	PMM	N 42° 27' 57.73" W 86° 6' 17.32" 00 E	H	639.9	112.10	PMM	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
6	MKG	N 43° 10' 9.31" W 86° 2' 21.76" 01 W	L	659.1	115.20	MKG	Disabled
Restriction:		Bearing [True]: 54.0° to 89.0° Bearing [Mag]: 55.0° to 90.0°			Distance: Beyond 10.0 NM Altitude: Below 4000.0 ft		
7	HIC	N 43° 34' 29.47" W 85° 42' 58.18" 01 W	L	920.0	117.60	HIC	Disabled
Restriction:		Bearing [True]: 19.0° to 89.0° Bearing [Mag]: 20.0° to 90.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 269.0° to 289.0° Bearing [Mag]: 270.0° to 290.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
8	PLN	N 45° 37' 50.33" W 84° 39' 50.79" 06 W	L	835.3	111.80	PLN	Disabled
9	MNM	N 45° 10' 48.58" W 87° 38' 49.83" 00 E	L	650.1	109.60	MNM	Disabled
10	CTW	N 40° 13' 45.15" W 81° 28' 35.32" 07 W	L	1180.0	111.80	CTW	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
11	JFN	N 41° 45' 36.42" W 80° 44' 53.20" 05 W	L	896.3	115.20	JFN	Disabled
Restriction:		Bearing [True]: 226.0° to 255.0° Bearing [Mag]: 231.0° to 260.0°			Distance: Beyond 30.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 121.0° to 185.0° Bearing [Mag]: 126.0° to 190.0°			Distance: Beyond 20.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 186.0° to 225.0° Bearing [Mag]: 191.0° to 230.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 80.0° to 120.0° Bearing [Mag]: 85.0° to 125.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
12	TVT	N 40° 27' 29.04" W 82° 7' 36.52" 03 W	L	1330.4	116.50	TVT	Disabled
13	BDF	N 41° 9' 35.03" W 89° 35' 16.34" 00 E	H	810.0	114.70	BDF	Disabled
14	DNV	N 40° 17' 37.56" W 87° 33' 26.14" 02 E	L	698.8	111.00	DNV	Disabled
15	EON	N 41° 16' 10.68" W 87° 47' 27.79" 02 E	L	688.7	113.20	EON	Disabled
16	PLL	N 41° 57' 56.31" W 89° 31' 27.19" 03 E	L	840.0	111.20	PLL	Disabled
17	PNT	N 40° 49' 16.32" W 88° 44' 0.63" 03 E	L	680.0	109.60	PNT	Disabled
18	RBS	N 40° 34' 54.13" W 88° 9' 51.36" 02 E	L	780.0	116.80	RBS	Disabled
19	SAM	N 38° 29' 6.68" W 88° 5' 8.90" 03 E	L	540.0	116.60	SAM	Disabled
20	UIN	N 39° 50' 52.35" W 91° 16' 44.13" 05 E	H	715.1	113.60	UIN	Disabled
21	VLA	N 39° 5' 37.82" W 89° 9' 44.08" 04 E	L	605.5	114.30	VLA	Disabled
22	BVT	N 40° 33' 22.22" W 87° 4' 9.75" 01 E	H	752.2	115.10	BVT	Disabled
Restriction:		Bearing [True]: 299.0° to 45.0° Bearing [Mag]: 298.0° to 44.0°			Distance: Beyond 0.0 NM Altitude: Below 2800.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
23	GSH	N 41° 31' 30.56" W 86° 1' 40.63" 00 E	H	851.8	113.70	GSH	Disabled
Restriction:		Bearing [True]: 71.0° to 129.0° Bearing [Mag]: 71.0° to 129.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
24	ECB	N 38° 9' 30.11" W 82° 54' 36.20" 02 W	L	1070.0	110.40	ECB	Disabled
25	EWO	N 37° 37' 54.52" W 85° 40' 33.16" 01 E	L	960.0	110.80	EWO	Disabled
26	FLM	N 38° 38' 57.99" W 84° 18' 38.17" 04 W	H	808.5	117.00	FLM	Disabled
27	YRK	N 38° 38' 38.88" W 82° 58' 42.02" 05 W	L	1040.0	112.80	YRK	Disabled
28	BRD	N 46° 20' 53.81" W 94° 1' 33.54" 03 E	H	1253.9	116.90	BRD	Disabled
Restriction:		Bearing [True]: 3.0° to 3.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 29.0 NM Altitude: Below 3000.0 ft		
29	DWN	N 45° 5' 14.87" W 94° 27' 13.86" 07 E	L	1130.0	109.00	DWN	Disabled
30	HML	N 48° 52' 9.07" W 97° 7' 4.45" 09 E	H	797.4	112.40	HML	Disabled
Restriction:		Bearing [True]: 84.0° to 94.0° Bearing [Mag]: 75.0° to 85.0°			Distance: Beyond 0.0 NM Altitude: Below 10000.0 ft		
Restriction:		Bearing [True]: 95.0° to 263.0° Bearing [Mag]: 86.0° to 254.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 264.0° to 279.0° Bearing [Mag]: 255.0° to 270.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 280.0° to 83.0° Bearing [Mag]: 271.0° to 74.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
31	ODI	N 43° 54' 44.38" W 91° 28' 3.06" 01 E	H	1282.2	117.90	ODI	Disabled
32	RST	N 43° 46' 58.45" W 92° 35' 49.06" 05 E	L	1393.0	112.00	RST	Disabled
33	CMK	N 41° 16' 48.32" W 73° 34' 52.77" 12 W	L	693.8	116.60	CMK	Disabled
34	DNY	N 42° 10' 41.81" W 74° 57' 24.99" 11 W	L	2560.0	112.10	DNY	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
35	GFL	N 43° 20' 30.09" W 73° 36' 42.32" 14 W	L	323.7	110.20	GFL	Disabled
Restriction:		Bearing [True]: 346.0° to 346.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 0.0 NM Altitude: Below 9000.0 ft		
36	GGT	N 42° 47' 20.24" W 75° 49' 36.29" 11 W	L	2040.0	117.80	GGT	Disabled
37	HNK	N 42° 3' 47.00" W 75° 18' 58.62" 11 W	H	2070.0	116.80	HNK	Disabled
38	HUO	N 41° 24' 34.87" W 74° 35' 29.74" 11 W	H	1300.3	116.10	HUO	Disabled
39	LGA	N 40° 47' 1.38" W 73° 52' 6.96" 12 W	L	8.9	113.10	LGA	Disabled
Restriction:		Bearing [True]: 233.0° to 268.0° Bearing [Mag]: 245.0° to 280.0°			Distance: Beyond 25.0 NM Altitude: Below 6000.0 ft		
40	HTO	N 40° 55' 8.38" W 72° 19' 0.14" 13 W	H	22.0	113.60	HTO	Disabled
Restriction:		Bearing [True]: 267.0° to 312.0° Bearing [Mag]: 280.0° to 325.0°			Distance: Beyond 35.0 NM Altitude: Below 1700.0 ft		
Restriction:		Bearing [True]: 312.0° to 342.0° Bearing [Mag]: 325.0° to 355.0°			Distance: Beyond 30.0 NM Altitude: Below 2000.0 ft		
41	MSS	N 44° 54' 51.92" W 74° 43' 21.78" 14 W	H	197.5	114.10	MSS	Disabled
42	PWL	N 41° 46' 11.18" W 73° 36' 1.99" 12 W	L	1250.0	114.30	PWL	Disabled
43	RKA	N 42° 27' 58.91" W 75° 14' 21.51" 11 W	L	2027.2	112.60	RKA	Disabled
44	SLK	N 44° 23' 4.41" W 74° 12' 16.21" 14 W	L	1646.8	109.20	SLK	Disabled
45	UCA	N 43° 1' 35.45" W 75° 9' 52.28" 12 W	L	1420.0	111.20	UCA	Disabled
46	ULW	N 42° 5' 39.16" W 77° 1' 28.53" 12 W	L	1631.8	109.65	ULW	Disabled
47	CRI	N 40° 36' 44.90" W 73° 53' 40.00" 11 W	T	10.0	112.30	CRI	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
48	AGC	N 40° 16' 43.12" W 80° 2' 27.08" 09 W	L	1284.6	110.00	AGC	Disabled
49	BFD	N 41° 47' 10.99" W 78° 37' 9.65" 07 W	L	2110.6	116.60	BFD	Disabled
50	CIP	N 41° 8' 46.66" W 79° 27' 28.71" 06 W	L	1519.5	112.90	CIP	Disabled
51	ETG	N 41° 12' 53.82" W 78° 8' 33.92" 10 W	H	2250.0	116.00	ETG	Disabled
52	FJC	N 40° 43' 36.12" W 75° 27' 17.12" 10 W	L	680.6	117.50	FJC	Disabled
Restriction:		Bearing [True]: 290.0° to 50.0° Bearing [Mag]: 300.0° to 60.0°			Distance: Beyond 26.0 NM Altitude: Below 4500.0 ft		
Restriction:		Bearing [True]: 51.0° to 289.0° Bearing [Mag]: 61.0° to 299.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
53	FQM	N 41° 20' 18.81" W 76° 46' 29.52" 09 W	L	2098.0	114.40	FQM	Disabled
54	IHD	N 39° 58' 27.27" W 79° 21' 30.12" 06 W	L	2820.0	108.20	IHD	Disabled
55	LVZ	N 41° 16' 22.09" W 75° 41' 22.08" 10 W	L	2118.8	111.60	LVZ	Disabled
56	MIP	N 41° 1' 24.21" W 76° 39' 55.04" 09 W	L	1000.0	109.20	MIP	Disabled
57	MXE	N 39° 55' 5.00" W 75° 40' 14.91" 09 W	L	473.4	113.20	MXE	Disabled
58	REC	N 40° 32' 47.25" W 78° 44' 49.28" 09 W	L	2340.0	110.60	REC	Disabled
59	SFK	N 41° 41' 42.91" W 77° 25' 11.66" 08 W	L	1984.7	108.60	SFK	Disabled
60	SLT	N 41° 30' 45.93" W 77° 58' 12.39" 08 W	H	2310.0	113.90	SLT	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
61	TDT	N 41° 42' 46.91" W 79° 25' 2.17" 09 W	L	1710.0	117.60	TDT	Disabled
Restriction:		Bearing [True]: 32.0° to 42.0° Bearing [Mag]: 41.0° to 51.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
Restriction:		Bearing [True]: 296.0° to 331.0° Bearing [Mag]: 305.0° to 340.0°			Distance: Beyond 24.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 331.0° to 356.0° Bearing [Mag]: 340.0° to 5.0°			Distance: Beyond 24.0 NM Altitude: Below 5000.0 ft		
62	THS	N 39° 55' 59.62" W 77° 57' 3.40" 07 W	L	2338.0	115.00	THS	Disabled
63	AUW	N 44° 50' 48.40" W 89° 35' 11.68" 02 E	L	1204.7	111.60	AUW	Disabled
Restriction:		Bearing [True]: 322.0° to 302.0° Bearing [Mag]: 320.0° to 300.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 302.0° to 322.0° Bearing [Mag]: 300.0° to 320.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
64	JVL	N 42° 33' 28.83" W 89° 6' 18.93" 03 E	L	931.4	114.30	JVL	Disabled
65	LNR	N 43° 17' 39.85" W 90° 7' 59.33" 00 E	L	1184.6	112.80	LNR	Disabled
66	STE	N 44° 32' 35.69" W 89° 31' 50.02" 01 W	L	1110.0	110.60	STE	Disabled
Restriction:		Bearing [True]: 359.0° to 359.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
67	CKB	N 39° 15' 11.57" W 80° 16' 4.32" 04 W	L	1425.7	112.60	CKB	Disabled
68	ESL	N 39° 13' 31.77" W 78° 59' 22.20" 06 W	L	2590.0	110.80	ESL	Disabled
69	HNN	N 38° 45' 14.85" W 82° 1' 34.20" 03 W	H	880.0	115.90	HNN	Disabled
70	GRV	N 39° 38' 6.11" W 79° 3' 1.90" 06 W	L	2640.0	112.30	GRV	Disabled
Restriction:		Bearing [True]: 301.0° to 64.0° Bearing [Mag]: 307.0° to 70.0°			Distance: Beyond 20.0 NM Altitude: Below 5000.0 ft		
Restriction:		Bearing [True]: 65.0° to 300.0° Bearing [Mag]: 71.0° to 306.0°			Distance: Beyond 20.0 NM Altitude: Below 6000.0 ft		
Restriction:		Bearing [True]: 102.0° to 107.0° Bearing [Mag]: 108.0° to 113.0°			Distance: Beyond 38.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 319.0° to 339.0° Bearing [Mag]: 325.0° to 345.0°			Distance: Beyond 35.0 NM Altitude: Below 99999.0 ft		

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
71	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H	780.0	113.60	DJB	Used
		ESV:	Bearing [True]: 165.0° to 297.0° Bearing [Mag]: 170.0° to 302.0°		Arc Distance: Out to 102.0 NM Altitude: 8200.0 to 16000.0 ft		
72	CRL	N 42° 2' 52.90" W 83° 27' 27.30" 03 W	H	629.0	115.70	CRL	Not Used
		ESV:	Bearing [True]: 144.0° to 170.0° Bearing [Mag]: 147.0° to 173.0°		Arc Distance: Out to 95.0 NM Altitude: 8900.0 to 16000.0 ft		
73	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H	1317.2	112.70	CXR	Not Used
		ESV:	Bearing [True]: 235.0° to 273.0° Bearing [Mag]: 240.0° to 278.0°		Arc Distance: Out to 71.0 NM Altitude: 4500.0 to 16000.0 ft		
74	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H	792.6	117.80	FWA	Not Used
		Restriction:	Bearing [True]: 55.0° to 65.0° Bearing [Mag]: 61.0° to 71.0°		Distance: Beyond 0.0 NM Altitude: Below 7000.0 ft		
		Restriction:	Bearing [True]: 354.0° to 354.0° Bearing [Mag]: 360.0° to 360.0°		Distance: Beyond 33.0 NM Altitude: Below 2800.0 ft		
		Restriction:	Bearing [True]: 170.0° to 210.0° Bearing [Mag]: 176.0° to 216.0°		Distance: Beyond 22.0 NM Altitude: Below 4000.0 ft		
		Restriction:	Bearing [True]: 260.0° to 290.0° Bearing [Mag]: 266.0° to 296.0°		Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
		ESV:	Bearing [True]: 108.0° to 128.0° Bearing [Mag]: 114.0° to 134.0°		Arc Distance: Out to 101.0 NM Altitude: 10000.0 to 20000.0 ft		
75	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H	1353.7	116.70	APE	Not Used
		Restriction:	Bearing [True]: 177.0° to 182.0° Bearing [Mag]: 183.0° to 188.0°		Distance: Beyond 20.0 NM Altitude: Below 3000.0 ft		
		ESV:	Bearing [True]: 260.0° to 280.0° Bearing [Mag]: 266.0° to 286.0°		Arc Distance: Out to 94.0 NM Altitude: 10000.0 to 18000.0 ft		
76	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L	1221.0	112.40	BSV	Used
		ESV:	Bearing [True]: 288.0° to 340.0° Bearing [Mag]: 292.0° to 344.0°		Arc Distance: Out to 60.0 NM Altitude: 4100.0 to 20000.0 ft		

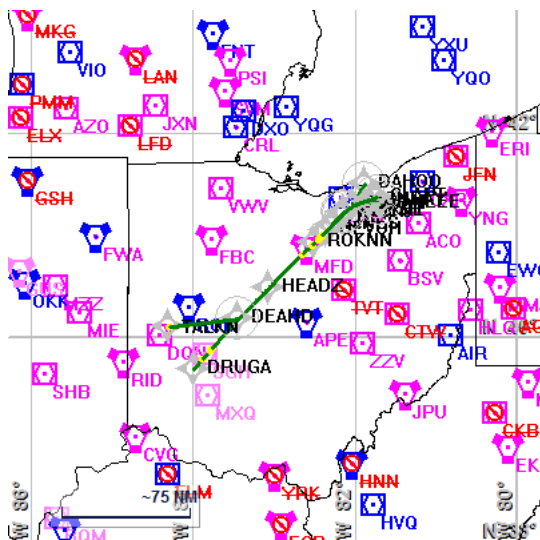

Name: Paul Jackson
Project Name: KCLE ROKNN STAR
Output File: KCLE ROKNN1 STAR
 DEVOH DAHOO
 20171030_1110
Procedure Name: ROKNN1
Software: RNAV-Pro™
Version: 2.39
Date/Time: 10/30/2017 11:10:45 AM
Input File: [KCLE ROKNN1 STAR
 DEVOH DAHOO
 20170829_1015.txt](#)
Databases: AIRNAV Date: 9/17/2017
 CIFP Date: 7/20/2017
 DTED® (MAX) Date: 2002

Results Summary:

Flyability



DME/DME



No Critical DMEs Exist

Radars




Comms



TERPS




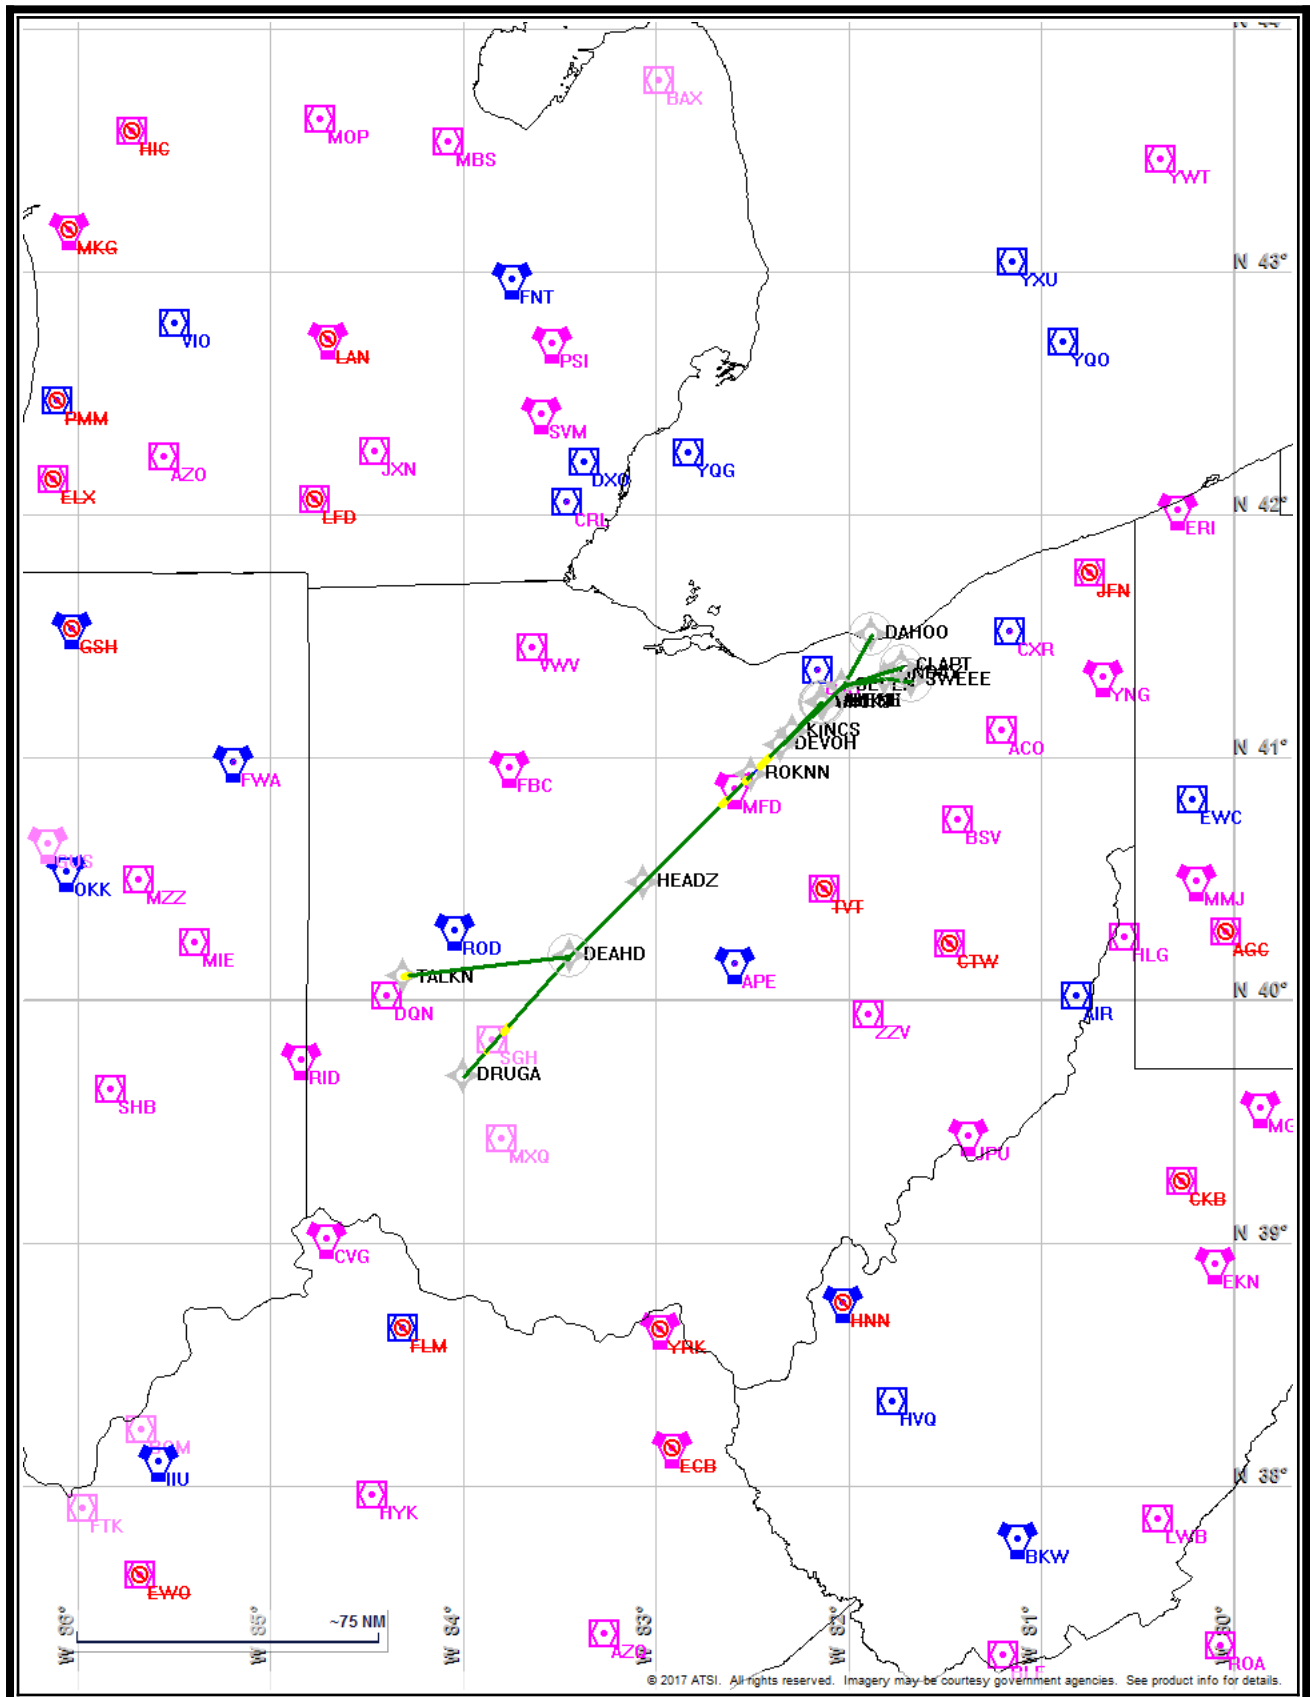

Flight Plan					Return To Summary		
Name	Type	Lat/Lon	Alt [ft]	VNAV Mode	IAS [Kts]	Turn Type	Leg Type
DEVOH	WP	N 41° 3' 3.73" W 82° 21' 3.41"	7000.0	Step	210.0	Fly By	TF
SEPLN	WP	N 41° 17' 30.33" W 82° 1' 55.89"	7000.0	Step	210.0	Fly By	TF
DAHOO	WP	N 41° 30' 18.29" W 81° 52' 53.14"	6000.0	Step	210.0	Fly Over	TF

Flyability		Return To Summary
Settings:	Flight Type: Arrival	
	Selected Airport: KCLE	
	Aircraft Category: Cat D	
	Climb Gradient: <i>None assigned</i>	
	Ground Speeds:	
	Table:	
	200.0 Kts up to 11000.0 ft	
	240.0 Kts up to 18000.0 ft	
	260.0 Kts up to 24000.0 ft	
	340.0 Kts up to 99900.0 ft	
	Wind Settings: <i>None assigned</i>	
	Descent During a Turn: Allowed	
	VNAV Mode: Flight Plan	
Entire track is fly-able		

DME/DME	Return To Summary
Settings:	RNP: 2.0 Flight Mode: Manual Line of Sight (DTED Level 0 Max): Evaluated DME Restrictions: Evaluated Inertial Drift: Enabled Initial Drift: 0.558 NM INS Drift Rate: 8.000 NM/Hour Range Mode: OSV Co-Frequencies: Evaluated RNP Edges: Evaluated Min DME Range: 3.0 NM Allowed Gap Length: 4.0 NM DME Types: VOR/DME, VORTAC, Standalone, and User DME Include Angles: 30 to 150 Critical DMEs: Allowed DoD Facilities: Not included Foreign Facilities: Not included Low DMEs: Included Terminal DMEs: Included Flight Check DMEs: Selected Higher Altitudes: Evaluated Near Maximum Altitude: Evaluated
Total Number of DMEs Used: 4 Maximum DME Error: 0.296 NM. No Critical DMEs were found. Available DMEs: DJB, CXR, BSV, MFD Disabled DMEs: LAN, LFD, ELX, GIJ, PMM, MKG, HIC, PLN, MNM, CTW, JFN, TVT, BDF, DNV, EON, PLL, PNT, RBS, SAM, UIN, VLA, BVT, GSH, ECB, EWO, FLM, YRK, BRD, DWN, HML, ODI, RST, CMK, DNY, GFL, GGT, HNK, HUO, LGA, HTO, MSS, PWL, RKA, SLK, UCA, ULW, CRI, AGC, BFD, CIP, ETG, FJC, FQM, IHD, LVZ, MIP, MXE, REC, SFK, SLT, TDT, THS, AUW, JVL, LNR, STE, CKB, ESL, HNN, and GRV Foreign DMEs within range: YEE, YQG, YQO, YVV, YWT, YXU, YYZ	

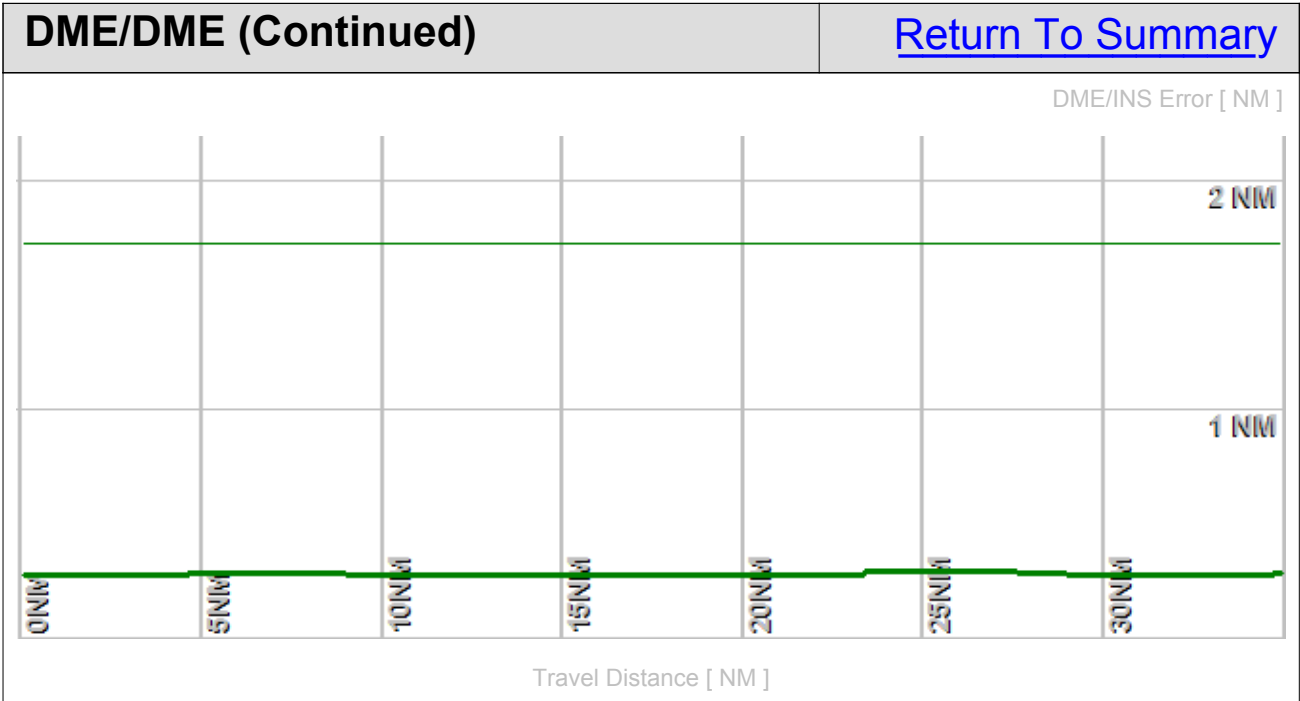

DME/DME (Continued)							Return To Summary		
DMEs Used									
#	Name	Lat/Lon/MAGVAR	Range	Source	Critical	Err. [NM]	Status	Time	Distance
1	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H + ESV	User	NO	0.302	Enabled	39.8%	39.8%
2	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L + ESV	User	NO	0.795	Enabled	99.5%	99.5%
3	MFD	N 40° 52' 7.00" W 82° 35' 27.46" 03 W	L	Database	NO	0.320	Enabled	49.4%	49.4%
4	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H + ESV	User	NO	0.406	Enabled	11.3%	11.3%
	Total Coverage							100.0%	100.0%
Flight Check DME Selection									
Distance [NM]		Selected DMEs						Alternate	
0.0		BSV	MFD	DJB	CXR				
19.9		BSV	MFD	DJB	CXR				

Available DMEs by Waypoints		Return To Summary
Waypoint Before	Waypoint After	DME List
DEVOH	SEPLN	BSV, CXR, DJB, and MFD
SEPLN	DAHOO	BSV, CXR, DJB, and MFD

User Data					Return To Summary		
User Data Files							
#	File Name						
1	ROKKN1 NEW.udt						
User DMEs							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
1	LAN	N 42° 43' 2.62" W 84° 41' 51.03" 05 W	L	887.4	110.80	LAN	Disabled
2	LFD	N 42° 3' 44.96" W 84° 45' 54.48" 05 W	L	1040.0	111.20	LFD	Disabled
Restriction:		Bearing [True]: 105.0° to 160.0° Bearing [Mag]: 110.0° to 165.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
3	ELX	N 42° 8' 39.88" W 86° 7' 21.74" 00 E	L	793.7	116.60	ELX	Disabled
4	GIJ	N 41° 46' 7.00" W 86° 19' 6.42" 00 E	H	802.7	115.40	GIJ	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
5	PMM	N 42° 27' 57.73" W 86° 6' 17.32" 00 E	H	639.9	112.10	PMM	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
6	MKG	N 43° 10' 9.31" W 86° 2' 21.76" 01 W	L	659.1	115.20	MKG	Disabled
Restriction:		Bearing [True]: 54.0° to 89.0° Bearing [Mag]: 55.0° to 90.0°			Distance: Beyond 10.0 NM Altitude: Below 4000.0 ft		
7	HIC	N 43° 34' 29.47" W 85° 42' 58.18" 01 W	L	920.0	117.60	HIC	Disabled
Restriction:		Bearing [True]: 19.0° to 89.0° Bearing [Mag]: 20.0° to 90.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 269.0° to 289.0° Bearing [Mag]: 270.0° to 290.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
8	PLN	N 45° 37' 50.33" W 84° 39' 50.79" 06 W	L	835.3	111.80	PLN	Disabled
9	MNM	N 45° 10' 48.58" W 87° 38' 49.83" 00 E	L	650.1	109.60	MNM	Disabled
10	CTW	N 40° 13' 45.15" W 81° 28' 35.32" 07 W	L	1180.0	111.80	CTW	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
11	JFN	N 41° 45' 36.42" W 80° 44' 53.20" 05 W	L	896.3	115.20	JFN	Disabled
Restriction:		Bearing [True]: 226.0° to 255.0° Bearing [Mag]: 231.0° to 260.0°			Distance: Beyond 30.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 121.0° to 185.0° Bearing [Mag]: 126.0° to 190.0°			Distance: Beyond 20.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 186.0° to 225.0° Bearing [Mag]: 191.0° to 230.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 80.0° to 120.0° Bearing [Mag]: 85.0° to 125.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
12	TVT	N 40° 27' 29.04" W 82° 7' 36.52" 03 W	L	1330.4	116.50	TVT	Disabled
13	BDF	N 41° 9' 35.03" W 89° 35' 16.34" 00 E	H	810.0	114.70	BDF	Disabled
14	DNV	N 40° 17' 37.56" W 87° 33' 26.14" 02 E	L	698.8	111.00	DNV	Disabled
15	EON	N 41° 16' 10.68" W 87° 47' 27.79" 02 E	L	688.7	113.20	EON	Disabled
16	PLL	N 41° 57' 56.31" W 89° 31' 27.19" 03 E	L	840.0	111.20	PLL	Disabled
17	PNT	N 40° 49' 16.32" W 88° 44' 0.63" 03 E	L	680.0	109.60	PNT	Disabled
18	RBS	N 40° 34' 54.13" W 88° 9' 51.36" 02 E	L	780.0	116.80	RBS	Disabled
19	SAM	N 38° 29' 6.68" W 88° 5' 8.90" 03 E	L	540.0	116.60	SAM	Disabled
20	UIN	N 39° 50' 52.35" W 91° 16' 44.13" 05 E	H	715.1	113.60	UIN	Disabled
21	VLA	N 39° 5' 37.82" W 89° 9' 44.08" 04 E	L	605.5	114.30	VLA	Disabled
22	BVT	N 40° 33' 22.22" W 87° 4' 9.75" 01 E	H	752.2	115.10	BVT	Disabled
Restriction:		Bearing [True]: 299.0° to 45.0° Bearing [Mag]: 298.0° to 44.0°			Distance: Beyond 0.0 NM Altitude: Below 2800.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
23	GSH	N 41° 31' 30.56" W 86° 1' 40.63" 00 E	H	851.8	113.70	GSH	Disabled
Restriction:		Bearing [True]: 71.0° to 129.0° Bearing [Mag]: 71.0° to 129.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
24	ECB	N 38° 9' 30.11" W 82° 54' 36.20" 02 W	L	1070.0	110.40	ECB	Disabled
25	EWO	N 37° 37' 54.52" W 85° 40' 33.16" 01 E	L	960.0	110.80	EWO	Disabled
26	FLM	N 38° 38' 57.99" W 84° 18' 38.17" 04 W	H	808.5	117.00	FLM	Disabled
27	YRK	N 38° 38' 38.88" W 82° 58' 42.02" 05 W	L	1040.0	112.80	YRK	Disabled
28	BRD	N 46° 20' 53.81" W 94° 1' 33.54" 03 E	H	1253.9	116.90	BRD	Disabled
Restriction:		Bearing [True]: 3.0° to 3.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 29.0 NM Altitude: Below 3000.0 ft		
29	DWN	N 45° 5' 14.87" W 94° 27' 13.86" 07 E	L	1130.0	109.00	DWN	Disabled
30	HML	N 48° 52' 9.07" W 97° 7' 4.45" 09 E	H	797.4	112.40	HML	Disabled
Restriction:		Bearing [True]: 84.0° to 94.0° Bearing [Mag]: 75.0° to 85.0°			Distance: Beyond 0.0 NM Altitude: Below 10000.0 ft		
Restriction:		Bearing [True]: 95.0° to 263.0° Bearing [Mag]: 86.0° to 254.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 264.0° to 279.0° Bearing [Mag]: 255.0° to 270.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 280.0° to 83.0° Bearing [Mag]: 271.0° to 74.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
31	ODI	N 43° 54' 44.38" W 91° 28' 3.06" 01 E	H	1282.2	117.90	ODI	Disabled
32	RST	N 43° 46' 58.45" W 92° 35' 49.06" 05 E	L	1393.0	112.00	RST	Disabled
33	CMK	N 41° 16' 48.32" W 73° 34' 52.77" 12 W	L	693.8	116.60	CMK	Disabled
34	DNY	N 42° 10' 41.81" W 74° 57' 24.99" 11 W	L	2560.0	112.10	DNY	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
35	GFL	N 43° 20' 30.09" W 73° 36' 42.32" 14 W	L	323.7	110.20	GFL	Disabled
Restriction:		Bearing [True]: 346.0° to 346.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 0.0 NM Altitude: Below 9000.0 ft		
36	GGT	N 42° 47' 20.24" W 75° 49' 36.29" 11 W	L	2040.0	117.80	GGT	Disabled
37	HNK	N 42° 3' 47.00" W 75° 18' 58.62" 11 W	H	2070.0	116.80	HNK	Disabled
38	HUO	N 41° 24' 34.87" W 74° 35' 29.74" 11 W	H	1300.3	116.10	HUO	Disabled
39	LGA	N 40° 47' 1.38" W 73° 52' 6.96" 12 W	L	8.9	113.10	LGA	Disabled
Restriction:		Bearing [True]: 233.0° to 268.0° Bearing [Mag]: 245.0° to 280.0°			Distance: Beyond 25.0 NM Altitude: Below 6000.0 ft		
40	HTO	N 40° 55' 8.38" W 72° 19' 0.14" 13 W	H	22.0	113.60	HTO	Disabled
Restriction:		Bearing [True]: 267.0° to 312.0° Bearing [Mag]: 280.0° to 325.0°			Distance: Beyond 35.0 NM Altitude: Below 1700.0 ft		
Restriction:		Bearing [True]: 312.0° to 342.0° Bearing [Mag]: 325.0° to 355.0°			Distance: Beyond 30.0 NM Altitude: Below 2000.0 ft		
41	MSS	N 44° 54' 51.92" W 74° 43' 21.78" 14 W	H	197.5	114.10	MSS	Disabled
42	PWL	N 41° 46' 11.18" W 73° 36' 1.99" 12 W	L	1250.0	114.30	PWL	Disabled
43	RKA	N 42° 27' 58.91" W 75° 14' 21.51" 11 W	L	2027.2	112.60	RKA	Disabled
44	SLK	N 44° 23' 4.41" W 74° 12' 16.21" 14 W	L	1646.8	109.20	SLK	Disabled
45	UCA	N 43° 1' 35.45" W 75° 9' 52.28" 12 W	L	1420.0	111.20	UCA	Disabled
46	ULW	N 42° 5' 39.16" W 77° 1' 28.53" 12 W	L	1631.8	109.65	ULW	Disabled
47	CRI	N 40° 36' 44.90" W 73° 53' 40.00" 11 W	T	10.0	112.30	CRI	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
48	AGC	N 40° 16' 43.12" W 80° 2' 27.08" 09 W	L	1284.6	110.00	AGC	Disabled
49	BFD	N 41° 47' 10.99" W 78° 37' 9.65" 07 W	L	2110.6	116.60	BFD	Disabled
50	CIP	N 41° 8' 46.66" W 79° 27' 28.71" 06 W	L	1519.5	112.90	CIP	Disabled
51	ETG	N 41° 12' 53.82" W 78° 8' 33.92" 10 W	H	2250.0	116.00	ETG	Disabled
52	FJC	N 40° 43' 36.12" W 75° 27' 17.12" 10 W	L	680.6	117.50	FJC	Disabled
Restriction:		Bearing [True]: 290.0° to 50.0° Bearing [Mag]: 300.0° to 60.0°			Distance: Beyond 26.0 NM Altitude: Below 4500.0 ft		
Restriction:		Bearing [True]: 51.0° to 289.0° Bearing [Mag]: 61.0° to 299.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
53	FQM	N 41° 20' 18.81" W 76° 46' 29.52" 09 W	L	2098.0	114.40	FQM	Disabled
54	IHD	N 39° 58' 27.27" W 79° 21' 30.12" 06 W	L	2820.0	108.20	IHD	Disabled
55	LVZ	N 41° 16' 22.09" W 75° 41' 22.08" 10 W	L	2118.8	111.60	LVZ	Disabled
56	MIP	N 41° 1' 24.21" W 76° 39' 55.04" 09 W	L	1000.0	109.20	MIP	Disabled
57	MXE	N 39° 55' 5.00" W 75° 40' 14.91" 09 W	L	473.4	113.20	MXE	Disabled
58	REC	N 40° 32' 47.25" W 78° 44' 49.28" 09 W	L	2340.0	110.60	REC	Disabled
59	SFK	N 41° 41' 42.91" W 77° 25' 11.66" 08 W	L	1984.7	108.60	SFK	Disabled
60	SLT	N 41° 30' 45.93" W 77° 58' 12.39" 08 W	H	2310.0	113.90	SLT	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
61	TDT	N 41° 42' 46.91" W 79° 25' 2.17" 09 W	L	1710.0	117.60	TDT	Disabled
Restriction:		Bearing [True]: 32.0° to 42.0° Bearing [Mag]: 41.0° to 51.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
Restriction:		Bearing [True]: 296.0° to 331.0° Bearing [Mag]: 305.0° to 340.0°			Distance: Beyond 24.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 331.0° to 356.0° Bearing [Mag]: 340.0° to 5.0°			Distance: Beyond 24.0 NM Altitude: Below 5000.0 ft		
62	THS	N 39° 55' 59.62" W 77° 57' 3.40" 07 W	L	2338.0	115.00	THS	Disabled
63	AUW	N 44° 50' 48.40" W 89° 35' 11.68" 02 E	L	1204.7	111.60	AUW	Disabled
Restriction:		Bearing [True]: 322.0° to 302.0° Bearing [Mag]: 320.0° to 300.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 302.0° to 322.0° Bearing [Mag]: 300.0° to 320.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
64	JVL	N 42° 33' 28.83" W 89° 6' 18.93" 03 E	L	931.4	114.30	JVL	Disabled
65	LNR	N 43° 17' 39.85" W 90° 7' 59.33" 00 E	L	1184.6	112.80	LNR	Disabled
66	STE	N 44° 32' 35.69" W 89° 31' 50.02" 01 W	L	1110.0	110.60	STE	Disabled
Restriction:		Bearing [True]: 359.0° to 359.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
67	CKB	N 39° 15' 11.57" W 80° 16' 4.32" 04 W	L	1425.7	112.60	CKB	Disabled
68	ESL	N 39° 13' 31.77" W 78° 59' 22.20" 06 W	L	2590.0	110.80	ESL	Disabled
69	HNN	N 38° 45' 14.85" W 82° 1' 34.20" 03 W	H	880.0	115.90	HNN	Disabled
70	GRV	N 39° 38' 6.11" W 79° 3' 1.90" 06 W	L	2640.0	112.30	GRV	Disabled
Restriction:		Bearing [True]: 301.0° to 64.0° Bearing [Mag]: 307.0° to 70.0°			Distance: Beyond 20.0 NM Altitude: Below 5000.0 ft		
Restriction:		Bearing [True]: 65.0° to 300.0° Bearing [Mag]: 71.0° to 306.0°			Distance: Beyond 20.0 NM Altitude: Below 6000.0 ft		
Restriction:		Bearing [True]: 102.0° to 107.0° Bearing [Mag]: 108.0° to 113.0°			Distance: Beyond 38.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 319.0° to 339.0° Bearing [Mag]: 325.0° to 345.0°			Distance: Beyond 35.0 NM Altitude: Below 99999.0 ft		

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
71	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H	780.0	113.60	DJB	Used
		ESV:	Bearing [True]: 165.0° to 297.0° Bearing [Mag]: 170.0° to 302.0°		Arc Distance: Out to 102.0 NM Altitude: 8200.0 to 16000.0 ft		
72	CRL	N 42° 2' 52.90" W 83° 27' 27.30" 03 W	H	629.0	115.70	CRL	Not Used
		ESV:	Bearing [True]: 144.0° to 170.0° Bearing [Mag]: 147.0° to 173.0°		Arc Distance: Out to 95.0 NM Altitude: 8900.0 to 16000.0 ft		
73	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H	1317.2	112.70	CXR	Used
		ESV:	Bearing [True]: 235.0° to 273.0° Bearing [Mag]: 240.0° to 278.0°		Arc Distance: Out to 71.0 NM Altitude: 4500.0 to 16000.0 ft		
74	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H	792.6	117.80	FWA	Not Used
		Restriction:	Bearing [True]: 55.0° to 65.0° Bearing [Mag]: 61.0° to 71.0°		Distance: Beyond 0.0 NM Altitude: Below 7000.0 ft		
		Restriction:	Bearing [True]: 354.0° to 354.0° Bearing [Mag]: 360.0° to 360.0°		Distance: Beyond 33.0 NM Altitude: Below 2800.0 ft		
		Restriction:	Bearing [True]: 170.0° to 210.0° Bearing [Mag]: 176.0° to 216.0°		Distance: Beyond 22.0 NM Altitude: Below 4000.0 ft		
		Restriction:	Bearing [True]: 260.0° to 290.0° Bearing [Mag]: 266.0° to 296.0°		Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
		ESV:	Bearing [True]: 108.0° to 128.0° Bearing [Mag]: 114.0° to 134.0°		Arc Distance: Out to 101.0 NM Altitude: 10000.0 to 20000.0 ft		
75	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H	1353.7	116.70	APE	Not Used
		Restriction:	Bearing [True]: 177.0° to 182.0° Bearing [Mag]: 183.0° to 188.0°		Distance: Beyond 20.0 NM Altitude: Below 3000.0 ft		
		ESV:	Bearing [True]: 260.0° to 280.0° Bearing [Mag]: 266.0° to 286.0°		Arc Distance: Out to 94.0 NM Altitude: 10000.0 to 18000.0 ft		
76	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L	1221.0	112.40	BSV	Used
		ESV:	Bearing [True]: 288.0° to 340.0° Bearing [Mag]: 292.0° to 344.0°		Arc Distance: Out to 60.0 NM Altitude: 4100.0 to 20000.0 ft		

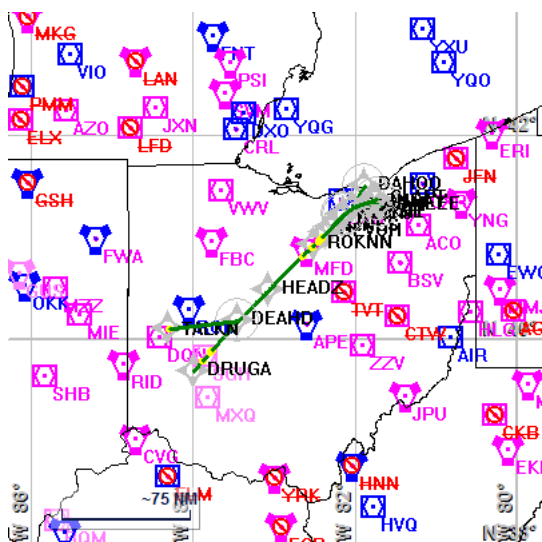

Name:	Paul Jackson
Project Name:	KCLE ROKNN STAR
Output File:	KCLE ROKNN1 STAR DEVOH KWENE 20171030_1110
Procedure Name:	ROKNN1
Software:	RNAV-Pro™
Version:	2.39
Date/Time:	10/30/2017 11:11:20 AM
Input File:	KCLE ROKNN1 STAR DEVOH KWENE 20170829_1011.txt
Databases:	AIRNAV Date: 9/17/2017 CIFP Date: 7/20/2017 DTED® (MAX) Date: 2002

Flyability



DME/DME



No Critical DMEs Exist

Radars




Comms



TERPS




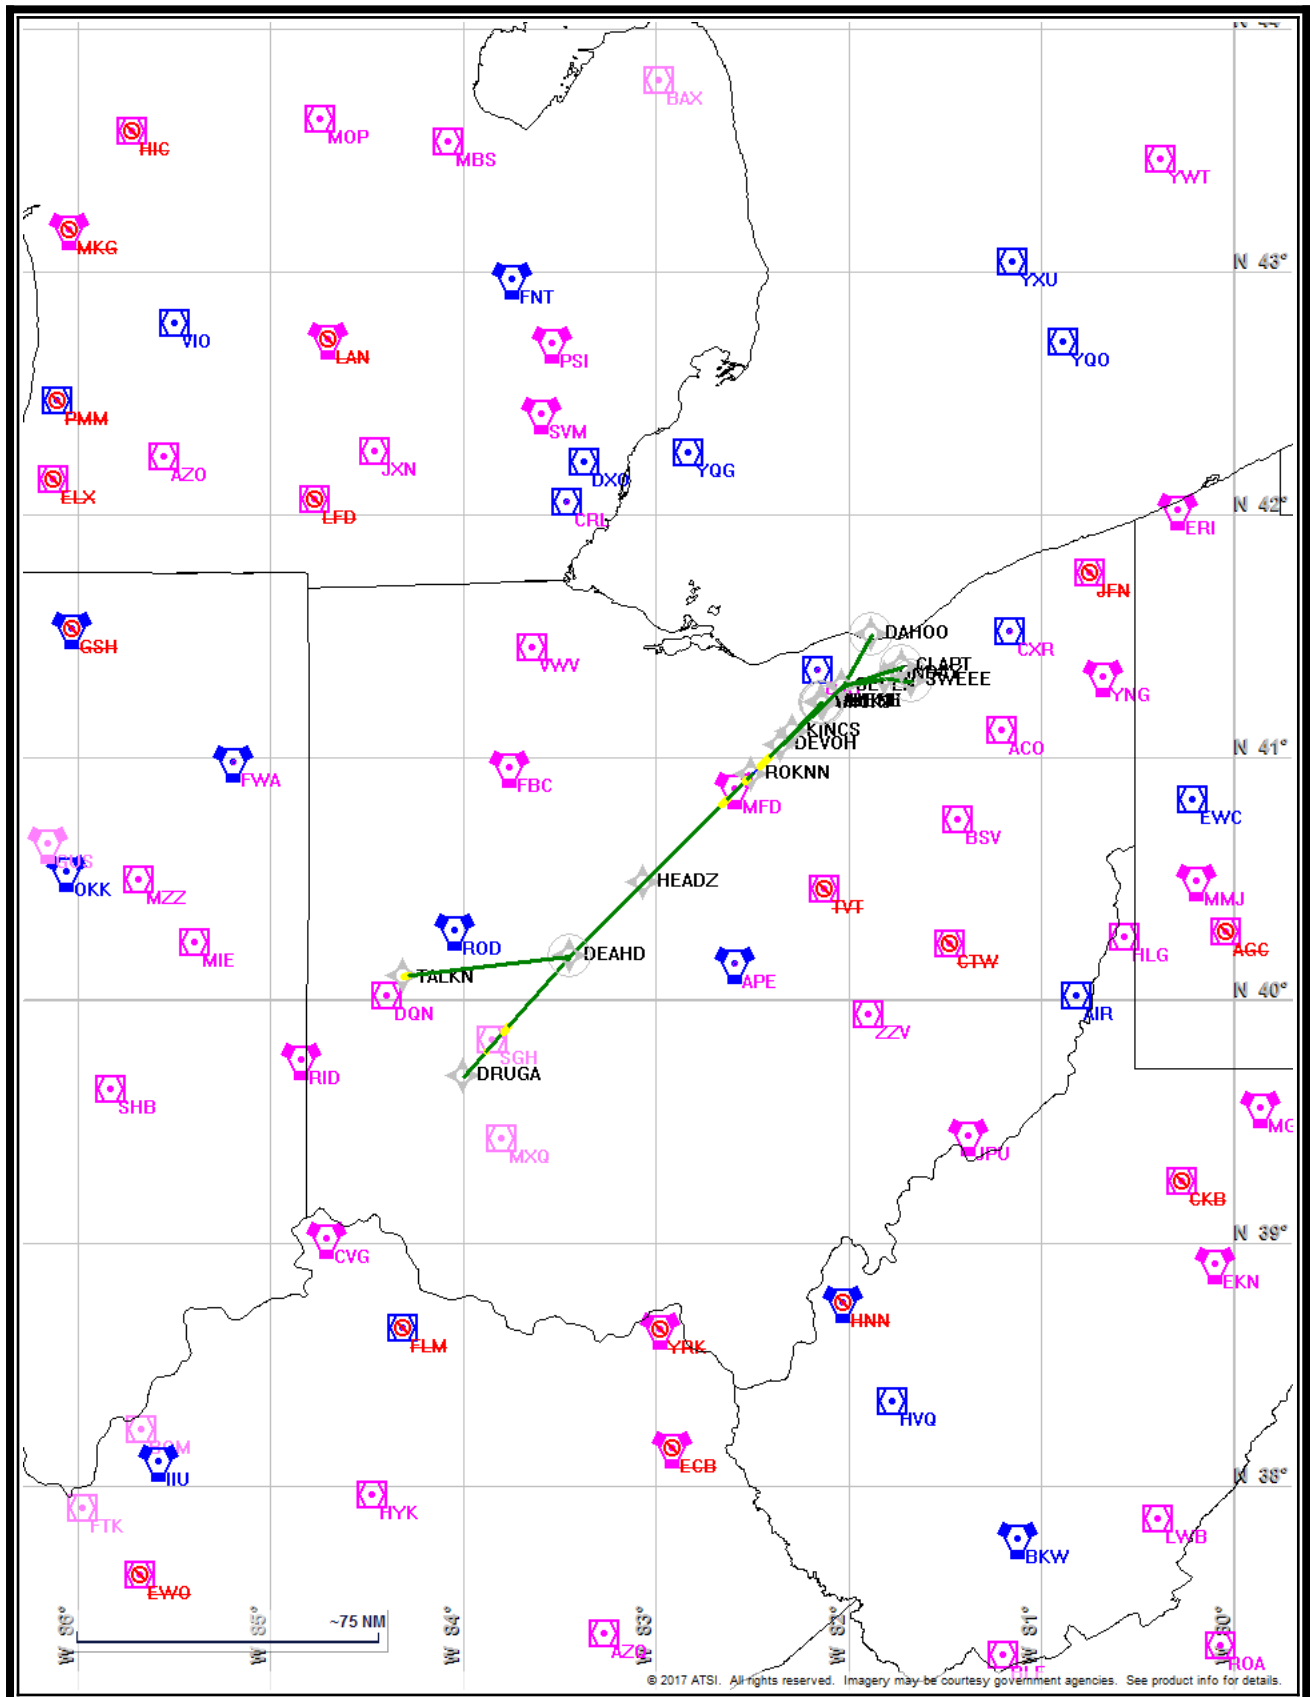

Flight Plan					Return To Summary		
Name	Type	Lat/Lon	Alt [ft]	VNAV Mode	IAS [Kts]	Turn Type	Leg Type
DEVOH	WP	N 41° 3' 3.73" W 82° 21' 3.41"	7000.0	Step	210.0	Fly By	TF
KINCS	WP	N 41° 6' 8.29" W 82° 17' 23.91"	6000.0	Step	210.0	Fly By	TF
KWENE	WP	N 41° 13' 30.51" W 82° 8' 53.51"	5000.0	Step	210.0	Fly Over	TF

Flyability		Return To Summary
Settings:	Flight Type: Arrival	
	Selected Airport: KCLE	
	Aircraft Category: Cat D	
	Climb Gradient: <i>None assigned</i>	
	Ground Speeds:	
	Table:	
	200.0 Kts up to 11000.0 ft	
	240.0 Kts up to 18000.0 ft	
	260.0 Kts up to 24000.0 ft	
	340.0 Kts up to 99900.0 ft	
	Wind Settings: <i>None assigned</i>	
	Descent During a Turn: Allowed	
	VNAV Mode: Flight Plan	
Entire track is fly-able		

DME/DME	Return To Summary
Settings:	<p> RNP: 2.0 Flight Mode: Manual Line of Sight (DTED Level 0 Max): Evaluated DME Restrictions: Evaluated Inertial Drift: Enabled Initial Drift: 0.558 NM INS Drift Rate: 8.000 NM/Hour Range Mode: OSV Co-Frequencies: Evaluated RNP Edges: Evaluated Min DME Range: 3.0 NM Allowed Gap Length: 4.0 NM DME Types: VOR/DME, VORTAC, Standalone, and User DME Include Angles: 30 to 150 Critical DMEs: Allowed DoD Facilities: Not included Foreign Facilities: Not included Low DMEs: Included Terminal DMEs: Included Flight Check DMEs: Selected Higher Altitudes: Evaluated Near Maximum Altitude: Evaluated </p>
<p> Total Number of DMEs Used: 3 Maximum DME Error: 0.286 NM. No Critical DMEs were found. Available DMEs: DJB, CXR, BSV, MFD Disabled DMEs: LAN, LFD, ELX, GIJ, PMM, MKG, HIC, PLN, MNM, CTW, JFN, TVT, BDF, DNV, EON, PLL, PNT, RBS, SAM, UIN, VLA, BVT, GSH, ECB, EWO, FLM, YRK, BRD, DWN, HML, ODI, RST, CMK, DNY, GFL, GGT, HNK, HUO, LGA, HTO, MSS, PWL, RKA, SLK, UCA, ULW, CRI, AGC, BFD, CIP, ETG, FJC, FQM, IHD, LVZ, MIP, MXE, REC, SFK, SLT, TDT, THS, AUW, JVL, LNR, STE, CKB, ESL, HNN, and GRV Foreign DMEs within range: YEE, YQG, YQO, YVV, YWT, YXU, YYZ </p>	

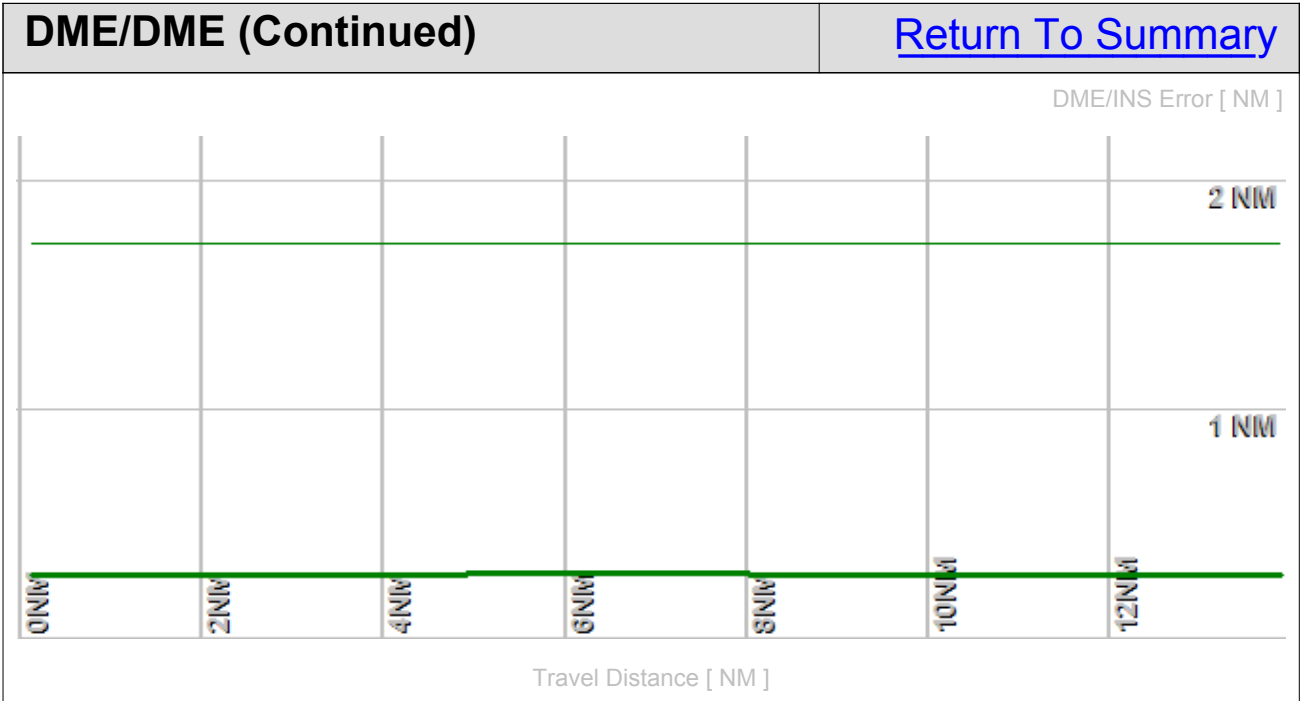

DME/DME (Continued)							Return To Summary		
DMEs Used									
#	Name	Lat/Lon/MAGVAR	Range	Source	Critical	Err. [NM]	Status	Time	Distance
1	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H + ESV	User	NO	0.299	Enabled	42.8%	42.8%
2	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L + ESV	User	NO	0.461	Enabled	100.0%	100.0%
3	MFD	N 40° 52' 7.00" W 82° 35' 27.46" 03 W	L	Database	NO	0.320	Enabled	57.2%	57.2%
	Total Coverage							100.0%	100.0%
Flight Check DME Selection									
Distance [NM]		Selected DMEs						Alternate	
0.0		BSV	DJB	CXR	MFD				
4.1		BSV	DJB	CXR	MFD				

Available DMEs by Waypoints		Return To Summary
Waypoint Before	Waypoint After	DME List
DEVOH	KINCS	BSV, CXR, DJB, and MFD
KINCS	KWENE	BSV, CXR, DJB, and MFD

User Data					Return To Summary		
User Data Files							
#	File Name						
1	ROKKN1 NEW.udt						
User DMEs							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
1	LAN	N 42° 43' 2.62" W 84° 41' 51.03" 05 W	L	887.4	110.80	LAN	Disabled
2	LFD	N 42° 3' 44.96" W 84° 45' 54.48" 05 W	L	1040.0	111.20	LFD	Disabled
Restriction:		Bearing [True]: 105.0° to 160.0° Bearing [Mag]: 110.0° to 165.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
3	ELX	N 42° 8' 39.88" W 86° 7' 21.74" 00 E	L	793.7	116.60	ELX	Disabled
4	GIJ	N 41° 46' 7.00" W 86° 19' 6.42" 00 E	H	802.7	115.40	GIJ	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
5	PMM	N 42° 27' 57.73" W 86° 6' 17.32" 00 E	H	639.9	112.10	PMM	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
6	MKG	N 43° 10' 9.31" W 86° 2' 21.76" 01 W	L	659.1	115.20	MKG	Disabled
Restriction:		Bearing [True]: 54.0° to 89.0° Bearing [Mag]: 55.0° to 90.0°			Distance: Beyond 10.0 NM Altitude: Below 4000.0 ft		
7	HIC	N 43° 34' 29.47" W 85° 42' 58.18" 01 W	L	920.0	117.60	HIC	Disabled
Restriction:		Bearing [True]: 19.0° to 89.0° Bearing [Mag]: 20.0° to 90.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 269.0° to 289.0° Bearing [Mag]: 270.0° to 290.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
8	PLN	N 45° 37' 50.33" W 84° 39' 50.79" 06 W	L	835.3	111.80	PLN	Disabled
9	MNM	N 45° 10' 48.58" W 87° 38' 49.83" 00 E	L	650.1	109.60	MNM	Disabled
10	CTW	N 40° 13' 45.15" W 81° 28' 35.32" 07 W	L	1180.0	111.80	CTW	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
11	JFN	N 41° 45' 36.42" W 80° 44' 53.20" 05 W	L	896.3	115.20	JFN	Disabled
Restriction:		Bearing [True]: 226.0° to 255.0° Bearing [Mag]: 231.0° to 260.0°			Distance: Beyond 30.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 121.0° to 185.0° Bearing [Mag]: 126.0° to 190.0°			Distance: Beyond 20.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 186.0° to 225.0° Bearing [Mag]: 191.0° to 230.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 80.0° to 120.0° Bearing [Mag]: 85.0° to 125.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
12	TVT	N 40° 27' 29.04" W 82° 7' 36.52" 03 W	L	1330.4	116.50	TVT	Disabled
13	BDF	N 41° 9' 35.03" W 89° 35' 16.34" 00 E	H	810.0	114.70	BDF	Disabled
14	DNV	N 40° 17' 37.56" W 87° 33' 26.14" 02 E	L	698.8	111.00	DNV	Disabled
15	EON	N 41° 16' 10.68" W 87° 47' 27.79" 02 E	L	688.7	113.20	EON	Disabled
16	PLL	N 41° 57' 56.31" W 89° 31' 27.19" 03 E	L	840.0	111.20	PLL	Disabled
17	PNT	N 40° 49' 16.32" W 88° 44' 0.63" 03 E	L	680.0	109.60	PNT	Disabled
18	RBS	N 40° 34' 54.13" W 88° 9' 51.36" 02 E	L	780.0	116.80	RBS	Disabled
19	SAM	N 38° 29' 6.68" W 88° 5' 8.90" 03 E	L	540.0	116.60	SAM	Disabled
20	UIN	N 39° 50' 52.35" W 91° 16' 44.13" 05 E	H	715.1	113.60	UIN	Disabled
21	VLA	N 39° 5' 37.82" W 89° 9' 44.08" 04 E	L	605.5	114.30	VLA	Disabled
22	BVT	N 40° 33' 22.22" W 87° 4' 9.75" 01 E	H	752.2	115.10	BVT	Disabled
Restriction:		Bearing [True]: 299.0° to 45.0° Bearing [Mag]: 298.0° to 44.0°			Distance: Beyond 0.0 NM Altitude: Below 2800.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
23	GSH	N 41° 31' 30.56" W 86° 1' 40.63" 00 E	H	851.8	113.70	GSH	Disabled
Restriction:		Bearing [True]: 71.0° to 129.0° Bearing [Mag]: 71.0° to 129.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
24	ECB	N 38° 9' 30.11" W 82° 54' 36.20" 02 W	L	1070.0	110.40	ECB	Disabled
25	EWO	N 37° 37' 54.52" W 85° 40' 33.16" 01 E	L	960.0	110.80	EWO	Disabled
26	FLM	N 38° 38' 57.99" W 84° 18' 38.17" 04 W	H	808.5	117.00	FLM	Disabled
27	YRK	N 38° 38' 38.88" W 82° 58' 42.02" 05 W	L	1040.0	112.80	YRK	Disabled
28	BRD	N 46° 20' 53.81" W 94° 1' 33.54" 03 E	H	1253.9	116.90	BRD	Disabled
Restriction:		Bearing [True]: 3.0° to 3.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 29.0 NM Altitude: Below 3000.0 ft		
29	DWN	N 45° 5' 14.87" W 94° 27' 13.86" 07 E	L	1130.0	109.00	DWN	Disabled
30	HML	N 48° 52' 9.07" W 97° 7' 4.45" 09 E	H	797.4	112.40	HML	Disabled
Restriction:		Bearing [True]: 84.0° to 94.0° Bearing [Mag]: 75.0° to 85.0°			Distance: Beyond 0.0 NM Altitude: Below 10000.0 ft		
Restriction:		Bearing [True]: 95.0° to 263.0° Bearing [Mag]: 86.0° to 254.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 264.0° to 279.0° Bearing [Mag]: 255.0° to 270.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 280.0° to 83.0° Bearing [Mag]: 271.0° to 74.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
31	ODI	N 43° 54' 44.38" W 91° 28' 3.06" 01 E	H	1282.2	117.90	ODI	Disabled
32	RST	N 43° 46' 58.45" W 92° 35' 49.06" 05 E	L	1393.0	112.00	RST	Disabled
33	CMK	N 41° 16' 48.32" W 73° 34' 52.77" 12 W	L	693.8	116.60	CMK	Disabled
34	DNY	N 42° 10' 41.81" W 74° 57' 24.99" 11 W	L	2560.0	112.10	DNY	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
35	GFL	N 43° 20' 30.09" W 73° 36' 42.32" 14 W	L	323.7	110.20	GFL	Disabled
Restriction:		Bearing [True]: 346.0° to 346.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 0.0 NM Altitude: Below 9000.0 ft		
36	GGT	N 42° 47' 20.24" W 75° 49' 36.29" 11 W	L	2040.0	117.80	GGT	Disabled
37	HNK	N 42° 3' 47.00" W 75° 18' 58.62" 11 W	H	2070.0	116.80	HNK	Disabled
38	HUO	N 41° 24' 34.87" W 74° 35' 29.74" 11 W	H	1300.3	116.10	HUO	Disabled
39	LGA	N 40° 47' 1.38" W 73° 52' 6.96" 12 W	L	8.9	113.10	LGA	Disabled
Restriction:		Bearing [True]: 233.0° to 268.0° Bearing [Mag]: 245.0° to 280.0°			Distance: Beyond 25.0 NM Altitude: Below 6000.0 ft		
40	HTO	N 40° 55' 8.38" W 72° 19' 0.14" 13 W	H	22.0	113.60	HTO	Disabled
Restriction:		Bearing [True]: 267.0° to 312.0° Bearing [Mag]: 280.0° to 325.0°			Distance: Beyond 35.0 NM Altitude: Below 1700.0 ft		
Restriction:		Bearing [True]: 312.0° to 342.0° Bearing [Mag]: 325.0° to 355.0°			Distance: Beyond 30.0 NM Altitude: Below 2000.0 ft		
41	MSS	N 44° 54' 51.92" W 74° 43' 21.78" 14 W	H	197.5	114.10	MSS	Disabled
42	PWL	N 41° 46' 11.18" W 73° 36' 1.99" 12 W	L	1250.0	114.30	PWL	Disabled
43	RKA	N 42° 27' 58.91" W 75° 14' 21.51" 11 W	L	2027.2	112.60	RKA	Disabled
44	SLK	N 44° 23' 4.41" W 74° 12' 16.21" 14 W	L	1646.8	109.20	SLK	Disabled
45	UCA	N 43° 1' 35.45" W 75° 9' 52.28" 12 W	L	1420.0	111.20	UCA	Disabled
46	ULW	N 42° 5' 39.16" W 77° 1' 28.53" 12 W	L	1631.8	109.65	ULW	Disabled
47	CRI	N 40° 36' 44.90" W 73° 53' 40.00" 11 W	T	10.0	112.30	CRI	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
48	AGC	N 40° 16' 43.12" W 80° 2' 27.08" 09 W	L	1284.6	110.00	AGC	Disabled
49	BFD	N 41° 47' 10.99" W 78° 37' 9.65" 07 W	L	2110.6	116.60	BFD	Disabled
50	CIP	N 41° 8' 46.66" W 79° 27' 28.71" 06 W	L	1519.5	112.90	CIP	Disabled
51	ETG	N 41° 12' 53.82" W 78° 8' 33.92" 10 W	H	2250.0	116.00	ETG	Disabled
52	FJC	N 40° 43' 36.12" W 75° 27' 17.12" 10 W	L	680.6	117.50	FJC	Disabled
Restriction:		Bearing [True]: 290.0° to 50.0° Bearing [Mag]: 300.0° to 60.0°			Distance: Beyond 26.0 NM Altitude: Below 4500.0 ft		
Restriction:		Bearing [True]: 51.0° to 289.0° Bearing [Mag]: 61.0° to 299.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
53	FQM	N 41° 20' 18.81" W 76° 46' 29.52" 09 W	L	2098.0	114.40	FQM	Disabled
54	IHD	N 39° 58' 27.27" W 79° 21' 30.12" 06 W	L	2820.0	108.20	IHD	Disabled
55	LVZ	N 41° 16' 22.09" W 75° 41' 22.08" 10 W	L	2118.8	111.60	LVZ	Disabled
56	MIP	N 41° 1' 24.21" W 76° 39' 55.04" 09 W	L	1000.0	109.20	MIP	Disabled
57	MXE	N 39° 55' 5.00" W 75° 40' 14.91" 09 W	L	473.4	113.20	MXE	Disabled
58	REC	N 40° 32' 47.25" W 78° 44' 49.28" 09 W	L	2340.0	110.60	REC	Disabled
59	SFK	N 41° 41' 42.91" W 77° 25' 11.66" 08 W	L	1984.7	108.60	SFK	Disabled
60	SLT	N 41° 30' 45.93" W 77° 58' 12.39" 08 W	H	2310.0	113.90	SLT	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
61	TDT	N 41° 42' 46.91" W 79° 25' 2.17" 09 W	L	1710.0	117.60	TDT	Disabled
Restriction:		Bearing [True]: 32.0° to 42.0° Bearing [Mag]: 41.0° to 51.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
Restriction:		Bearing [True]: 296.0° to 331.0° Bearing [Mag]: 305.0° to 340.0°			Distance: Beyond 24.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 331.0° to 356.0° Bearing [Mag]: 340.0° to 5.0°			Distance: Beyond 24.0 NM Altitude: Below 5000.0 ft		
62	THS	N 39° 55' 59.62" W 77° 57' 3.40" 07 W	L	2338.0	115.00	THS	Disabled
63	AUW	N 44° 50' 48.40" W 89° 35' 11.68" 02 E	L	1204.7	111.60	AUW	Disabled
Restriction:		Bearing [True]: 322.0° to 302.0° Bearing [Mag]: 320.0° to 300.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 302.0° to 322.0° Bearing [Mag]: 300.0° to 320.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
64	JVL	N 42° 33' 28.83" W 89° 6' 18.93" 03 E	L	931.4	114.30	JVL	Disabled
65	LNR	N 43° 17' 39.85" W 90° 7' 59.33" 00 E	L	1184.6	112.80	LNR	Disabled
66	STE	N 44° 32' 35.69" W 89° 31' 50.02" 01 W	L	1110.0	110.60	STE	Disabled
Restriction:		Bearing [True]: 359.0° to 359.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
67	CKB	N 39° 15' 11.57" W 80° 16' 4.32" 04 W	L	1425.7	112.60	CKB	Disabled
68	ESL	N 39° 13' 31.77" W 78° 59' 22.20" 06 W	L	2590.0	110.80	ESL	Disabled
69	HNN	N 38° 45' 14.85" W 82° 1' 34.20" 03 W	H	880.0	115.90	HNN	Disabled
70	GRV	N 39° 38' 6.11" W 79° 3' 1.90" 06 W	L	2640.0	112.30	GRV	Disabled
Restriction:		Bearing [True]: 301.0° to 64.0° Bearing [Mag]: 307.0° to 70.0°			Distance: Beyond 20.0 NM Altitude: Below 5000.0 ft		
Restriction:		Bearing [True]: 65.0° to 300.0° Bearing [Mag]: 71.0° to 306.0°			Distance: Beyond 20.0 NM Altitude: Below 6000.0 ft		
Restriction:		Bearing [True]: 102.0° to 107.0° Bearing [Mag]: 108.0° to 113.0°			Distance: Beyond 38.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 319.0° to 339.0° Bearing [Mag]: 325.0° to 345.0°			Distance: Beyond 35.0 NM Altitude: Below 99999.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
71	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H	780.0	113.60	DJB	Used
		ESV:	Bearing [True]: 165.0° to 297.0° Bearing [Mag]: 170.0° to 302.0°		Arc Distance: Out to 102.0 NM Altitude: 8200.0 to 16000.0 ft		
72	CRL	N 42° 2' 52.90" W 83° 27' 27.30" 03 W	H	629.0	115.70	CRL	Not Used
		ESV:	Bearing [True]: 144.0° to 170.0° Bearing [Mag]: 147.0° to 173.0°		Arc Distance: Out to 95.0 NM Altitude: 8900.0 to 16000.0 ft		
73	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H	1317.2	112.70	CXR	Not Used
		ESV:	Bearing [True]: 235.0° to 273.0° Bearing [Mag]: 240.0° to 278.0°		Arc Distance: Out to 71.0 NM Altitude: 4500.0 to 16000.0 ft		
74	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H	792.6	117.80	FWA	Not Used
		Restriction:	Bearing [True]: 55.0° to 65.0° Bearing [Mag]: 61.0° to 71.0°		Distance: Beyond 0.0 NM Altitude: Below 7000.0 ft		
		Restriction:	Bearing [True]: 354.0° to 354.0° Bearing [Mag]: 360.0° to 360.0°		Distance: Beyond 33.0 NM Altitude: Below 2800.0 ft		
		Restriction:	Bearing [True]: 170.0° to 210.0° Bearing [Mag]: 176.0° to 216.0°		Distance: Beyond 22.0 NM Altitude: Below 4000.0 ft		
		Restriction:	Bearing [True]: 260.0° to 290.0° Bearing [Mag]: 266.0° to 296.0°		Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
		ESV:	Bearing [True]: 108.0° to 128.0° Bearing [Mag]: 114.0° to 134.0°		Arc Distance: Out to 101.0 NM Altitude: 10000.0 to 20000.0 ft		
75	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H	1353.7	116.70	APE	Not Used
		Restriction:	Bearing [True]: 177.0° to 182.0° Bearing [Mag]: 183.0° to 188.0°		Distance: Beyond 20.0 NM Altitude: Below 3000.0 ft		
		ESV:	Bearing [True]: 260.0° to 280.0° Bearing [Mag]: 266.0° to 286.0°		Arc Distance: Out to 94.0 NM Altitude: 10000.0 to 18000.0 ft		
76	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L	1221.0	112.40	BSV	Used
		ESV:	Bearing [True]: 288.0° to 340.0° Bearing [Mag]: 292.0° to 344.0°		Arc Distance: Out to 60.0 NM Altitude: 4100.0 to 20000.0 ft		

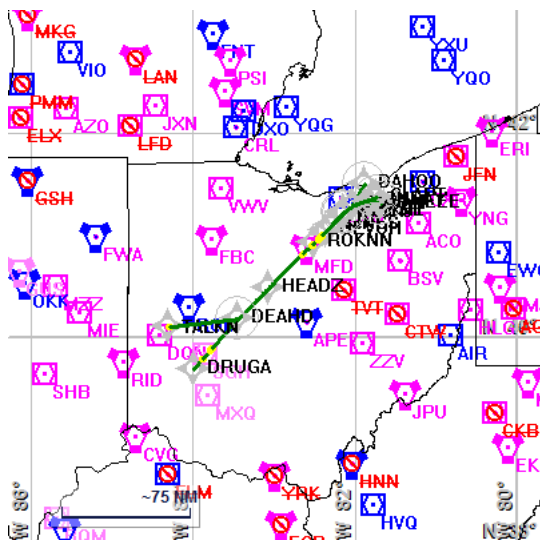

Name: Paul Jackson
Project Name: KCLE ROKNN STAR
Output File: KCLE ROKNN1 STAR
 DEVOH RUHSH
 20171030_1110
Procedure Name: ROKNN1
Software: RNAV-Pro™
Version: 2.39
Date/Time: 10/30/2017 11:12:31 AM
Input File: [KCLE ROKNN1 STAR
 DEVOH RUHSH
 20170829_1012.txt](#)
Databases: AIRNAV Date: 9/17/2017
 CIFP Date: 7/20/2017
 DTED® (MAX) Date: 2002

Results Summary:


Flyability	✓	
DME/DME	✓	No Critical DMEs Exist
Radars	?	
Comms	?	
TERPS	?	

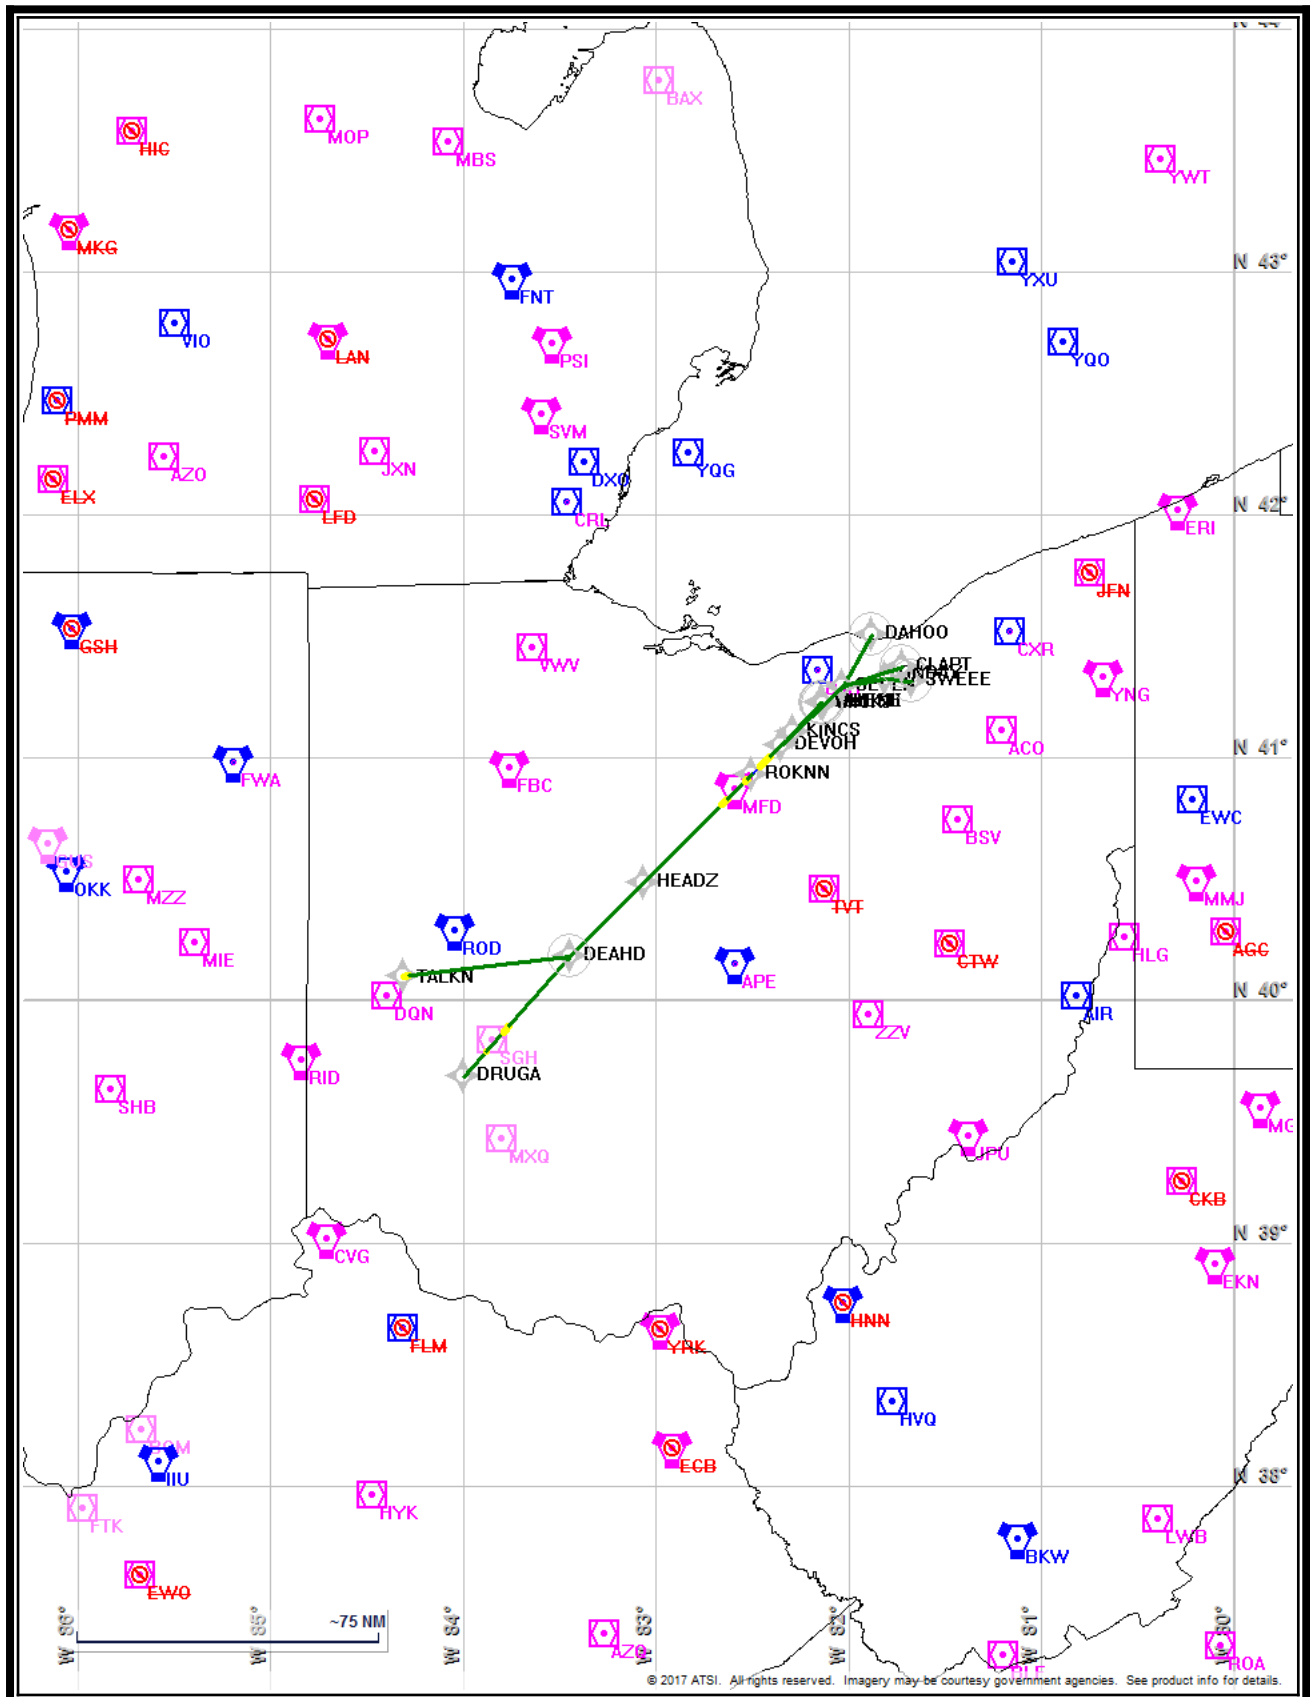

Flight Plan					Return To Summary		
Name	Type	Lat/Lon	Alt [ft]	VNAV Mode	IAS [Kts]	Turn Type	Leg Type
DEVOH	WP	N 41° 3' 3.73" W 82° 21' 3.41"	7000.0	Step	210.0	Fly By	TF
KINCS	WP	N 41° 6' 8.29" W 82° 17' 23.91"	6000.0	Step	210.0	Fly By	TF
RUHSH	WP	N 41° 13' 35.22" W 82° 8' 20.78"	5000.0	Step	210.0	Fly Over	TF

Flyability		Return To Summary
Settings:	Flight Type: Arrival Selected Airport: KCLE Aircraft Category: Cat D Climb Gradient: <i>None assigned</i> Ground Speeds: Table: 200.0 Kts up to 11000.0 ft 240.0 Kts up to 18000.0 ft 260.0 Kts up to 24000.0 ft 340.0 Kts up to 99900.0 ft Wind Settings: <i>None assigned</i> Descent During a Turn: Allowed VNAV Mode: Flight Plan	
	Entire track is fly-able	

DME/DME	Return To Summary
Settings:	RNP: 2.0 Flight Mode: Manual Line of Sight (DTED Level 0 Max): Evaluated DME Restrictions: Evaluated Inertial Drift: Enabled Initial Drift: 0.558 NM INS Drift Rate: 8.000 NM/Hour Range Mode: OSV Co-Frequencies: Evaluated RNP Edges: Evaluated Min DME Range: 3.0 NM Allowed Gap Length: 4.0 NM DME Types: VOR/DME, VORTAC, Standalone, and User DME Include Angles: 30 to 150 Critical DMEs: Allowed DoD Facilities: Not included Foreign Facilities: Not included Low DMEs: Included Terminal DMEs: Included Flight Check DMEs: Selected Higher Altitudes: Evaluated Near Maximum Altitude: Evaluated
Total Number of DMEs Used: 3 Maximum DME Error: 0.286 NM. No Critical DMEs were found. Available DMEs: DJB, CXR, BSV, MFD Disabled DMEs: LAN, LFD, ELX, GIJ, PMM, MKG, HIC, PLN, MNM, CTW, JFN, TVT, BDF, DNV, EON, PLL, PNT, RBS, SAM, UIN, VLA, BVT, GSH, ECB, EWO, FLM, YRK, BRD, DWN, HML, ODI, RST, CMK, DNY, GFL, GGT, HNK, HUO, LGA, HTO, MSS, PWL, RKA, SLK, UCA, ULW, CRI, AGC, BFD, CIP, ETG, FJC, FQM, IHD, LVZ, MIP, MXE, REC, SFK, SLT, TDT, THS, AUW, JVL, LNR, STE, CKB, ESL, HNN, and GRV Foreign DMEs within range: YEE, YQG, YQO, YVV, YWT, YXU, YYZ	

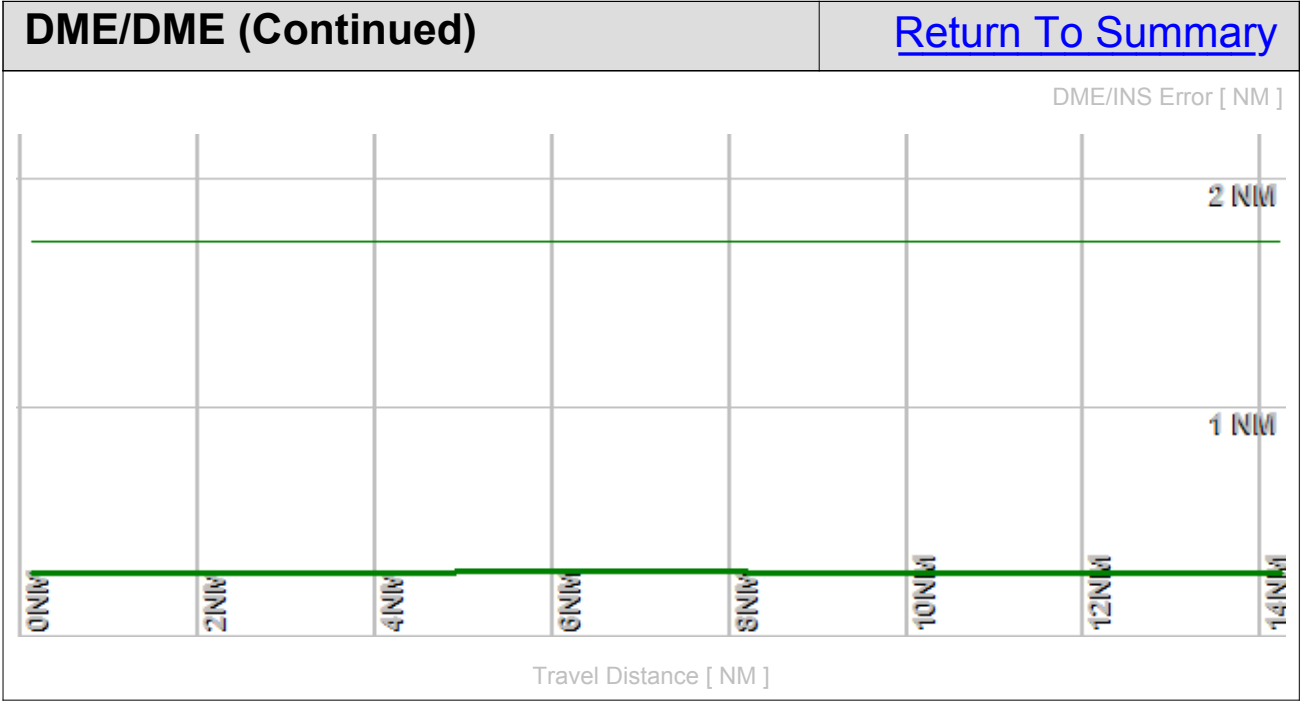

DME/DME (Continued)							Return To Summary		
DMEs Used									
#	Name	Lat/Lon/MAGVAR	Range	Source	Critical	Err. [NM]	Status	Time	Distance
1	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H + ESV	User	NO	0.299	Enabled	41.8%	41.8%
2	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L + ESV	User	NO	0.461	Enabled	100.0%	100.0%
3	MFD	N 40° 52' 7.00" W 82° 35' 27.46" 03 W	L	Database	NO	0.320	Enabled	58.2%	58.2%
	Total Coverage							100.0%	100.0%
Flight Check DME Selection									
Distance [NM]		Selected DMEs						Alternate	
0.0		BSV	DJB	CXR	MFD				
4.1		BSV	DJB	CXR	MFD				

Available DMEs by Waypoints		Return To Summary
Waypoint Before	Waypoint After	DME List
DEVOH	KINCS	BSV, CXR, DJB, and MFD
KINCS	RUHSH	BSV, CXR, DJB, and MFD

User Data					Return To Summary		
User Data Files							
#	File Name						
1	ROKKN1 NEW.udt						
User DMEs							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
1	LAN	N 42° 43' 2.62" W 84° 41' 51.03" 05 W	L	887.4	110.80	LAN	Disabled
2	LFD	N 42° 3' 44.96" W 84° 45' 54.48" 05 W	L	1040.0	111.20	LFD	Disabled
Restriction:		Bearing [True]: 105.0° to 160.0° Bearing [Mag]: 110.0° to 165.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
3	ELX	N 42° 8' 39.88" W 86° 7' 21.74" 00 E	L	793.7	116.60	ELX	Disabled
4	GIJ	N 41° 46' 7.00" W 86° 19' 6.42" 00 E	H	802.7	115.40	GIJ	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
5	PMM	N 42° 27' 57.73" W 86° 6' 17.32" 00 E	H	639.9	112.10	PMM	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
6	MKG	N 43° 10' 9.31" W 86° 2' 21.76" 01 W	L	659.1	115.20	MKG	Disabled
Restriction:		Bearing [True]: 54.0° to 89.0° Bearing [Mag]: 55.0° to 90.0°			Distance: Beyond 10.0 NM Altitude: Below 4000.0 ft		
7	HIC	N 43° 34' 29.47" W 85° 42' 58.18" 01 W	L	920.0	117.60	HIC	Disabled
Restriction:		Bearing [True]: 19.0° to 89.0° Bearing [Mag]: 20.0° to 90.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 269.0° to 289.0° Bearing [Mag]: 270.0° to 290.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
8	PLN	N 45° 37' 50.33" W 84° 39' 50.79" 06 W	L	835.3	111.80	PLN	Disabled
9	MNM	N 45° 10' 48.58" W 87° 38' 49.83" 00 E	L	650.1	109.60	MNM	Disabled
10	CTW	N 40° 13' 45.15" W 81° 28' 35.32" 07 W	L	1180.0	111.80	CTW	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
11	JFN	N 41° 45' 36.42" W 80° 44' 53.20" 05 W	L	896.3	115.20	JFN	Disabled
Restriction:		Bearing [True]: 226.0° to 255.0° Bearing [Mag]: 231.0° to 260.0°			Distance: Beyond 30.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 121.0° to 185.0° Bearing [Mag]: 126.0° to 190.0°			Distance: Beyond 20.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 186.0° to 225.0° Bearing [Mag]: 191.0° to 230.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 80.0° to 120.0° Bearing [Mag]: 85.0° to 125.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
12	TVT	N 40° 27' 29.04" W 82° 7' 36.52" 03 W	L	1330.4	116.50	TVT	Disabled
13	BDF	N 41° 9' 35.03" W 89° 35' 16.34" 00 E	H	810.0	114.70	BDF	Disabled
14	DNV	N 40° 17' 37.56" W 87° 33' 26.14" 02 E	L	698.8	111.00	DNV	Disabled
15	EON	N 41° 16' 10.68" W 87° 47' 27.79" 02 E	L	688.7	113.20	EON	Disabled
16	PLL	N 41° 57' 56.31" W 89° 31' 27.19" 03 E	L	840.0	111.20	PLL	Disabled
17	PNT	N 40° 49' 16.32" W 88° 44' 0.63" 03 E	L	680.0	109.60	PNT	Disabled
18	RBS	N 40° 34' 54.13" W 88° 9' 51.36" 02 E	L	780.0	116.80	RBS	Disabled
19	SAM	N 38° 29' 6.68" W 88° 5' 8.90" 03 E	L	540.0	116.60	SAM	Disabled
20	UIN	N 39° 50' 52.35" W 91° 16' 44.13" 05 E	H	715.1	113.60	UIN	Disabled
21	VLA	N 39° 5' 37.82" W 89° 9' 44.08" 04 E	L	605.5	114.30	VLA	Disabled
22	BVT	N 40° 33' 22.22" W 87° 4' 9.75" 01 E	H	752.2	115.10	BVT	Disabled
Restriction:		Bearing [True]: 299.0° to 45.0° Bearing [Mag]: 298.0° to 44.0°			Distance: Beyond 0.0 NM Altitude: Below 2800.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
23	GSH	N 41° 31' 30.56" W 86° 1' 40.63" 00 E	H	851.8	113.70	GSH	Disabled
Restriction:		Bearing [True]: 71.0° to 129.0° Bearing [Mag]: 71.0° to 129.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
24	ECB	N 38° 9' 30.11" W 82° 54' 36.20" 02 W	L	1070.0	110.40	ECB	Disabled
25	EWO	N 37° 37' 54.52" W 85° 40' 33.16" 01 E	L	960.0	110.80	EWO	Disabled
26	FLM	N 38° 38' 57.99" W 84° 18' 38.17" 04 W	H	808.5	117.00	FLM	Disabled
27	YRK	N 38° 38' 38.88" W 82° 58' 42.02" 05 W	L	1040.0	112.80	YRK	Disabled
28	BRD	N 46° 20' 53.81" W 94° 1' 33.54" 03 E	H	1253.9	116.90	BRD	Disabled
Restriction:		Bearing [True]: 3.0° to 3.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 29.0 NM Altitude: Below 3000.0 ft		
29	DWN	N 45° 5' 14.87" W 94° 27' 13.86" 07 E	L	1130.0	109.00	DWN	Disabled
30	HML	N 48° 52' 9.07" W 97° 7' 4.45" 09 E	H	797.4	112.40	HML	Disabled
Restriction:		Bearing [True]: 84.0° to 94.0° Bearing [Mag]: 75.0° to 85.0°			Distance: Beyond 0.0 NM Altitude: Below 10000.0 ft		
Restriction:		Bearing [True]: 95.0° to 263.0° Bearing [Mag]: 86.0° to 254.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 264.0° to 279.0° Bearing [Mag]: 255.0° to 270.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 280.0° to 83.0° Bearing [Mag]: 271.0° to 74.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
31	ODI	N 43° 54' 44.38" W 91° 28' 3.06" 01 E	H	1282.2	117.90	ODI	Disabled
32	RST	N 43° 46' 58.45" W 92° 35' 49.06" 05 E	L	1393.0	112.00	RST	Disabled
33	CMK	N 41° 16' 48.32" W 73° 34' 52.77" 12 W	L	693.8	116.60	CMK	Disabled
34	DNY	N 42° 10' 41.81" W 74° 57' 24.99" 11 W	L	2560.0	112.10	DNY	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
35	GFL	N 43° 20' 30.09" W 73° 36' 42.32" 14 W	L	323.7	110.20	GFL	Disabled
Restriction:		Bearing [True]: 346.0° to 346.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 0.0 NM Altitude: Below 9000.0 ft		
36	GGT	N 42° 47' 20.24" W 75° 49' 36.29" 11 W	L	2040.0	117.80	GGT	Disabled
37	HNK	N 42° 3' 47.00" W 75° 18' 58.62" 11 W	H	2070.0	116.80	HNK	Disabled
38	HUO	N 41° 24' 34.87" W 74° 35' 29.74" 11 W	H	1300.3	116.10	HUO	Disabled
39	LGA	N 40° 47' 1.38" W 73° 52' 6.96" 12 W	L	8.9	113.10	LGA	Disabled
Restriction:		Bearing [True]: 233.0° to 268.0° Bearing [Mag]: 245.0° to 280.0°			Distance: Beyond 25.0 NM Altitude: Below 6000.0 ft		
40	HTO	N 40° 55' 8.38" W 72° 19' 0.14" 13 W	H	22.0	113.60	HTO	Disabled
Restriction:		Bearing [True]: 267.0° to 312.0° Bearing [Mag]: 280.0° to 325.0°			Distance: Beyond 35.0 NM Altitude: Below 1700.0 ft		
Restriction:		Bearing [True]: 312.0° to 342.0° Bearing [Mag]: 325.0° to 355.0°			Distance: Beyond 30.0 NM Altitude: Below 2000.0 ft		
41	MSS	N 44° 54' 51.92" W 74° 43' 21.78" 14 W	H	197.5	114.10	MSS	Disabled
42	PWL	N 41° 46' 11.18" W 73° 36' 1.99" 12 W	L	1250.0	114.30	PWL	Disabled
43	RKA	N 42° 27' 58.91" W 75° 14' 21.51" 11 W	L	2027.2	112.60	RKA	Disabled
44	SLK	N 44° 23' 4.41" W 74° 12' 16.21" 14 W	L	1646.8	109.20	SLK	Disabled
45	UCA	N 43° 1' 35.45" W 75° 9' 52.28" 12 W	L	1420.0	111.20	UCA	Disabled
46	ULW	N 42° 5' 39.16" W 77° 1' 28.53" 12 W	L	1631.8	109.65	ULW	Disabled
47	CRI	N 40° 36' 44.90" W 73° 53' 40.00" 11 W	T	10.0	112.30	CRI	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
48	AGC	N 40° 16' 43.12" W 80° 2' 27.08" 09 W	L	1284.6	110.00	AGC	Disabled
49	BFD	N 41° 47' 10.99" W 78° 37' 9.65" 07 W	L	2110.6	116.60	BFD	Disabled
50	CIP	N 41° 8' 46.66" W 79° 27' 28.71" 06 W	L	1519.5	112.90	CIP	Disabled
51	ETG	N 41° 12' 53.82" W 78° 8' 33.92" 10 W	H	2250.0	116.00	ETG	Disabled
52	FJC	N 40° 43' 36.12" W 75° 27' 17.12" 10 W	L	680.6	117.50	FJC	Disabled
Restriction:		Bearing [True]: 290.0° to 50.0° Bearing [Mag]: 300.0° to 60.0°			Distance: Beyond 26.0 NM Altitude: Below 4500.0 ft		
Restriction:		Bearing [True]: 51.0° to 289.0° Bearing [Mag]: 61.0° to 299.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
53	FQM	N 41° 20' 18.81" W 76° 46' 29.52" 09 W	L	2098.0	114.40	FQM	Disabled
54	IHD	N 39° 58' 27.27" W 79° 21' 30.12" 06 W	L	2820.0	108.20	IHD	Disabled
55	LVZ	N 41° 16' 22.09" W 75° 41' 22.08" 10 W	L	2118.8	111.60	LVZ	Disabled
56	MIP	N 41° 1' 24.21" W 76° 39' 55.04" 09 W	L	1000.0	109.20	MIP	Disabled
57	MXE	N 39° 55' 5.00" W 75° 40' 14.91" 09 W	L	473.4	113.20	MXE	Disabled
58	REC	N 40° 32' 47.25" W 78° 44' 49.28" 09 W	L	2340.0	110.60	REC	Disabled
59	SFK	N 41° 41' 42.91" W 77° 25' 11.66" 08 W	L	1984.7	108.60	SFK	Disabled
60	SLT	N 41° 30' 45.93" W 77° 58' 12.39" 08 W	H	2310.0	113.90	SLT	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
61	TDT	N 41° 42' 46.91" W 79° 25' 2.17" 09 W	L	1710.0	117.60	TDT	Disabled
Restriction:		Bearing [True]: 32.0° to 42.0° Bearing [Mag]: 41.0° to 51.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
Restriction:		Bearing [True]: 296.0° to 331.0° Bearing [Mag]: 305.0° to 340.0°			Distance: Beyond 24.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 331.0° to 356.0° Bearing [Mag]: 340.0° to 5.0°			Distance: Beyond 24.0 NM Altitude: Below 5000.0 ft		
62	THS	N 39° 55' 59.62" W 77° 57' 3.40" 07 W	L	2338.0	115.00	THS	Disabled
63	AUW	N 44° 50' 48.40" W 89° 35' 11.68" 02 E	L	1204.7	111.60	AUW	Disabled
Restriction:		Bearing [True]: 322.0° to 302.0° Bearing [Mag]: 320.0° to 300.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 302.0° to 322.0° Bearing [Mag]: 300.0° to 320.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
64	JVL	N 42° 33' 28.83" W 89° 6' 18.93" 03 E	L	931.4	114.30	JVL	Disabled
65	LNR	N 43° 17' 39.85" W 90° 7' 59.33" 00 E	L	1184.6	112.80	LNR	Disabled
66	STE	N 44° 32' 35.69" W 89° 31' 50.02" 01 W	L	1110.0	110.60	STE	Disabled
Restriction:		Bearing [True]: 359.0° to 359.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
67	CKB	N 39° 15' 11.57" W 80° 16' 4.32" 04 W	L	1425.7	112.60	CKB	Disabled
68	ESL	N 39° 13' 31.77" W 78° 59' 22.20" 06 W	L	2590.0	110.80	ESL	Disabled
69	HNN	N 38° 45' 14.85" W 82° 1' 34.20" 03 W	H	880.0	115.90	HNN	Disabled
70	GRV	N 39° 38' 6.11" W 79° 3' 1.90" 06 W	L	2640.0	112.30	GRV	Disabled
Restriction:		Bearing [True]: 301.0° to 64.0° Bearing [Mag]: 307.0° to 70.0°			Distance: Beyond 20.0 NM Altitude: Below 5000.0 ft		
Restriction:		Bearing [True]: 65.0° to 300.0° Bearing [Mag]: 71.0° to 306.0°			Distance: Beyond 20.0 NM Altitude: Below 6000.0 ft		
Restriction:		Bearing [True]: 102.0° to 107.0° Bearing [Mag]: 108.0° to 113.0°			Distance: Beyond 38.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 319.0° to 339.0° Bearing [Mag]: 325.0° to 345.0°			Distance: Beyond 35.0 NM Altitude: Below 99999.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
71	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H	780.0	113.60	DJB	Used
		ESV:	Bearing [True]: 165.0° to 297.0° Bearing [Mag]: 170.0° to 302.0°		Arc Distance: Out to 102.0 NM Altitude: 8200.0 to 16000.0 ft		
72	CRL	N 42° 2' 52.90" W 83° 27' 27.30" 03 W	H	629.0	115.70	CRL	Not Used
		ESV:	Bearing [True]: 144.0° to 170.0° Bearing [Mag]: 147.0° to 173.0°		Arc Distance: Out to 95.0 NM Altitude: 8900.0 to 16000.0 ft		
73	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H	1317.2	112.70	CXR	Not Used
		ESV:	Bearing [True]: 235.0° to 273.0° Bearing [Mag]: 240.0° to 278.0°		Arc Distance: Out to 71.0 NM Altitude: 4500.0 to 16000.0 ft		
74	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H	792.6	117.80	FWA	Not Used
		Restriction:	Bearing [True]: 55.0° to 65.0° Bearing [Mag]: 61.0° to 71.0°		Distance: Beyond 0.0 NM Altitude: Below 7000.0 ft		
		Restriction:	Bearing [True]: 354.0° to 354.0° Bearing [Mag]: 360.0° to 360.0°		Distance: Beyond 33.0 NM Altitude: Below 2800.0 ft		
		Restriction:	Bearing [True]: 170.0° to 210.0° Bearing [Mag]: 176.0° to 216.0°		Distance: Beyond 22.0 NM Altitude: Below 4000.0 ft		
		Restriction:	Bearing [True]: 260.0° to 290.0° Bearing [Mag]: 266.0° to 296.0°		Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
		ESV:	Bearing [True]: 108.0° to 128.0° Bearing [Mag]: 114.0° to 134.0°		Arc Distance: Out to 101.0 NM Altitude: 10000.0 to 20000.0 ft		
75	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H	1353.7	116.70	APE	Not Used
		Restriction:	Bearing [True]: 177.0° to 182.0° Bearing [Mag]: 183.0° to 188.0°		Distance: Beyond 20.0 NM Altitude: Below 3000.0 ft		
		ESV:	Bearing [True]: 260.0° to 280.0° Bearing [Mag]: 266.0° to 286.0°		Arc Distance: Out to 94.0 NM Altitude: 10000.0 to 18000.0 ft		
76	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L	1221.0	112.40	BSV	Used
		ESV:	Bearing [True]: 288.0° to 340.0° Bearing [Mag]: 292.0° to 344.0°		Arc Distance: Out to 60.0 NM Altitude: 4100.0 to 20000.0 ft		

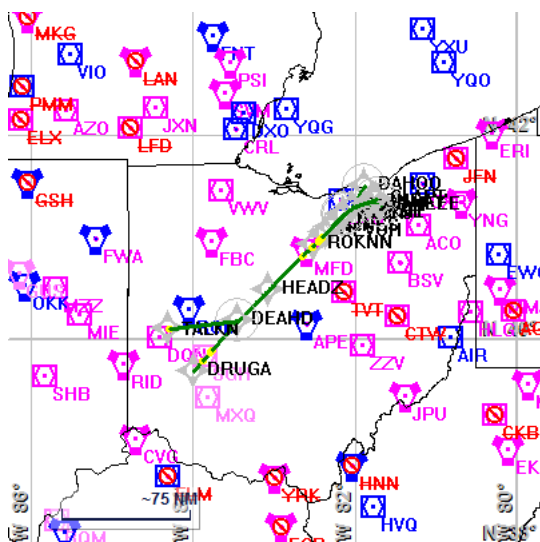

Name: Paul Jackson
Project Name: KCLE ROKNN STAR
Output File: KCLE ROKNN1 STAR
 DEVOH SWEEE
 20171030_1110
Procedure Name: ROKNN1
Software: RNAV-Pro™
Version: 2.39
Date/Time: 10/30/2017 11:13:07 AM
Input File: [KCLE ROKNN1 STAR
 DEVOH SWEEE
 20170829_1016.txt](#)
Databases: AIRNAV Date: 9/17/2017
 CIFP Date: 7/20/2017
 DTED® (MAX) Date: 2002

Results Summary:


Flyability	✓	
DME/DME	✓	No Critical DMEs Exist
Radars	?	
Comms	?	
TERPS	?	

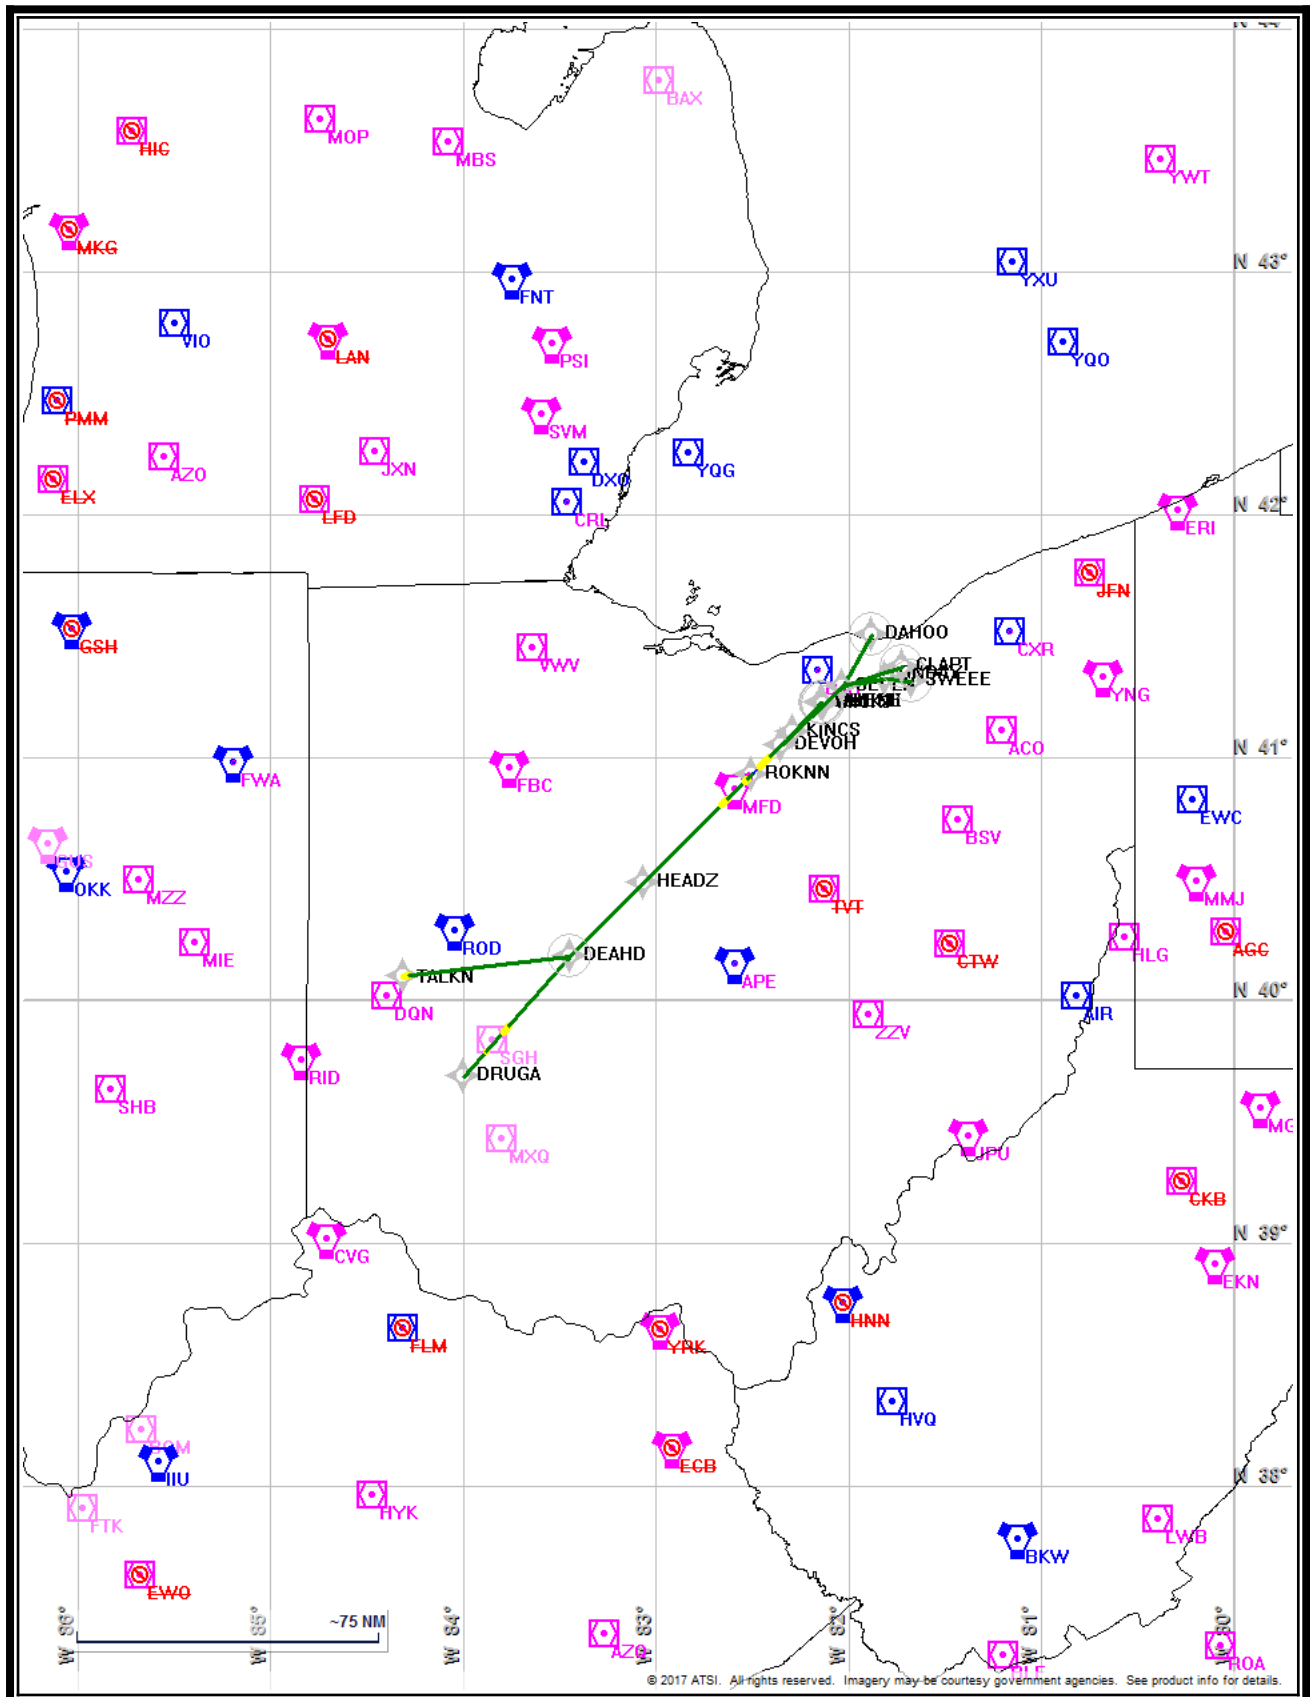

Flight Plan					Return To Summary		
Name	Type	Lat/Lon	Alt [ft]	VNAV Mode	IAS [Kts]	Turn Type	Leg Type
DEVOH	WP	N 41° 3' 3.73" W 82° 21' 3.41"	7000.0	Step	210.0	Fly By	TF
SEPLN	WP	N 41° 17' 30.33" W 82° 1' 55.89"	7000.0	Step	210.0	Fly By	TF
GNDAY	WP	N 41° 19' 31.94" W 81° 48' 35.92"	6000.0	Step	210.0	Fly By	TF
SWEEE	WP	N 41° 18' 42.74" W 81° 40' 35.88"	6000.0	Step	210.0	Fly Over	TF

Flyability		Return To Summary
Settings:	Flight Type: Arrival Selected Airport: KCLE Aircraft Category: Cat D Climb Gradient: <i>None assigned</i> Ground Speeds: Table: 200.0 Kts up to 11000.0 ft 240.0 Kts up to 18000.0 ft 260.0 Kts up to 24000.0 ft 340.0 Kts up to 99900.0 ft Wind Settings: <i>None assigned</i> Descent During a Turn: Allowed VNAV Mode: Flight Plan	
Entire track is fly-able		

DME/DME	Return To Summary
Settings:	<p> RNP: 2.0 Flight Mode: Manual Line of Sight (DTED Level 0 Max): Evaluated DME Restrictions: Evaluated Inertial Drift: Enabled Initial Drift: 0.558 NM INS Drift Rate: 8.000 NM/Hour Range Mode: OSV Co-Frequencies: Evaluated RNP Edges: Evaluated Min DME Range: 3.0 NM Allowed Gap Length: 4.0 NM DME Types: VOR/DME, VORTAC, Standalone, and User DME Include Angles: 30 to 150 Critical DMEs: Allowed DoD Facilities: Not included Foreign Facilities: Not included Low DMEs: Included Terminal DMEs: Included Flight Check DMEs: Selected Higher Altitudes: Evaluated Near Maximum Altitude: Evaluated </p>
<p>Total Number of DMEs Used: 5</p> <p>Maximum DME Error: 0.360 NM.</p> <p>No Critical DMEs were found.</p> <p>Available DMEs: DJB, CXR, BSV, MFD, ACO</p> <p>Disabled DMEs: LAN, LFD, ELX, GIJ, PMM, MKG, HIC, PLN, MNM, CTW, JFN, TVT, BDF, DNV, EON, PLL, PNT, RBS, SAM, UIN, VLA, BVT, GSH, ECB, EWO, FLM, YRK, BRD, DWN, HML, ODI, RST, CMK, DNY, GFL, GGT, HNK, HUO, LGA, HTO, MSS, PWL, RKA, SLK, UCA, ULW, CRI, AGC, BFD, CIP, ETG, FJC, FQM, IHD, LVZ, MIP, MXE, REC, SFK, SLT, TDT, THS, AUW, JVL, LNR, STE, CKB, ESL, HNN, and GRV</p> <p>Foreign DMEs within range: YEE, YQG, YQO, YVV, YWT, YXU, YYZ</p>	

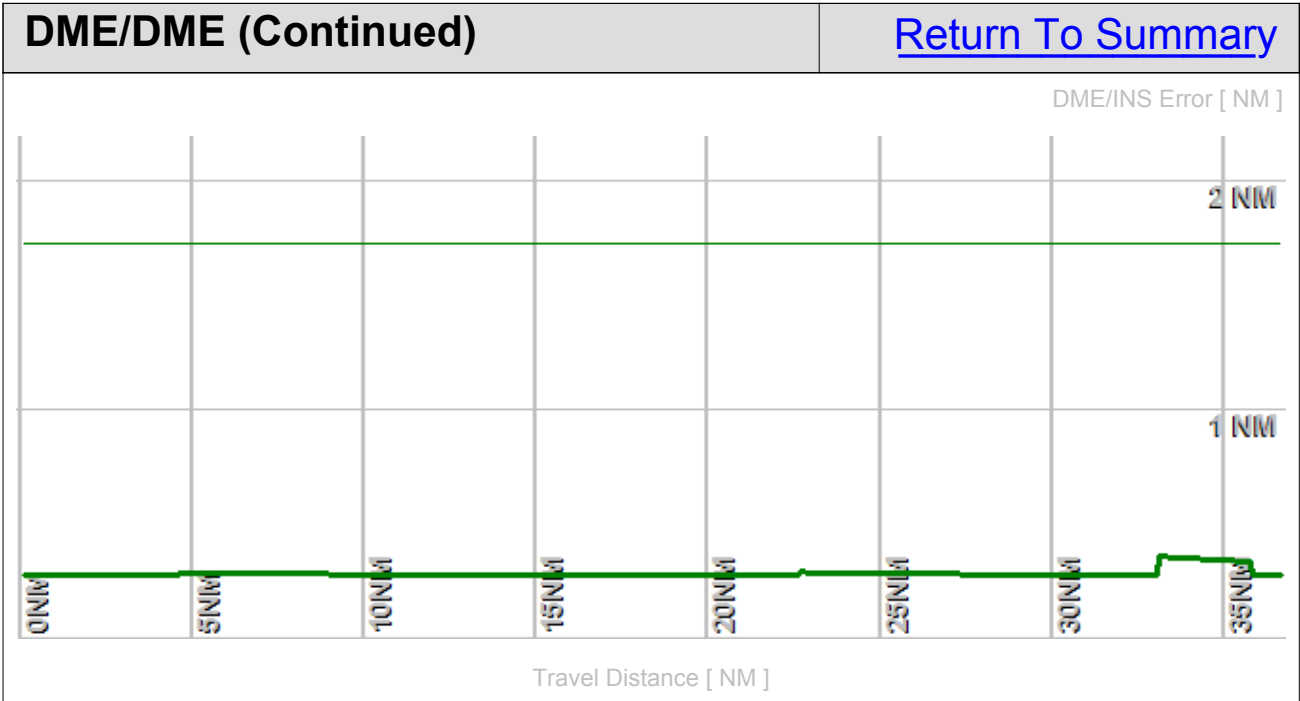

DME/DME (Continued)						Return To Summary			
DMEs Used									
#	Name	Lat/Lon/MAGVAR	Range	Source	Critical	Err. [NM]	Status	Time	Distance
1	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H + ESV	User	NO	0.360	Enabled	16.7%	16.7%
2	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L + ESV	User	NO	0.461	Enabled	92.1%	92.1%
3	MFD	N 40° 52' 7.00" W 82° 35' 27.46" 03 W	L	Database	NO	0.360	Enabled	45.0%	45.0%
4	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H + ESV	User	NO	0.482	Enabled	38.8%	38.8%
5	ACO	N 41° 6' 28.45" W 81° 12' 5.49" 04 W	L	Database	NO	0.388	Enabled	7.4%	7.4%
	Total Coverage							100.0%	100.0%
Flight Check DME Selection									
Distance [NM]		Selected DMEs						Alternate	
0.0		BSV	MFD	DJB	CXR				
19.8		BSV	MFD	DJB	CXR	ACO			
30.2		BSV	DJB	CXR	ACO				

Available DMEs by Waypoints		Return To Summary
Waypoint Before	Waypoint After	DME List
DEVOH	SEPLN	BSV, CXR, DJB, and MFD
SEPLN	GNDAY	BSV, CXR, DJB, ACO, and MFD
GNDAY	SWEEE	BSV, CXR, DJB, and ACO

User Data					Return To Summary		
User Data Files							
#	File Name						
1	ROKKN1 NEW.udt						
User DMEs							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
1	LAN	N 42° 43' 2.62" W 84° 41' 51.03" 05 W	L	887.4	110.80	LAN	Disabled
2	LFD	N 42° 3' 44.96" W 84° 45' 54.48" 05 W	L	1040.0	111.20	LFD	Disabled
Restriction:		Bearing [True]: 105.0° to 160.0° Bearing [Mag]: 110.0° to 165.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
3	ELX	N 42° 8' 39.88" W 86° 7' 21.74" 00 E	L	793.7	116.60	ELX	Disabled
4	GIJ	N 41° 46' 7.00" W 86° 19' 6.42" 00 E	H	802.7	115.40	GIJ	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
5	PMM	N 42° 27' 57.73" W 86° 6' 17.32" 00 E	H	639.9	112.10	PMM	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
6	MKG	N 43° 10' 9.31" W 86° 2' 21.76" 01 W	L	659.1	115.20	MKG	Disabled
Restriction:		Bearing [True]: 54.0° to 89.0° Bearing [Mag]: 55.0° to 90.0°			Distance: Beyond 10.0 NM Altitude: Below 4000.0 ft		
7	HIC	N 43° 34' 29.47" W 85° 42' 58.18" 01 W	L	920.0	117.60	HIC	Disabled
Restriction:		Bearing [True]: 19.0° to 89.0° Bearing [Mag]: 20.0° to 90.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 269.0° to 289.0° Bearing [Mag]: 270.0° to 290.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
8	PLN	N 45° 37' 50.33" W 84° 39' 50.79" 06 W	L	835.3	111.80	PLN	Disabled
9	MNM	N 45° 10' 48.58" W 87° 38' 49.83" 00 E	L	650.1	109.60	MNM	Disabled
10	CTW	N 40° 13' 45.15" W 81° 28' 35.32" 07 W	L	1180.0	111.80	CTW	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
11	JFN	N 41° 45' 36.42" W 80° 44' 53.20" 05 W	L	896.3	115.20	JFN	Disabled
Restriction:		Bearing [True]: 226.0° to 255.0° Bearing [Mag]: 231.0° to 260.0°			Distance: Beyond 30.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 121.0° to 185.0° Bearing [Mag]: 126.0° to 190.0°			Distance: Beyond 20.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 186.0° to 225.0° Bearing [Mag]: 191.0° to 230.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 80.0° to 120.0° Bearing [Mag]: 85.0° to 125.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
12	TVT	N 40° 27' 29.04" W 82° 7' 36.52" 03 W	L	1330.4	116.50	TVT	Disabled
13	BDF	N 41° 9' 35.03" W 89° 35' 16.34" 00 E	H	810.0	114.70	BDF	Disabled
14	DNV	N 40° 17' 37.56" W 87° 33' 26.14" 02 E	L	698.8	111.00	DNV	Disabled
15	EON	N 41° 16' 10.68" W 87° 47' 27.79" 02 E	L	688.7	113.20	EON	Disabled
16	PLL	N 41° 57' 56.31" W 89° 31' 27.19" 03 E	L	840.0	111.20	PLL	Disabled
17	PNT	N 40° 49' 16.32" W 88° 44' 0.63" 03 E	L	680.0	109.60	PNT	Disabled
18	RBS	N 40° 34' 54.13" W 88° 9' 51.36" 02 E	L	780.0	116.80	RBS	Disabled
19	SAM	N 38° 29' 6.68" W 88° 5' 8.90" 03 E	L	540.0	116.60	SAM	Disabled
20	UIN	N 39° 50' 52.35" W 91° 16' 44.13" 05 E	H	715.1	113.60	UIN	Disabled
21	VLA	N 39° 5' 37.82" W 89° 9' 44.08" 04 E	L	605.5	114.30	VLA	Disabled
22	BVT	N 40° 33' 22.22" W 87° 4' 9.75" 01 E	H	752.2	115.10	BVT	Disabled
Restriction:		Bearing [True]: 299.0° to 45.0° Bearing [Mag]: 298.0° to 44.0°			Distance: Beyond 0.0 NM Altitude: Below 2800.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
23	GSH	N 41° 31' 30.56" W 86° 1' 40.63" 00 E	H	851.8	113.70	GSH	Disabled
Restriction:		Bearing [True]: 71.0° to 129.0° Bearing [Mag]: 71.0° to 129.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
24	ECB	N 38° 9' 30.11" W 82° 54' 36.20" 02 W	L	1070.0	110.40	ECB	Disabled
25	EWO	N 37° 37' 54.52" W 85° 40' 33.16" 01 E	L	960.0	110.80	EWO	Disabled
26	FLM	N 38° 38' 57.99" W 84° 18' 38.17" 04 W	H	808.5	117.00	FLM	Disabled
27	YRK	N 38° 38' 38.88" W 82° 58' 42.02" 05 W	L	1040.0	112.80	YRK	Disabled
28	BRD	N 46° 20' 53.81" W 94° 1' 33.54" 03 E	H	1253.9	116.90	BRD	Disabled
Restriction:		Bearing [True]: 3.0° to 3.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 29.0 NM Altitude: Below 3000.0 ft		
29	DWN	N 45° 5' 14.87" W 94° 27' 13.86" 07 E	L	1130.0	109.00	DWN	Disabled
30	HML	N 48° 52' 9.07" W 97° 7' 4.45" 09 E	H	797.4	112.40	HML	Disabled
Restriction:		Bearing [True]: 84.0° to 94.0° Bearing [Mag]: 75.0° to 85.0°			Distance: Beyond 0.0 NM Altitude: Below 10000.0 ft		
Restriction:		Bearing [True]: 95.0° to 263.0° Bearing [Mag]: 86.0° to 254.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 264.0° to 279.0° Bearing [Mag]: 255.0° to 270.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 280.0° to 83.0° Bearing [Mag]: 271.0° to 74.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
31	ODI	N 43° 54' 44.38" W 91° 28' 3.06" 01 E	H	1282.2	117.90	ODI	Disabled
32	RST	N 43° 46' 58.45" W 92° 35' 49.06" 05 E	L	1393.0	112.00	RST	Disabled
33	CMK	N 41° 16' 48.32" W 73° 34' 52.77" 12 W	L	693.8	116.60	CMK	Disabled
34	DNY	N 42° 10' 41.81" W 74° 57' 24.99" 11 W	L	2560.0	112.10	DNY	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
35	GFL	N 43° 20' 30.09" W 73° 36' 42.32" 14 W	L	323.7	110.20	GFL	Disabled
Restriction:		Bearing [True]: 346.0° to 346.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 0.0 NM Altitude: Below 9000.0 ft		
36	GGT	N 42° 47' 20.24" W 75° 49' 36.29" 11 W	L	2040.0	117.80	GGT	Disabled
37	HNK	N 42° 3' 47.00" W 75° 18' 58.62" 11 W	H	2070.0	116.80	HNK	Disabled
38	HUO	N 41° 24' 34.87" W 74° 35' 29.74" 11 W	H	1300.3	116.10	HUO	Disabled
39	LGA	N 40° 47' 1.38" W 73° 52' 6.96" 12 W	L	8.9	113.10	LGA	Disabled
Restriction:		Bearing [True]: 233.0° to 268.0° Bearing [Mag]: 245.0° to 280.0°			Distance: Beyond 25.0 NM Altitude: Below 6000.0 ft		
40	HTO	N 40° 55' 8.38" W 72° 19' 0.14" 13 W	H	22.0	113.60	HTO	Disabled
Restriction:		Bearing [True]: 267.0° to 312.0° Bearing [Mag]: 280.0° to 325.0°			Distance: Beyond 35.0 NM Altitude: Below 1700.0 ft		
Restriction:		Bearing [True]: 312.0° to 342.0° Bearing [Mag]: 325.0° to 355.0°			Distance: Beyond 30.0 NM Altitude: Below 2000.0 ft		
41	MSS	N 44° 54' 51.92" W 74° 43' 21.78" 14 W	H	197.5	114.10	MSS	Disabled
42	PWL	N 41° 46' 11.18" W 73° 36' 1.99" 12 W	L	1250.0	114.30	PWL	Disabled
43	RKA	N 42° 27' 58.91" W 75° 14' 21.51" 11 W	L	2027.2	112.60	RKA	Disabled
44	SLK	N 44° 23' 4.41" W 74° 12' 16.21" 14 W	L	1646.8	109.20	SLK	Disabled
45	UCA	N 43° 1' 35.45" W 75° 9' 52.28" 12 W	L	1420.0	111.20	UCA	Disabled
46	ULW	N 42° 5' 39.16" W 77° 1' 28.53" 12 W	L	1631.8	109.65	ULW	Disabled
47	CRI	N 40° 36' 44.90" W 73° 53' 40.00" 11 W	T	10.0	112.30	CRI	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
48	AGC	N 40° 16' 43.12" W 80° 2' 27.08" 09 W	L	1284.6	110.00	AGC	Disabled
49	BFD	N 41° 47' 10.99" W 78° 37' 9.65" 07 W	L	2110.6	116.60	BFD	Disabled
50	CIP	N 41° 8' 46.66" W 79° 27' 28.71" 06 W	L	1519.5	112.90	CIP	Disabled
51	ETG	N 41° 12' 53.82" W 78° 8' 33.92" 10 W	H	2250.0	116.00	ETG	Disabled
52	FJC	N 40° 43' 36.12" W 75° 27' 17.12" 10 W	L	680.6	117.50	FJC	Disabled
Restriction:		Bearing [True]: 290.0° to 50.0° Bearing [Mag]: 300.0° to 60.0°			Distance: Beyond 26.0 NM Altitude: Below 4500.0 ft		
Restriction:		Bearing [True]: 51.0° to 289.0° Bearing [Mag]: 61.0° to 299.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
53	FQM	N 41° 20' 18.81" W 76° 46' 29.52" 09 W	L	2098.0	114.40	FQM	Disabled
54	IHD	N 39° 58' 27.27" W 79° 21' 30.12" 06 W	L	2820.0	108.20	IHD	Disabled
55	LVZ	N 41° 16' 22.09" W 75° 41' 22.08" 10 W	L	2118.8	111.60	LVZ	Disabled
56	MIP	N 41° 1' 24.21" W 76° 39' 55.04" 09 W	L	1000.0	109.20	MIP	Disabled
57	MXE	N 39° 55' 5.00" W 75° 40' 14.91" 09 W	L	473.4	113.20	MXE	Disabled
58	REC	N 40° 32' 47.25" W 78° 44' 49.28" 09 W	L	2340.0	110.60	REC	Disabled
59	SFK	N 41° 41' 42.91" W 77° 25' 11.66" 08 W	L	1984.7	108.60	SFK	Disabled
60	SLT	N 41° 30' 45.93" W 77° 58' 12.39" 08 W	H	2310.0	113.90	SLT	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
61	TDT	N 41° 42' 46.91" W 79° 25' 2.17" 09 W	L	1710.0	117.60	TDT	Disabled
Restriction:		Bearing [True]: 32.0° to 42.0° Bearing [Mag]: 41.0° to 51.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
Restriction:		Bearing [True]: 296.0° to 331.0° Bearing [Mag]: 305.0° to 340.0°			Distance: Beyond 24.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 331.0° to 356.0° Bearing [Mag]: 340.0° to 5.0°			Distance: Beyond 24.0 NM Altitude: Below 5000.0 ft		
62	THS	N 39° 55' 59.62" W 77° 57' 3.40" 07 W	L	2338.0	115.00	THS	Disabled
63	AUW	N 44° 50' 48.40" W 89° 35' 11.68" 02 E	L	1204.7	111.60	AUW	Disabled
Restriction:		Bearing [True]: 322.0° to 302.0° Bearing [Mag]: 320.0° to 300.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 302.0° to 322.0° Bearing [Mag]: 300.0° to 320.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
64	JVL	N 42° 33' 28.83" W 89° 6' 18.93" 03 E	L	931.4	114.30	JVL	Disabled
65	LNR	N 43° 17' 39.85" W 90° 7' 59.33" 00 E	L	1184.6	112.80	LNR	Disabled
66	STE	N 44° 32' 35.69" W 89° 31' 50.02" 01 W	L	1110.0	110.60	STE	Disabled
Restriction:		Bearing [True]: 359.0° to 359.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
67	CKB	N 39° 15' 11.57" W 80° 16' 4.32" 04 W	L	1425.7	112.60	CKB	Disabled
68	ESL	N 39° 13' 31.77" W 78° 59' 22.20" 06 W	L	2590.0	110.80	ESL	Disabled
69	HNN	N 38° 45' 14.85" W 82° 1' 34.20" 03 W	H	880.0	115.90	HNN	Disabled
70	GRV	N 39° 38' 6.11" W 79° 3' 1.90" 06 W	L	2640.0	112.30	GRV	Disabled
Restriction:		Bearing [True]: 301.0° to 64.0° Bearing [Mag]: 307.0° to 70.0°			Distance: Beyond 20.0 NM Altitude: Below 5000.0 ft		
Restriction:		Bearing [True]: 65.0° to 300.0° Bearing [Mag]: 71.0° to 306.0°			Distance: Beyond 20.0 NM Altitude: Below 6000.0 ft		
Restriction:		Bearing [True]: 102.0° to 107.0° Bearing [Mag]: 108.0° to 113.0°			Distance: Beyond 38.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 319.0° to 339.0° Bearing [Mag]: 325.0° to 345.0°			Distance: Beyond 35.0 NM Altitude: Below 99999.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
71	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H	780.0	113.60	DJB	Used
		ESV:	Bearing [True]: 165.0° to 297.0° Bearing [Mag]: 170.0° to 302.0°		Arc Distance: Out to 102.0 NM Altitude: 8200.0 to 16000.0 ft		
72	CRL	N 42° 2' 52.90" W 83° 27' 27.30" 03 W	H	629.0	115.70	CRL	Not Used
		ESV:	Bearing [True]: 144.0° to 170.0° Bearing [Mag]: 147.0° to 173.0°		Arc Distance: Out to 95.0 NM Altitude: 8900.0 to 16000.0 ft		
73	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H	1317.2	112.70	CXR	Used
		ESV:	Bearing [True]: 235.0° to 273.0° Bearing [Mag]: 240.0° to 278.0°		Arc Distance: Out to 71.0 NM Altitude: 4500.0 to 16000.0 ft		
74	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H	792.6	117.80	FWA	Not Used
		Restriction:	Bearing [True]: 55.0° to 65.0° Bearing [Mag]: 61.0° to 71.0°		Distance: Beyond 0.0 NM Altitude: Below 7000.0 ft		
		Restriction:	Bearing [True]: 354.0° to 354.0° Bearing [Mag]: 360.0° to 360.0°		Distance: Beyond 33.0 NM Altitude: Below 2800.0 ft		
		Restriction:	Bearing [True]: 170.0° to 210.0° Bearing [Mag]: 176.0° to 216.0°		Distance: Beyond 22.0 NM Altitude: Below 4000.0 ft		
		Restriction:	Bearing [True]: 260.0° to 290.0° Bearing [Mag]: 266.0° to 296.0°		Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
		ESV:	Bearing [True]: 108.0° to 128.0° Bearing [Mag]: 114.0° to 134.0°		Arc Distance: Out to 101.0 NM Altitude: 10000.0 to 20000.0 ft		
75	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H	1353.7	116.70	APE	Not Used
		Restriction:	Bearing [True]: 177.0° to 182.0° Bearing [Mag]: 183.0° to 188.0°		Distance: Beyond 20.0 NM Altitude: Below 3000.0 ft		
		ESV:	Bearing [True]: 260.0° to 280.0° Bearing [Mag]: 266.0° to 286.0°		Arc Distance: Out to 94.0 NM Altitude: 10000.0 to 18000.0 ft		
76	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L	1221.0	112.40	BSV	Used
		ESV:	Bearing [True]: 288.0° to 340.0° Bearing [Mag]: 292.0° to 344.0°		Arc Distance: Out to 60.0 NM Altitude: 4100.0 to 20000.0 ft		

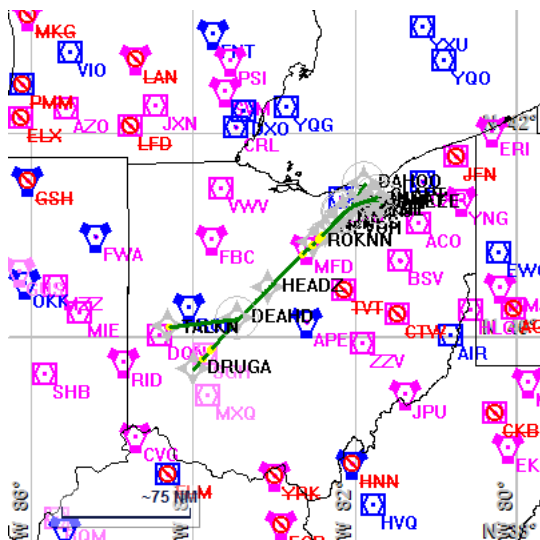

Name: Paul Jackson
Project Name: KCLE ROKNN STAR
Output File: KCLE ROKNN1 STAR
 DRUGA CLAPT
 20171030_1110
Procedure Name: ROKNN1
Software: RNAV-Pro™
Version: 2.39
Date/Time: 10/30/2017 11:13:43 AM
Input File: [KCLE ROKNN1 STAR
 DRUGA CLAPT
 20170828_1509.txt](#)
Databases: AIRNAV Date: 9/17/2017
 CIFP Date: 7/20/2017
 DTED® (MAX) Date: 2002

Results Summary:


Flyability	✓	
DME/DME	✓	No Critical DMEs Exist
Radars	?	
Comms	?	
TERPS	?	



Flight Plan					Return To Summary		
Name	Type	Lat/Lon	Alt [ft]	VNAV Mode	IAS [Kts]	Turn Type	Leg Type
DRUGA	WP	N 39° 41' 16.70" W 83° 59' 48.61"	10000.0	Step	280.0	Fly By	TF
DEAHD	WP	N 40° 10' 54.17" W 83° 26' 49.43"	10000.0	Step	280.0	Fly By	TF
HEADZ	WP	N 40° 29' 10.99" W 83° 3' 55.31"	10000.0	Step	280.0	Fly By	TF
ROKNN	WP	N 40° 55' 52.34" W 82° 30' 14.16"	9000.0	Step	210.0	Fly By	TF
DEVOH	WP	N 41° 3' 3.73" W 82° 21' 3.41"	7000.0	Step	210.0	Fly By	TF
SEPLN	WP	N 41° 17' 30.33" W 82° 1' 55.89"	7000.0	Step	210.0	Fly By	TF
CLAPT	WP	N 41° 22' 20.63" W 81° 43' 32.22"	6000.0	Step	210.0	Fly Over	TF

Flyability		Return To Summary
Settings:	<div>Flight Type: Arrival</div> <div>Selected Airport: KCLE</div> <div>Aircraft Category: Cat D</div> <div>Climb Gradient: <i>None assigned</i></div> <div>Ground Speeds:</div> <div>Table:</div> <div><div>200.0 Kts up to 11000.0 ft</div><div>240.0 Kts up to 18000.0 ft</div><div>260.0 Kts up to 24000.0 ft</div><div>340.0 Kts up to 99900.0 ft</div></div> <div>Wind Settings: <i>None assigned</i></div> <div>Descent During a Turn: Allowed</div> <div>VNAV Mode: Flight Plan</div>	
	Entire track is fly-able	

DME/DME	Return To Summary
Settings:	<p> RNP: 2.0 Flight Mode: Manual Line of Sight (DTED Level 0 Max): Evaluated DME Restrictions: Evaluated Inertial Drift: Enabled Initial Drift: 0.558 NM INS Drift Rate: 8.000 NM/Hour Range Mode: OSV Co-Frequencies: Evaluated RNP Edges: Evaluated Min DME Range: 3.0 NM Allowed Gap Length: 4.0 NM DME Types: VOR/DME, VORTAC, Standalone, and User DME Include Angles: 30 to 150 Critical DMEs: Allowed DoD Facilities: Not included Foreign Facilities: Not included Low DMEs: Included Terminal DMEs: Included Flight Check DMEs: Selected Higher Altitudes: Evaluated Near Maximum Altitude: Evaluated </p>
<p> Total Number of DMEs Used: 11 Maximum DME Error: 0.555 NM. No Critical DMEs were found. Available DMEs: DQN, MXQ, ROD, SGH, FWA, DJB, APE, MFD, CRL, CXR, BSV, ACO Disabled DMEs: LAN, LFD, ELX, GIJ, PMM, MKG, HIC, PLN, MNM, CTW, JFN, TVT, BDF, DNV, EON, PLL, PNT, RBS, SAM, UIN, VLA, BVT, GSH, ECB, EWO, FLM, YRK, BRD, DWN, HML, ODI, RST, CMK, DNY, GFL, GGT, HNK, HUO, LGA, HTO, MSS, PWL, RKA, SLK, UCA, ULW, CRI, AGC, BFD, CIP, ETG, FJC, FQM, IHD, LVZ, MIP, MXE, REC, SFK, SLT, TDT, THS, AUW, JVL, LNR, STE, CKB, ESL, HNN, and GRV Foreign DMEs within range: YQG, YQO, YXU, YWT, YYZ, YVV, YEE Co-Frequency Interference: 108.6(JPU, MZZ) and 114.4(ACO, MIE) </p>	

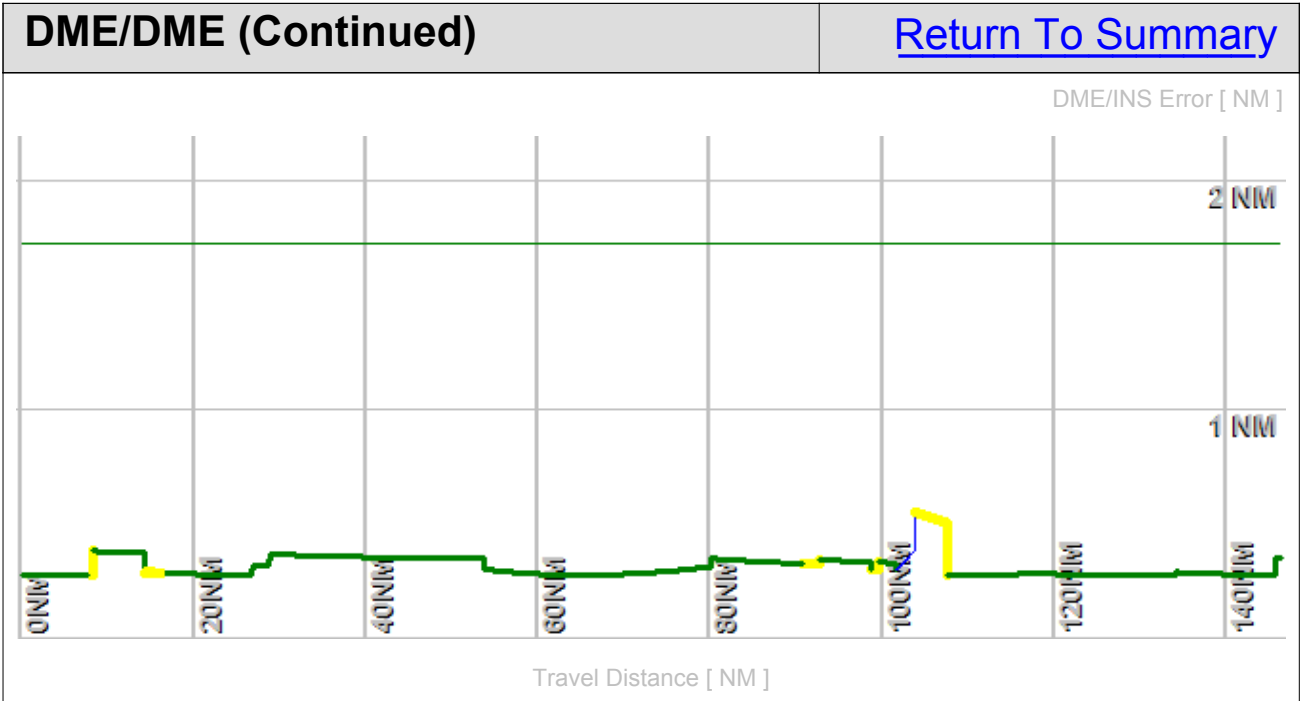

DME/DME (Continued)						Return To Summary			
DMEs Used									
#	Name	Lat/Lon/MAGVAR	Range	Source	Critical	Err. [NM]	Status	Time	Distance
1	DQN	N 40° 0' 59.20" W 84° 23' 48.83" 01 W	L	Database	NO	0.871	Enabled	9.8%	9.8%
2	SGH	N 39° 50' 11.52" W 83° 50' 41.86" 04 W	T	Database	NO	0.555	Enabled	15.6%	15.6%
3	ROD	N 40° 17' 16.08" W 84° 2' 35.15" 05 W	H	Database	NO	0.668	Enabled	12.6%	12.6%
4	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H + ESV	User	NO	0.555	Enabled	18.5%	18.5%
5	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H + ESV	User	NO	1.366	Enabled	38.3%	38.3%
6	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H + ESV	User	NO	1.013	Enabled	18.0%	18.0%
7	MFD	N 40° 52' 7.00" W 82° 35' 27.46" 03 W	L	Database	NO	0.538	Enabled	32.2%	32.2%
8	CRL	N 42° 2' 52.90" W 83° 27' 27.30" 03 W	H + ESV	User	NO	1.044	Enabled	14.7%	14.7%
9	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H + ESV	User	NO	0.570	Enabled	11.1%	11.1%
10	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L + ESV	User	NO	0.555	Enabled	25.9%	25.9%
11	ACO	N 41° 6' 28.45" W 81° 12' 5.49" 04 W	L	Database	NO	0.555	Enabled	0.4%	0.4%
	Total Coverage							98.6%	98.6%
Flight Check DME Selection									
Distance [NM]		Selected DMEs						Alternate	
0.0		DQN	ROD	SGH	MXQ				
26.8		FWA	ROD	SGH	DJB	APE		DQN	
38.8		FWA	MFD	DJB	APE				
64.3		CRL	MFD	DJB	APE				
101.3		CRL	MFD	CXR	DJB	BSV			
111.2		MFD	CXR	DJB	BSV				
131.1		ACO	MFD	CXR	DJB	BSV			
Inertial Drift Segments									
#	Start Location			End Location				Length [NM]	

Available DMEs by Waypoints		Return To Summary
Waypoint Before	Waypoint After	DME List
DRUGA	DEAHD	APE, FWA, DJB, DQN, MXQ, ROD, and SGH
DEAHD	HEADZ	APE, FWA, DJB, and MFD
HEADZ	ROKNN	APE, CRL, DJB, and MFD
ROKNN	DEVOH	BSV, CXR, CRL, DJB, and MFD
DEVOH	SEPLN	BSV, CXR, DJB, and MFD
SEPLN	CLAPT	BSV, CXR, DJB, ACO, and MFD

User Data					Return To Summary		
User Data Files							
#	File Name						
1	ROKKN1 NEW.udt						
User DMEs							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
1	LAN	N 42° 43' 2.62" W 84° 41' 51.03" 05 W	L	887.4	110.80	LAN	Disabled
2	LFD	N 42° 3' 44.96" W 84° 45' 54.48" 05 W	L	1040.0	111.20	LFD	Disabled
Restriction:		Bearing [True]: 105.0° to 160.0° Bearing [Mag]: 110.0° to 165.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
3	ELX	N 42° 8' 39.88" W 86° 7' 21.74" 00 E	L	793.7	116.60	ELX	Disabled
4	GIJ	N 41° 46' 7.00" W 86° 19' 6.42" 00 E	H	802.7	115.40	GIJ	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
5	PMM	N 42° 27' 57.73" W 86° 6' 17.32" 00 E	H	639.9	112.10	PMM	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
6	MKG	N 43° 10' 9.31" W 86° 2' 21.76" 01 W	L	659.1	115.20	MKG	Disabled
Restriction:		Bearing [True]: 54.0° to 89.0° Bearing [Mag]: 55.0° to 90.0°			Distance: Beyond 10.0 NM Altitude: Below 4000.0 ft		
7	HIC	N 43° 34' 29.47" W 85° 42' 58.18" 01 W	L	920.0	117.60	HIC	Disabled
Restriction:		Bearing [True]: 19.0° to 89.0° Bearing [Mag]: 20.0° to 90.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 269.0° to 289.0° Bearing [Mag]: 270.0° to 290.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
8	PLN	N 45° 37' 50.33" W 84° 39' 50.79" 06 W	L	835.3	111.80	PLN	Disabled
9	MNM	N 45° 10' 48.58" W 87° 38' 49.83" 00 E	L	650.1	109.60	MNM	Disabled
10	CTW	N 40° 13' 45.15" W 81° 28' 35.32" 07 W	L	1180.0	111.80	CTW	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
11	JFN	N 41° 45' 36.42" W 80° 44' 53.20" 05 W	L	896.3	115.20	JFN	Disabled
Restriction:		Bearing [True]: 226.0° to 255.0° Bearing [Mag]: 231.0° to 260.0°			Distance: Beyond 30.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 121.0° to 185.0° Bearing [Mag]: 126.0° to 190.0°			Distance: Beyond 20.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 186.0° to 225.0° Bearing [Mag]: 191.0° to 230.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 80.0° to 120.0° Bearing [Mag]: 85.0° to 125.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
12	TVT	N 40° 27' 29.04" W 82° 7' 36.52" 03 W	L	1330.4	116.50	TVT	Disabled
13	BDF	N 41° 9' 35.03" W 89° 35' 16.34" 00 E	H	810.0	114.70	BDF	Disabled
14	DNV	N 40° 17' 37.56" W 87° 33' 26.14" 02 E	L	698.8	111.00	DNV	Disabled
15	EON	N 41° 16' 10.68" W 87° 47' 27.79" 02 E	L	688.7	113.20	EON	Disabled
16	PLL	N 41° 57' 56.31" W 89° 31' 27.19" 03 E	L	840.0	111.20	PLL	Disabled
17	PNT	N 40° 49' 16.32" W 88° 44' 0.63" 03 E	L	680.0	109.60	PNT	Disabled
18	RBS	N 40° 34' 54.13" W 88° 9' 51.36" 02 E	L	780.0	116.80	RBS	Disabled
19	SAM	N 38° 29' 6.68" W 88° 5' 8.90" 03 E	L	540.0	116.60	SAM	Disabled
20	UIN	N 39° 50' 52.35" W 91° 16' 44.13" 05 E	H	715.1	113.60	UIN	Disabled
21	VLA	N 39° 5' 37.82" W 89° 9' 44.08" 04 E	L	605.5	114.30	VLA	Disabled
22	BVT	N 40° 33' 22.22" W 87° 4' 9.75" 01 E	H	752.2	115.10	BVT	Disabled
Restriction:		Bearing [True]: 299.0° to 45.0° Bearing [Mag]: 298.0° to 44.0°			Distance: Beyond 0.0 NM Altitude: Below 2800.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
23	GSH	N 41° 31' 30.56" W 86° 1' 40.63" 00 E	H	851.8	113.70	GSH	Disabled
Restriction:		Bearing [True]: 71.0° to 129.0° Bearing [Mag]: 71.0° to 129.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
24	ECB	N 38° 9' 30.11" W 82° 54' 36.20" 02 W	L	1070.0	110.40	ECB	Disabled
25	EWO	N 37° 37' 54.52" W 85° 40' 33.16" 01 E	L	960.0	110.80	EWO	Disabled
26	FLM	N 38° 38' 57.99" W 84° 18' 38.17" 04 W	H	808.5	117.00	FLM	Disabled
27	YRK	N 38° 38' 38.88" W 82° 58' 42.02" 05 W	L	1040.0	112.80	YRK	Disabled
28	BRD	N 46° 20' 53.81" W 94° 1' 33.54" 03 E	H	1253.9	116.90	BRD	Disabled
Restriction:		Bearing [True]: 3.0° to 3.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 29.0 NM Altitude: Below 3000.0 ft		
29	DWN	N 45° 5' 14.87" W 94° 27' 13.86" 07 E	L	1130.0	109.00	DWN	Disabled
30	HML	N 48° 52' 9.07" W 97° 7' 4.45" 09 E	H	797.4	112.40	HML	Disabled
Restriction:		Bearing [True]: 84.0° to 94.0° Bearing [Mag]: 75.0° to 85.0°			Distance: Beyond 0.0 NM Altitude: Below 10000.0 ft		
Restriction:		Bearing [True]: 95.0° to 263.0° Bearing [Mag]: 86.0° to 254.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 264.0° to 279.0° Bearing [Mag]: 255.0° to 270.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 280.0° to 83.0° Bearing [Mag]: 271.0° to 74.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
31	ODI	N 43° 54' 44.38" W 91° 28' 3.06" 01 E	H	1282.2	117.90	ODI	Disabled
32	RST	N 43° 46' 58.45" W 92° 35' 49.06" 05 E	L	1393.0	112.00	RST	Disabled
33	CMK	N 41° 16' 48.32" W 73° 34' 52.77" 12 W	L	693.8	116.60	CMK	Disabled
34	DNY	N 42° 10' 41.81" W 74° 57' 24.99" 11 W	L	2560.0	112.10	DNY	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
35	GFL	N 43° 20' 30.09" W 73° 36' 42.32" 14 W	L	323.7	110.20	GFL	Disabled
Restriction:		Bearing [True]: 346.0° to 346.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 0.0 NM Altitude: Below 9000.0 ft		
36	GGT	N 42° 47' 20.24" W 75° 49' 36.29" 11 W	L	2040.0	117.80	GGT	Disabled
37	HNK	N 42° 3' 47.00" W 75° 18' 58.62" 11 W	H	2070.0	116.80	HNK	Disabled
38	HUO	N 41° 24' 34.87" W 74° 35' 29.74" 11 W	H	1300.3	116.10	HUO	Disabled
39	LGA	N 40° 47' 1.38" W 73° 52' 6.96" 12 W	L	8.9	113.10	LGA	Disabled
Restriction:		Bearing [True]: 233.0° to 268.0° Bearing [Mag]: 245.0° to 280.0°			Distance: Beyond 25.0 NM Altitude: Below 6000.0 ft		
40	HTO	N 40° 55' 8.38" W 72° 19' 0.14" 13 W	H	22.0	113.60	HTO	Disabled
Restriction:		Bearing [True]: 267.0° to 312.0° Bearing [Mag]: 280.0° to 325.0°			Distance: Beyond 35.0 NM Altitude: Below 1700.0 ft		
Restriction:		Bearing [True]: 312.0° to 342.0° Bearing [Mag]: 325.0° to 355.0°			Distance: Beyond 30.0 NM Altitude: Below 2000.0 ft		
41	MSS	N 44° 54' 51.92" W 74° 43' 21.78" 14 W	H	197.5	114.10	MSS	Disabled
42	PWL	N 41° 46' 11.18" W 73° 36' 1.99" 12 W	L	1250.0	114.30	PWL	Disabled
43	RKA	N 42° 27' 58.91" W 75° 14' 21.51" 11 W	L	2027.2	112.60	RKA	Disabled
44	SLK	N 44° 23' 4.41" W 74° 12' 16.21" 14 W	L	1646.8	109.20	SLK	Disabled
45	UCA	N 43° 1' 35.45" W 75° 9' 52.28" 12 W	L	1420.0	111.20	UCA	Disabled
46	ULW	N 42° 5' 39.16" W 77° 1' 28.53" 12 W	L	1631.8	109.65	ULW	Disabled
47	CRI	N 40° 36' 44.90" W 73° 53' 40.00" 11 W	T	10.0	112.30	CRI	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
48	AGC	N 40° 16' 43.12" W 80° 2' 27.08" 09 W	L	1284.6	110.00	AGC	Disabled
49	BFD	N 41° 47' 10.99" W 78° 37' 9.65" 07 W	L	2110.6	116.60	BFD	Disabled
50	CIP	N 41° 8' 46.66" W 79° 27' 28.71" 06 W	L	1519.5	112.90	CIP	Disabled
51	ETG	N 41° 12' 53.82" W 78° 8' 33.92" 10 W	H	2250.0	116.00	ETG	Disabled
52	FJC	N 40° 43' 36.12" W 75° 27' 17.12" 10 W	L	680.6	117.50	FJC	Disabled
Restriction:		Bearing [True]: 290.0° to 50.0° Bearing [Mag]: 300.0° to 60.0°			Distance: Beyond 26.0 NM Altitude: Below 4500.0 ft		
Restriction:		Bearing [True]: 51.0° to 289.0° Bearing [Mag]: 61.0° to 299.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
53	FQM	N 41° 20' 18.81" W 76° 46' 29.52" 09 W	L	2098.0	114.40	FQM	Disabled
54	IHD	N 39° 58' 27.27" W 79° 21' 30.12" 06 W	L	2820.0	108.20	IHD	Disabled
55	LVZ	N 41° 16' 22.09" W 75° 41' 22.08" 10 W	L	2118.8	111.60	LVZ	Disabled
56	MIP	N 41° 1' 24.21" W 76° 39' 55.04" 09 W	L	1000.0	109.20	MIP	Disabled
57	MXE	N 39° 55' 5.00" W 75° 40' 14.91" 09 W	L	473.4	113.20	MXE	Disabled
58	REC	N 40° 32' 47.25" W 78° 44' 49.28" 09 W	L	2340.0	110.60	REC	Disabled
59	SFK	N 41° 41' 42.91" W 77° 25' 11.66" 08 W	L	1984.7	108.60	SFK	Disabled
60	SLT	N 41° 30' 45.93" W 77° 58' 12.39" 08 W	H	2310.0	113.90	SLT	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
61	TDT	N 41° 42' 46.91" W 79° 25' 2.17" 09 W	L	1710.0	117.60	TDT	Disabled
Restriction:		Bearing [True]: 32.0° to 42.0° Bearing [Mag]: 41.0° to 51.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
Restriction:		Bearing [True]: 296.0° to 331.0° Bearing [Mag]: 305.0° to 340.0°			Distance: Beyond 24.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 331.0° to 356.0° Bearing [Mag]: 340.0° to 5.0°			Distance: Beyond 24.0 NM Altitude: Below 5000.0 ft		
62	THS	N 39° 55' 59.62" W 77° 57' 3.40" 07 W	L	2338.0	115.00	THS	Disabled
63	AUW	N 44° 50' 48.40" W 89° 35' 11.68" 02 E	L	1204.7	111.60	AUW	Disabled
Restriction:		Bearing [True]: 322.0° to 302.0° Bearing [Mag]: 320.0° to 300.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 302.0° to 322.0° Bearing [Mag]: 300.0° to 320.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
64	JVL	N 42° 33' 28.83" W 89° 6' 18.93" 03 E	L	931.4	114.30	JVL	Disabled
65	LNR	N 43° 17' 39.85" W 90° 7' 59.33" 00 E	L	1184.6	112.80	LNR	Disabled
66	STE	N 44° 32' 35.69" W 89° 31' 50.02" 01 W	L	1110.0	110.60	STE	Disabled
Restriction:		Bearing [True]: 359.0° to 359.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
67	CKB	N 39° 15' 11.57" W 80° 16' 4.32" 04 W	L	1425.7	112.60	CKB	Disabled
68	ESL	N 39° 13' 31.77" W 78° 59' 22.20" 06 W	L	2590.0	110.80	ESL	Disabled
69	HNN	N 38° 45' 14.85" W 82° 1' 34.20" 03 W	H	880.0	115.90	HNN	Disabled
70	GRV	N 39° 38' 6.11" W 79° 3' 1.90" 06 W	L	2640.0	112.30	GRV	Disabled
Restriction:		Bearing [True]: 301.0° to 64.0° Bearing [Mag]: 307.0° to 70.0°			Distance: Beyond 20.0 NM Altitude: Below 5000.0 ft		
Restriction:		Bearing [True]: 65.0° to 300.0° Bearing [Mag]: 71.0° to 306.0°			Distance: Beyond 20.0 NM Altitude: Below 6000.0 ft		
Restriction:		Bearing [True]: 102.0° to 107.0° Bearing [Mag]: 108.0° to 113.0°			Distance: Beyond 38.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 319.0° to 339.0° Bearing [Mag]: 325.0° to 345.0°			Distance: Beyond 35.0 NM Altitude: Below 99999.0 ft		


User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
71	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H	780.0	113.60	DJB	Used
		ESV:	Bearing [True]: 165.0° to 297.0° Bearing [Mag]: 170.0° to 302.0°		Arc Distance: Out to 102.0 NM Altitude: 8200.0 to 16000.0 ft		
72	CRL	N 42° 2' 52.90" W 83° 27' 27.30" 03 W	H	629.0	115.70	CRL	Used
		ESV:	Bearing [True]: 144.0° to 170.0° Bearing [Mag]: 147.0° to 173.0°		Arc Distance: Out to 95.0 NM Altitude: 8900.0 to 16000.0 ft		
73	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H	1317.2	112.70	CXR	Used
		ESV:	Bearing [True]: 235.0° to 273.0° Bearing [Mag]: 240.0° to 278.0°		Arc Distance: Out to 71.0 NM Altitude: 4500.0 to 16000.0 ft		
74	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H	792.6	117.80	FWA	Used
		Restriction:	Bearing [True]: 55.0° to 65.0° Bearing [Mag]: 61.0° to 71.0°		Distance: Beyond 0.0 NM Altitude: Below 7000.0 ft		
		Restriction:	Bearing [True]: 354.0° to 354.0° Bearing [Mag]: 360.0° to 360.0°		Distance: Beyond 33.0 NM Altitude: Below 2800.0 ft		
		Restriction:	Bearing [True]: 170.0° to 210.0° Bearing [Mag]: 176.0° to 216.0°		Distance: Beyond 22.0 NM Altitude: Below 4000.0 ft		
		Restriction:	Bearing [True]: 260.0° to 290.0° Bearing [Mag]: 266.0° to 296.0°		Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
		ESV:	Bearing [True]: 108.0° to 128.0° Bearing [Mag]: 114.0° to 134.0°		Arc Distance: Out to 101.0 NM Altitude: 10000.0 to 20000.0 ft		
75	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H	1353.7	116.70	APE	Used
		Restriction:	Bearing [True]: 177.0° to 182.0° Bearing [Mag]: 183.0° to 188.0°		Distance: Beyond 20.0 NM Altitude: Below 3000.0 ft		
		ESV:	Bearing [True]: 260.0° to 280.0° Bearing [Mag]: 266.0° to 286.0°		Arc Distance: Out to 94.0 NM Altitude: 10000.0 to 18000.0 ft		
76	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L	1221.0	112.40	BSV	Used
		ESV:	Bearing [True]: 288.0° to 340.0° Bearing [Mag]: 292.0° to 344.0°		Arc Distance: Out to 60.0 NM Altitude: 4100.0 to 20000.0 ft		

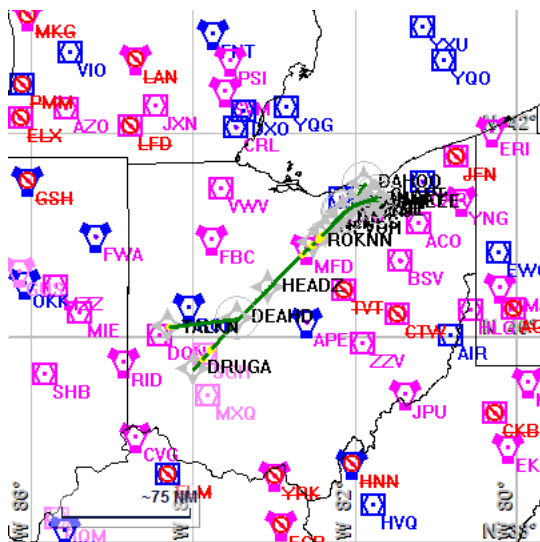

Name: Paul Jackson
Project Name: KCLE ROKNN STAR
Output File: KCLE ROKNN1 TALKN
DEAHD 20171030_1110
Procedure Name: ROKNN1
Software: RNAV-Pro™
Version: 2.39
Date/Time: 10/30/2017 11:14:19 AM
Input File: [KCLE ROKNN1 STAR
TALKN DEAHD
20170828_1534.txt](#)
Databases: AIRNAV Date: 9/17/2017
CIFP Date: 7/20/2017
DTED® (MAX) Date: 2002

Results Summary:


Flyability	✓	
DME/DME	✓	No Critical DMEs Exist
Radars	?	
Comms	?	
TERPS	?	

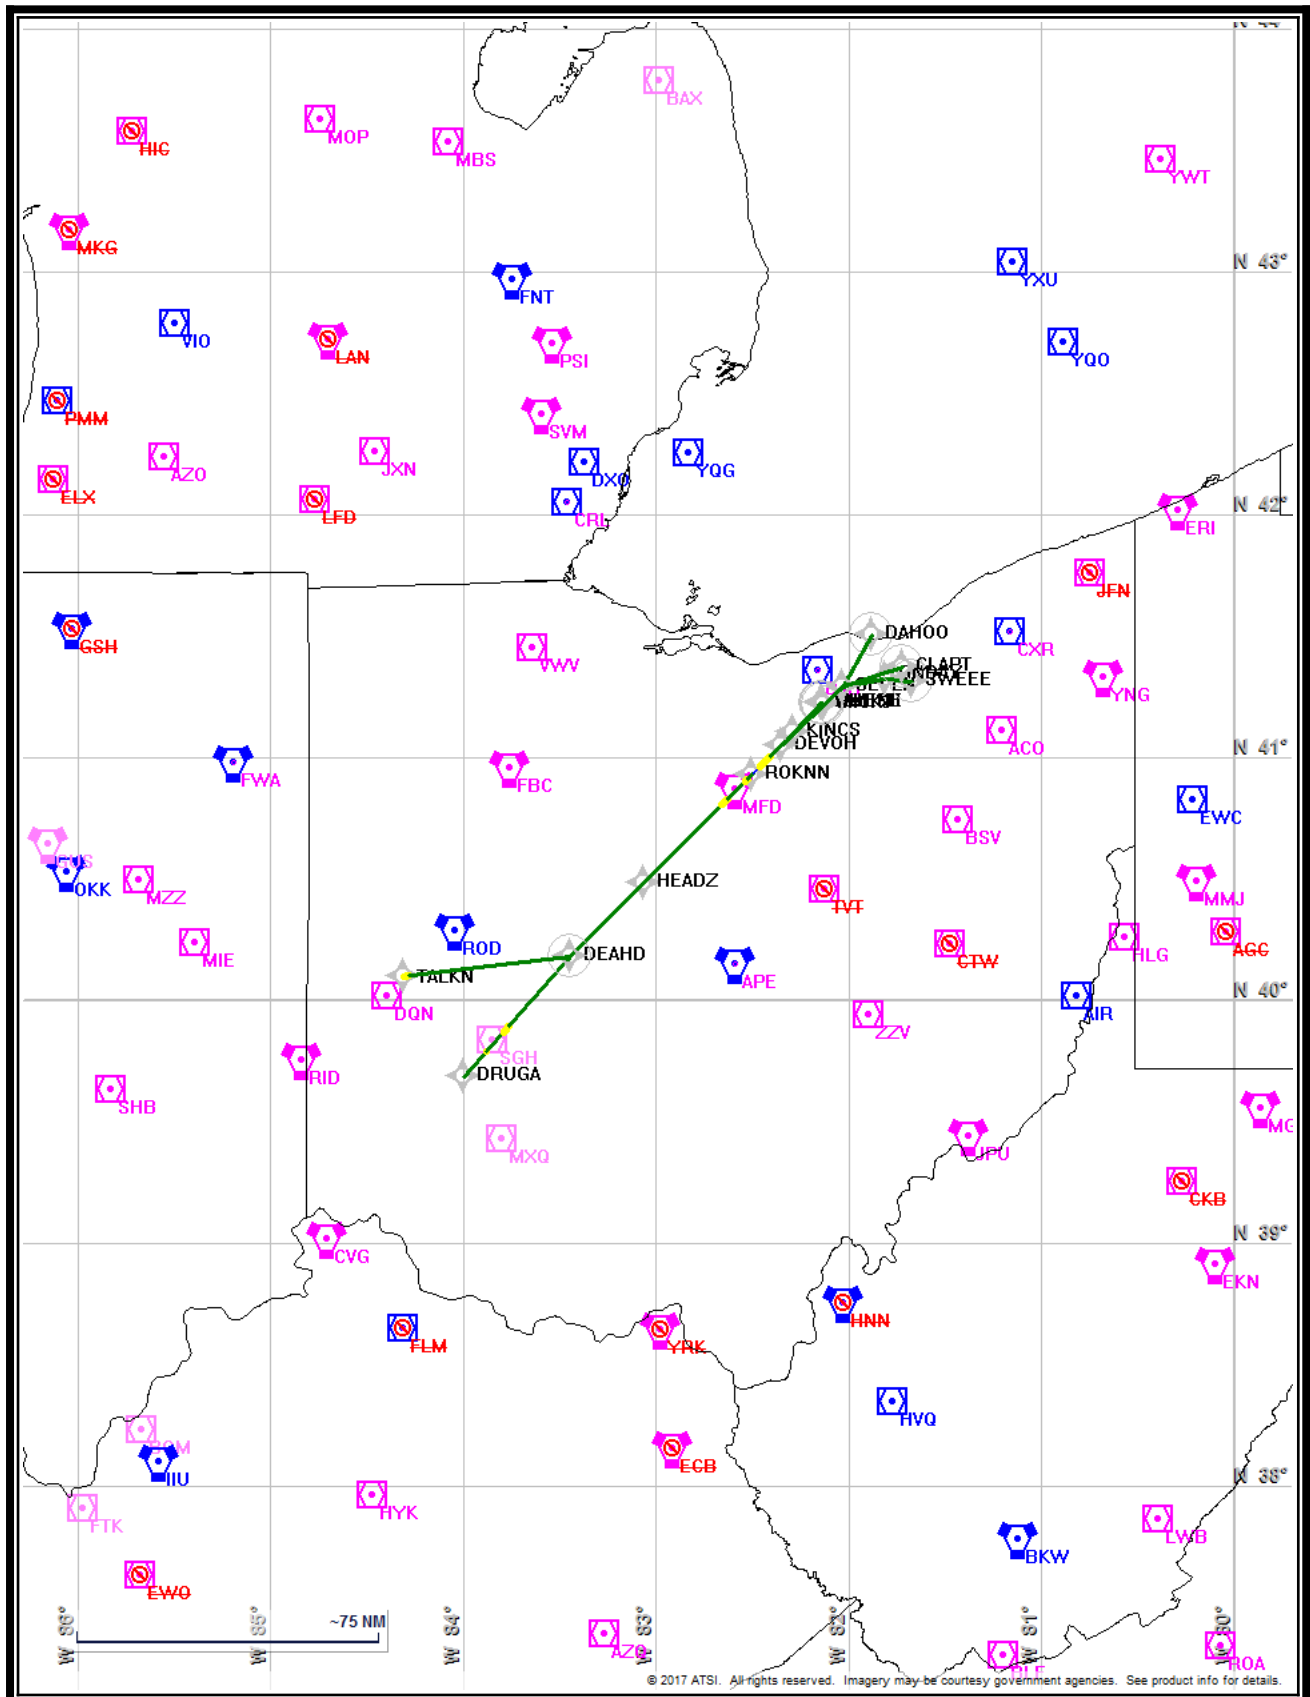

Flight Plan					Return To Summary		
Name	Type	Lat/Lon	Alt [ft]	VNAV Mode	IAS [Kts]	Turn Type	Leg Type
TALKN	WP	N 40° 6' 4.49" W 84° 18' 33.13"	10000.0	Step	280.0	Fly By	TF
DEAHD	WP	N 40° 10' 54.17" W 83° 26' 49.43"	10000.0	Step	280.0	Fly Over	TF

Flyability		Return To Summary
Settings:	<p>Flight Type:</p> <p>Selected Airport: KCLE</p> <p>Aircraft Category: Cat D</p> <p>Climb Gradient: <i>None assigned</i></p> <p>Ground Speeds:</p> <p>Table:</p> <p>200.0 Kts up to 11000.0 ft</p> <p>240.0 Kts up to 18000.0 ft</p> <p>260.0 Kts up to 24000.0 ft</p> <p>340.0 Kts up to 99900.0 ft</p> <p>Wind Settings: <i>None assigned</i></p> <p>Descent During a Turn: Allowed</p> <p>VNAV Mode: Flight Plan</p>	
Entire track is fly-able		

DME/DME	Return To Summary
Settings:	<p>RNP: 2.0</p> <p>Flight Mode: Manual</p> <p>Line of Sight (DTED Level 0 Max): Evaluated</p> <p>DME Restrictions: Evaluated</p> <p>Inertial Drift: Enabled</p> <p> Initial Drift: 0.558 NM</p> <p> INS Drift Rate: 8.000 NM/Hour</p> <p>Range Mode: OSV</p> <p>Co-Frequencies: Evaluated</p> <p>RNP Edges: Evaluated</p> <p>Min DME Range: 3.0 NM</p> <p>Allowed Gap Length: 4.0 NM</p> <p>DME Types: VOR/DME, VORTAC, Standalone, and User</p> <p>DME Include Angles: 30 to 150</p> <p>Critical DMEs: Allowed</p> <p>DoD Facilities: Not included</p> <p>Foreign Facilities: Not included</p> <p>Low DMEs: Included</p> <p>Terminal DMEs: Included</p> <p>Flight Check DMEs: Selected</p> <p>Higher Altitudes: Evaluated</p> <p>Near Maximum Altitude: Evaluated</p>
<p>Total Number of DMEs Used: 6</p> <p>Maximum DME Error: 0.437 NM.</p> <p>No Critical DMEs were found.</p> <p>Available DMEs: APE, DQN, RID, ROD, SGH, FWA, DJB</p> <p>Disabled DMEs: LAN, LFD, ELX, GIJ, PMM, MKG, HIC, PLN, MNM, CTW, JFN, TVT, BDF, DNV, EON, PLL, PNT, RBS, SAM, UIN, VLA, BVT, GSH, ECB, EWO, FLM, YRK, BRD, DWN, HML, ODI, RST, CMK, DNY, GFL, GGT, HNK, HUO, LGA, HTO, MSS, PWL, RKA, SLK, UCA, ULW, CRI, AGC, BFD, CIP, ETG, FJC, FQM, IHD, LVZ, MIP, MXE, REC, SFK, SLT, TDT, THS, AUW, JVL, LNR, STE, CKB, ESL, HNN, and GRV</p> <p>Foreign DMEs within range: YQG, YQO, YXU, YWT</p> <p>Co-Frequency Interference: 108.6(JPU, MZZ) and 114.4(ACO, MIE)</p>	

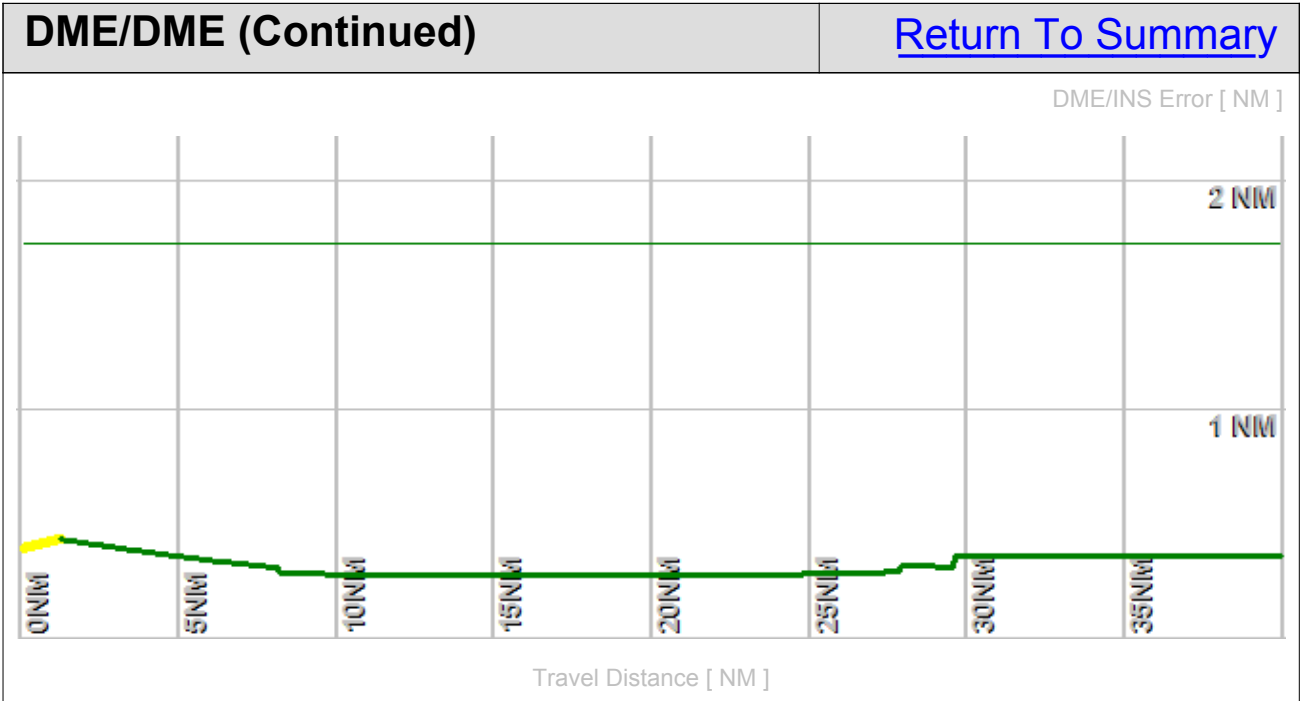

DME/DME (Continued)						Return To Summary			
DMEs Used									
#	Name	Lat/Lon/MAGVAR	Range	Source	Critical	Err. [NM]	Status	Time	Distance
1	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H + ESV	User	NO	0.885	Enabled	49.0%	49.0%
2	DQN	N 40° 0' 59.20" W 84° 23' 48.83" 01 W	L	Database	NO	0.464	Enabled	23.8%	23.8%
3	ROD	N 40° 17' 16.08" W 84° 2' 35.15" 05 W	H	Database	NO	0.885	Enabled	23.6%	23.6%
4	SGH	N 39° 50' 11.52" W 83° 50' 41.86" 04 W	T	Database	NO	0.507	Enabled	47.4%	47.4%
5	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H + ESV	User	NO	0.450	Enabled	30.2%	30.2%
6	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H + ESV	User	NO	0.650	Enabled	26.0%	26.0%
	Total Coverage							100.0%	100.0%
Flight Check DME Selection									
Distance [NM]		Selected DMEs						Alternate	
0.0		APE	DQN	ROD	RID	SGH			
26.7		APE	DQN	DJB	FWA	SGH			

Available DMEs by Waypoints		Return To Summary
Waypoint Before	Waypoint After	DME List
TALKN	DEAHD	APE, FWA, DJB, DQN, RID, ROD, and SGH

User Data					Return To Summary		
User Data Files							
#	File Name						
1	ROKKN1 NEW.udt						
User DMEs							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
1	LAN	N 42° 43' 2.62" W 84° 41' 51.03" 05 W	L	887.4	110.80	LAN	Disabled
2	LFD	N 42° 3' 44.96" W 84° 45' 54.48" 05 W	L	1040.0	111.20	LFD	Disabled
Restriction:		Bearing [True]: 105.0° to 160.0° Bearing [Mag]: 110.0° to 165.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
3	ELX	N 42° 8' 39.88" W 86° 7' 21.74" 00 E	L	793.7	116.60	ELX	Disabled
4	GIJ	N 41° 46' 7.00" W 86° 19' 6.42" 00 E	H	802.7	115.40	GIJ	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
5	PMM	N 42° 27' 57.73" W 86° 6' 17.32" 00 E	H	639.9	112.10	PMM	Disabled
Restriction:		Bearing [True]: 360.0° to 360.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
6	MKG	N 43° 10' 9.31" W 86° 2' 21.76" 01 W	L	659.1	115.20	MKG	Disabled
Restriction:		Bearing [True]: 54.0° to 89.0° Bearing [Mag]: 55.0° to 90.0°			Distance: Beyond 10.0 NM Altitude: Below 4000.0 ft		
7	HIC	N 43° 34' 29.47" W 85° 42' 58.18" 01 W	L	920.0	117.60	HIC	Disabled
Restriction:		Bearing [True]: 19.0° to 89.0° Bearing [Mag]: 20.0° to 90.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 269.0° to 289.0° Bearing [Mag]: 270.0° to 290.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
8	PLN	N 45° 37' 50.33" W 84° 39' 50.79" 06 W	L	835.3	111.80	PLN	Disabled
9	MNM	N 45° 10' 48.58" W 87° 38' 49.83" 00 E	L	650.1	109.60	MNM	Disabled
10	CTW	N 40° 13' 45.15" W 81° 28' 35.32" 07 W	L	1180.0	111.80	CTW	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
11	JFN	N 41° 45' 36.42" W 80° 44' 53.20" 05 W	L	896.3	115.20	JFN	Disabled
Restriction:		Bearing [True]: 226.0° to 255.0° Bearing [Mag]: 231.0° to 260.0°			Distance: Beyond 30.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 121.0° to 185.0° Bearing [Mag]: 126.0° to 190.0°			Distance: Beyond 20.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 186.0° to 225.0° Bearing [Mag]: 191.0° to 230.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 80.0° to 120.0° Bearing [Mag]: 85.0° to 125.0°			Distance: Beyond 35.0 NM Altitude: Below 3500.0 ft		
12	TVT	N 40° 27' 29.04" W 82° 7' 36.52" 03 W	L	1330.4	116.50	TVT	Disabled
13	BDF	N 41° 9' 35.03" W 89° 35' 16.34" 00 E	H	810.0	114.70	BDF	Disabled
14	DNV	N 40° 17' 37.56" W 87° 33' 26.14" 02 E	L	698.8	111.00	DNV	Disabled
15	EON	N 41° 16' 10.68" W 87° 47' 27.79" 02 E	L	688.7	113.20	EON	Disabled
16	PLL	N 41° 57' 56.31" W 89° 31' 27.19" 03 E	L	840.0	111.20	PLL	Disabled
17	PNT	N 40° 49' 16.32" W 88° 44' 0.63" 03 E	L	680.0	109.60	PNT	Disabled
18	RBS	N 40° 34' 54.13" W 88° 9' 51.36" 02 E	L	780.0	116.80	RBS	Disabled
19	SAM	N 38° 29' 6.68" W 88° 5' 8.90" 03 E	L	540.0	116.60	SAM	Disabled
20	UIN	N 39° 50' 52.35" W 91° 16' 44.13" 05 E	H	715.1	113.60	UIN	Disabled
21	VLA	N 39° 5' 37.82" W 89° 9' 44.08" 04 E	L	605.5	114.30	VLA	Disabled
22	BVT	N 40° 33' 22.22" W 87° 4' 9.75" 01 E	H	752.2	115.10	BVT	Disabled
Restriction:		Bearing [True]: 299.0° to 45.0° Bearing [Mag]: 298.0° to 44.0°			Distance: Beyond 0.0 NM Altitude: Below 2800.0 ft		

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
23	GSH	N 41° 31' 30.56" W 86° 1' 40.63" 00 E	H	851.8	113.70	GSH	Disabled
Restriction:		Bearing [True]: 71.0° to 129.0° Bearing [Mag]: 71.0° to 129.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
24	ECB	N 38° 9' 30.11" W 82° 54' 36.20" 02 W	L	1070.0	110.40	ECB	Disabled
25	EWO	N 37° 37' 54.52" W 85° 40' 33.16" 01 E	L	960.0	110.80	EWO	Disabled
26	FLM	N 38° 38' 57.99" W 84° 18' 38.17" 04 W	H	808.5	117.00	FLM	Disabled
27	YRK	N 38° 38' 38.88" W 82° 58' 42.02" 05 W	L	1040.0	112.80	YRK	Disabled
28	BRD	N 46° 20' 53.81" W 94° 1' 33.54" 03 E	H	1253.9	116.90	BRD	Disabled
Restriction:		Bearing [True]: 3.0° to 3.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 29.0 NM Altitude: Below 3000.0 ft		
29	DWN	N 45° 5' 14.87" W 94° 27' 13.86" 07 E	L	1130.0	109.00	DWN	Disabled
30	HML	N 48° 52' 9.07" W 97° 7' 4.45" 09 E	H	797.4	112.40	HML	Disabled
Restriction:		Bearing [True]: 84.0° to 94.0° Bearing [Mag]: 75.0° to 85.0°			Distance: Beyond 0.0 NM Altitude: Below 10000.0 ft		
Restriction:		Bearing [True]: 95.0° to 263.0° Bearing [Mag]: 86.0° to 254.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 264.0° to 279.0° Bearing [Mag]: 255.0° to 270.0°			Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 280.0° to 83.0° Bearing [Mag]: 271.0° to 74.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
31	ODI	N 43° 54' 44.38" W 91° 28' 3.06" 01 E	H	1282.2	117.90	ODI	Disabled
32	RST	N 43° 46' 58.45" W 92° 35' 49.06" 05 E	L	1393.0	112.00	RST	Disabled
33	CMK	N 41° 16' 48.32" W 73° 34' 52.77" 12 W	L	693.8	116.60	CMK	Disabled
34	DNY	N 42° 10' 41.81" W 74° 57' 24.99" 11 W	L	2560.0	112.10	DNY	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
35	GFL	N 43° 20' 30.09" W 73° 36' 42.32" 14 W	L	323.7	110.20	GFL	Disabled
Restriction:		Bearing [True]: 346.0° to 346.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 0.0 NM Altitude: Below 9000.0 ft		
36	GGT	N 42° 47' 20.24" W 75° 49' 36.29" 11 W	L	2040.0	117.80	GGT	Disabled
37	HNK	N 42° 3' 47.00" W 75° 18' 58.62" 11 W	H	2070.0	116.80	HNK	Disabled
38	HUO	N 41° 24' 34.87" W 74° 35' 29.74" 11 W	H	1300.3	116.10	HUO	Disabled
39	LGA	N 40° 47' 1.38" W 73° 52' 6.96" 12 W	L	8.9	113.10	LGA	Disabled
Restriction:		Bearing [True]: 233.0° to 268.0° Bearing [Mag]: 245.0° to 280.0°			Distance: Beyond 25.0 NM Altitude: Below 6000.0 ft		
40	HTO	N 40° 55' 8.38" W 72° 19' 0.14" 13 W	H	22.0	113.60	HTO	Disabled
Restriction:		Bearing [True]: 267.0° to 312.0° Bearing [Mag]: 280.0° to 325.0°			Distance: Beyond 35.0 NM Altitude: Below 1700.0 ft		
Restriction:		Bearing [True]: 312.0° to 342.0° Bearing [Mag]: 325.0° to 355.0°			Distance: Beyond 30.0 NM Altitude: Below 2000.0 ft		
41	MSS	N 44° 54' 51.92" W 74° 43' 21.78" 14 W	H	197.5	114.10	MSS	Disabled
42	PWL	N 41° 46' 11.18" W 73° 36' 1.99" 12 W	L	1250.0	114.30	PWL	Disabled
43	RKA	N 42° 27' 58.91" W 75° 14' 21.51" 11 W	L	2027.2	112.60	RKA	Disabled
44	SLK	N 44° 23' 4.41" W 74° 12' 16.21" 14 W	L	1646.8	109.20	SLK	Disabled
45	UCA	N 43° 1' 35.45" W 75° 9' 52.28" 12 W	L	1420.0	111.20	UCA	Disabled
46	ULW	N 42° 5' 39.16" W 77° 1' 28.53" 12 W	L	1631.8	109.65	ULW	Disabled
47	CRI	N 40° 36' 44.90" W 73° 53' 40.00" 11 W	T	10.0	112.30	CRI	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
48	AGC	N 40° 16' 43.12" W 80° 2' 27.08" 09 W	L	1284.6	110.00	AGC	Disabled
49	BFD	N 41° 47' 10.99" W 78° 37' 9.65" 07 W	L	2110.6	116.60	BFD	Disabled
50	CIP	N 41° 8' 46.66" W 79° 27' 28.71" 06 W	L	1519.5	112.90	CIP	Disabled
51	ETG	N 41° 12' 53.82" W 78° 8' 33.92" 10 W	H	2250.0	116.00	ETG	Disabled
52	FJC	N 40° 43' 36.12" W 75° 27' 17.12" 10 W	L	680.6	117.50	FJC	Disabled
Restriction:		Bearing [True]: 290.0° to 50.0° Bearing [Mag]: 300.0° to 60.0°			Distance: Beyond 26.0 NM Altitude: Below 4500.0 ft		
Restriction:		Bearing [True]: 51.0° to 289.0° Bearing [Mag]: 61.0° to 299.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
53	FQM	N 41° 20' 18.81" W 76° 46' 29.52" 09 W	L	2098.0	114.40	FQM	Disabled
54	IHD	N 39° 58' 27.27" W 79° 21' 30.12" 06 W	L	2820.0	108.20	IHD	Disabled
55	LVZ	N 41° 16' 22.09" W 75° 41' 22.08" 10 W	L	2118.8	111.60	LVZ	Disabled
56	MIP	N 41° 1' 24.21" W 76° 39' 55.04" 09 W	L	1000.0	109.20	MIP	Disabled
57	MXE	N 39° 55' 5.00" W 75° 40' 14.91" 09 W	L	473.4	113.20	MXE	Disabled
58	REC	N 40° 32' 47.25" W 78° 44' 49.28" 09 W	L	2340.0	110.60	REC	Disabled
59	SFK	N 41° 41' 42.91" W 77° 25' 11.66" 08 W	L	1984.7	108.60	SFK	Disabled
60	SLT	N 41° 30' 45.93" W 77° 58' 12.39" 08 W	H	2310.0	113.90	SLT	Disabled

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
61	TDT	N 41° 42' 46.91" W 79° 25' 2.17" 09 W	L	1710.0	117.60	TDT	Disabled
Restriction:		Bearing [True]: 32.0° to 42.0° Bearing [Mag]: 41.0° to 51.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
Restriction:		Bearing [True]: 296.0° to 331.0° Bearing [Mag]: 305.0° to 340.0°			Distance: Beyond 24.0 NM Altitude: Below 3500.0 ft		
Restriction:		Bearing [True]: 331.0° to 356.0° Bearing [Mag]: 340.0° to 5.0°			Distance: Beyond 24.0 NM Altitude: Below 5000.0 ft		
62	THS	N 39° 55' 59.62" W 77° 57' 3.40" 07 W	L	2338.0	115.00	THS	Disabled
63	AUW	N 44° 50' 48.40" W 89° 35' 11.68" 02 E	L	1204.7	111.60	AUW	Disabled
Restriction:		Bearing [True]: 322.0° to 302.0° Bearing [Mag]: 320.0° to 300.0°			Distance: Beyond 30.0 NM Altitude: Below 3000.0 ft		
Restriction:		Bearing [True]: 302.0° to 322.0° Bearing [Mag]: 300.0° to 320.0°			Distance: Beyond 30.0 NM Altitude: Below 4000.0 ft		
64	JVL	N 42° 33' 28.83" W 89° 6' 18.93" 03 E	L	931.4	114.30	JVL	Disabled
65	LNR	N 43° 17' 39.85" W 90° 7' 59.33" 00 E	L	1184.6	112.80	LNR	Disabled
66	STE	N 44° 32' 35.69" W 89° 31' 50.02" 01 W	L	1110.0	110.60	STE	Disabled
Restriction:		Bearing [True]: 359.0° to 359.0° Bearing [Mag]: 360.0° to 360.0°			Distance: Beyond 35.0 NM Altitude: Below 3000.0 ft		
67	CKB	N 39° 15' 11.57" W 80° 16' 4.32" 04 W	L	1425.7	112.60	CKB	Disabled
68	ESL	N 39° 13' 31.77" W 78° 59' 22.20" 06 W	L	2590.0	110.80	ESL	Disabled
69	HNN	N 38° 45' 14.85" W 82° 1' 34.20" 03 W	H	880.0	115.90	HNN	Disabled
70	GRV	N 39° 38' 6.11" W 79° 3' 1.90" 06 W	L	2640.0	112.30	GRV	Disabled
Restriction:		Bearing [True]: 301.0° to 64.0° Bearing [Mag]: 307.0° to 70.0°			Distance: Beyond 20.0 NM Altitude: Below 5000.0 ft		
Restriction:		Bearing [True]: 65.0° to 300.0° Bearing [Mag]: 71.0° to 306.0°			Distance: Beyond 20.0 NM Altitude: Below 6000.0 ft		
Restriction:		Bearing [True]: 102.0° to 107.0° Bearing [Mag]: 108.0° to 113.0°			Distance: Beyond 38.0 NM Altitude: Below 99999.0 ft		
Restriction:		Bearing [True]: 319.0° to 339.0° Bearing [Mag]: 325.0° to 345.0°			Distance: Beyond 35.0 NM Altitude: Below 99999.0 ft		

User Data (Continued)					Return To Summary		
User DMEs (Continued)							
#	Name	Lat/Lon/MAGVAR	Range	Elevation [ft]	Frequency	Replaces	Status
71	DJB	N 41° 21' 29.03" W 82° 9' 43.09" 05 W	H	780.0	113.60	DJB	Used
		ESV:	Bearing [True]: 165.0° to 297.0° Bearing [Mag]: 170.0° to 302.0°		Arc Distance: Out to 102.0 NM Altitude: 8200.0 to 16000.0 ft		
72	CRL	N 42° 2' 52.90" W 83° 27' 27.30" 03 W	H	629.0	115.70	CRL	Not Used
		ESV:	Bearing [True]: 144.0° to 170.0° Bearing [Mag]: 147.0° to 173.0°		Arc Distance: Out to 95.0 NM Altitude: 8900.0 to 16000.0 ft		
73	CXR	N 41° 31' 0.94" W 81° 9' 47.47" 05 W	H	1317.2	112.70	CXR	Not Used
		ESV:	Bearing [True]: 235.0° to 273.0° Bearing [Mag]: 240.0° to 278.0°		Arc Distance: Out to 71.0 NM Altitude: 4500.0 to 16000.0 ft		
74	FWA	N 40° 58' 44.63" W 85° 11' 17.01" 06 W	H	792.6	117.80	FWA	Used
		Restriction:	Bearing [True]: 55.0° to 65.0° Bearing [Mag]: 61.0° to 71.0°		Distance: Beyond 0.0 NM Altitude: Below 7000.0 ft		
		Restriction:	Bearing [True]: 354.0° to 354.0° Bearing [Mag]: 360.0° to 360.0°		Distance: Beyond 33.0 NM Altitude: Below 2800.0 ft		
		Restriction:	Bearing [True]: 170.0° to 210.0° Bearing [Mag]: 176.0° to 216.0°		Distance: Beyond 22.0 NM Altitude: Below 4000.0 ft		
		Restriction:	Bearing [True]: 260.0° to 290.0° Bearing [Mag]: 266.0° to 296.0°		Distance: Beyond 0.0 NM Altitude: Below 99999.0 ft		
		ESV:	Bearing [True]: 108.0° to 128.0° Bearing [Mag]: 114.0° to 134.0°		Arc Distance: Out to 101.0 NM Altitude: 10000.0 to 20000.0 ft		
75	APE	N 40° 9' 3.83" W 82° 35' 17.88" 06 W	H	1353.7	116.70	APE	Used
		Restriction:	Bearing [True]: 177.0° to 182.0° Bearing [Mag]: 183.0° to 188.0°		Distance: Beyond 20.0 NM Altitude: Below 3000.0 ft		
		ESV:	Bearing [True]: 260.0° to 280.0° Bearing [Mag]: 266.0° to 286.0°		Arc Distance: Out to 94.0 NM Altitude: 10000.0 to 18000.0 ft		
76	BSV	N 40° 44' 26.54" W 81° 25' 55.62" 04 W	L	1221.0	112.40	BSV	Not Used
		ESV:	Bearing [True]: 288.0° to 340.0° Bearing [Mag]: 292.0° to 344.0°		Arc Distance: Out to 60.0 NM Altitude: 4100.0 to 20000.0 ft		