

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
DLAMP (RNAV)	EIGHT	ANCHR.DLAMP8	SEVEN	05/16/2024	

TRANSITION ROUTES:

Transition Name	Transition Computer Codes	From FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	MAA	Crossing Altitudes / Fixes
RINTE	RINTE.DLAMP8	RINTE	RINTE						
			ZIDHI	211.60	80.97	10000	3000		BETWEEN FL210 AND FL230
			ANCHR	211.49	22.89	10000	2300		BETWEEN 17000 AND FL200
UKATS	UKATS.DLAMP8	UKATS	UKATS						
			SHIRT	240.91	53.24	10000	2900		
			ZIDHI	245.56	66.93	10000	2900		BETWEEN FL210 AND FL230
			ANCHR	211.49	22.89	10000	2300		BETWEEN 17000 AND FL200

ARRIVAL ROUTE DESCRIPTION:

FROM ANCHR ON TRACK 211.33/11.24 TO CROSS DLAMP BETWEEN 14000 AND 16000 AND AT 280 KIAS.

LANDING RWY 17L: FROM DLAMP ON TRACK 270.15/6.99 TO CROSS NEIBR BETWEEN 11000 AND 13000, THEN ON TRACK 269.82/7.00 TO CROSS SPOKY BETWEEN 9000 AND 11000, THEN ON TRACK 269.82/7.05 TO CROSS BEEBY BETWEEN 7000 AND 9000, THEN ON TRACK 269.60/7.00 TO CROSS MIAHH BETWEEN 6000 AND 7000, THEN ON TRACK 270.02/4.11 TO CROSS OHHGE AT 6000 AND AT 210 KIAS, THEN ON TRACK 188.66/3.25 TO CROSS LEXXI AT 6000 AND AT 210 KIAS. EXPECT ILS OR LOC RWY 17L APPROACH.

LANDING RWY 17R: FROM DLAMP ON TRACK 270.15/6.99 TO CROSS NEIBR BETWEEN 11000 AND 13000, THEN ON TRACK 269.82/7.00 TO CROSS SPOKY BETWEEN 9000 AND 11000, THEN ON TRACK 269.82/7.05 TO CROSS BEEBY BETWEEN 7000 AND 9000, THEN ON TRACK 269.60/7.00 TO CROSS MIAHH BETWEEN 6000 AND 7000, THEN ON TRACK 270.02/4.11 TO CROSS OHHGE AT 6000 AND AT 210 KIAS, THEN ON TRACK 200.13/3.46 TO CROSS CWAYN AT 6000 AND AT 210 KIAS. EXPECT ILS OR LOC RWY 17R APPROACH.

LANDING RWY 29: FROM DLAMP ON TRACK 191.81/6.99 TO CROSS MTERO BETWEEN 11000 AND 13000, THEN ON TRACK 191.63/7.01 TO CROSS MMRTN BETWEEN 9000 AND 11000 AND AT 250 KIAS, THEN ON TRACK 191.67/7.00 TO CROSS JBOND BETWEEN 7000 AND 9000, THEN ON TRACK 191.60/6.88 TO CROSS BETTN BETWEEN 6000 AND 7000, THEN ON TRACK 253.03/7.29 TO CROSS SNDLS AT 6000, THEN ON TRACK 294.87/7.62 TO CROSS TRUBS AT 4000 AND AT 210 KIAS. EXPECT LOC RWY 29 APPROACH.

LANDING RWY 35L/R: FROM DLAMP ON TRACK 220.08/7.00 TO CROSS KFONG BETWEEN 11000 AND 13000, THEN ON TRACK 220.03/7.00 TO CROSS MRSHY BETWEEN 9000 AND 11000, THEN ON TRACK 220.12/7.00 TO CROSS MKENZ BETWEEN 7000 AND 9000, THEN ON TRACK 220.08/7.00 TO CROSS PURPL AT 6000, THEN ON TRACK 219.62/8.53 TO KELSS, THEN ON TRACK 169.26/5.95 TO CROSS BECOO AT 6000, THEN ON TRACK 169.26. EXPECT RADAR VECTORS TO FINAL APPROACH COURSE.

PBN REQUIREMENT NOTES:

RNAV 1 - DME/DME/IRU OR GPS

EQUIPMENT REQUIREMENT NOTES:

RADAR REQUIRED

PROCEDURAL DATA NOTES:

NOTE: JET AIRCRAFT ONLY

NOTE: KSDF LANDING NORTH SELECT RWY 35R TRANSITION. EXPECT RUNWAY ASSIGNMENT FROM LOUISVILLE APP CON PRIOR TO ANCHR.

NOTE: KSDF LANDING SOUTH SELECT RWY 17L TRANSITION. EXPECT RUNWAY ASSIGNMENT FROM LOUISVILLE APP CON PRIOR TO ANCHR.

FIXES AND/OR HOLDING PATTERNS:

CHART HOLDING AT ZIDHI: HOLD NE, LT, 211.49 INBOUND, 10 NM LEGS.

CHART HOLDING AT DLAMP: HOLD NE, LT, 211.33 INBOUND, 10 NM LEGS.

COMMUNICATIONS:

CHART: LOUISVILLE APP CON

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
DLAMP (RNAV)	EIGHT	ANCHR.DLAMP8	SEVEN	05/16/2024	

AIRPORTS SERVED:

AIRPORT ID	CITY	STATE
KSDF	LOUISVILLE	KY

LOST COMMUNICATIONS PREFERENCES:

REMARKS:

ADDITIONAL FLIGHT DATA:

DME/DME ASSESSMENT: SAT (RNP 2.0)
MAG VAR: KSDF 05W/2020
CHART AT BECOO TERMINUS: KSDF LDG RWY 35L/R
CHART AT TRUBS TERMINUS: KSDF LDG RWY 29
CHART AT CWAYN TERMINUS: KSDF LDG RWY 17R
CHART AT LEXXI TERMINUS: KSDF LDG RWY 17L

FLIGHT INSPECTED BY:

ORGANIZATION: FPO
DATE: 05/09/2024

Flight Inspected Signature:

Digitally signed by
ALLAN WILL
May 13, 2024

DEVELOPED BY:

JEFFREY CHESTER,AIRSPACE/PROCEDURES
MANAGER
INDIANAPOLIS
ARTCC
3/5/2024

Developed By Signature:

Digitally signed by
ALLAN WILL
May 13, 2024

APPROVED BY:

ALLAN WILL
AJV-A4213

Approved By Signature:

Digitally signed by
ALLAN WILL
May 13, 2024

CHANGES:

1. Transition Routes: Deleted CINCINNATI transition and MALDN transition.
2. Transition Routes: Added RINTE transition.
3. Transition Routes: UPDATED UKATS TRANSITIONS, ADDED ZEEDE WITH BETWEEN FL 210 AND FL230 ALTITUDE RESTRICTION, ADDED ANCHR WITH BETWEEN 17000 AND FL200 RESTRICTION, REMOVED CVG VORTAC.
4. TRANSITION ROUTES: MOCA CHANGE ON UKATS TRANSITION FROM 2800 TO 2900.
5. PROCEDURAL DATA NOTES: DELETED CHART AT NERVE: EXPECT CLEARANCE TO CROSS AT 10000.
6. PROCEDURAL DATA NOTES: ADDED NOTE: KSDF LANDING NORTH SELECT RWY 35R TRANSITION. EXPECT RUNWAY ASSIGNMENT FROM LOUISVILLE APP CON PRIOR TO ANCHR AND NOTE: KSDF LANDING SOUTH SELECT RWY 17L TRANSITION. EXPECT RUNWAY ASSIGNMENT FROM LOUISVILLE APP CON PRIOR TO ANCHR.
7. REMOVED HOLDING AT NERVE; REMOVED STAND-ALONE FIXES BRBON, QARRY, SORTT; CHARTED HOLDING AT DLAMP AND ZIDH.



FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
DLAMP (RNAV)	EIGHT	ANCHR.DLAMP8	SEVEN	05/16/2024	

- 8. REMOVED ALL LOST COMMUNICATIONS PREFERENCES.
- 9. ADDITIONAL FLIGHT DATA: CHARTED TERMINUS DATA INFORMATION.
- 10. ADDITIONAL FLIGHT DATA: REMOVED CHART IIU AND CHART LAANG LOM.
- 11. ADDED 14,000-16,000FT ALTITUDE RESTRICTION AT DLAMP WP.
- 12. ALL RUNWAY TRANSITIONS COMPLETELY REDESIGNED, DLAMP ONLY FIX RETAINED.

REASONS:


- 1 - 3,6,7,13. REMOVAL OF GROUND-BASED NAVAIDS FROM PROCEDURE, ATC REQUEST TO COMPLY.
- 4. UPDATED RE-EVALUATION.
- 5. NO LONGER PERMITTED BY CRITERIA.
- 8. NO LONGER NEEDED
- 9. CURRENT DOCUMENTATION STANDARDS 8260.19I, 4-5-2H(2).
- 10. ATC REQUEST.
- 11. PROCEDURE REDESIGN.



FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
DLAMP (RNAV)	EIGHT	ANCHR.DLAMP8	SEVEN	05/16/2024	
Graphic Depiction 1					

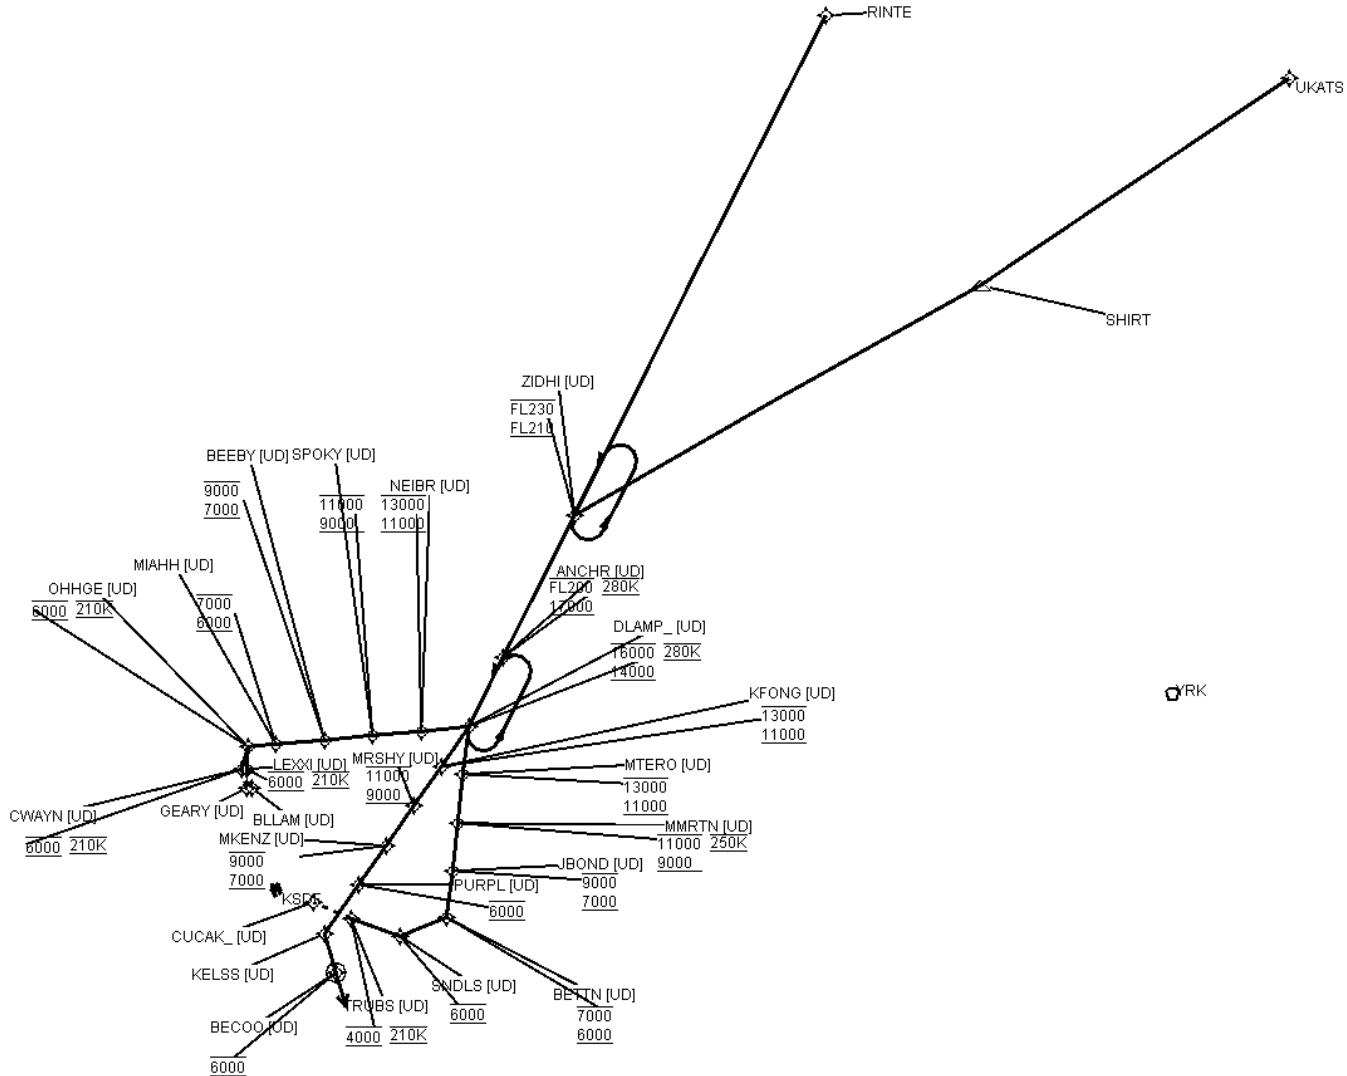

**FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STAR (DATA RECORD)**

Arrival Name DLAMP (RNAV)		Number EIGHT		STAR Computer Code ANCHR.DLAMP8			Superseded Number SEVEN		Dated 05/16/2024	Effective Date
FIX/NAVAID	LAT/LONG	C	FO/FB	LEG TYPE	TC	DIST (NM)	ALTITUDE	SPEED	REMARKS	
En Route Transition										
RINTE	401716.11N / 0840234.51W	Y		IF					RINTE.DLAMP8	
ZIDHI	390439.15N / 0844907.43W	Y	FB	TF	206.60	80.97	FL210BFL230			
ANCHR	384408.11N / 0850210.15W	Y	FB	TF	206.49	22.89	17000BFL200	AT 280K		
En Route Transition										
UKATS	400804.48N / 0823712.20W	Y		IF					UKATS.DLAMP8	
SHIRT	393758.72N / 0833416.14W	Y	FB	TF	235.91	53.24				
ZIDHI	390439.15N / 0844907.43W	Y	FB	TF	240.56	66.93	FL210BFL230			
ANCHR	384408.11N / 0850210.15W	Y	FB	TF	206.49	22.89	17000BFL200	AT 280K		
Common Route										
ANCHR	384408.11N / 0850210.15W	Y		IF			17000BFL200	AT 280K	ANCHR.DLAMP8	
DLAMP	383402.85N / 0850831.49W	Y	FB	TF	206.33	11.24	14000B16000	AT 280K		
Runway Transition										
DLAMP	383402.85N / 0850831.49W	Y		IF			14000B16000	AT 280K		
NEIBR	383327.06N / 0851724.10W	Y	FB	TF	265.15	06.99	11000B13000			
SPOKY	383248.80N / 0852616.95W	Y	FB	TF	264.82	07.00	9000B11000			
BEEBY	383210.26N / 0853513.87W	Y	FB	TF	264.82	07.05	7000B9000			
MIAHH	383130.40N / 0854406.54W	Y	FB	TF	264.60	07.00	6000B7000			
OHHGE	383108.85N / 0854919.84W	Y	FB	TF	265.02	04.11	AT 6000	AT 210K		
LEXXI	382753.96N / 0854935.71W	Y	FB	TF	183.66	03.25	AT 6000	AT 210K		
KSDF:RWY 17L										
Runway Transition										
DLAMP	383402.85N / 0850831.49W	Y		IF			14000B16000	AT 280K		
NEIBR	383327.06N / 0851724.10W	Y	FB	TF	265.15	06.99	11000B13000			
SPOKY	383248.80N / 0852616.95W	Y	FB	TF	264.82	07.00	9000B11000			
BEEBY	383210.26N / 0853513.87W	Y	FB	TF	264.82	07.05	7000B9000			

QUALITY

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STAR (DATA RECORD)

Arrival Name DLAMP (RNAV)		Number EIGHT		STAR Computer Code ANCHR.DLAMP8		Superseded Number SEVEN		Dated 05/16/2024	Effective Date
FIX/NAVAID	LAT/LONG	C	FO/FB	LEG TYPE	TC	DIST (NM)	ALTITUDE	SPEED	REMARKS
MIAHH	383130.40N / 0854406.54W	Y	FB	TF	264.60	07.00	6000B7000		
OHHGE	383108.85N / 0854919.84W	Y	FB	TF	265.02	04.11	AT 6000	AT 210K	
CWAYN	382748.33N / 0855028.79W	Y	FB	TF	195.13	03.46	AT 6000	AT 210K	
KSDF:RWY 17R									
Runway Transition									
DLAMP	383402.85N / 0850831.49W	Y		IF			14000B16000	AT 280K	
MTERO	382705.84N / 0850934.79W	Y	FB	TF	186.81	06.99	11000B13000		
MMRTN	382007.81N / 0851036.48W	Y	FB	TF	186.63	07.01	9000B11000	AT 250K	
JBOND	381310.25N / 0851138.40W	Y	FB	TF	186.67	07.00	7000B9000		
BETTN	380619.54N / 0851238.52W	Y	FB	TF	186.60	06.88	6000B7000		
SNDLS	380335.46N / 0852111.94W	Y	FB	TF	248.03	07.29	AT 6000		
TRUBS	380610.75N / 0853016.96W	Y	FB	TF	289.87	07.62	AT 4000	AT 210K	
KSDF:RWY 29									
Runway Transition									
DLAMP	383402.85N / 0850831.49W	Y		IF			14000B16000	AT 280K	
KFONG	382818.68N / 0851338.86W	Y	FB	TF	215.08	07.00	11000B13000		
MRSHY	382234.29N / 0851845.43W	Y	FB	TF	215.03	07.00	9000B11000		
MKENZ	381650.53N / 0852352.11W	Y	FB	TF	215.12	07.00	7000B9000		
PURPL	381106.11N / 0852858.48W	Y	FB	TF	215.08	07.00	AT 6000		
KELSS	380404.25N / 0853506.73W	Y	FB	TF	214.62	08.53			
BECOO	375820.42N / 0853304.32W	Y	FO	TF	164.26	05.95	AT 6000		
KSDF:RWY 35L,RWY 35R				FM	164.26				