

LOC I-UXW <u>109.3</u>	APP CRS 094°	Rwy Idg TDZE Apt Elev	8412 790 798
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 9R
SOUTH BEND INTL (SBN)

ADF or RADAR required.

T Rwy 9R helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-ILS 09R visibility all Cats to RVR 5500, increase S-LOC 09R Cats C/D visibility to RVR 6000. Circling Rwy 27R NA at night.



MALSF



MISSED APPROACH: Climb to 3000 direct MISHA LOM/RADAR and hold, continue climb-in-hold to 3000.

ATIS 120.675	SOUTH BEND APP CON ★ 118.55 257.8	SOUTH BEND TOWER ★ 135.675 (CTAF) 0 257.8	GND CON 121.7	CLNC DEL 121.9
-----------------	--------------------------------------	--	------------------	-------------------

PROTOTYPE-NOT FOR NAVIGATION

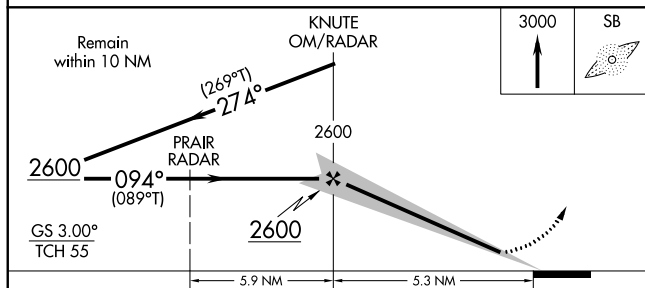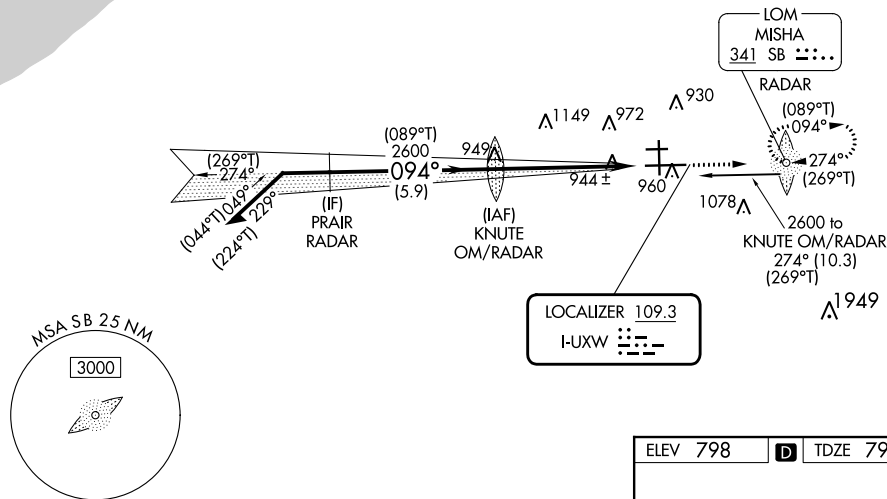

CATEGORY	A	B	C	D
S-ILS 9R	1135/40 345 (400-¾)			
S-LOC 9R	1200/40 410 (500-¾)		1200/50 410 (500-1)	
C CIRCLING	1280-1 482 (500-1)		1440-1¾ 642 (700-1¾)	1500-2¼ 722 (800-2¼)