
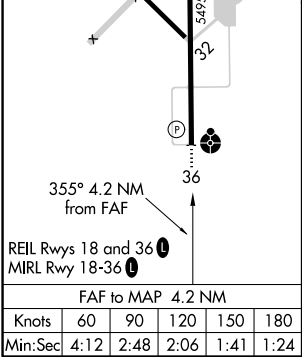


LOC I-DRI <b>111.1</b>	APP CRS <b>355°</b>	Rwy Idg TDZE <b>197</b> Apt Elev <b>202</b>
---------------------------	------------------------	---

LOC RWY 36  
BEAUREGARD RGNL (DRI)

<b>NA</b>	Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDA 60 feet, and S-36 visibility Cat C ¼ mile.	ODALS MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.
-----------	--	--

AWOS-3PT <b>118.225</b>	POLK APP CON <b>123.7 261.3</b>	UNICOM <b>122.8 (CTAF) 0</b>
----------------------------	------------------------------------	---------------------------------

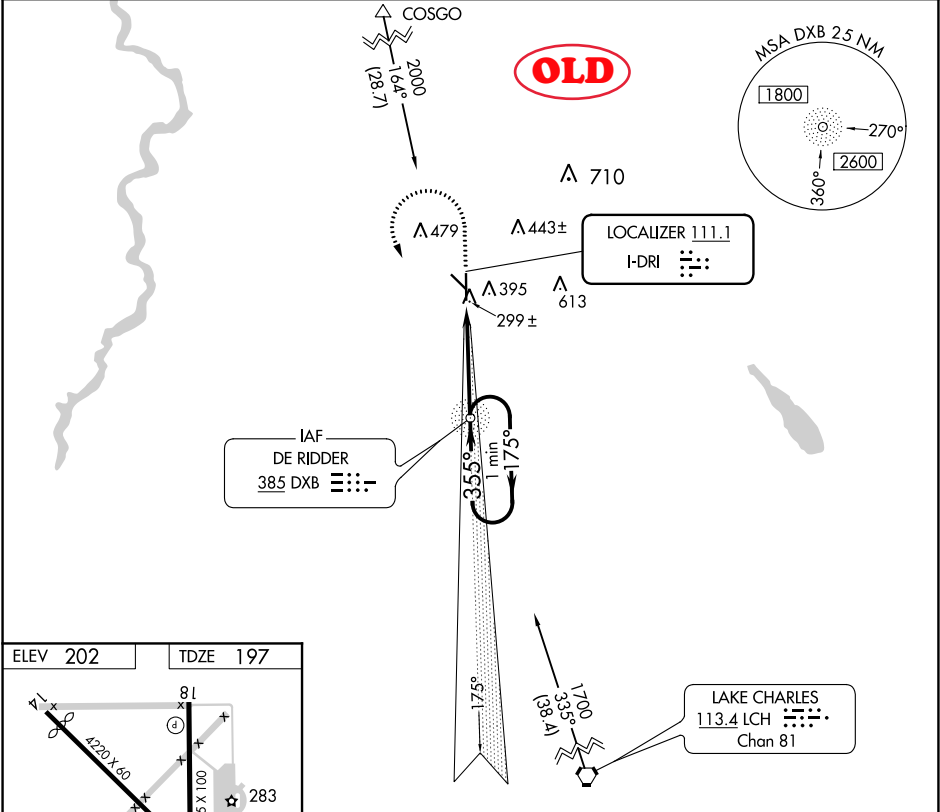

1000	1700	DXB	DXB NDB	One Minute Holding Pattern
CATEGORY	A	B	C	D
S-36	560-1 363 (400-1)			560-1¼ 363 (400-1¼)
CIRCLING	720-1 518 (600-1)		720-1½ 518 (600-1½)	780-2 578 (600-2)

SC-4, 08 OCT 2020 to 05 NOV 2020

SC-4, 08 OCT 2020 to 05 NOV 2020



DRI  
BEAUREGARD RGNL  
DE RIDDER, LA  
LOC RWY 36  
CIRCLING 100K

