Federal Aviation Administration

TM

U.S. Terminal Procedures Publication

Southwest (SW) Vol 2 of 4

Effective: 0901Z

30 JAN 2020

to: 0901Z

26 MAR 2020

Consult the Change Notice (CN) effective 27 FEB 2020 for revised Instrument Procedure Charts for this volume

Consult NOTAMs for latest information

Consult/Subscribe to FAA Safety Alerts and Charting Notices at:
http://www.faa.gov/air_traffic/flight_info/aeronav/safety_alerts/

Published from digital files compiled in accordance with Interagency Air Committee specifications and agreements approved by Department of Defense - Federal Aviation Administration

TABLE OF CONTENTS

Inoperative Components or Visual Aids Table....A1
Explanation of Terms/Landing Minima Data....B1
General Information....C1
Abbreviations....D1
Legend — IAP Planview....E1
Legend — IAP Profile....F1
Legend — Departure Procedures and Standard Terminal Arrival Charts....G1
Legend — Airport Diagram/Sketch....H1
Legend — Approach Lighting Systems....I1
Frequency Pairing....J1
Index of Terminal Charts and Minimums....K1
IFR Takeoff Minimums, Departure Procedures, and Diverse Vector Area (Radar Vectors)....L1
IFR Alternate Airport Minimums....M1
Radar Minimums....N1
Land and Hold-Short Operations (LAHSO)....O1
Hot Spots....P1
Standard Terminal Arrival Charts....Z1
Terminal Charts....Page 1
Rate of Climb/Descent Table....Inside Back Cover
Area of Coverage....Outside Back Cover

CORRECTIONS, COMMENTS AND/OR PROCUREMENT

FOR CHARTING ERRORS, OR FOR CHANGES, ADDITIONS, RECOMMENDATIONS ON PROCEDURAL ASPECTS CONTACT:
FAA, Aeronautical Information Services
1305 East-West Highway
SSMC 4, Room 3424
Silver Spring, MD 20910
Telephone: 1-800-638-8972
https://www.faa.gov/air_traffic/flight_info/aeronav/aero_data/

For inquiries regarding military charts, please contact aerohelp@nga.mil

FOR PROCUREMENT:
For digital products, visit our website at:
https://www.faa.gov/air_traffic/flight_info/aeronav/digital_products/

For a list of approved FAA Print Providers, visit our website at:
https://www.faa.gov/air_traffic/flight_info/aeronav/print_providers/

Frequently asked questions (FAQ) are answered on our website at https://www.faa.gov/go/ais
See the FAQs prior to contact via toll free number or email.

Request for the creation or revisions to Airport Diagrams should be in accordance with FAA Order 7910.4.

INOP COMPONENTS 19339

INOPERATIVE COMPONENTS OR VISUAL AIDS TABLE
(For Civil Use Only)

Straight-in and Sidestep landing minimums published on instrument approach procedure charts are based on full operation of all components and visual aids (see exception below for ALSF 1 & 2) associated with the particular approach chart being used. Higher minimums are required with inoperative components or visual aids as indicated below. If more than one component is inoperative, each minimum is raised to the highest minimum required by any single component that is inoperative. ILS glideslope inoperative minimums are published on the instrument approach charts as localizer minimums. This table applies to approach categories A thru D and is to be used unless amended by notes on the approach chart. Such notes apply only to the particular approach category(ies) as stated. Category E inoperative notes will be specified when published on civil charts. The inoperative table does not apply to Circling minimums. See legend page for description of components indicated below.

Full Operation Exception: For ALSF 1 & 2 operated as SSALR, or when the sequenced flashing lights are inoperative, there is no effect on visibility for ILS lines of minima.

(1) ILS, PAR, LPV, GLS minima

Inoperative Component or Visual Aid	Increase Visibility
All ALS types (except ODALS)	¼ mile

(2) ILS, LPV, GLS with visibility minima of RVR 1800†/2000*/2200*

Inoperative Component or Visual Aid	Increase Visibility
ALSF 1 & 2, MALSR, SSALR	To RVR 4000† To RVR 4500*
TDZL or RCLS	To RVR 2400#
RVR	To ½ mile

#For ILS, LPV, GLS procedures with a 200 foot HAT, RVR 1800 authorized with use of FD or AP or HUD to DA.

(3) All Approach Types and all lines of minima other than (1) & (2) above

Inoperative Component or Visual Aid	Increase Visibility
ALSF 1 & 2, MALSR, SSALR	½ mile
MALSF, MALS, SSALF, SSALS, SALSF, SALS	¼ mile

(4) Sidestep minima (CAT C-D)

Inoperative Component or Visual Aid to Sidestep Runway	Increase Visibility
ALSF 1 & 2, MALSR, SSALR	½ mile

(5) All Approach Types, All lines of minima

Inoperative Component or Visual Aid	Increase Visibility
ODALS (CAT A-B)	¼ mile
ODALS (CAT C-D)	⅛ mile

INOP COMPONENTS 19339

SW-2, 30 JAN 2020 to 26 MAR 2020

TERMS/LANDING MINIMA DATA 19339

IFR LANDING MINIMA

The United States Standard for Terminal Instrument Procedures (TERPS) is the approved criteria for formulating instrument approach procedures. Landing minima are established for six aircraft approach categories (ABCDE and COPTER). In the absence of COPTER MINIMA, helicopters may use the CAT A minimums of other procedures.

LANDING MINIMA FORMAT

In this example airport elevation is 1179, and runway touchdown zone elevation is 1152.

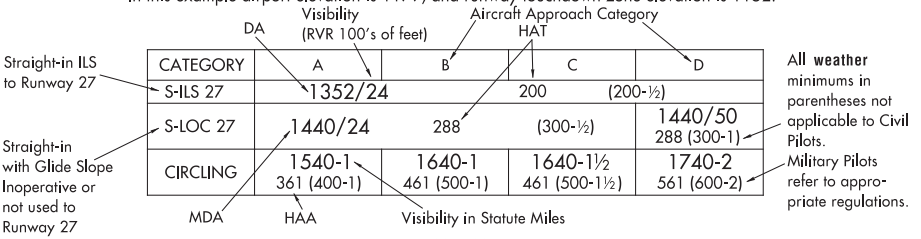

COPTER MINIMA ONLY

CATEGORY	COPTER
H-176°	680-½ 363 (400-½)

Copter Approach Direction

Height of MDA/DA Above Landing Area (HAL)

No circling minimums are provided

NOTE: The W symbol indicates outages of the WAAS vertical guidance may occur daily at this location due to initial system limitations. WAAS NOTAMS for vertical outages are not provided for this approach. Use LNAV minima for flight planning at these locations, whether as a destination or alternate. For flight operations at these locations, when the WAAS avionics indicate that LNAV/VNAV or LPV service is available, then vertical guidance may be used to complete the approach using the displayed level of service. Should an outage occur during the procedure, reversion to LNAV minima may be required. As the WAAS coverage is expanded, the W will be removed.

RNAV minimums are dependent on navigation equipment capability, as stated in the applicable AFM, AFMS, or other FAA approved document. See AIM paragraph 5-4-5, AC 90-105 and AC 90-107 for detailed requirements for each line of minima.

COLD TEMPERATURE RESTRICTED AIRPORTS

NOTE: A -12°C symbol indicates a cold temperature altitude correction is required at this airport when reported temperature is at or below the published restricted temperature. Pilots familiar with cold temperature procedure in the Notice to Airman Publication (NTAP) and correcting all altitudes from the IAF to the MA final holding altitude do not have to reference the NTAP. Pilots wishing to correct on individual segments must reference the NTAP airport list for affected segments. See Notice to Airman Publication (NTAP) Graphic Notices General for complete list of published airports, temperature, segments, and procedure information. www.faa.gov/air_traffic/publications/notices. Pilots will advise ATC with the required altitude correction when making a correction to any segment other than the final segment. See following Cold Temperature Error Table to make manual corrections.

COLD TEMPERATURE ERROR TABLE

HEIGHT ABOVE AIRPORT IN FEET

REPORTED TEMP °C	200	300	400	500	600	700	800	900	1000	1500	2000	3000	4000	5000
+10	10	10	10	10	20	20	20	20	20	30	40	60	80	90
0	20	20	30	30	40	40	50	50	60	90	120	170	230	280
-10	20	30	40	50	60	70	80	90	100	150	200	290	390	490
-20	30	50	60	70	90	100	120	130	140	210	280	420	570	710
-30	40	60	80	100	120	140	150	170	190	280	380	570	760	950
-40	50	80	100	120	150	170	190	220	240	360	480	720	970	1210
-50	60	90	120	150	180	210	240	270	300	450	590	890	1190	1500

AIRCRAFT APPROACH CATEGORIES

Aircraft approach category indicates a grouping of aircraft based on a speed of VREF, if specified, or if VREF not specified, 1.3 VSO at the maximum certificated landing weight. VREF, VSO, and the maximum certificated landing weight are those values as established for the aircraft by the certification authority of the country of registry. Helicopters are Category A aircraft. An aircraft shall fit in only one category. However, if it is necessary to operate at a speed in excess of the upper limit of the speed range for an aircraft's category, the minimums for the category for that speed shall be used. For example, an airplane which fits into Category B, but is circling to land at a speed of 145 knots, shall use the approach Category D minimums. As an additional example, a Category A airplane (or helicopter) which is operating at 130 knots on a straight-in approach shall use the approach Category C minimums. See following category limits:

MANEUVERING TABLE

Approach Category	A	B	C	D	E
Speed (Knots)	0-90	91-120	121-140	141-165	Abv 165

TERMS/LANDING MINIMA DATA 19339

SW-2, 30 JAN 2020 to 26 MAR 2020

TERMS/LANDING MINIMA DATA 19339

CIRCLING APPROACH OBSTACLE PROTECTED AIRSPACE

The circling MDA provides vertical obstacle clearance during a circle-to-land maneuver. The circling MDA protected area extends from the threshold of each runway authorized for landing following a circle-to-land maneuver for a distance as shown in the tables below. The resultant arcs are then connected tangentially to define the protected area.

STANDARD CIRCLING APPROACH MANEUVERING RADIUS

Circling approach protected areas developed prior to late 2012 used the radius distances shown in the following table, expressed in nautical miles (NM), dependent on aircraft approach category. The approaches using standard circling approach areas can be identified by the absence of the C symbol on the circling line of minima.

Circling MDA in feet MSL	Approach Category and Circling Radius (NM)				
	CAT A	CAT B	CAT C	CAT D	CAT E
All Altitudes	1.3	1.5	1.7	2.3	4.5

C EXPANDED CIRCLING APPROACH MANEUVERING AIRSPACE RADIUS

Circling approach protected areas developed after late 2012 use the radius distance shown in the following table, expressed in nautical miles (NM), dependent on aircraft approach category, and the altitude of the circling MDA, which accounts for true airspeed increase with altitude. The approaches using expanded circling approach areas can be identified by the presence of the C symbol on the circling line of minima.

Circling MDA in feet MSL	Approach Category and Circling Radius (NM)				
	CAT A	CAT B	CAT C	CAT D	CAT E
1000 or less	1.3	1.7	2.7	3.6	4.5
1001-3000	1.3	1.8	2.8	3.7	4.6
3001-5000	1.3	1.8	2.9	3.8	4.8
5001-7000	1.3	1.9	3.0	4.0	5.0
7001-9000	1.4	2.0	3.2	4.2	5.3
9001 and above	1.4	2.1	3.3	4.4	5.5

Comparable Values of RVR and Visibility

The following table shall be used for converting RVR to ground or flight visibility. For converting RVR values that fall between listed values, use the next higher RVR value; do not interpolate. For example, when converting 4800 RVR, use 5000 RVR with the resultant visibility of 1 mile.

RVR (feet)	Visibility (SM)	RVR (feet)	Visibility (SM)	RVR (feet)	Visibility (SM)	RVR (feet)	Visibility (SM)
1600	¼	2400	½	3500	⅝	5500	1
1800	½	2600	½	4000	¾	6000	1¼
2000	½	3000	⅝	4500	⅞		
2200	½	3200	⅝	5000	1		

RADAR MINIMA

	RWY	GP/TCH/RPI	CAT	DA/ MDA-VIS	HAT HAA	CEIL-VIS	CAT	DA/ MDA-VIS	HAT HAA	CEIL-VIS
PAR	10	2.5°/42/1000	ABCDE	**195**/16	100	(100-¼)				
	28	2.5°/48/1068	ABCDE	**187**/16	100	(100-¼)				
ASR	10		ABC	**560**/40	463	(500-¾)	DE	**560**/50	463	(500-1)
	28		AB	**600**/50	513	(600-1)	CDE	**600**/60	513	(600-1¼)
CIR	10		AB	**560-**1¼	463	(500-1¼)	CDE	**560-**1½	463	(500-1½)
	28		AB	**600-**1¼	503	(600-1¼)	CDE	**600-**1½	503	(600-1½)

Visibility (RVR 100's of feet)

Visibility in Statute Miles

All minimums in parentheses not applicable to Civil Pilots. Military Pilots refer to appropriate regulations.

Radar Minima:

1. Minima shown are the lowest permitted by established criteria. Pilots should consult applicable directives for their category of aircraft.
2. The circling MDA and weather minima to be used are those for the runway to which the final approach is flown- not the landing runway. In the above RADAR MINIMA example, a category C aircraft flying a radar approach to runway 10, circling to land on runway 28, must use an MDA of 560 feet with weather minima of 500-1½.

NOTE: Military RADAR MINIMA may be shown with communications symbology that indicates emergency frequency monitoring capability by the radar facility as follows: (E) VHF and UHF emergency frequencies monitored
(V) VHF emergency frequency (121.5) monitored
(U) UHF emergency frequency (243.0) monitored

Additionally, unmonitored frequencies which are available on request from the controlling agency may be annotated with an "x".

A Alternate Minimums not standard. Civil users refer to tabulation. USA/USN/USAF pilots refer to appropriate regulations.

A NA Alternate minimums are Not Authorized due to unmonitored facility or absence of weather reporting service.

T Airport is published in the Takeoff Minimums, (Obstacle) Departure Procedures, and Diverse Vector Area (Radar Vectors) tabulation.

TERMS/LANDING MINIMA DATA 19339

SW-2, 30 JAN 2020 to 26 MAR 2020

GENERAL INFORMATION

This publication is issued every 56 days and includes Standard Instrument Approach Procedures (SIAPS), Standard Instrument Departures (SIDs), Standard Terminal Arrivals (STARs), IFR Takeoff Minimums and (Obstacle) Departure Procedures (ODPs), IFR Alternate Minimums, and Radar Instrument Approach Minimums for use by civil and military aviation. The organization responsible for SIAPs, Radar Minimums, SIDs, STARs and graphic ODPs is identified in parentheses in the top margin of the procedure; e.g., (FAA), (FAA-O), (USA), (USAF), (USN). SIAPS with the (FAA) and (FAA-O) designation are regulated under 14 CFR, Part 97. SIAPs with the (FAA-O) designation have been developed under Other Transaction Agreement (OTA) by private providers and have been certified by the FAA. See 14 CFR, Part 91.175 (a) and the AIM for further details. 14 CFR, Part 91.175 (g) and the Special Notices section of the Chart Supplement contain information on civil operations at military airports.

The FAA uses an internal numbering system on all charts in the TPP. This Approach and Landing (AL) number is located on the top center margin of the chart followed by the organization responsible for the procedure in parentheses, e.g., AL-18 (FAA), AL-227 (USAF).

CHART CURRENCY INFORMATION

Date of Latest Revision 09365

The Date of Latest Revision identifies the Julian date the chart was added or last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6) in which the latest revision of any kind has been made to the chart.

The FAA Procedure Amendment Number represents the most current amendment of a given procedure. The Procedure Amendment Effective Date represents the AIRAC cycle date on which the procedure amendment was incorporated into the chart. Updates to the amendment number & effective date represent procedural/criteria revisions to the charted procedure, e.g., course, fix, altitude, minima, etc. On Departure Procedures and Standard Terminal Arrivals, procedural revisions to the current chart are indicated by an upnumber to the procedure title with the procedure amendment effective date following. On Radar Minima, Takeoff Minimums and (Obstacle) Departure Procedures and Diverse Vector Areas, the FAA Procedure Amendment Number, Procedure Effective Date, and the Julian Date of Last Revision will be shown on the same line, e.g., AMDT 2 10DEC15 (15344).

MISCELLANEOUS

★ Indicates a non-continuously operating facility, see Chart Supplement.

For Civil (FAA) instrument procedures, "RADAR REQUIRED" in the planview of the chart indicates that ATC radar must be available to assist the pilot when transitioning from the en route environment. "Radar required" in the pilot briefing portion of the chart indicates that ATC radar is required on portions of the procedure outside the final approach segment, including the missed approach. Some military procedures also have equipment requirements such as "Radar Required", but do not conform to the same charting application standards used by the FAA.

Distances are in nautical miles (except visibility in statute miles and Runway Visual Range in hundreds of feet). Runway dimensions are in feet. Elevations are in feet, Mean Sea Level (MSL). Ceilings are in feet above airport elevation. Radials/bearings/headings/courses are magnetic. Horizontal Datum: Unless otherwise noted on the chart, all coordinates are referenced to North American Datum 1983 (NAD 83), which for charting purposes is considered equivalent to World Geodetic System 1984 (WGS 84).

Terrain is scaled within the neat lines (planview boundaries) and does not accurately underlie not-to-scale distance depictions or symbols.

GENERAL INFO 19003

STANDARD TERMINAL ARRIVALS AND DEPARTURE PROCEDURES

The use of the associated codified STAR/DP and transition identifiers are requested of users when filing flight plans via teletype and are required for users filing flight plans via computer interface. It must be noted that when filing a STAR/DP with a transition, the first three coded characters of the STAR and the last three coded characters of the DP are replaced by the transition code. Examples: ACTON SIX ARRIVAL, file (AQN.AQN6); ACTON SIX ARRIVAL, EDNAS TRANSITION, file (EDNAS.AQN6). FREEHOLD THREE DEPARTURE, file (FREH3.RBV), FREEHOLD THREE DEPARTURE, ELWOOD CITY TRANSITION, file (FREH3.EWC).

PROCEDURE EQUIPMENT REQUIREMENTS

Users will begin to see Performance-Based Navigation (PBN) Requirements and Equipment Requirements prominently displayed in separate, standardized notes boxes. For procedures with PBN elements, the PBN box will contain the procedure's navigation specification(s); and, if required: specific sensors or infrastructure needed for the navigation solution; any additional or advanced functional requirements; the minimum Required Navigation Performance (RNP) value and any amplifying remarks. Items listed in this PBN box are REQUIRED for the procedure's PBN elements. The Equipment Requirements Box will list non-PBN requirements. On procedures with both PBN elements and equipment requirements, the PBN requirements box will be listed first. The publication of these notes will continue incrementally until all charts have been amended to comply with the new standard.

PBN Requirements Box → From WINRZ, LIBGE: RNAV-1 GPS, RNAV-1GPS from MAP to YARKU.

Equipment Requirements Box → DME required for LOC only.

Standard Procedure Notes Box → Circling to Rwy 25 NA at night.
#For inop MALSR increase S-ILS 16R all cats visibility to 2½ SM.

PILOT CONTROLLED AIRPORT LIGHTING SYSTEMS

Available pilot controlled lighting (PCL) systems are indicated as follows:
1. Approach lighting systems that bear a system identification are symbolized using negative symbology, e.g., (A1), (V), (✿)
2. Approach lighting systems that do not bear a system identification are indicated with a negative "(L)" beside the name. A star (★) indicates non-standard PCL, consult Chart Supplement, e.g., (L★)

To activate lights, use frequency indicated in the communication section of the chart with a (L) or the appropriate lighting system identification e.g., UNICOM 122.8 (L), (A1), (V)

KEY MIKE	FUNCTION
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-off)

SW-2, 30 JAN 2020 to 26 MAR 2020

GENERAL INFO 19003

ABBREVIATIONS

AAUP..... Attention All Users Page
ADF..... Automatic Direction Finder
ADIZ..... Air Defense Identification Zone
AFIS..... Automatic Flight Information Service
ALS..... Approach Light System
ALSF..... Approach Light System with Sequenced Flashing Lights
AOB..... At Or Below
AP..... Autopilot System
APCH..... Approach
APP CON..... Approach Control
ARR..... Arrival
ASOS..... Automated Surface Observing System
ASR/PAR..... Published Radar Minimums at this Airport
ASSC..... Airport Surface Surveillance Systems
ATIS..... Automatic Terminal Information Service
AUNICOM..... Automated UNICOM
AWOS..... Automated Weather Observing System
AZ..... Azimuth
BC..... Back Course
BND..... Bound
C..... Circling
CAT..... Category
CCW..... Counter Clockwise
CDI..... Course Deviation Indicator
Chan..... Channel
CIFP..... Coded Instrument Flight Procedures
CIR..... Circling
CLNC DEL..... Clearance Delivery
CNF..... Computer Navigation Fix
CPDLC..... Controller Pilot Data Link Communication
CTAF..... Common Traffic Advisory Frequency
CW..... Clockwise
D-ATIS..... Digital-Automatic Terminal Information Service
DA..... Decision Altitude
DER..... Departure End of Runway
DH..... Decision Height
DME..... Distance Measuring Equipment
DTHR..... Displaced Threshold
DVA..... Diverse Vector Area
ELEV..... Elevation
EMAS..... Engineered Material Arresting System
FAF..... Final Approach Fix
FD..... Flight Director System
FM..... Fan Marker
FMS..... Flight Management System
GBAS..... Ground Based Augmentation System
GCO..... Ground Communications Outlet
GLS..... Ground Based Augmentation System Landing System
GP..... Glidepath
GPI..... Ground Point of Interception
GPS..... Global Positioning System
GS..... Glide Slope
HAA..... Height above Airport
HAL..... Height above Landing
HAT..... Height above Touchdown
HATh..... Height Above Threshold
HCH..... Heliport Crossing Height
HGS..... Head-up Guidance System
HIRL..... High Intensity Runway Lights
HUD..... Head-up Display
IAF..... Initial Approach Fix
ICAO..... International Civil Aviation Organization
IF..... Intermediate Fix
IM..... Inner Marker
INOP..... Inoperative
INT..... Intersection
K..... Knots
KIAS..... Knots Indicated Airspeed
LAAS..... Local Area Augmentation System
LDA..... Localizer Type Directional Aid
Ldg..... Landing
LIRL..... Low Intensity Runway Lights
LNAV..... Lateral Navigation
LOC..... Localizer
LP..... Localizer Performance
LPV..... Localizer Performance with Vertical Guidance
LR..... Lead Radial. Provides at least 2 NM (Copter 1 NM) of lead to assist in turning onto the intermediate/final course.
MAA..... Maximum Authorized Altitude
MALS..... Medium Intensity Approach Light System
MALSF..... Medium Approach Lighting System with Sequenced Flashers
MALSR..... Medium Intensity Approach Light System with RAIL
MAP..... Missed Approach Point
MDA..... Minimum Descent Altitude
MIRL..... Medium Intensity Runway Lights
MM..... Middle Marker
MRA..... Minimum Reception Altitude
N/A..... Not Applicable
NA..... Not Authorized
NDB..... Non-directional Radio Beacon
NM..... Nautical Mile
NoPT..... No Procedure Turn Required (Procedure Turn shall not be executed without ATC clearance)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ODALS..... Omnidirectional Approach Light System
ODP..... Obstacle Departure Procedure
OM..... Outer Marker
PAR..... Precision Approach Radar
PRM..... Precision Runway Monitor
R..... Radial
RA..... Radio Altimeter setting height
RAIL..... Runway Alignment Indicator Lights
RCLS..... Runway Centerline Light System
REIL..... Runway End Identifier Lights
RF..... Radius-to-Fix
RLLS..... Runway Lead-in Light System
RNAV..... Area Navigation
RNP..... Required Navigation Performance
RPI..... Runway Point of Intercept(ion)
RRL..... Runway Remaining Lights
Rwy..... Runway
RVR..... Runway Visual Range
S..... Straight-in
SALS..... Short Approach Light System
SALSF..... Short Approach Lighting System with Sequenced Flashing Lights
SSALF..... Simplified Short Approach Lighting System with Sequenced Flashers
SSALR..... Simplified Short Approach Light System with RAIL
SSALS..... Simplified Short Approach Lighting System
SDF..... Simplified Directional Facility
SM..... Statute Mile
SOIA.....Simultaneous Offset Instrument Approach
SR-SS..... Sunrise-Sunset
TAA..... Terminal Arrival Area
TAC..... TACAN
TCH..... Threshold Crossing Height (height in feet Above Ground level)
TDZ..... Touchdown Zone
TDZE.....Touchdown Zone Elevation
TDZ/CL..... Touchdown Zone and Runway Centerline Lighting
TDZL..... Touchdown Zone Lights
THR..... Threshold
TODA..... Takeoff Distance Available
TORA..... Takeoff Run Available
TR..... Track
VASI..... Visual Approach Slope Indicator
VCOA..... Visual Climb Over Airport
VDP..... Visual Descent Point
VGSI..... Visual Glide Slope Indicator
VNAV..... Vertical Navigation
WAAS..... Wide Area Augmentation System
WP/WPT..... Waypoint (RNAV)

LEGEND 19339

INSTRUMENT APPROACH PROCEDURES (CHARTS)

PLANVIEW SYMBOLS

TERMINAL ROUTES

Procedure Track

Missed Approach

Visual Flight Path

165°
345°
Procedure Turn
(Type degree and point of turn optional)

3100 NoPT 5.6 NM to GS Intcpt
045°
(14.2 to LOM)
Minimum Route Altitude
2000
155°
Feeder Route
(15.1)
Mileage

HOLDING PATTERNS

Missed Approach
090°
270°

Hold-in-lieu of Procedure Turn
090°
1 min
270°

HOLD 8000
Arrival
090°
270°

090°
(IAS)
270°
4 NM

Holding pattern with max. restricted airspeed:
(175K) applies to all altitudes.
(210K) applies to altitudes above 6000′ to and including 14000′.
Arrival Holding Pattern altitude restrictions will be indicated when they deviate from the adjacent leg.
Timing or distance limits for Hold-in-lieu of Procedure Turn Holding Patterns will be shown.
DME fixes may be shown.

FIXES/ATC REPORTING REQUIREMENTS

Reporting Point
▲ Name (Compulsory)
△ Name (Non-Compulsory)

Intersection

WAYPOINT (Compulsory)

WAYPOINT (Non-Compulsory)

FLYOVER POINT

MAP WP (Flyover)

Computer Navigation Fix (CNF) - No ATC Function
x (NAME) ("x" omitted when it conflicts with runway pattern)

15 DME Distance From Facility

AUSTN INT
ARC/DME/RNAV Fix

R-198 Radial line and value

LR-198 Lead Radial

LB-198 Lead Bearing

ALTITUDES

5500 Mandatory Altitude
2500 Minimum Altitude
4300 Maximum Altitude
3000 Recommended Altitude
5000 Mandatory Block
3000 Altitude

INDICATED AIRSPEED

175K Mandatory Airspeed
120K Minimum Airspeed
250K Maximum Airspeed
180K Recommended Airspeed

RADIO AIDS TO NAVIGATION

110.1 Underline indicates No Voice transmitted on this frequency

Compulsory:
VOR, VORTAC, DME, VOR/DME, TACAN, NDB, NDB/DME

Non-Compulsory:
VOR, VORTAC, DME, VOR/DME, TACAN, NDB, NDB/DME

LOM/LMM (Compass locator at Outer Marker/Middle Marker)

Marker Beacon

Marker beacons that are not specifically part of the procedure but underlie the final approach course are shown in screened color.

Localizer (LOC/LDA) Course
Right side shading- Front course; Left side shading- Back Course

SDF Course

LOC/DME

LOC/LDA/SDF Transmitter
(shown when installation is offset from its normal postion off the end of the runway.)

Primary Navaid with Coordinate Values
LIMA
114.5 LIM
Chan 92
S12°00.80′
W77°07.00′

Secondary Navaid
LMM
LIMA
248 NT

SCOTT
Chan 59
SKE
(112.2)
VHF Paired Frequency

SW-2, 30 JAN 2020 to 26 MAR 2020

LEGEND 19339

LEGEND 19171

INSTRUMENT APPROACH PROCEDURES (CHARTS)

SW-2, 30 JAN 2020 to 26 MAR 2020

PLANVIEW SYMBOLS

MINIMUM SAFE ALTITUDE (MSA)

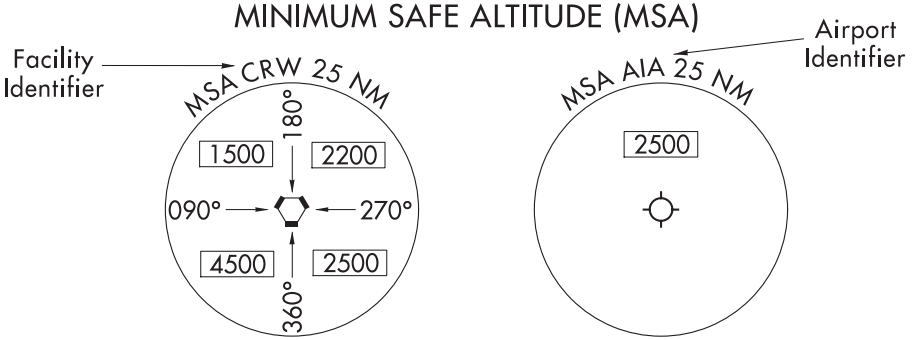

(arrows on distance circle identify sectors)

TERMINAL ARRIVAL AREA (TAA)

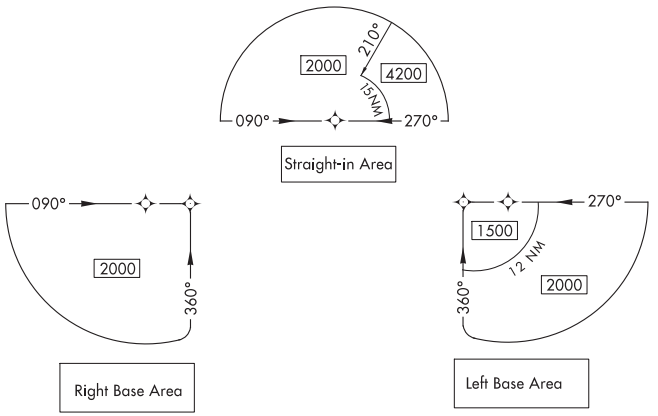

MISCELLANEOUS

VOR Changeover Point

RWY 15 S12° 00.52′ W77° 06.91′ End of Rwy Coordinates (DOD only)

Distance not to scale

International Boundary

Air Defense Identification Zone

SPECIAL USE AIRSPACE

R-352 R-Restricted W-Warning P-Prohibited A-Alert

AIRPORTS

Primary and Secondary (named in planview)

Civil

Seaplane Base

Heliport

OBSTACLES

- Spot Elevation
- Highest Spot Elevation
- Obstacle
- Group of Obstacles
- Highest Obstacle
- ± Doubtful accuracy

LEGEND 19171

SW-2, 30 JAN 2020 to 26 MAR 2020

PROFILE VIEW

Three different methods are used to depict either electronic or vertical guidance: "GS", "GP", or "VDA".

1. "GS" indicates that an Instrument Landing System (ILS) electronic glide slope (a ground antenna) provides vertical guidance. The profile section of ILS procedures depict a GS angle and TCH in the following format: GS 3.00°, TCH 55.

2. "GP" on GLS and RNAV procedures indicates that either electronic vertical guidance (via Wide Area Augmentation System - WAAS or Ground Based Augmentation System - GBAS) or barometric vertical guidance is provided. GLS and RNAV procedures with a published decision altitude (DA/H) depict a GP angle and TCH in the following format: GP 3.00°, TCH 50.

3. An advisory vertical descent angle (VDA) is provided on non-vertically guided conventional procedures and RNAV procedures with only a minimum descent altitude (MDA) to assist in preventing controlled flight into terrain. On Civil (FAA) procedures, this information is placed above or below the procedure track following the fix it is based on. Absence of a VDA or a note that the VDA is not authorized indicates that the prescribed obstacle clearance surface is not clear and the VDA must not be used below MDA. VDA is depicted in the following format: 3.00°, TCH 55. On Copter procedures this is depicted in the following format: 7.30°, HCH 20.

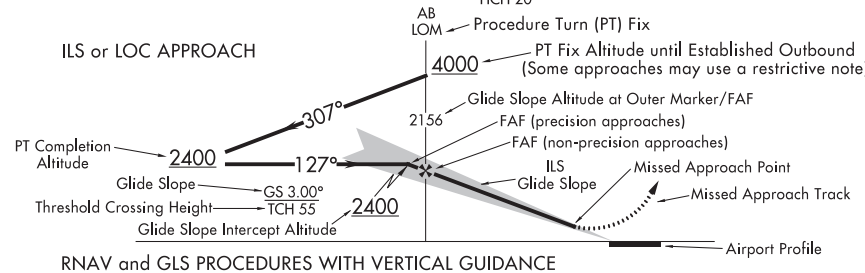

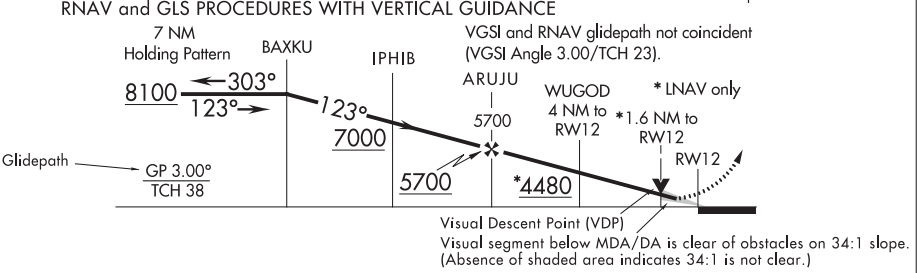

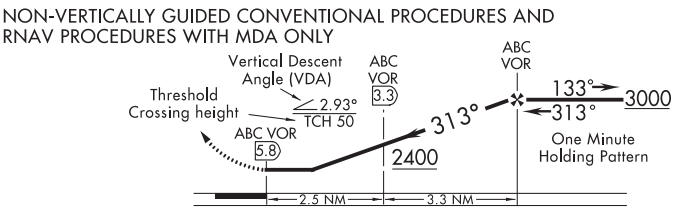

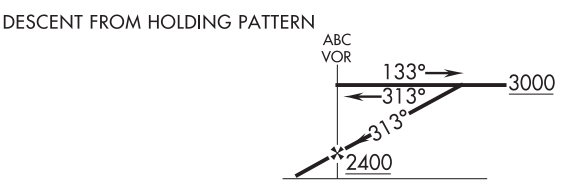

ALTITUDES

- 5500 Mandatory Altitude
- 2500 Minimum Altitude
- 4300 Maximum Altitude
- 3000 Recommended Altitude
- 5000 / 3000 Mandatory Block Altitude

2400 Glide Slope/Glidepath Intercept Altitude and final approach fix for vertically guided approach procedures.

▼ Visual Descent Point (VDP)

PROFILE SYMBOLS

Visual Flight Path

Note: Facilities and waypoints are depicted as a solid vertical line while fixes and intersections are depicted as a dashed vertical line.

LEGEND 19059

LEGEND

STANDARD TERMINAL ARRIVAL (STAR) CHARTS
DEPARTURE PROCEDURE (DP) CHARTS

Applies to both STAR and DP Charts unless otherwise noted.

RADIO AIDS TO NAVIGATION

Compulsory:

VOR · VORTAC · DME · VOR/DME · TACAN · NDB · NDB/DME

Non-Compulsory:

VOR · VORTAC · DME · VOR/DME · TACAN · NDB · NDB/DME

LMM, LOM (Compass locator)

Marker Beacon

LOC · LOC/DME (shown when installation is offset from its normal position off the end of the runway.) (DP)

Localizer Course

SDF Course

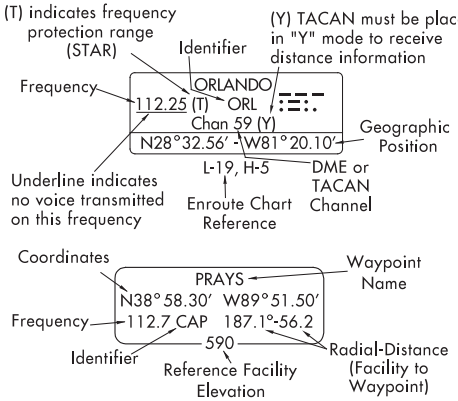

FIXES/ATC REPORTING REQUIREMENTS

Reporting Points N00°00.00' W00°00.00'

75 → DME Mileage (when not obvious)

▲ Fix-Compulsory and

△ Non-Compulsory Position Report

DME fix

WAYPOINT (Compulsory)

WAYPOINT (Non-Compulsory)

FLYOVER POINT

X Computer Navigation Fix (CNF) - No ATC Function N00°00.00' W00°00.00'

ROUTES

4500 MEA-Minimum Enroute Altitude

*3500 MOCA-Minimum Obstruction Clearance Altitude

270° Departure Route - Arrival Route

(65) Mileage between Radio Aids, Reporting Points, and Route Breaks

Transition Route

R-275 Radial line and value

Lost Communications Track

Visual Flight Path (DP)

V12 J80 Airway/Jet Route Identification

DP Holding Pattern (IAS)

STAR Holding Pattern (IAS)

Holding pattern with max. restricted airspeed (175K) applies to all altitudes (210K) applies to altitudes above 6000' to and including 14000'

SPECIAL USE AIRSPACE

R-352

R-Restricted W-Warning
P-Prohibited A-Alert
MOA-Military Operations Area

ALTITUDES

5500 Mandatory Altitude (Cross at)

2300 Minimum Altitude (Cross at or above)

4800 Maximum Altitude (Cross at or below)

15000 / 12000 Block Altitude

Altitude change at other than Radio Aids (STAR)

INDICATED AIRSPEED

175K Mandatory Airspeed

120K Minimum Airspeed

250K Maximum Airspeed

AIRPORTS

(DP) · (H) Heliport

Civil · Military · Joint Civil-Military

Airports not served by the procedure shown in screened color (STAR)

Civil · Military · Joint Civil-Military

MISCELLANEOUS

Changeover Point

Distance not to scale (DP)

International Boundary (DP)

Air Defense Identification Zone

Takeoff Minimums and (Obstacle) Departure Procedures entry published. (DP)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LEGEND 19059

19339

LEGEND

INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways

Hard Surface | Other Than Hard Surface | Stopways,Taxiways, Parking Areas | Metal Surface

Closed Runway | Closed Surface | Under Construction | Water Runway

ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to appropriate DOD publications.

uni-directional | bi-directional | Jet Barrier

ARRESTING SYSTEM (EMAS)

REFERENCE FEATURES

Displaced Threshold.....
Hot Spot .....
Runway Holding Position Markings.....
Buildings.....
24-Hour Self-Serve Fuel ##.....
Tanks.....
Obstructions.....
Airport Beacon #.....
Runway
Radar Reflectors.....
Control Tower #..... TWR

When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.

A fuel symbol is shown to indicate 24-hour self-serve fuel available, see appropriate Chart Supplement for information.

NOTE:
All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in FLIP. (Foreign Only)

Runway Weight Bearing Capacity/or PCN Pavement Classification Number is shown as a codified expression. Refer to the appropriate Supplement/Directory for applicable codes e.g., RWY 14-32 PCN 80 F/D/X/U S-75, D-185, 2S-175, 2D-325

Helicopter Alighting Areas

Negative Symbols used to identify Copter Procedures

landing point.....

NOTE:
Landmark features depicted on Copter Approach insets and sketches are provided for visual reference only.

Runway TDZ elevation.....TDZE 123

←0.3% DOWN

Runway Slope.....0.8% UP→
(shown when runway slope is greater than or equal to 0.3%)

NOTE:
Runway Slope measured to midpoint on runways 8000 feet or longer.

U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.

Airport diagram scales are variable.

True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or ½ minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.

Positional accuracy within ±600 feet unless otherwise noted on the chart.

Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A D symbol is shown to indicate runway declared distance information available, see appropriate Chart Supplement for distance information.

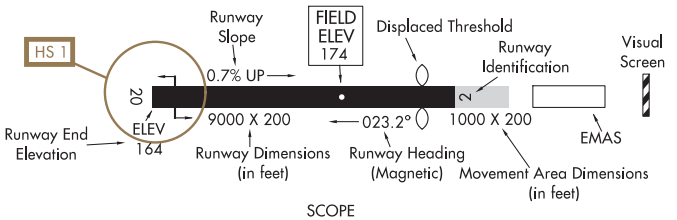

SCOPE

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

SW-2, 30 JAN 2020 to 26 MAR 2020

LEGEND 15344

INSTRUMENT APPROACH PROCEDURES (CHARTS)
APPROACH LIGHTING SYSTEM - UNITED STATES

Approach lighting and visual glide slope systems are indicated on the airport sketch by an identifier, e.g., (A2), (V), etc.

A dot " ● " portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A1). Negative symbology, e.g., (A1), (V) indicates Pilot Controlled Lighting (PCL).

RUNWAY TOUCHDOWN ZONE AND CENTERLINE LIGHTING SYSTEMS



AVAILABILITY of TDZ/CL will be shown by NOTE in SKETCH e.g. "TDZ/CL Rwy 15"

APPROACH LIGHTING SYSTEM

(A) **ALSF-2**



(High Intensity)
LENGTH 2400/3000 FEET

APPROACH LIGHTING SYSTEM

(A1) **ALSF-1**



(High Intensity)
LENGTH 2400/3000 FEET

SHORT APPROACH LIGHTING SYSTEM

(A2)

SALS/SALSF

(High Intensity)

SAME AS INNER 1500' OF ALSF-1

SIMPLIFIED SHORT APPROACH LIGHTING SYSTEM

with Runway Alignment Indicator Lights

(A3) **SSALR**



(High Intensity)
LENGTH 2400/3000 FEET

MEDIUM INTENSITY (**MALS** and **MALSF**) OR SIMPLIFIED SHORT (**SSALS** and **SSALF**) APPROACH LIGHTING SYSTEMS



LENGTH 1400 FEET

MEDIUM INTENSITY APPROACH LIGHTING SYSTEM

with Runway Alignment Indicator Lights

(A5) **MALSR**

SAME LIGHT CONFIGURATION AS SSALR.

OMNIDIRECTIONAL APPROACH LIGHTING SYSTEM

ODALS



LENGTH 1500 FEET

(V) VISUAL APPROACH SLOPE INDICATOR

VASI

VISUAL APPROACH SLOPE INDICATOR WITH STANDARD THRESHOLD CLEARANCE PROVIDED.

ALL LIGHTS WHITE — TOO HIGH
FAR LIGHTS RED / NEAR LIGHTS WHITE — ON GLIDE SLOPE
ALL LIGHTS RED — TOO LOW



(V3) VISUAL APPROACH SLOPE INDICATOR

VASI

3-BAR, 6 OR 16 BOX, VISUAL APPROACH SLOPE INDICATOR THAT PROVIDES 2 GLIDE ANGLES AND 2 THRESHOLD CROSSING HEIGHTS.



LEGEND 15344

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

LEGEND 18256

INSTRUMENT APPROACH PROCEDURES (CHARTS)
APPROACH LIGHTING SYSTEM - UNITED STATES

Approach lighting and visual glide slope systems are indicated on the airport sketch by an identifier, (A2), (V) etc.

A dot " ● " portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A1). Negative symbology, e.g., (A1), (V) indicates Pilot Controlled Lighting (PCL).

(P) PRECISION APPROACH PATH INDICATOR

PAPI



Legend: □ White ■ Red

(V1) "T"-VISUAL APPROACH SLOPE INDICATOR

"T"-VASI



"T" ON BOTH SIDES OF RWY ALL LIGHTS VARIABLE WHITE. CORRECT APPROACH SLOPE- ONLY CROSS BAR VISIBLE. UPRIGHT "T"- FLY UP. INVERTED "T"- FLY DOWN. RED "T"- GROSS UNDERSHOOT.

(V2) PULSATING VISUAL APPROACH SLOPE INDICATOR

PVASI

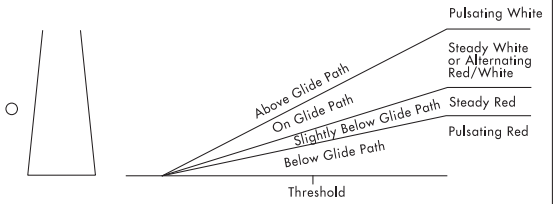

CAUTION: When viewing the pulsating visual approach slope indicators in the pulsating white or pulsating red sectors, it is possible to mistake this lighting aid for another aircraft or a ground vehicle. Pilots should exercise caution when using this type of system.

(V4) TRI-COLOR VISUAL APPROACH SLOPE INDICATOR

TRCV



CAUTION: When the aircraft descends from green to red, the pilot may see a dark amber color during the transition from green to red.

(V5) ALIGNMENT OF ELEMENTS SYSTEMS

APAP



Painted panels which may be lighted at night. To use the system the pilot positions the aircraft so the elements are in alignment.

LEGEND 18256

SW-2, 30 JAN 2020 to 26 MAR 2020

FREQ PAIRING 15008

FREQUENCY PAIRING TABLE

TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY
17Y	108.05	40X	110.30	88Y	114.15
18X	108.10	40Y	110.35	89Y	114.25
18Y	108.15	41Y	110.45	90Y	114.35
19Y	108.25	42X	110.50	91Y	114.45
20X	108.30	42Y	110.55	92Y	114.55
20Y	108.35	43Y	110.65	93Y	114.65
21Y	108.45	44X	110.70	94Y	114.75
22X	108.50	44Y	110.75	95Y	114.85
22Y	108.55	45Y	110.85	96Y	114.95
23Y	108.65	46X	110.90	97Y	115.05
24X	108.70	46Y	110.95	98Y	115.15
24Y	108.75	47Y	111.05	99Y	115.25
25Y	108.85	48X	111.10	100Y	115.35
26X	108.90	48Y	111.15	101Y	115.45
26Y	108.95	49Y	111.25	102Y	115.55
27Y	109.05	50X	111.30	103Y	115.65
28X	109.10	50Y	111.35	104Y	115.75
28Y	109.15	51Y	111.45	105Y	115.85
29Y	109.25	52X	111.50	106Y	115.95
30X	109.30	52Y	111.55	107Y	116.05
30Y	109.35	53Y	111.65	108Y	116.15
31Y	109.45	54X	111.70	109Y	116.25
32X	109.50	54Y	111.75	110Y	116.35
32Y	109.55	55Y	111.85	111Y	116.45
33Y	109.65	56X	111.90	112Y	116.55
34X	109.70	56Y	111.95	113Y	116.65
34Y	109.75	80Y	113.35	114Y	116.75
35Y	109.85	81Y	113.45	115Y	116.85
36X	109.90	82Y	113.55	116Y	116.95
36Y	109.95	83Y	113.65	117Y	117.05
37Y	110.05	84Y	113.75	118Y	117.15
38X	110.10	85Y	113.85	119Y	117.25
38Y	110.15	86Y	113.95		
39Y	110.25	87Y	114.05		

SW-2, 30 JAN 2020 to 26 MAR 2020

FREQ PAIRING 15008

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME PROC SECT PG

ALTURAS, CA
ALTURAS MUNI(AAT)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 31 1
DPS ..... BACHS TWO (OBSTACLE) (RNAV) 2
CHOIR THREE (RNAV) 3

AMEDEE AAF(AHC)
HERLONG, CA
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 27 4

ARCATA-EUREKA, CA
CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY(ACV)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC RWY 32 5
RNAV (GPS) RWY 01 6
RNAV (GPS) RWY 14 7
RNAV (GPS) RWY 32 8
VOR RWY 14 9
DPS ..... HOCUT FIVE 10

ATWATER, CA
CASTLE(MER)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
IAPS ..... ILS OR LOC RWY 31 11
RNAV (GPS) RWY 13 12
RNAV (GPS) RWY 31 13
AIRPORT DIAGRAM 14

AUBURN, CA
AUBURN MUNI(AUN)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 07 15

BEALE AFB(KBAB)
MARYSVILLE, CA
TAKEOFF MINIMUMS L
HOT SPOT ..... P
IAPS ..... ILS OR LOC Y RWY 15 16
ILS OR LOC Y RWY 33 17
RNAV (GPS) RWY 15 18
RNAV (GPS) RWY 33 19
TACAN Y RWY 15 20
TACAN Y RWY 33 21
AIRPORT DIAGRAM 22
DPS ..... PYNUN SIX 23

BECKWOURTH, CA
NERVINO(O02)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) Y RWY 26 24
RNAV (GPS) Z RWY 26 25

BISHOP, CA
BISHOP(BIH)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (RNP) RWY 30 26
RNAV (GPS) Y RWY 12 27
RNAV (GPS) Z RWY 12 28
LDA RWY 17 29

BUCHANAN FIELD
---SEE CONCORD, CA

BYRON, CA
BYRON(C83)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 30 30

CALAVERAS COUNTY-MAURY RASMUSSEN FIELD
---SEE SAN ANDREAS, CA

CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY
---SEE ARCATA-EUREKA, CA

CASTLE
---SEE ATWATER, CA

CHARLES M SCHULZ-SONOMA COUNTY
---SEE SANTA ROSA, CA

CHICO, CA
CHICO MUNI(CIC)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC/DME RWY 13L 31
RNAV (GPS) RWY 13L 32
RNAV (GPS) RWY 31R 33
VOR/DME RWY 31R 34
AIRPORT DIAGRAM 35
DPS ..... CHICO FOUR 36
GONGS THREE 37

CLOVERDALE, CA
CLOVERDALE MUNI(O60)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 32 38

COLUMBIA, CA
COLUMBIA(O22)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 35 39
DPS ..... FICHU THREE (OBSTACLE) (RNAV) 40

SW-2, 30 JAN 2020 to 26 MAR 2020

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME PROC SECT PG

COLUSA, CA
COLUSA COUNTY(O08)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS)-B 41
RNAV (GPS) RWY 31 42
VOR-A 43

CONCORD, CA
BUCHANAN FIELD(CCR)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
STARS ..... BMBER ONE (RNAV) Z10
IAPS ..... RNAV (GPS) RWY 19R 44
LDA RWY 19R 45
VOR RWY 19R 46
AIRPORT DIAGRAM 47
DPS ..... BUCHANAN TWO 48

CRESCENT CITY, CA
JACK MCNAMARA FIELD(CEC)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC RWY 12 49
RNAV (GPS) RWY 12 50
RNAV (GPS) RWY 36 51
VOR/DME RWY 12 52
VOR/DME RWY 36 53
VOR RWY 12 54

DAVIS, CA
UNIVERSITY(EDU)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 17 55

DAVIS/WOODLAND/WINTERS, CA
YOLO COUNTY(DWA)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 16 56
RNAV (GPS) RWY 34 57

ELLS FIELD-WILLITS MUNI
---SEE WILLITS, CA

EUREKA, CA
MURRAY FIELD(EKA)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 12 58
RNAV (GPS)-B 59
VOR-A 60

FAIRFIELD, CA
---SEE TRAVIS AFB

FIREBAUGH, CA
FIREBAUGH(F34)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS)-B 61
VOR-A 62

FORTUNA, CA
ROHNERVILLE(FOT)
TAKEOFF MINIMUMS L
IAPS ..... GPS RWY 11 63
GPS RWY 29 64
VOR RWY 11 65

FRESNO, CA
FRESNO CHANDLER EXECUTIVE(FCH)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 12 66
RNAV (GPS) RWY 30 67
AIRPORT DIAGRAM 68
FRESNO YOSEMITE INTL(FAT)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
STARS ..... ALTTA NINE Z2
IAPS ..... ILS Y OR LOC Y RWY 29R 69
ILS Y RWY 29R (SA CAT I) 70
ILS Y RWY 29R (CAT II - III) 71
RNAV (GPS) RWY 11L 72
RNAV (GPS) RWY 11R 73
RNAV (GPS) RWY 29L 74
RNAV (GPS) RWY 29R 75
LOC Y RWY 11L 76
TACAN RWY 11L 77
TACAN RWY 29R 78
AIRPORT DIAGRAM 79
DPS ..... BULLDOG THREE 80
COALDALE FOUR 81
YOSEMITE THREE 82

GNOSS FIELD
---SEE NOVATO, CA

GRASS VALLEY, CA
NEVADA COUNTY(GOO)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 07 83
VOR OR GPS-A 84
AIRPORT DIAGRAM 85

GROVELAND, CA
PINE MOUNTAIN LAKE(E45)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 09 86
GPS RWY 27 87

HAIGH FIELD
---SEE ORLAND, CA

HALF MOON BAY, CA
HALF MOON BAY(HAF)
TAKEOFF MINIMUMS L
DIVERSE VECTOR AREA L
IAPS ..... RNAV (GPS) RWY 12 88
RNAV (GPS) RWY 30 89

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME PROC SECT PG

HANFORD, CA
HANFORD MUNI(HJO)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 32 90
RNAV (GPS)-B 91
VOR-A 92

HAYWARD, CA
HAYWARD EXECUTIVE(HWD)
TAKEOFF MINIMUMS L
DIVERSE VECTOR AREA L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
STARS ..... PANOCHE SIX Z23
SHARR ONE (RNAV) Z33
IAPS ..... RNAV (GPS) RWY 28L 93
LOC/DME RWY 28L 94
VOR/DME-A 95
AIRPORT DIAGRAM 96

HERLONG, CA
---SEE AMEDEE AAF

HOLLISTER, CA
HOLLISTER MUNI(CVH)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 31 97

JACK MCNAMARA FIELD
---SEE CRESCENT CITY, CA

JACKSON, CA
WESTOVER FIELD AMADOR COUNTY(JAQ)
TAKEOFF MINIMUMS L
IAPS ..... GPS RWY 01 98
VOR/DME RWY 01 99

LAKE TAHOE
---SEE SOUTH LAKE TAHOE, CA

LAKEPORT, CA
LAMPSON FIELD(1O2)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS)-A 100
DPS ..... LAKEPORT THREE (RNAV) 101

LAMPSON FIELD
---SEE LAKEPORT, CA

LEMOORE NAS (REEVES FIELD)(NLC)
LEMOORE, CA
TAKEOFF MINIMUMS L
RADAR MINIMUMS ..... N
IAPS ..... RNAV (GPS) RWY 14L 102
RNAV (GPS) RWY 14R 103
RNAV (GPS) RWY 32L 104
RNAV (GPS) RWY 32R 105
TACAN RWY 14L 106
TACAN RWY 14R 107
TACAN RWY 32L 108
AIRPORT DIAGRAM 109
DPS ..... LEMOORE NINE 110
REEVES THREE 111

LINCOLN, CA
LINCOLN RGNL/KARL HARDER FIELD(LHM)
TAKEOFF MINIMUMS L
DIVERSE VECTOR AREA L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC RWY 15 112
RNAV (GPS) RWY 15 113
RNAV (GPS) RWY 33 114

LITTLE RIVER, CA
LITTLE RIVER(LLR)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 29 115
DPS ..... LITTLE RIVER ONE (OBSTACLE) (RNAV) 116

LIVERMORE, CA
LIVERMORE MUNI(LVK)
TAKEOFF MINIMUMS L
DIVERSE VECTOR AREA L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
IAPS ..... ILS RWY 25R 117
RNAV (GPS) RWY 25R 118
LOC RWY 25R 119
AIRPORT DIAGRAM 120
DPS ..... LIVERMORE THREE (OBSTACLE) 121

LODI, CA
LODI(1O3)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS)-B 123
VOR-A 124

LOS BANOS, CA
LOS BANOS MUNI(LSN)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 14 125
RNAV (GPS) RWY 32 126
VOR RWY 32 127

MADERA, CA
MADERA MUNI(MAE)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 12 128
RNAV (GPS) RWY 30 129

SW-2, 30 JAN 2020 to 26 MAR 2020

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME PROC SECT PG

MAMMOTH LAKES, CA
MAMMOTH YOSEMITE(MMH)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 27 130
DPS ..... NIKOL ONE (OBSTACLE) 131
CROLI ONE (RNAV) 132
OENNS ONE (RNAV) 133

MARINA, CA
MARINA MUNI(OAR)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 11 134
RNAV (GPS) RWY 29 135
VOR/DME RWY 29 136
VOR RWY 11 137

MARIPOSA, CA
MARIPOSA-YOSEMITE(MPI)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS)-A 138
RNAV (GPS)-B 139

MARIPOSA-YOSEMITE
---SEE MARIPOSA, CA

MARYSVILLE, CA
YUBA COUNTY(MYV)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC RWY 14 140
RNAV (GPS) RWY 14 141
RNAV (GPS) RWY 32 142
VOR RWY 32 143
AIRPORT DIAGRAM 144

MARYSVILLE, CA
---SEE BEALE AFB

MC CLELLAN AIRFIELD
---SEE SACRAMENTO, CA

MEFFORD FIELD
---SEE TULARE, CA

MERCED, CA
MERCED RGNL/MACREADY FIELD(MCE)
TAKEOFF MINIMUMS L
IAPS ..... ILS OR LOC RWY 30 145
RNAV (GPS) RWY 12 146
RNAV (GPS) RWY 30 147
LOC BC RWY 12 148
VOR RWY 30 149

METROPOLITAN OAKLAND INTL
---SEE OAKLAND, CA

MODESTO, CA
MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC RWY 28R 150
RNAV (GPS) RWY 28R 151
VOR RWY 28R 152
AIRPORT DIAGRAM 153

MOFFETT FEDERAL AFLD
---SEE MOUNTAIN VIEW, CA

MONTAGUE, CA
SISKIYOU COUNTY(SIY)
TAKEOFF MINIMUMS L
IAPS ..... NDB OR GPS-A 154

MONTEREY, CA
MONTEREY RGNL(MRY)
TAKEOFF MINIMUMS L
DIVERSE VECTOR AREA L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC RWY 10R 155
RNAV (RNP) Z RWY 28L 156
RNAV (GPS) RWY 10R 157
RNAV (GPS) Y RWY 28L 158
LOC RWY 28L 159
RACEWAY VISUAL RWY 28L 160
AIRPORT DIAGRAM 161
DPS ..... MONTEREY FIVE 162
TORO SEVEN 163

MOUNTAIN VIEW, CA
MOFFETT FEDERAL AFLD(NUQ)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
STARS ..... POINT REYES THREE Z26
IAPS ..... ILS OR LOC RWY 32R 164
RNAV (GPS) RWY 14L 165
RNAV (GPS) RWY 14R 166
RNAV (GPS) RWY 32L 167
RNAV (GPS) RWY 32R 168
LOC RWY 14L 169
TACAN RWY 32L 170
TACAN RWY 32R 171
AIRPORT DIAGRAM 172
DPS ..... HOOKS TWO 173
SOUTHLAND THREE 174
WOODSIDE TWO 175

MURRAY FIELD
---SEE EUREKA, CA

SW-2, 30 JAN 2020 to 26 MAR 2020

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME PROC SECT PG

NAPA, CA
NAPA COUNTY(APC)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
LAHSO ..... O
HOT SPOT ..... P
IAPS ..... ILS OR LOC Z RWY 01L 176
RNAV (GPS) RWY 06 177
RNAV (GPS) Y RWY 01L 178
RNAV (GPS) Z RWY 01L 179
VOR RWY 06 180
AIRPORT DIAGRAM 181
DPS ..... NAPAA FOUR (OBSTACLE) 182
LIZRD FIVE 185
MERLOT THREE 186
OZIEE FOUR (RNAV) 188

NERVINO
---SEE BECKWOURTH, CA

NEVADA COUNTY
---SEE GRASS VALLEY, CA

NORMAN Y MINETA SAN JOSE INTL
---SEE SAN JOSE, CA

NOVATO, CA
GNOSS FIELD(DVO)
TAKEOFF MINIMUMS L
IAPS ..... GPS RWY 13 190

NUT TREE
---SEE VACAVILLE, CA

OAKDALE, CA
OAKDALE(O27)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 10 191
RNAV (GPS) RWY 28 192
VOR-A 193

OAKLAND, CA
METROPOLITAN OAKLAND INTL(OAK)
TAKEOFF MINIMUMS L
DIVERSE VECTOR AREA L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
STARS ..... AANET ONE (RNAV) Z1
BANND TWO (RNAV) Z6
EMZOH THREE (RNAV) Z17
OAKES TWO (RNAV) Z20
PANOCHE SIX Z23
PIRAT TWO (RNAV) Z25
SHARR ONE (RNAV) Z33
SKIZM TWO (RNAV) Z36
WNDSR TWO (RNAV) Z46
IAPS ..... ILS OR LOC RWY 12 194
ILS OR LOC RWY 30 195
ILS OR LOC/DME RWY 28R 196
ILS RWY 12 (SA CAT I) 197
ILS RWY 30 (SA CAT I) 198
ILS RWY 30 (CAT II - III) 199
RNAV (RNP) Z RWY 12 200
RNAV (RNP) Z RWY 28L 201
RNAV (RNP) Z RWY 28R 202
RNAV (RNP) Z RWY 30 203
RNAV (GPS) RWY 10L 204
RNAV (GPS) RWY 10R 205
RNAV (GPS) Y RWY 12 206
RNAV (GPS) Y RWY 28L 207
RNAV (GPS) Y RWY 28R 208
RNAV (GPS) Y RWY 30 209
VOR RWY 10R 210
AIRPORT DIAGRAM 211
DPS ..... CNDEL FOUR (RNAV) 212
COAST NINE 213
HUSSH TWO (RNAV) 215
KATFH TWO (RNAV) 216
NIMITZ FIVE 217
NUEVO EIGHT 218
OAKLAND FIVE 220
QUAKE ONE 222
SALAD FIVE 223
SILENT ONE 224
SKYLINE ONE 226
SUNNE ONE 228

ORLAND, CA
HAIGH FIELD(O37)
TAKEOFF MINIMUMS L
IAPS ..... VOR OR GPS-A 229

OROVILLE, CA
OROVILLE MUNI(OVE)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 02 230
VOR-A 231

SW-2, 30 JAN 2020 to 26 MAR 2020

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME PROC SECT PG

PALO ALTO, CA
PALO ALTO(PAO)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
STARS ..... POINT REYES THREE Z26
IAPS ..... RNAV (GPS) RWY 31 232
VOR RWY 31 233
AIRPORT DIAGRAM 234

PETALUMA, CA
PETALUMA MUNI(O69)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 29 235
VOR RWY 29 236

PINE MOUNTAIN LAKE
---SEE GROVELAND, CA

PLACERVILLE, CA
PLACERVILLE(PVF)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 05 237

PORTERVILLE, CA
PORTERVILLE MUNI(PTV)
TAKEOFF MINIMUMS L
IAPS ..... GPS RWY 12 238
GPS RWY 30 239
VOR OR GPS-A 240

RED BLUFF, CA
RED BLUFF MUNI(RBL)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 15 241
RNAV (GPS) RWY 33 242
VOR/DME RWY 15 243
VOR RWY 33 244

REDDING, CA
REDDING MUNI(RDD)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC RWY 34 245
RNAV (GPS) RWY 16 246
RNAV (GPS) RWY 34 247
LOC BC RWY 16 248
VOR RWY 34 249
AIRPORT DIAGRAM 250
DPS ..... HOMAN TWO 251
KENDL FOUR 252
KREST THREE 253
SHASTA FOUR 254

REEDLEY, CA
REEDLEY MUNI(O32)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 16 255
RNAV (GPS) RWY 34 256

REID-HILLVIEW OF SANTA CLARA CO
---SEE SAN JOSE, CA

RIO VISTA, CA
RIO VISTA MUNI(O88)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 25 257
VOR/DME-A 258

ROHNERVILLE
---SEE FORTUNA, CA

SACRAMENTO, CA
MC CLELLAN AIRFIELD(MCC)
IAPS ..... ILS OR LOC RWY 16 259
VOR/DME RWY 34 260
AIRPORT DIAGRAM 261
SACRAMENTO EXECUTIVE(SAC)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
IAPS ..... ILS OR LOC RWY 02 262
RNAV (GPS) RWY 02 263
VOR RWY 02 264
AIRPORT DIAGRAM 265
SACRAMENTO INTL(SMF)
TAKEOFF MINIMUMS L
DIVERSE VECTOR AREA L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
STARS ..... CONCORD TWO Z14
SLMMR THREE (RNAV) Z37
SUUTR TWO (RNAV) Z42
TUDOR TWO Z43
IAPS ..... ILS OR LOC RWY 16L 266
ILS OR LOC RWY 16R 267
ILS OR LOC RWY 34L 268
ILS RWY 16R (SA CAT I) 269
ILS RWY 16R (CAT II - III) 270
ILS RWY 16L (SA CAT II) 271
RNAV (RNP) Z RWY 16L 272
RNAV (RNP) Z RWY 16R 273
RNAV (RNP) Z RWY 34L 274
RNAV (RNP) Z RWY 34R 275
RNAV (GPS) Y RWY 16L 276
RNAV (GPS) Y RWY 16R 277
RNAV (GPS) Y RWY 34L 278
RNAV (GPS) Y RWY 34R 279
AIRPORT DIAGRAM 280
DPS ..... DUDES NINE 281
FTHIL TWO (RNAV) 282
RVRCT TWO (RNAV) 283
SCTWN TWO (RNAV) 284

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME	PROC	SECT PG
SACRAMENTO, CA		
SACRAMENTO MATHER(MHR)		
TAKEOFF MINIMUMS		L
ALTERNATE MINIMUMS		M
STARS	AMRVR TWO (RNAV)	Z5
IAPS	ILS OR LOC RWY 22L	285
	ILS RWY 22L (SA CAT I - II)	286
	RNAV (GPS) RWY 04R	287
	RNAV (GPS) RWY 22L	288
	VOR RWY 04R	289
AIRPORT DIAGRAM		290
SALINAS, CA		
SALINAS MUNI(SNS)		
TAKEOFF MINIMUMS		L
DIVERSE VECTOR AREA		L
ALTERNATE MINIMUMS		M
HOT SPOT		P
IAPS	ILS RWY 31	291
	RNAV (GPS) RWY 13	292
	RNAV (GPS) Y RWY 31	293
	RNAV (GPS) Z RWY 31	294
	LOC/DME RWY 31	295
	VOR RWY 13	296
AIRPORT DIAGRAM		297
DPS	CHALONE THREE	298
	SALINAS TWO	299
SAN ANDREAS, CA		
CALAVERAS COUNTY-MAURY RASMUSSEN FIELD(CPU)		
TAKEOFF MINIMUMS		L
ALTERNATE MINIMUMS		M
IAPS	RNAV (GPS) RWY 31	300
SAN CARLOS, CA		
SAN CARLOS(SQL)		
TAKEOFF MINIMUMS		L
DIVERSE VECTOR AREA		L
ALTERNATE MINIMUMS		M
STARS	POINT REYES THREE	Z26
IAPS	RNAV (GPS) Y RWY 30	301
	RNAV (GPS) Z RWY 30	302
AIRPORT DIAGRAM		303
SAN FRANCISCO, CA		
SAN FRANCISCO INTL(SFO)		
TAKEOFF MINIMUMS		L
DIVERSE VECTOR AREA		L
ALTERNATE MINIMUMS		M
HOT SPOT		P
STARS	ALWYS TWO (RNAV)	Z3
	BDEGA THREE (RNAV)	Z8
	BIG SUR THREE	Z9
	DYAMD FIVE (RNAV)	Z15
	MODESTO NINE	Z19
	PIRAT TWO (RNAV)	Z25
	POINT REYES THREE	Z26
	RISTI ONE (RNAV)	Z29
	SERFR FOUR (RNAV)	Z32
	STINS THREE	Z39
	STLER THREE (RNAV)	Z40
	WWAVS ONE (RNAV)	Z47
	YOSEM THREE (RNAV)	Z48
IAPS	ILS OR LOC RWY 19L	304
	ILS OR LOC RWY 28L	305
	ILS OR LOC RWY 28R	306
	ILS RWY 28R (SA CAT I)	307
	ILS RWY 28R (CAT II - III)	308
	ILS RWY 28L (SA CAT II)	309
	RNAV (RNP) Y RWY 28R	310
	RNAV (RNP) Z RWY 10R	311
	RNAV (GPS) RWY 10L	312
	RNAV (GPS) RWY 19L	313
	RNAV (GPS) RWY 19R	314
	RNAV (GPS) RWY 28L	315
	RNAV (GPS) X RWY 28R	316
	RNAV (GPS) Y RWY 10R	317
	RNAV (GPS) Z RWY 28R	318
	LDA/DME RWY 28R	319
	PRM AAUP	320
	ILS PRM RWY 28L	322
	RNAV (GPS) PRM RWY 28L	323
	RNAV (GPS) PRM X RWY 28R	324
	LDA PRM RWY 28R	325
	QUIET BRIDGE VISUAL RWY 28L/R	326
	TIPP TOE VISUAL RWY 28L/R	327
AIRPORT DIAGRAM		328
DPS	CIITY THREE (RNAV)	329
	GAP SEVEN	330
	GNNRR TWO (RNAV)	331
	MOLEN EIGHT	332
	NIITE THREE (RNAV)	333
	OFFSHORE TWO	334
	SAHEY THREE (RNAV)	336
	SAN FRANCISCO FOUR	337
	SNTNA TWO (RNAV)	338
	SSTIK FOUR (RNAV)	339
	TRUKN TWO (RNAV)	340
	WESLA FOUR (RNAV)	341

SW-2, 30 JAN 2020 to 26 MAR 2020

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME PROC SECT PG

SAN JOSE, CA

NORMAN Y MINETA SAN JOSE INTL(SJC)

TAKEOFF MINIMUMS L
DIVERSE VECTOR AREA L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
STARS ..... BRINY TWO Z12
BRIXX TWO (RNAV) Z13
FRLON TWO (RNAV) Z18
POINT REYES THREE Z26
RAZRR FOUR (RNAV) Z27
RISTI ONE (RNAV) Z29
ROBIE FIVE Z30
SILCN FOUR (RNAV) Z34
IAPS ..... ILS OR LOC RWY 12R 342
ILS OR LOC RWY 30L 343
ILS RWY 30L (SA CAT I - II) 344
RNAV (RNP) Z RWY 12L 345
RNAV (RNP) Z RWY 12R 346
RNAV (RNP) Z RWY 30L 347
RNAV (RNP) Z RWY 30R 348
RNAV (GPS) Y RWY 12L 349
RNAV (GPS) Y RWY 12R 350
RNAV (GPS) Y RWY 30L 351
RNAV (GPS) Y RWY 30R 352
FAIRGROUNDS VISUAL RWY 30L/R 353
AIRPORT DIAGRAM 354
DPS ..... ALMDN FOUR (RNAV) 355
BMRNG FOUR (RNAV) 356
LOUPE FIVE 357
SAN JOSE THREE 358
SUNOL ONE 359
TECKY THREE (RNAV) 360

REID-HILLVIEW OF SANTA CLARA CO(RHV)

TAKEOFF MINIMUMS L
HOT SPOT ..... P
STARS ..... POINT REYES THREE Z26
IAPS ..... RNAV (GPS) RWY 13L 361
RNAV (GPS) Y RWY 31R 362
RNAV (GPS) Z RWY 31R 363
AIRPORT DIAGRAM 364
DPS ..... DECOT ONE (OBSTACLE) (RNAV) 365

SAN MARTIN, CA

SAN MARTIN(E16)

TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 32 366

SANTA ROSA, CA

CHARLES M SCHULZ-SONOMA COUNTY(STS)

TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
LAHSO ..... O
HOT SPOT ..... P
IAPS ..... ILS OR LOC/DME RWY 32 367
RNAV (GPS) RWY 02 368
RNAV (GPS) RWY 14 369
RNAV (GPS) RWY 32 370
VOR/DME RWY 14 371
AIRPORT DIAGRAM 372
DPS ..... CHARLIE FIVE 373
FREES NINE 374
SANTA ROSA EIGHT 375

SISKIYOU COUNTY

---SEE MONTAGUE, CA

SOUTH LAKE TAHOE, CA

LAKE TAHOE(TVL)

TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 18 376
LDA RWY 18 377
AIRPORT DIAGRAM 378
DPS ..... RICHY SIX 379

STOCKTON, CA

STOCKTON METROPOLITAN(SCK)

TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
IAPS ..... ILS OR LOC RWY 29R 380
ILS RWY 29R (SA CAT II) 381
RNAV (GPS) RWY 11L 382
RNAV (GPS) RWY 29R 383
AIRPORT DIAGRAM 384

SUSANVILLE, CA

SUSANVILLE MUNI(SVE)

TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 29 385
RNAV (GPS)-A 386
DPS ..... AMEDEE ONE (OBSTACLE) 387

TRACY, CA

TRACY MUNI(TCY)

TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 12 388
RNAV (GPS) RWY 26 389
RNAV (GPS) RWY 30 390
VOR RWY 26 391

SW-2, 30 JAN 2020 to 26 MAR 2020

INDEX OF TERMINAL CHARTS AND MINIMUMS

NAME PROC SECT PG

TRAVIS AFB(KSUU)
FAIRFIELD, CA
TAKEOFF MINIMUMS L
STARS ..... BMBER ONE (RNAV) Z10
OSVEE ONE (RNAV) Z22
PEBLL ONE (RNAV) Z24
SEATO FOUR Z31
SQUAW VALLEY THREE Z38
SUTHU ONE (RNAV) Z41
WEBGO ONE (RNAV) Z45
IAPS ..... ILS OR LOC RWY 03L 392
ILS OR LOC RWY 21L 393
ILS RWY 21L (CAT II) 394
RNAV (GPS) RWY 03L 395
RNAV (GPS) RWY 21L 396
RNAV (GPS) RWY 21R 397
TACAN RWY 03L 398
TACAN RWY 21L 399
TACAN RWY 21R 400
AIRPORT DIAGRAM 401
DPS ..... MENTO TWO 402
WAPEX ONE 403

TRUCKEE, CA
TRUCKEE-TAHOE(TRK)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
HOT SPOT ..... P
IAPS ..... RNAV (GPS) RWY 11 404
RNAV (GPS) Y RWY 20 405
RNAV (GPS) Z RWY 20 406
RNAV (GPS)-A 407
AIRPORT DIAGRAM 408
DPS ..... TRUCK FOUR (OBSTACLE) 409
TAHOE ONE (RNAV) 410

TULARE, CA
MEFFORD FIELD(TLR)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 13 411
VOR RWY 13 412

UKIAH, CA
UKIAH MUNI(UKI)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS)-B 413
LOC RWY 15 414
VOR-A 415
DPS ..... RONHU ONE (RNAV) 416
RYPAX ONE (RNAV) 417

UNIVERSITY
---SEE DAVIS, CA

VACAVILLE, CA
NUT TREE(VCB)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 20 418
VOR-A 419
DPS ..... SOKOY THREE 420

VISALIA, CA
VISALIA MUNI(VIS)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... ILS OR LOC RWY 30 421
RNAV (GPS) RWY 12 422
RNAV (GPS) RWY 30 423
VOR RWY 12 424

WATSONVILLE, CA
WATSONVILLE MUNI(WVI)
TAKEOFF MINIMUMS L
ALTERNATE MINIMUMS ..... M
IAPS ..... RNAV (GPS) RWY 02 425
LOC RWY 02 426
VOR-A 427
AIRPORT DIAGRAM 428
DPS ..... WATSONVILLE FOUR (OBSTACLE) 429
GARLK ONE (RNAV) 430

WATTS-WOODLAND
---SEE WOODLAND, CA

WEED, CA
WEED(O46)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 14 431
DPS ..... FOBRO ONE (OBSTACLE) (RNAV) 432

WESTOVER FIELD AMADOR COUNTY
---SEE JACKSON, CA

WILLITS, CA
ELLS FIELD-WILLITS MUNI(O28)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 16 433
RNAV (GPS) RWY 34 434
DPS ..... FLUEN TWO (OBSTACLE) (RNAV) 435
MENDOCINO ONE (OBSTACLE) (RNAV) 436

WILLOWS, CA
WILLOWS-GLENN COUNTY(WLW)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 34 437
VOR RWY 34 438

WOODLAND, CA
WATTS-WOODLAND(O41)
TAKEOFF MINIMUMS L
IAPS ..... RNAV (GPS) RWY 36 439
VOR/DME-A 440

YOLO COUNTY
---SEE DAVIS/WOODLAND/WINTERS, CA

YUBA COUNTY
---SEE MARYSVILLE, CA

SW-2, 30 JAN 2020 to 26 MAR 2020

IFR TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

Civil Airports and Selected Military Airports

ALL USERS: Airports that have Departure Procedures (DPs) designed specifically to assist pilots in avoiding obstacles during the climb to the minimum enroute altitude, and/or airports that have civil IFR takeoff minimums other than standard, are listed below. Takeoff Minimums and Departure Procedures apply to all runways unless otherwise specified. An entry may also be listed that contains only Takeoff Obstacle Notes. Altitudes, unless otherwise indicated, are minimum altitudes in MSL.

DPs specifically designed for obstacle avoidance are referred to as Obstacle Departure Procedures (ODPs) and are textually described below, or published separately as a graphic procedure. If the ODP is published as a graphic procedure, its name will be listed below, and it can be found in either this volume (civil), or the applicable military volume, as appropriate. Users will recognize graphic obstacle DPs by the term "(OBSTACLE)" included in the procedure title; e.g., TETON TWO (OBSTACLE). If not specifically assigned an ODP, SID, or radar vector as part of an IFR clearance, an ODP may be required to be flown for obstacle clearance, even though not specifically stated in the IFR clearance. When doing so in this manner, ATC should be informed when the ODP being used contains a specified route to be flown, restrictions before turning, and/or altitude restrictions.

Some ODPs, which are established solely for obstacle avoidance, require a climb in visual conditions to cross the airport, a fix, or a NAVAID in a specified direction, at or above a specified altitude. These procedures are called Visual Climb Over Airport (VCOA). To ensure safe and efficient operations, the pilot must verbally request approval from ATC to fly the VCOA when requesting their IFR clearance.

At some locations where an ODP has been established, a diverse vector area (DVA) may be created to allow radar vectors to be used in lieu of an ODP. DVA information will state that headings will be as assigned by ATC and climb gradients, when applicable, will be published immediately following the specified departure procedure.

Graphic DPs designed by ATC to standardize traffic flows, ensure aircraft separation and enhance capacity are referred to as "Standard Instrument Departures (SIDs)". SIDs also provide obstacle clearance and are published under the appropriate airport section. ATC clearance must be received prior to flying a SID.

CIVIL USERS NOTE: Title 14 Code of Federal Regulations Part 91 prescribes standard takeoff rules and establishes takeoff minimums for certain operators as follows: (1) For aircraft, other than helicopters, having two engines or less – one statute mile visibility. (2) For aircraft having more than two engines – one-half statute mile visibility. (3) For helicopters – one-half statute mile visibility. These standard minima apply in the absence of any different minima listed below.

Mmilitary users note: Civil (nonstandard) takeoff minima are published below. For military takeoff minima, refer to appropriate service directives.

SW-2, 30 JAN 2020 to 26 MAR 2020

NAME	TAKEOFF MINIMUMS

ALTURAS, CA

ALTURAS MUNI (AAT)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 08101 (FAA)

DEPARTURE PROCEDURE: Use BACHS DEPARTURE.

AMEDEE AAF (KAHC)

HERLONG, CA

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 20030

TAKEOFF MINIMUMS: **Rwy 9,** std. w/min. climb of 350' per NM to 9500, or 4100-3 for VCOA. **Rwy 27,** std. w/ min. climb of 390' per NM to 8500, or 4100-3 for VCOA.

DEPARTURE PROCEDURE: **Rwy 9**, climbing right turn on a heading between 086° CW to 266° from DER. **Rwy 27,** climbing left turn on a heading between 086° CW 266° from DER.

VCOA: **All runways,** obtain ATC approval for VCOA When requesting IFR clearance. Climb in visual Conditions to cross AMEDEE AAF at or above 8000 before proceeding on course.

ARCATA-EUREKA, CA

CALIFORNIA REDWOOD COAST—
HUMBOLDT COUNTY (ACV)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 8 17285 (FAA)

TAKEOFF MINIMUMS: **Rwy 1,** std. w/min. climb of 360' per NM to 500 or 1100-2½ for VCOA. **Rwy 14,** 400-2½ or std. w/min. climb of 382' per NM to 600.

DEPARTURE PROCEDURE: **Rwy 1, 32,** climbing left turn to intercept ACV R-250 to HOCUT INT and continue climb to MEA on V27. **Rwy 14, 19,** climbing right turn to intercept ACV R-250 to HOCUT INT and continue climb to MEA on V27.

VCOA: **Rwy 1,** obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross California Redwood Coast-Humboldt County airport westbound at or above 1200 to intercept ACV R-250 to HOCUT INT and continue climb to MEA on V27.

TAKEOFF OBSTACLE NOTES: **Rwy 1,** runway lights 10' from DER, 54' left and right of centerline, 1' AGL/209' MSL. Fence beginning 150' from DER, 397' right of centerline, up to 9' AGL/217' MSL. Tree, fence, pole beginning 222' from DER, 158' right of centerline, up to 260' MSL. Tree 276' from DER, 491' left of centerline, 245' MSL. Trees beginning 310' from DER, 198' left of centerline, up to 248' MSL. Tree 383' from DER, 408' right of centerline, 316' MSL. Trees beginning 385' from DER, 0' left of centerline, up to 179' AGL/325' MSL. Trees beginning 423' from DER, 11' left of centerline, up to 118' AGL/260' MSL. Trees beginning 583' from DER, 6' left of centerline, up to 178 AGL/278' MSL. Trees beginning 1922' from DER, 179' right of centerline, up to 344' MSL. Trees beginning 2291' from DER, 266' right of centerline, up to 124 AGL/356' MSL. Tree 3390' from DER, 164' left of centerline, 150' AGL/335' MSL. Trees beginning 3400' from DER, 108' left of centerline, up to 175' AGL/357' MSL. Trees beginning 3478' from DER, 12' left of centerline, up to 187' AGL/364' MSL. Tree 3602' from DER, 725' right of centerline, 358' MSL. Trees beginning 3603' from DER, 1' right of centerline, up to 177' AGL/365' MSL. Trees beginning 3714' from DER, 34' left of centerline, up to 192' AGL/369' MSL. Trees beginning 3722' from DER, 51' left of centerline, up to 197' AGL/372' MSL. Trees beginning 3763' from DER, 1' left of centerline, up to 202' AGL/375' MSL. Tree 4016' from DER, 567' right of centerline, 367' MSL. Trees beginning 4017' from DER, 67' right of centerline, up to 197' AGL/373' MSL. Trees beginning 6044' from DER, 852' left of centerline, up to 163' AGL/379' MSL. Tree 1.1 NM from DER, 48' right of centerline, 385' MSL. Trees beginning 1.2 NM from DER, 1220' right of centerline, up to 416' MSL. Trees beginning 1.7 NM from DER, 2648' right of centerline, up to 602' MSL. Tree 1.8 NM from DER, 3460' right of centerline, 605' MSL.

ARCATA-EUREKA, CA (CON'T)

CALIFORNIA REDWOOD COAST—
HUMBOLDT COUNTY (ACV) (CON'T)

Rwy 14, runway lights 9' from DER, 54' left and right of centerline, 1' AGL/223' MSL. Tree 621' from DER, 591' left of centerline, 256' MSL. Tree, antenna, pole, beginning 733' from DER, 378' left of centerline, up to 262' MSL. Tree 1086' from DER, 716' right of centerline, 277' MSL. Trees, beginning 1110' from DER, 717' right of centerline, up to 290' MSL. Tree 1701' from DER, 860' left of centerline, 283' MSL. Trees beginning 1843' from DER, 875' left of centerline, up to 307' MSL. Trees, beginning 2568' from DER, 801' left of centerline, up to 321' MSL. Trees beginning 3085' from DER, 565' left of centerline, up to 326' MSL. Tree 3807' from DER, 1202' left of centerline, 374' MSL. Trees, beginning 3827' from DER, 794' left of centerline, up to 392' MSL. Trees, beginning 4152' from DER, 813' left of centerline, up to 420' MSL. Trees, beginning 4514' from DER, 1245' left of centerline, up to 443' MSL. Trees, beginning 4707' from DER, 880' left of centerline, up to 446' MSL. Trees, beginning 5176' from DER, 1028' left of centerline, up to 447' MSL. Trees, beginning 5712' from DER, 1337' left of centerline, up to 467' MSL. Trees, beginning 1.1 NM from DER, 1618' left of centerline, up to 515' MSL. Trees, beginning 1.2 NM from DER, 1929' left of centerline, up to 565' MSL. Tree 1.7 NM from DER, 3238' left of centerline, 568' MSL. Trees beginning 1.8 NM from DER, 1864' left of centerline, up to 588' MSL. **Rwy 19,** runway lights 9' from DER, 55' left and right of centerline, 189' MSL. Vegetation 15' from DER, 270' right of centerline, 191' MSL. Tree 776' from DER, 696' right of centerline, 77' AGL/215' MSL. **Rwy 32,** fence, beginning 91' from DER, 476' right of centerline, up to 196' MSL. Fence 132' from DER, 221' left of centerline, 8' AGL/188' MSL. Tree, fence, bush beginning 183' from DER, 202' left of centerline, up to 195' MSL. Fence, beginning 268' from DER, 176' right of centerline, up to 13' AGL/197' MSL. Obs light DME, NAVAID, beginning 580' from DER, 258' right of centerline, up to 29' AGL/203' MSL. Tree 1022' from DER, 624' right of centerline, 256' MSL. Trees, beginning 1036' from DER, 448' right of centerline, up to 267' MSL.

ATWATER, CA

CASTLE (MER)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1A 11349 (FAA)

TAKEOFF MINIMUMS: **Rwy 13,** std. w/ min. climb of 250' per NM to 2500 or 2200-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 13,** climb heading 126° to 2500 before turning left. For climb in visual conditions, cross Castle Airport at or above 2200 before proceeding on course. **Rwy 31,** climb heading 306° to 1100 before turning right.

TAKEOFF OBSTACLE NOTES: **Rwy 13,** tree 2539' from DER, 1005' right of centerline, 89' AGL/261' MSL. **Rwy 31,** tree 1274' from DER, 829' left of centerline, 20' AGL/224' MSL. Trees beginning 2909' from DER, 542' right of centerline, 65' AGL/269' MSL.

AUBURN, CA

AUBURN MUNI (AUN)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1A 11349 (FAA)

TAKEOFF MINIMUMS: **Rwy 7,** 300-1 w/ min. climb of 387' per NM to 2500, or 1100-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 7,** climbing left turn to 5000 heading 310°, and MYV VOR/DME R-083 to MYV VOR/DME, then via MYV VOR/DME R-263 to YUBBA INT before proceeding on course, or for climb in visual conditions: cross Auburn Muni airport at or above 2500, continue climb to 5000 via heading 275° and MYV VOR/DME R-094 to MYV VOR/DME, then via MYV VOR/DME R-263 to YUBBA INT before proceeding on course. **Rwy 25,** climbing right turn to 5000 via heading 310° and MYV VOR/DME R-083 to MYV VOR/DME, then via MYV VOR/DME R-263 to YUBBA INT before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 7,** trees beginning 1117' from DER, 504' right of centerline, up to 40' AGL/1708' MSL. Pole 1365' from DER, 600' right of centerline, 59' AGL/1679' MSL. Tree 3791' from DER, 700' right of centerline, 40' AGL/1639' MSL. **Rwy 25,** tree 37' from DER, 479' left of centerline, 40' AGL/1528' MSL. Tree 86' from DER, 461' right of centerline, 40' AGL/1532' MSL. Fence 301' from DER, 244' right of centerline, 8' AGL/1508' MSL. Trees beginning 660' from DER, 249' right of centerline, up to 40' AGL/1559' MSL.

BEALE AFB (KBAB)

MARYSVILLE, CA

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2, 14149

DEPARTURE PROCEDURE: **Rwy 15,** Climb on a heading between 100° CW to 325° from DER. **Rwy 33,** Climb on a heading between 146° CW to 344° from DER.

TAKEOFF OBSTACLE NOTES: **Rwy 33,** terrain 118' MSL, 62' from DER, 500' right of centerline. Terrain 118' MSL, 3' from DER, 517' right of centerline. Aircraft tail 16' GL/134' MSL, 39' from DER, 533' right of centerline. ircraft tail 16' AGL/134' MSL, 129' from DER, 525' right of centerline.

BECKWOURTH, CA

NERVINO (O02)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG-A 13290 (FAA)

TAKEOFF MINIMUMS: **Rwys 8, 26,** 3500-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 8, 26,** for climb in visual conditions: cross Nervino Airport at or above 8300 before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 8,** road 58' from DER, 469' right of centerline, 15' AGL/4920' MSL. Pole 310' from DER, 522' right of centerline, 49' AGL/4925' MSL. Pole 528' from DER, 522' right of centerline, 39' AGL/4924' MSL. Tree 1.47 NM from DER, 727' right of centerline, 100' AGL/5193' MSL. Tree 1.9 NM from DER, 2534' right of centerline, 100' AGL/5499' MSL. Bush 2.03 NM from DER, 2126' right of centerline, 4' AGL/5406' MSL. **Rwy 26,** tree 5856' from DER, 1984' right of centerline, 100' AGL/5339' MSL. Tree 1.25 NM from DER, 2439' right of centerline, 100' AGL/5420' MSL. Tree 2.07 NM from DER, 3302' left of centerline, 100' AGL/5570' MSL.

BISHOP, CA

BISHOP (BIH)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 4A 18088 (FAA)

TAKEOFF MINIMUMS: **Rwy 8, 12, 17,** 9000-3 for VCOA. **Rwy 26,** std. w/ min. climb of 280' per NM to 10400', or 9000-3 for VCOA. **Rwys 30, 35,** std. w/ min. climb of 285' per NM to 10500', or 9000-3 for VCOA.

DEPARTURE PROCEDURE: **Rwys 26, 30,** climbing right turn on heading 360, thence… **Rwy 35,** climbing left turn on heading 290, thence…

…all aircraft intercept BIH R-322 to NIKOL INT/BIH 38.46 DME. Aircraft departing NIKOL on V244 westbound cross NIKOL at or above 13100; aircraft departing NIKOL on V381 southeast bound cross NIKOL at or above 13000; aircraft departing NIKOL on T298 westbound or T259 westbound cross NIKOL at or above 12200; all other aircraft cross NIKOL at or above 11000.

VCOA: **All runways,** obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Bishop airport at or above 13000' before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 26,** trees and bushes beginning 69' from DER, 150' right of centerline, up to 4197' MSL. Trees beginning 925' from DER, 32' left of centerline, up to 4167' MSL. **Rwy 35,** trees beginning 238' from DER, 31' left of centerline, up to 4146' MSL. Trees beginning 215' from DER, 146' right of centerline, up to 4146' MSL.

BYRON, CA

BYRON (C83)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 17229 (FAA)

TAKEOFF MINIMUMS: **Rwy 23,** NA - obstacles. **Rwy 30,** 200-1⅛ or std. with a min. climb of 245' per NM to 300, or alternatively, with standard takeoff minimums and normal 200' per NM climb gradient, takeoff must occur no later than 1900' prior to DER.

DEPARTURE PROCEDURE: **Rwy 5,** climbing left turn heading 010°, thence... **Rwy 12,** climbing left turn heading 360°, thence… **Rwy 30,** climbing right turn heading 065°, thence…

…on LIN VOR/DME R-227 to LIN VOR/DME before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 5,** bush 17' from DER, 67' right of centerline, 6' AGL/52' MSL. **Rwy 12,** multiple trees and bush beginning 240' from DER, 286' right of centerline, up to 39' AGL/76' MSL. **Rwy 30,** multiple poles, building, and terrain beginning 66' from DER, 228' left of centerline, up to 65' AGL/225' MSL. Multiple poles beginning 949' from DER, 28' right of centerline, up to 42' AGL/103' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

CHICO, CA

CHICO MUNI (CIC)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 6A 13346 (FAA)

DEPARTURE PROCEDURE: **Rwy 13L/R,** climbing right turn to intercept CIC R-205, thence ... **Rwy 31L/R**, climbing left turn heading 140° to intercept CIC R-205. Thence ... ...all aircraft climb via CIC R-205 to JINGO INT. Aircraft departing JINGO INT 030° CW 345° climb on course. All others climb in JINGO INT holding pattern (hold SE, right turns, 320° inbound) to depart JINGO INT at or above 3800.

TAKEOFF OBSTACLE NOTES: **Rwy 13L,** terrain 298' from DER, 534' left of centerline, 216' MSL. Pole 957' from DER, 735' left of centerline, 35' AGL/232' MSL. Trees beginning 948' from DER, 559' left of centerline, up to 51' AGL/241' MSL. **Rwy 13R,** plane on tarmac 582' from DER, 647' left of centerline, up to 40' AGL/255' MSL. **Rwy 31L,** plane on tarmac 570' from DER, 647' right of centerline, up to 40' AGL/279' MSL. Tower 611' from DER, 349' right of centerline, 35' AGL/267' MSL. **Rwy 31R,** trees beginning 1124' from DER, right and left of centerline, up to 60' AGL/282' MSL.

CLOVERDALE, CA

CLOVERDALE MUNI (O60)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 19087 (FAA)

TAKEOFF MINIMUMS: **Rwy 32,** NA - obstacles. **Rwy 14,** 700-3 w/ min. climb of 390' per NM to 1200 or standard w/ min. climb of 744' per NM to 1000, or 3600-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 14,** climb direct STS VOR/DME, thence . . . or climb in visual conditions to cross Cloverdale Muni airport at or above 3700 before proceeding on course .

... Climb in STS VOR/DME holding pattern, hold NW, right turn, 140° inbound, to cross STS VOR/DME at or above MEA/MCA for direction of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 14,** trees beginning 19' from DER, 23' right of centerline, up to 100' AGL/404' MSL. Trees beginning 1.6 NM from DER, 491' right of centerline, up to 100' AGL/959' MSL. Trees beginning 258' from DER, on centerline, up to 100' AGL/296' MSL. Trees beginning 21' from DER, 7' left of centerline, up to 100' AGL/442' MSL. Trees beginning 1.7 NM from DER, 34' left of centerline, up to 100' AGL/679' MSL. Buildings 1524' from DER, 110' right of centerline, up to 427' MSL. Buildings 4605' from DER, 532' left of centerline, up to 408' MSL.

COLUMBIA, CA

COLUMBIA (O22)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 20030 (FAA)

TAKEOFF MINIMUMS: **Rwys 11, 29,** NA - Environmental. **Rwy 35,** NA - ATC.

DEPARTURE PROCEDURE: **Rwy 17**, use FICHU RNAV DEPARTURE.

TAKEOFF OBSTACLE NOTES: **Rwy 17,** bush 31' from DER, 196' right of centerline, 2083' MSL. Tree 148' from DER, 387' right of centerline, 2108' MSL. Trees beginning 180' from DER, 287' left of centerline, up to 2126' MSL. Tree 262' from DER, 527' right of centerline, 2163' MSL. Trees beginning 354' from DER, 240' left of centerline, up to 2127' MSL. Tree, rd (n), pole, grd, bush beginning 414' from DER, 46' right of centerline, up to 2188' MSL. Tree 456' from DER, 325' left of centerline, 2130' MSL. Trees beginning 492' from DER, 109' left of centerline, up to 2133' MSL. Trees beginning 725' from DER, 26' left of centerline, up to 2171' MSL. Trees beginning 1260' from DER, 56' left of centerline, up to 2181' MSL. Tree 1527' from DER, 893' right of centerline, 2205' MSL. Tree 1619' from DER, 860' right of centerline, 2220' MSL. Trees beginning 1664' from DER, 896' right of centerline, up to 2238' MSL. Tree 2152' from DER, 982' left of centerline, 2212' MSL. Tree 2195' from DER, 988' left of centerline, 2262' MSL. Tree 2195' from DER, 987' left of centerline, 2273' MSL. Tree, tower beginning 5842' from DER, 410' left of centerline, up to 2339' MSL. Tree 5936' from DER, 557' left of centerline, 2239' MSL.

COLUSA, CA

COLUSA COUNTY (O08)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG-A 16315 (FAA)

TAKEOFF MINIMUMS: **Rwy 31,** 300-1 or std. w/min. climb of 310' per NM to 400.

DEPARTURE PROCEDURE: **Rwy 31,** climbing left turn direct ILA VORTAC before proceeding on course. **Rwy 13**, climbing right turn direct ILA VORTAC before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 13**, fence 1' from DER, 234 right of centerline, 49' MSL. Tree 138' from DER, 346' left of centerline, 77' MSL. Bldg 255' from DER, 496' right of centerline, 62' MSL. Trees beginning 543' from DER, 146' right of centerline, up to 85' MSL. Bldg 1476' from DER, 428' left of centerline, 61' AGL/107' MSL. **Rwy 13**, tower 1396' from DER, 92' right of centerline, 55' AGL/105' MSL. Tower 4958' from DER, 1806' right of centerline, 190' AGL/240' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

CONCORD, CA

BUCHANAN FIELD (CCR)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 3 17173 (FAA)

TAKEOFF MINIMUMS: **Rwys 1L/R,** standard with minimum climb of 330' per NM to 1000 or 3700-3 for VCOA. Rwy 14L/R, standard with minimum climb of 420' per NM to 2700 or 3700-3 FOR VCOA. **Rwys 19L/R,** standard with minimum climb of 490' per NM to 3900 or 3700-3 for VCOA. **Rwys 32L/R,** standard with minimum climb of 330' per NM to 1000 or 3700-3 for VCOA.

DEPARTURE PROCEDURE: **Rwy 1L/R, 14L/R, 19L/R,** climbing left turn direct CCR VOR/DME, thence... Rwy 32L/R, climbing right turn direct CCR VOR/DME, thence... ...aircraft departing on CCR VOR/DME R-150 clockwise R-110, climb on course. **All others,** climb in CCR VOR/DME holding pattern (hold N, left turns, 191° inbound) to cross CCR VOR/DME at or above 3400 before proceeding on course.

VCOA: **All Rwys,** obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Buchanon Field airport at or above 3600 before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 1L,** fence 116' from DER, 1' right of centerline, 29' MSL. Building 639' from DER, 381' right of centerline, 25' AGL/48' MSL. Vegetation 675' from DER, 96' left of centerline, 38' MSL. Tree and poles beginning 1261' from DER, 19' right of centerline, up to 78' MSL. Flagpole 1520' from DER, 753' left of centerline, 71' MSL. Tree, camera, and general utility beginning 1860' from DER, 48' right of centerline, up to 98' MSL. Pole 1906' from DER, 120' left of centerline, 51' AGL/72' MSL. Sign 1996' from DER, 812' left of centerline, 78' MSL. Tree 2392' from DER, 8' left of centerline, 83' MSL. **Rwy 1R,** pole 1551' from DER, 97' right of centerline, 43' AGL/67' MSL. Pole 1864' from DER, 357' right of centerline, 96' MSL. Tree 1927' from DER, 222' right of centerline, 131' MSL. Tree 2110' from DER, 981' right of centerline, 133' MSL. **Rwy 14L,** vehicles on road and fences beginning 82' from DER, 29' left of centerline, up to 40' MSL. Building and trees beginning 731' from DER, 191' left of centerline, up to 51' MSL. Trees and buildings beginning 840' from DER, 93' left of centerline, up to 77' MSL. Trees, poles, and buildings beginning 942' from DER, 13' left of centerline, up to 102' MSL. Trees, buildings, and poles beginning 1116' from DER, 10' right of centerline, up to 40' AGL/71' MSL. Tree 1465' from DER, 112' right of centerline, 73' MSL. Trees beginning 1496' from DER, 121' right of centerline, up to 84' MSL. Trees beginning 1648' from DER, 62' right of centerline, up to 91' MSL. Trees and building beginning 1750' from DER, 30' left of centerline, up to 105' MSL. Tree 2570' from DER, 93' right of centerline, 92' MSL. Buildings beginning 5413' from DER, 99' left of centerline, up to 177' MSL. Building 5456' from DER, 138' left of centerline, 146' AGL/179' MSL. **Rwy 14R,** windsock 411' from DER, 451' right of centerline, 31' AGL/51' MSL. Control tower 1140' from DER, 315' right of centerline, 61' AGL/84' MSL. Electrical system, tree, pole, and antenna beginning 1140' from DER, 167' right of centerline, up to 98' MSL. Tree 2744' from DER, 886' left of centerline, 102' MSL. Building 3149' from DER, 946' right of centerline, 92' AGL/125' MSL. Buildings beginning 3253' from DER, 846' right of centerline, up to 103' AGL/136' MSL. **Rwy 19L**, tree 2132' from DER, 376' left of centerline, 90' MSL. Tree 2257' from DER, 27' left of centerline, 97' MSL. Tree 2543' from DER, 384' right of centerline, 87' MSL. Tree 3111' from DER, 946' right of centerline, 106' MSL.

CONCORD, CA (CON'T)

BUCHANAN FIELD (CON'T)

Rwy 19R, terrain 43' from DER, 397' left of centerline, 25' MSL. Fence 123' from DER, 502' left of centerline, 30' MSL. Tree 603' from DER, 489' right of centerline, 44' MSL. Pole and trees beginning 844' from DER, 152' right of centerline, up to 94' MSL. Tree 1023' from DER, 81' left of centerline, 59' MSL. Pole and trees beginning 1201' from DER, 568' left of centerline, up to 77' MSL. Building and trees beginning 1275' from DER, 114' left of centerline, up to 97' MSL. Tree 2129' from DER, 447' right of centerline, 106' MSL. Tree 2755' from DER, 216' left of centerline, 108' MSL. **Rwy 32L,** building 7' from DER, 321' left of centerline, 18' AGL/35' MSL. Vehicles on road and hangar beginning 259' from DER, 300' left of centerline, up to 37' MSL. Vehicles on road beginning 560' from DER, 3' right of centerline, up to 34' MSL. Vehicles on road 627' from DER, 609' left of centerline, 38' MSL. Vehicles on road beginning 631' from DER, 63' left of centerline, up to 38' MSL. Building 633' from DER, 253' right of centerline, 17' AGL/35' MSL. Vehicles on road 699' from DER, 8' right of centerline, 38' MSL. Vehicles on road beginning 715' from DER, 37' right of centerline, up to 39' MSL. Vehicles on road beginning 720' from DER, 2' left of centerline, up to 39' MSL. Vehicles on road beginning 730' from DER, 137' right of centerline, up to 40' MSL. Vehicles on road beginning 751' from DER, 216' right of centerline, up to 41' MSL. Vehicles on road beginning 792' from DER, 493' right of centerline, up to 42' MSL. Vehicles on road beginning 798' from DER, on centerline, up to 42' MSL. Tree 824' from DER, 135' left of centerline, 40' MSL. Vehicles on road beginning 891' from DER, 488' right of centerline, up to 43' MSL. Vehicles on road 920' from DER, 642' right of centerline, 44' MSL. Transmission towers beginning 6014' from DER, 1332 'left of centerline, up to 173' MSL. Tank 1 NM from DER, 1927' right of centerline, 213' MSL. Chimney 1.4 NM from DER, 2458' right of centerline, 355' AGL/378' MSL. Refinery 1.6 NM from DER, 2934' right of centerline, 308' AGL/322' MSL. **Rwy 32R,** terrain 81' from DER, 481' right of centerline, 21' MSL. Vehicles on road 559' from DER, 3' right of centerline, 34' MSL. Vehicles on road 585' from DER, 496' left of centerline, 34' MSL. Building 632' from DER, 246' left of centerline, 35' MSL. Building 653' from DER, 236' right of centerline, 41' MSL. Flagpole, signs, and vehicles on road beginning 654' from DER, 55' right of centerline, up to 21' AGL/43' MSL. Vehicles on road beginning 677' from DER, 491' left of centerline, up to 38' MSL. Vehicles on road beginning 714' from DER, 374' left of centerline, up to 39' MSL. Vehicles on road beginning 730' from DER, 243' left of centerline, up to 40' MSL. Vehicles on road and trees beginning 750' from DER, 6' left of centerline, up to 41' MSL. Vehicles on road beginning 820' from DER, 285' right of centerline, up to 45' MSL. Vehicles on road beginning 824' from DER, 234' right of centerline, up to 47' MSL. Vehicles on road 828' from DER, 624' right of centerline, 48' MSL. Vehicles on road beginning 829' from DER, on centerline, up to 50' MSL. Vehicles on road beginning 867' from DER, 43' left of centerline, up to 42' MSL. Vehicles on road 899' from DER, 11' left of centerline, 43' MSL. Vehicles on road beginning 932' from DER, 269' right of centerline, up to 52' MSL. Agricultural equipment 2109' from DER, 600' right of centerline, 78' AGL/99' MSL. Pole 3700' from DER, 1431' right of centerline, up to 40' AGL/150' MSL. Pole 4067' from DER, 1531' right of centerline, 43' AGL/161' MSL. Tank 4527' from DER, 1675' right of centerline, 57' AGL/170' MSL. Transmission tower 6013' from DER, 1840' left of centerline, 173' MSL. Tank 1 NM from DER, 1423' right of centerline, 126' AGL/213' MSL. Chimney 1.4 NM from DER, 1954' right of centerline, 355' AGL/378' MSL. Refinery 1.6 NM from DER, 2429' right of centerline, 308' AGL/322' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

CRESCENT CITY, CA

JACK MC NAMARA FIELD (CEC)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2A 19003 (FAA)

TAKEOFF MINIMUMS: **Rwy 12,** 300-2¼ or std. w/min. climb of 254' per NM to 300, or alternatively, with std. takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later than 2200' prior to DER. **Rwy 18,** 300-1 or std. w/min. climb of 308' per NM to 400. **Rwy 36,** 300-1 or std. w/min. climb of 443' per NM to 300.

DEPARTURE PROCEDURE: **Rwys 12, 18,** climbing right turn, thence... **Rwys 30, 36,** climbing left turn, thence... ...Climb direct CEC VORTAC. Aircraft departing CEC R-144 CW R-350 climb on course. All others continue climb in CEC VORTAC holding pattern (hold south, left turn, 346° inbound) to cross CEC VORTAC at or above:

R-351 CW R-048, 2900;
R-049 CW R-113, 4300;
R-114 CW R-143, 2900.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** terrain 7' from DER, 6' right of centerline, 54' MSL. Terrain 9' from DER, 15' left of centerline, 54' MSL. NAVAID and tree beginning 12' from DER, 117' left of centerline, up to 4' AGL/57' MSL. Tree 798' from DER, 378' left of centerline, 149' MSL. Trees beginning 828' from DER, 437' left of centerline, up to 151' MSL. Tree 1078' from DER, 390' right of centerline, 101' MSL. Trees beginning 1162' from DER, 75' left of centerline, up to 163' MSL. Trees beginning 1185' from DER, 156' right of centerline, up to 123' MSL. Tree and pole beginning 1332' from DER, 215' right of centerline, up to 149' MSL. Trees beginning 1458' from DER, 2' left of centerline, up to 169' MSL. Tree and pole beginning 1526' from DER, 93' right of centerline, up to 150' MSL. Trees beginning 1914' from DER, 83' right of centerline, up to 152' MSL. Trees beginning 2058' from DER, 155' right of centerline, up to 156' MSL. Trees beginning 2353' from DER, 182' right of centerline, up to 159' MSL. Trees beginning 2549' from DER, 604' right of centerline, up to 173' MSL. Trees beginning 2656' from DER, 108' right of centerline, up to 175' MSL. Trees beginning 2986' from DER, 73' right of centerline, up to 189' MSL. Tree 5151' from DER, 211' right of centerline, 216' MSL. Tree 5184' from DER, 47' left of centerline, 195' MSL. Antenna 1.8 NM from DER, 2439' left of centerline, 320' AGL/333' MSL. **Rwy 18,** terrain 27' from DER, 12' left of centerline, 52' MSL. Structure 35' from DER, 113' right of centerline, 7' AGL/57' MSL. Structure 35' from DER, 116' left of centerline, 4' AGL/54' MSL. Trees beginning 183' from DER, 384' right of centerline, up to 59' MSL. Vehicles on road 319' from DER, 570' left of centerline, 60' MSL. Tree 412' from DER, 166' left of centerline, 64' MSL. Trees beginning 445' from DER, 188' left of centerline, up to 66' MSL. Trees beginning 543' from DER, 411' left of centerline, up to 68' MSL. Terrain 4897' from DER, 1653' right of centerline, 202' MSL. Terrain 4973' from DER, 1722' right of centerline, 242' MSL. **Rwy 30,** NAVAID and terrain beginning 4' from DER, 5' right of centerline, up to 1' AGL/58' MSL. Trees beginning 29' from DER, 374' right of centerline, up to 65' MSL. Tree 153' from DER, 332' left of centerline, 65' MSL. Tree 164' from DER, 439' left of centerline, 73' MSL. **Rwy 36,** terrain six' from DER, 317' left of centerline, 77' MSL. Tree 104' from DER, 467' right of centerline, 77' MSL. Tree 143' from DER, 201' left of centerline, 84' MSL. Tree and vegetation beginning 185' from DER, 92' right of centerline, up to 86' MSL. Tree and vegetation beginning 405' from DER, 197' right of centerline, up to 97' MSL. Tree 663' from DER, 30' left of centerline, 86' MSL. Tree 762' from DER, 97' left of centerline, 94' MSL. Tree 791' from DER, 155' left of centerline, 96' MSL.

CRESCENT CITY, CA (CON'T)

JACK MC NAMARA FIELD (CEC) (CON'T)

Rwy 36 (CON'T), tree 843' from DER, 227' left of centerline, 105' MSL. Trees beginning 981' from DER, 100' left of centerline, up to 117' MSL. Trees beginning 1081' from DER, 35' left of centerline, up to 135' MSL. Tree 1135' from DER, 226' right of centerline, 104' MSL. Tree 1273' from DER, 60' right of centerline, 111' MSL. Trees beginning 1352' from DER, 100' right of centerline, up to 112' MSL. Trees beginning 1550' from DER, 25' right of centerline, up to 129' MSL. Tree 1629' from DER, 425' left of centerline, 149' MSL. Trees beginning 1654' from DER, 473' left of centerline, up to 151' MSL. Trees beginning 1824' from DER, 192' left of centerline, up to 159' MSL. Trees beginning 1961' from DER, 78' left of centerline, up to 164' MSL. Trees beginning 2056' from DER, 978' right of centerline, up to 150' MSL. Tree 2322' from DER, 757' right of centerline, 155' MSL. Trees beginning 2322' from DER, 35' right of centerline, up to 176' MSL. Tree 2590' from DER, 908' right of centerline, 179' MSL. Tree 2591' from DER, 1044' right of centerline, 189' MSL. Trees beginning 2644' from DER, 367' right of centerline, up to 192' MSL. Trees beginning 2696' from DER, 70' right of centerline, up to 195' MSL. Trees beginning 2928' from DER, 135' left of centerline, up to 174' MSL. Trees beginning 2933' from DER, 37' right of centerline, up to 196' MSL. Trees beginning 3318' from DER, 75' left of centerline, up to 181' MSL. Trees beginning 3587' from DER, 132' left of centerline, up to 182' MSL.

DAVIS, CA

UNIVERSITY (EDU)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 3 09127 (FAA)

DEPARTURE PROCEDURE: **Rwy 17,** climbing right turn via heading 200° and ILA R-151 to EMBER INT/ILA 48 DME before proceeding on course. **Rwy 35,** climbing left turn via heading 320° and ILA R-145 to ILA VORTAC before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 17,** trees beginning 1353' from DER, 31' right of centerline, up to 40' AGL/109' MSL. **Rwy 35,** tree 24' from DER, 433' left of centerline, 40' AGL/104' MSL. Vehicle 288' from DER, on centerline, 15' AGL/74' MSL.

DAVIS/WOODLAND/WINTERS, CA

YOLO COUNTY (DWA)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 18200 (FAA)

DEPARTURE PROCEDURE: **Rwy 16,** climb heading 164° to 2200 before turning right. **Rwy 34,** climb heading 344° to 1500 before turning left.

TAKEOFF OBSTACLE NOTES: **Rwy 16,** tree 462' from DER, 543' right of centerline, 139' MSL. Tree 733' from DER, 566' right of centerline, 147' MSL. Trees beginning 1182' from DER, 434' left of centerline, up to 195' MSL. Tree 2760' from DER, 217' right of centerline, 197' MSL. **Rwy 34,** tree 367' from DER, 574' right of centerline, 135' MSL. Tree, pole beginning 544' from DER, 473' left of centerline, up to 166' MSL. Tree 1010' from DER, 541' left of centerline, 206' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

EUREKA, CA

MURRAY FIELD (EKA)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 4 09239 (FAA)

TAKEOFF MINIMUMS: **Rwy 12,** std. w/ min. climb of 465' per NM to 1800 or 3800-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 12** climbing right turn heading 265° to intercept V27. For climb in visual conditions: cross Eureka airport at or above 3700 before proceeding on course. **Rwy 30,** climbing left turn heading 265° to intercept V27.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** bush 50' from DER, 82' left of centerline, 6' AGL/16' MSL. Multiple trees beginning 1.5 NM from DER, 2993' left of centerline. Multiple trees beginning 1.6 NM from DER, 2318' right of centerline. **Rwy 30,** multiple trees, beginning 443' from DER, 389' right of centerline, up to 93' AGL/103' MSL. Tree 664' from DER, 587' left of centerline, 46' AGL/56' MSL. Pole 753' from DER, 155' right of centerline 27' AGL/37' MSL. Railroad 786' from DER, 4' left of centerline 23' AGL/31' MSL. Road beginning 602' from DER, 4' left of centerline up to 15' AGL/23' MSL. Bush 566' from DER, 69' left of centerline, 8' AGL/18' MSL.

FIREBAUGH, CA

FIREBAUGH (F34)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 12264 (FAA)

DEPARTURE PROCEDURE: **Rwy 12,** climbing right turn heading 134° to intercept the PXN VORTAC R-061 to MENDO INT. Aircraft departing MENDO INT heading 230° CW 150°, climb on course. All others, climb in MENDO INT holding pattern (hold NE, right turns, 241° inbound) to cross MENDO INT at or above 3000 before proceeding on course. **Rwy 30,** climbing left turn heading 180° to intercept PXN VORTAC R-061 to PXN VORTAC, continue climb in PXN VORTAC holding pattern (SW, right turns, 049° inbound) to cross PXN VORTAC at or above airway MEA/MCA for route of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 30,** poles beginning 921' from DER, 525' left of centerline, up to 65' AGL/203' MSL. Elevator 1941' from DER, 739' right of centerline, 97' AGL/242' MSL.

FORTUNA, CA

ROHNERVILLE (FOT)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 3 86296 (FAA)

TAKEOFF MINIMUMS: **Rwy 11,** NA.

DEPARTURE PROCEDURE: Climb direct FOT VORTAC. Continue climb in holding pattern (hold N, right turns, 161° inbound) to cross FOT VORTAC at or above 3000.

FRESNO, CA

FRESNO CHANDLER EXECUTIVE (FCH)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 3 19283 (FAA)

DEPARTURE PROCEDURE: **Rwy 12,** climb on a heading between 101° CW to 290° from DER. **Rwy 30,** climb on a heading between 111° CW to 338° from DER.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** sign 9' from DER, 125' left of centerline, 3' AGL/282' MSL. Pole, traverse way, fence, vegetation, trees beginning 32' from DER, 125' right of centerline, up to 20' AGL/300' MSL. Tree 94' from DER, 310' right of centerline, 317' MSL. Trees, traverse way, vegetation, fence beginning 95' from DER, 60' right of centerline, up to 323 ' MSL. Trees, poles, traverse ways, fence, transmission line, building beginning 154' from DER, right of centerline, up to 326' MSL. Vegetation, fence beginning 250' from DER, 14' left of centerline, up to 292' MSL. Trees, vegetation, traverse way beginning 344' from DER, 14' left of centerline, up to 294' MSL. Traverse way, tree beginning 390' from DER, 10' left of centerline, up to 296' MSL. Pole, trees, vegetation, traverse way beginning 408' from DER, 9' left of centerline, up to 31' AGL/311' MSL. Trees, poles, transmission line, building beginning 476' from DER, 93' right of centerline, up to 341' MSL. Trees, traverse ways, vegetation beginning 499' from DER, 47' left of centerline, up to 323 ' MSL. Trees, poles, traverse way, transmission line, building beginning 615' from DER, 36' left of centerline, up to 332 ' MSL. Trees, poles, buildings beginning 630' from DER, 4' right of centerline, up to 346' MSL. Trees beginning 904' from DER, 15' left of centerline, up to 340' MSL. Trees, poles beginning 934' from DER, 38' left of centerline, up to 346' MSL. Trees, pole beginning 966' from DER, 7' right of centerline, up to 347' MSL. Poles, tree beginning 1093' from DER, 263' left of centerline, up to 63' AGL/348' MSL. Trees, poles beginning 1118' from DER, 12' left of centerline, up to 349' MSL. Trees, poles beginning 1133' from DER, 2' right of centerline, up to 355' MSL. Trees, poles beginning 1349' from DER, 13' left of centerline, up to 363' MSL. Trees, pole beginning 1640' from DER, 88' left of centerline, up to 372' MSL. Trees beginning 1756' from DER, 57' left of centerline, up to 375' MSL. Trees beginning 1816 ' from DER, 31' right of centerline, up to 376' MSL. Tree 3089' from DER, 146' left of centerline, 377' MSL. Tree 3792 ' from DER, 172' left of centerline, 378' MSL. Trees beginning 3938' from DER, 356' left of centerline, up to 391' MSL. **Rwy 30,** traverse way 7' from DER, 341' right of centerline, 294' MSL. Sign 21' from DER, 120' left of centerline, 2' AGL/279' MSL. Pole, traverse way beginning 72' from DER, 374' left of centerline, up to 28' AGL/305' MSL. Tree, fences, traverse way beginning 114' from DER, 122' right of centerline, up to 296' MSL. Pole 140' from DER, 427' left of centerline, 38' AGL/315' MSL. Trees, vegetation, traverse way, poles beginning 174' from DER, 43' left of centerline, up to 326' MSL. Electrical system, traverse way beginning 377' from DER, 7' right of centerline, up to 19' AGL/297' MSL. Tree 1412' from DER, 799' left of centerline, 358' MSL. Poles beginning 1419' from DER, 158' right of centerline, up to 41' AGL/320' MSL. Tree 1539' from DER, 844' left of centerline, 389' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

FRESNO, CA (CON'T)

FRESNO YOSEMITE INTL (FAT)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 9 19283(FAA)

TAKEOFF MINIMUMS: **Rwys 11L, 11R, 29L, 29R,** std. w/ min. climb of 250' per NM to 5000 or 5800 - 3 for VCOA.

DEPARTURE PROCEDURE: **Rwys 11L/R,** climb heading 112° to 2500,then climbing left turn heading 040° to intercept FRA VORTAC R-150 to FRA VORTAC. Cross FRA VORTAC at or above 6000, thence... **Rwys 29L/R,** climb heading 292° to 2500, then climbing right turn heading 350° to intercept FRA VORTAC R-230. Cross FRA VORTAC at or above 6000, thence...

...continue climb in FRA VORTAC holding pattern (hold south, left turn, 350° inbound) to cross FRA VORTAC at or above MEA/ MCA for route of flight.

VCOA: **ALL RUNWAYS**, obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Fresno Yosemite Intl airport at or above 6000, then on FRA R -180 to FRA VORTAC before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 11L,** lighting beginning 109' from DER, on centerline, up to 4' AGL/336' MSL. Pole 648' from DER, 542' left of centerline, 16' AGL/349' MSL. Electrical system 1223' from DER, 662' right of centerline, 30' AGL/363' MSL. Pole 1229' from DER, 664' right of centerline, 33' AGL/365' MSL. Tree, pole beginning 1414' from DER, 668' right of centerline, up to 377' MSL. Sign, transmission line beginning 1694' from DER, 862' right of centerline, up to 51' AGL/383' MSL. **Rwy 11R,** lighting 10' from DER, 55' right of centerline, 1' AGL/331' MSL. General utility 159' from DER, 433' left of centerline, 3' AGL/334' MSL. Pole 329' from DER, 280' left of centerline, 21' AGL/349' MSL. Tower 664' from DER, 274' left of centerline, 34' AGL/362' MSL. Pole 1205' from DER, 569' right of centerline, 54' AGL/382' MSL. Pole 1458' from DER, 393' right of centerline, 54' AGL/384' MSL. Pole 1598' from DER, 294' right of centerline, 55' AGL/385' MSL. Electrical system, pole beginning 1598' from DER, 262' right of centerline, up to 57' AGL/386' MSL. Tree 2648' from DER, 442' right of centerline, 398' MSL. **Rwy 29L** lighting 9' from DER, 55' left of centerline, 2' AGL/331' MSL. Lighting 10' from DER, 54' right of centerline, 1' AGL/331' MSL. Transmission line, pole beginning 997' from DER, 620' left of centerline, up to 55' AGL/385' MSL. Tree, transmission line beginning 1132' from DER, 189' left of centerline, up to 396' MSL. Trees beginning 1457' from DER, 172' left of centerline, up to 429' MSL. Trees beginning 1668' from DER, 2' right of centerline, up to 378' MSL. Tree 1905' from DER, 359' right of centerline, 380' MSL. **Rwy 29R,** lighting 9' from DER, 54' right of centerline, 2' AGL/334' MSL. Pole 994' from DER, 601' right of centerline, 29' AGL/364' MSL. Pole beginning 1019' from DER, 548' right of centerline, up to 30' AGL/365' MSL. Trees beginning 2315' from DER, 847' left of centerline, up to 395' MSL.

GRASS VALLEY, CA

NEVADA COUNTY (GOO)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1A 18088 (FAA)

TAKEOFF MINIMUMS: **Rwy 7,** NA.

DEPARTURE PROCEDURE: **Rwy 25,** climb via MYV R-058 to 6000 then continue climb on course.

TAKEOFF OBSTACLE NOTES: **Rwy 25,** multiple trees and bushes beginning 40' from DER, 78' right of centerline, up to 3087' MSL. Trees beginning 68' from DER, 312' left of centerline, up to 3137' MSL. Trees beginning 593' from DER, 149' right of centerline, up to 3088' MSL. Tree 648' from DER, 176' right of centerline, 3093' MSL. Trees beginning 698' from DER, 175' right of centerline, up to 3094' MSL. Tree 748' from DER, 138' right of centerline, 3096' MSL. Tree 773' from DER, 167' right of centerline, 3102' MSL.

GROVELAND, CA

PINE MOUNTAIN LAKE (E45)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 16315 (FAA)

TAKEOFF MINIMUMS: **Rwy 9,** 600-2¾ or std. w/min. climb of 400' per NM to 4000.

DEPARTURE PROCEDURE: **Rwy 9,** turn right. **Rwy 27,** turn left. **All aircraft** climb direct LIN VOR/DME. Cross LIN VOR/DME at or above 5000.

HALF MOON BAY, CA

HALF MOON BAY (HAF)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 16259 (FAA)

TAKEOFF MINIMUMS: **Rwy 12,** 2600-2 or std. with a min. climb of 306' per NM to 3400. **Rwy 30,** NA.

DEPARTURE PROCEDURE: **Rwy 12,** climb runway heading to 3000, then climb direct OSI VOR/DME, to cross OSI VOR/DME at or above 3500 before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** tree 2556' from DER, 212' left of centerline, 90' AGL/104' MSL.

DIVERSE VECTOR AREA (RADAR VECTORS)

ORIG 14289 (FAA)

Rwy 12, heading as assigned by ATC.

HANFORD, CA

HANFORD MUNI (HJO)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1A 16259 (FAA)

DEPARTURE PROCEDURE: **Rwy 14,** climbing left turn heading 050° to intercept V-23. **Rwy 32,** climbing right turn heading 050° to intercept V-23.

TAKEOFF OBSTACLE NOTES: **Rwy 14:** fence 9' from DER, 298' left of centerline, 244' MSL. Catenary 1293' from DER,1293' left of centerline, 39' AGL/287' MSL. Poles beginning 1679' from DER, crossing centerline, up to 52' AGL/296' MSL. Trees beginning 2224' from DER, 391' left of centerline up to 313' MSL. **Rwy 32:** fence 168' from DER, 9' left of centerline, 245' MSL. Pole 588' from DER, 588' left of centerline, 25' AGL/278' MSL. Sign 614' from DER, 151' right of centerline, 9' AGL/261' MSL. Trees and poles beginning 592' from DER, 3' left of centerline, up to 300' MSL. Poles beginning 1127' from DER, 222' right of centerline, up to 40' AGL/293' MSL. Tree 2159' from DER, 434' right of centerline, 299' MSL.

HAYWARD, CA

HAYWARD EXECUTIVE (HWD)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 11013 (FAA)

DEPARTURE PROCEDURE: **Rwys 10L, 10R,** Climbing right turn direct OSI VORTAC. **Rwys 28L, 28R,** Climbing left turn direct OSI VORTAC.

TAKEOFF OBSTACLE NOTES: **Rwy 10L,** hangars, trees and buildings beginning 625' from DER, 67' left of centerline, up to 100' AGL/155' MSL. Trees beginning 2050' from DER, 1' right of centerline, up to 60' AGL/107' MSL. **Rwy 10R,** trees, poles, and buildings beginning 21' from DER, 61' left of centerline, up to 100' AGL/155' MSL. Windsock, blast fence, trees, buildings and pole beginning 23' from DER, 38' right of centerline, up to 74' AGL/119' MSL. **Rwy 28L,** trees beginning 899' from DER, 141' left of centerline, up to 93' AGL/108' MSL. Antennas, road, and trees beginning 108' from DER, 68' right of centerline, up to 87' AGL/102' MSL. **Rwy 28R,** antenna and trees beginning 728' from DER, 28' left of centerline, up to 87' AGL/102' MSL. Trees beginning 391' from DER, 4' right of centerline, up to 95' AGL/125' MSL.

HAYWARD EXECUTIVE (HWD)

DIVERSE VECTOR AREA (RADAR VECTORS)

AMDT 1 16007 (FAA)

Rwy 10L/R, Heading as assigned by ATC. **Rwy 28L/R,** Heading as assigned by ATC; requires minimum climb of 310' per NM to 4600.

HOLLISTER, CA

HOLLISTER MUNI (CVH)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 08157 (FAA)

TAKEOFF MINIMUMS: **Rwy 6,** NA-obstacles. **Rwy 24,** NA-ATC. **Rwy 13,** std. w/ min. climb of 391' per NM to 3500, or 3100-3 for climb in visual conditions. **Rwy 31,** std. w/ min climb of 209' per NM to 2300, or 3100-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 13,** climbing right turn to heading 332° and via SJC R-121 direct SJC VOR/DME to 6000 before proceeding on course or for climb in visual conditions: cross Hollister Muni Airport at or above 3100 MSL before proceeding on course. **Rwy 31,** climb heading 307° and via SJC R-121 direct SJC VOR/DME to 6000 before proceeding on course or for climb in visual conditions: cross Hollister Muni Airport at or above 3100 MSL before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 13,** terrain beginning 992' from DER, 348' left of centerline, up to 289' MSL. Terrain beginning 2467' from DER, 154' right of centerline, up to 309' MSL, trees beginning 1277' from departure end of runway, 348' left of centerline, up to 309' MSL, trees beginning 2467' from DER, 153' right of centerline, up to 270' MSL. **Rwy 31,** terrain beginning 76' from DER, 392' left of centerline, up to 247' MSL. Terrain beginning 14' from DER, 179' right of centerline, up to 231' MSL.

JACKSON, CA

WESTOVER FIELD AMADOR COUNTY (JAQ)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 16315 (FAA)

DEPARTURE PROCEDURE: **Rwy 1,** turn left. **Rwy 19,** turn right. **All aircraft** climb direct LIN VOR/DME, continue climb on course.

LAKEPORT, CA

LAMPSON FIELD (1O2)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 10098 (FAA)

TAKEOFF MINIMUMS: **Rwy 10,** std. with a min. climb of 400' per NM to 4500, do not exceed 210 Knots until intercepting the ENI R-073 or 3200-3 for climb in visual conditions. **Rwy 28,** NA-Rapidly rising terrain.

DEPARTURE PROCEDURE: **Rwy 10,** climbing left turn to 6000 via heading 310° and ENI R-073 to ENI VORTAC before proceeding on course, or for climb in visual conditions: cross Lampson Field at or above 4400 MSL before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 10,** vehicle on road 347' from DER, 7' right of centerline, 15' AGL/1394' MSL. Trees beginning 280' from DER, 201' left of centerline, up to 100' AGL/1479' MSL. Trees beginning 494' from DER, 219' right of centerline, up to 100' AGL/1479' MSL.

LEMOORE NAS (REEVES FIELD) (KNLC)

LEMOORE, CA

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

07270

Rwy 14L, Cross DER at or above 15' AGL/235' MSL.
Rwy 14R, Cross DER at or above 15' AGL/245' MSL.
Rwy 32L, Cross DER at or above 15' AGL/ 234' MSL, Departure headings 142° CW 283°, minimum military climb 220 ft/NM to 6400, minimum civil climb 220 ft/NM to 6600.
Rwy 32R, Cross DER at or above 15' AGL/239' MSL, Departure headings 142° CW 281° minimum military climb 220 ft/NM to 6400, minimum civil climb 220 ft/NM to 6600.

LINCOLN, CA

LINCOLN RGNL/KARL HARDER FIELD (LHM)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 3 95201 (FAA)

DEPARTURE PROCEDURE: **Rwy 15,** climbing right turn. **Rwy 33,** climbing left turn. **All aircraft** climb direct MYV VOR/DME, then climb on course.

DIVERSE VECTOR AREA (RADAR VECTORS)

ORIG 15036 (FAA)

Rwys 15,33, headings as assigned by ATC.

LITTLE RIVER, CA

LITTLE RIVER (LLR)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG 10154 (FAA)

DEPARTURE PROCEDURE: Use LITTLE RIVER DEPARTURE.

LIVERMORE, CA

LIVERMORE MUNI (LVK)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 4 17173 (FAA)

DEPARTURE PROCEDURE: Use LIVERMORE DEPARTURE.

DIVERSE VECTOR AREA (RADAR VECTORS)

ORIG 15092 (FAA)

Rwys 7L, 7R, 25L, 25R, heading as assigned by ATC; requires minimum climb of 375' per NM to 5000.

LODI, CA

LODI (1O3)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2A 16315 (FAA)

TAKEOFF MINIMUMS: **Rwys 12, 30,** NA-Environmental.

DEPARTURE PROCEDURE: **Rwy 8,** climb heading 076° to 600 then climbing right turn on LIN R-290 to LIN VOR/DME, thence… **Rwy 26,** climb heading 256° to 800 climbing right turn on heading 080° to intercept LIN R-290 to LIN VOR/DME, thence… ...continue climb in hold (hold Southeast, right turns, 326° inbound) to MCA or MEA for route of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 8,** hangars, buildings, and vehicles on roadways beginning at DER, left and right of centerline, up to 25' AGL/84' MSL. Power lines beginning at 4.9 NM from DER, left and right of centerline, up to 160' AGL/220' MSL. **Rwy 26,** vehicles on roadway beginning 7' from DER, 265' right of centerline, up to 15' AGL/69' MSL. Trees beginning 15' from DER, left and right of centerline, up to 100' AGL/154' MSL. Power lines beginning at 4.6 NM from DER, left and right of centerline, up to 160' AGL/220' MSL.

LOS BANOS, CA

LOS BANOS MUNI (LSN)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 09351 (FAA)

DEPARTURE PROCEDURE: **Rwy 14,** climb on a heading between 318° CW to 151° from DER, or minimum climb of 320' per NM to 5100 for all other courses. **Rwy 32,** climb on a heading between 260° CW to 137° from DER, or minimum climb of 273' per NM to 5200 for all other courses.

TAKEOFF OBSTACLE NOTES: **Rwy 14,** multiple trees, poles, buildings beginning 3' from DER, 24' left of centerline, up to 73' AGL/194' MSL. Multiple trees, poles, buildings beginning 20' from DER, 21' right of centerline, up to 85' AGL/206' MSL. **Rwy 32,** multiple trees beginning 220' from DER, 453' right of centerline, up to 40' AGL/160' MSL. Multiple poles, beginning 1120' from DER, 173' left of centerline, up to 60' AGL/181' MSL.

MADERA, CA

MADERA MUNI (MAE)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 5 19283 (FAA)

TAKEOFF MINIMUMS: **Rwys 8, 26,** NA – environmental. **Rwy 12,** std. w/min. climb of 250' per NM to 2000.

DEPARTURE PROCEDURE: **Rwy 12,** climbing left turn heading 080° to intercept V-230. **Rwy 30,** climbing right turn heading 110° to intercept V-230.

MAMMOTH LAKES, CA

MAMMOTH YOSEMITE (MMH)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 15064 (FAA)

DEPARTURE PROCEDURE: Use NIKOL DEPARTURE.

MARINA, CA

MARINA MUNI (OAR)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 10042 (FAA)

TAKEOFF MINIMUMS: **Rwy 11,** std. with a min. climb of 307' per NM to 4500, or 2000-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 11,** climb heading 108° and SNS VORTAC R-252 to SNS VORTAC, thence..., or for climb in visual conditions: cross Marina Muni Airport at or above 2100, then proceed on SNS VORTAC R-261 to SNS VORTAC, thence... **Rwy 29,** climb via heading 288° to 1200', then climbing right turn direct SNS VORTAC, thence...

All aircraft continue climb in SNS holding pattern (West, left turns, 084° inbound) to cross SNS VORTAC at or above MEA/MCA for direction of flight before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 11,** windsock 32' from DER, 386' left of centerline, 8' AGL/148' MSL. **Rwy 29,** bush 158' from DER, 272' right of centerline, 10' AGL/142' MSL.

MARIPOSA, CA

MARIPOSA-YOSEMITE (MPI)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG 05020 (FAA)

TAKEOFF MINIMUMS: **Rwy 8,** N/A-Obstacles

DEPARTURE PROCEDURE: **Rwy 26,** climb via heading 265° to 3000, then climbing left turn to 7000 direct FRA VORTAC before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 26,** tree 10' from DER, 313' left of centerline, 100' AGL/2265' MSL. Tree 1146' from DER, 303' left of centerline, 100' AGL/2298' MSL.

MARYSVILLE, CA

YUBA COUNTY (MYV)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1A 13178 (FAA)

DEPARTURE PROCEDURE: **All runways,** climb direct ILA VORTAC.

TAKEOFF OBSTACLE NOTES: **Rwy 5**, tree 750' from DER, 239' right of centerline, 44' AGL/109' MSL. Tower 986' from DER, 258' left of centerline, 46' AGL/108' MSL. Tree 1737' from DER, 191' left of centerline, 70' AGL/134' MSL. Tree 2792' from DER, 607' left of centerline, 81' AGL/145' MSL. **Rwy 23**, railroad 822' from DER, 1' right of centerline, 23' AGL/85' MSL. Building 903' from DER, 387' right of centerline, 29' AGL/89' MSL. **Rwy 32**, pole 1040' from DER, 717' left of centerline, 32' AGL/94' MSL. Tree 2487' from DER, 586' left of centerline, 75' AGL/134' MSL. Tree 3135' from DER, 672' right of centerline, 93' AGL/157' MSL.

MERCED, CA

MERCED RGNL/MACREADY FIELD (MCE)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 5B 15344 (FAA)

DEPARTURE PROCEDURE: **Rwy 12,** climbing right turn to 3000 via heading 330° and MOD R-120 to MOD. **Rwy 30,** climb to 3000 via heading 300° and MOD R-120 to MOD.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** tree 1321' from DER, 785' left of centerline, 50' AGL/190' MSL. **Rwy 30,** bush 183' from DER, 490' right of centerline, 20' AGL/161' MSL. Bush 486' from DER, 604' left of centerline, 20' AGL/170' MSL. Tree 2457' from DER, 263' left of centerline, 50' AGL/220' MSL.

MODESTO, CA

MODESTO CITY-COUNTY HARRY SHAM FIELD (MOD)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 5A 13010 (FAA)

DEPARTURE PROCEDURE: **Rwys 28L, 28R,** climb on a heading between 256° CW to 109° from DER, or minimum climb of 230' per NM to 5000 for all other courses.

TAKEOFF OBSTACLE NOTES: **Rwy 10R,** trees beginning 169' from DER, 37' right of centerline, up to 91' AGL/195' MSL. Sign 57' from DER, 211' right of centerline, 15' AGL/89' MSL. Sign 16' from DER, 135' left of centerline, 4' AGL/87' MSL. Trees beginning 823' from DER, 79' left of centerline, up to 89' AGL/148' MSL. **Rwy 10L,** trees beginning 15' from DER, 65' right of centerline, up to 68' AGL/172' MSL. Vehicles on road beginning 178' from DER, 17' left of centerline, up to 15' AGL/96' MSL. Trees beginning 1413' from DER, 184' left of centerline, up to 63' AGL/126' MSL. **Rwy 28R,** vehicles on road beginning 47' from DER, 332' right of centerline, up to 15' AGL/114' MSL. Pole 754' from DER, 699' right of centerline, 34' AGL/133' MSL. Building 979' from DER, 697' right of centerline, 29' AGL/128' MSL. Tree 1390' from DER, 516' right of centerline, 37' AGL/136' MSL. Trees beginning 2077' from DER, 379' left of centerline, up to 79' AGL/173' MSL. **Rwy 28L,** multiple poles, trees, and buildings beginning 128' from DER, 34' left of centerline, up to 102' AGL/196' MSL. Vehicles on road beginning 448' from DER, 219' left of centerline, up to 15' AGL/112' MSL. Multiple poles and building beginning 1021' from DER, 350' right of centerline, up to 57' AGL/154' MSL. Trees beginning 1112' from DER, 20' right of centerline, up to 70' AGL/164' MSL.

MONTAGUE, CA

SISKIYOU COUNTY (SIY)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2A 14009 (FAA)

TAKEOFF MINIMUMS: **Rwy 17,** CAT A,B 2400-2 or std. with a min. climb of 350' per NM to 5500. CAT C,D 4100-2 or std. with a min. climb of 350' per NM to 7400. **Rwy 35,** 4000-2 or std. with a min. climb of 300' per NM to 7000.

DEPARTURE PROCEDURE: **Rwy 17,** climb direct MOG NDB. Continue climb to 10000 in MOG holding pattern (hold N, right turns, 176° inbound). **Rwy 35,** climb to 7000 via runway heading and 356° bearing from MOG NDB, then climbing right turn to 10000 direct MOG NDB. All aircraft depart MOG NDB at or above MEA for route of flight.

MONTEREY, CA

MONTEREY RGNL (MRY)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 8 15344 (FAA)

TAKEOFF MINIMUMS: **Rwy 10L,** std. w/min. climb of 449' per NM to 1800, or 1700-2½ for climb in visual conditions. **Rwy 10R,** std. w/min. climb of 459' per NM to 1800, or 1700-2½ for climb in visual conditions. **Rwy 28L,** std. w/ min. climb of 218' per NM to 3300, or 1700-2½ for climb in visual conditions. **Rwy 28R,** std. w/min. climb of 205' per NM to 3300, or 1700-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 10L,** climbing left turn heading 045.00 and SNS VORTAC R-225 to SNS VORTAC, climb in SNS holding pattern (hold W, LT, 084° inbound) to cross SNS VORTAC at or above MEA/MCA for route of flight. **Rwy 10R,** climbing left turn heading 045° and SNS VORTAC R-225 to SNS VORTAC, climb in SNS holding pattern (hold W, LT, 084° inbound) to cross SNS VORTAC at or above MEA/MCA for route of flight. **Rwy 28L,** climbing right turn heading 045° and SNS VORTAC R-260 to SNS VORTAC, climb in SNS holding pattern (hold W, LT, 084° inbound) to cross SNS VORTAC at or above MEA/MCA for route of flight. **Rwy 28R,** climbing right turn heading 045.00 and SNS VORTAC R-260 to SNS VORTAC, climb in SNS holding pattern (hold W, LT, 084° inbound) to cross SNS VORTAC at or above MEA/MCA for route of flight.

VCOA: Obtain ATC approval for climb in visual conditions when requesting IFR clearance. Climb in visual conditions to cross Monterey RGNL at or above 1800, then on SNS VORTAC R-231 to SNS VORTAC. Climb in SNS holding pattern (hold W, LT, 084° inbound) to cross SNS VORTAC at or above MEA/MCA for route of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 10L,** NAVAID 556' from DER, 217' right of centerline, 20' AGL/272' MSL. Bushes beginning 1.6 NM from DER, 1188' left of centerline up to 9' AGL/729' MSL. Trees beginning 1.7 NM from DER , 923' left of centerline up to 102' AGL/764' MSL. Trees beginning 1.6 NM from DER, 1993' right of centerline up to 90' AGL/923' MSL. Bushes beginning 1.9 NM from DER, 2497' right of centerline up to 9' AGL/781' MSL. Tower 2 NM from DER 3305' left of centerline, 27' AGL/767' MSL. **Rwy 10R,** ground 11' from DER, 358' left of centerline 258' MSL. Tree 230' from DER 388' left of centerline 21' AGL/265' MSL. NAVAID 240' from DER, 282' left of centerline, 20' AGL/272' MSL. Bushes beginning 1.5 NM from DER, 2381' left of centerline, up to 9' AGL/648' MSL. Trees beginning 1.7 NM from DER, 388' left of centerline up to 76' AGL/629' MSL. Bushes beginning 1.8 NM from DER, 2005' right of centerline up to 9' AGL/741' MSL. Trees beginning 1.5 NM from DER, 1749' right of centerline up to 90' AGL/843' MSL. **Rwy 28L,** terrain abeam DER, 198' left of centerline, up to 163' MSL. Trees beginning 797' from DER, 678' left of centerline, up to 83' AGL/228' MSL. Tree 1008' from DER, 616' left of centerline, 100' AGL/195' MSL. Pole 1128' from DER, 716' left of centerline, 54' AGL/195' MSL. Tree 1372' from DER, 755' left of centerline, 93' AGL/227' MSL.

DIVERSE VECTOR AREA (RADAR VECTORS)

AMDT 1 16175 (FAA)

Rwy 10L, heading as assigned by ATC; requires minimum climb of 360' per NM to 2900. **Rwy 10R,** heading as assigned by ATC; requires minimum climb of 370' per NM to 2800. **Rwy 28L,** heading as assigned by ATC; requires minimum climb of 310' per NM to 1100. **Rwy 28R,** heading as assigned by ATC; requires minimum climb of 250' per NM to 1100.

MOUNTAIN VIEW, CA

MOFFETT FEDERAL AFLD (NUQ)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 12292 (FAA)

TAKEOFF MINIMUMS: **Rwys 14L, 14R,** std. w/ min. climb of 550' per NM to 4000 or 1700-2½ for climb in visual conditions. **Rwys 32L, 32R,** std. w/ min. climb of 285' per NM to 3500 or 1700-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 14L,14R,** climbing right turn direct OSI VORTAC, thence…
or for climb in visual conditions cross Moffett Federal Airfield at or above 1600 then on OSI R-066 to OSI VORTAC, thence…
When executing VCOA notify ATC prior to departure.
Rwys 32L,32R, climb heading 322° to 700, then climbing left turn heading 230° until receiving OSI VORTAC, then direct OSI VORTAC, thence…
or for climb in visual conditions cross Moffett Federal Airfield at or above 1600 then on OSI R-066 to OSI VORTAC, thence…
When executing VCOA notify ATC prior to departure.
...continue climb in OSI VORTAC holding pattern (hold southeast, left turns, 321° inbound) to cross OSI VORTAC at or above MEA for route of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 32R,** light support structures abeam DER, 76' left and 76' right of centerline, up to 3' AGL/7' MSL. Vehicles on road beginning 5' from DER, 92' left of centerline, up to 15' AGL/20' MSL. Vehicles on road beginning 512' from DER, 158' right of centerline, up to 15' AGL/20' MSL. Fence 134' from DER, left and right of centerline, up to 8' AGL/12' MSL. **Rwy 32L,** light support structures abeam DER, 76' left and 76' right of centerline, up to 1' AGL/5' MSL. Navaid 449' from DER, 315' right of centerline, up to 17' AGL/21' MSL. Tree 1632' from DER, 934' left of centerline, up to 100' AGL/129' MSL. **Rwy 14L,** light support structure 13' from DER, 126' right of centerline, up to 4' AGL/34' MSL. Vehicles on road beginning 770' from DER, 547' right of centerline, 15' AGL/53' MSL. Rail car on railroad beginning 774' from DER, 261' right of centerline, up to 23' AGL/60' MSL. Trees beginning 1191' from DER, 71' right of centerline, up to 100' AGL/171' MSL. Trees beginning 1922' from DER, 109' left of centerline, up to 100' AGL/153' MSL. **Rwy 14R,** light support structures abeam DER, 77' right and 77' left of centerline, up to 3' AGL/37' MSL. Fence, 187' from DER, 488' right of centerline, up to 8' AGL/45' MSL. Vehicles on road beginning 207' from DER, 520' right of centerline, 15' AGL/55' MSL. Rail car on railroad beginning 955' from DER, 342' left of centerline, up to 23' AGL/60' MSL. Trees beginning 1066' from DER, 34' left of centerline, up to 100' AGL/153' MSL.

NAPA, CA

NAPA COUNTY (APC)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 4 10154 (FAA)

DEPARTURE PROCEDURE: Use NAPAA DEPARTURE.

NOVATO, CA

GNOSS FIELD (DVO)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 13122 (FAA)

TAKEOFF MINIMUMS: **Rwy 13,** 400-2¼ or std. w/ min. climb of 580' per NM to 500. **Rwy 31,** 600-2½ w/ min. climb of 285' per NM to 1500 or std. w/ min. climb of 679' per NM to 800 or 2000-2½ for climb in visual conditions...

DEPARTURE PROCEDURE: **Rwy 13,** climb heading 132° to 600 then turn left direct SGD VORTAC before proceeding on course. **Rwy 31,** climbing right turn direct SGD VORTAC before proceeding on course … For climb in visual conditions, cross Gnoss Field at or above 1900' MSL then proceed direct SGD VORTAC before proceeding on course. When executing VCOA, notify ATC prior to departure.

TAKEOFF OBSTACLE NOTES: **Rwy 13**, trees beginning 2633' from DER, 627' left of centerline, up to 50' AGL/346' MSL. Trees beginning 3630' from DER, 1274' right of centerline, up to 50' AGL/369' MSL. Power line 1.7 NM from DER, 1980' left of centerline, 121' AGL/360' MSL. **Rwy 31**, trees beginning 3237' from DER, 321' left of centerline, up to 50' AGL/569' MSL.

OAKDALE, CA

OAKDALE (O27)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 16315 (FAA)

DEPARTURE PROCEDURE: **Rwy 10,** climbing left turn via heading 020° and LIN VOR/DME R-124 to WRAPS INT/ LIN 16.66 DME. Climb in WRAPS holding pattern (Northwest, right turn, 124° inbound) to cross WRAPS INT at or above MEA for direction of flight. **Rwy 28,** climb via heading 276° and LIN VOR/DME R-146 to LIN VOR/DME to cross LIN VOR/DME at or above MEA for direction of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 10,** terrain beginning 388' from DER, up to 279' MSL. **Rwy 28,** power line 3447' from DER, 407' right of centerline, 115' AGL/329' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND, CA

METROPOLITAN OAKLAND INTL (OAK)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 7 13290 (FAA)

DEPARTURE PROCEDURE: **Rwys 10L, 10R, 12, 15, 30**, climbing right turn to intercept V107-301, thence …
Rwys 28L, 28R, climb heading 278° to intercept V107-301, thence …
Rwy 33, climbing left turn to intercept V107-301, thence...
… to cross COMMO INT at or above 4000, continue climb-in-hold (hold E, right turns, 288° inbound) to 4000 before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 10L,** building, hanger and road beginning 225' from DER, 554' left of centerline, up to 37' AGL/42' MSL. Trees beginning 1644' from DER, 309' left of centerline, up to 59' AGL/67' MSL. **Rwy 10R,** Runway lights 9' from DER, 26' left and right of centerline, 1' AGL/9' MSL. Sign 63' from DER, 251' left of centerline, 4' AGL/10' MSL. Signs, fence and poles beginning 361' from DER, 540' right of centerline up to 35' AGL/44' MSL. Signs and trees beginning 1160' from DER, 177' right of centerline, up to 36' AGL/50' MSL. **Rwy 12,** Runway end and ALS lights beginning 11' from DER, 9' left and right of centerline, 1' AGL/10' MSL. **Rwy 15,** ATCT 3613' from DER, 1017' left of centerline, 88' AGL/101' MSL. Obstruction light on WSK 813' from DER, 577' right of centerline, 24' AGL/27' MSL. **Rwy 28L,** rising terrain beginning 8' from DER, crossing centerline, up to 9' MSL. Multiple trees beginning 105' from DER, 35' left of centerline, up to 64' AGL/80' MSL. Traffic lights and poles beginning 895' from DER, 164' left of centerline, up to 29' AGL/37' MSL. Substation 1593' from DER, 871' left of centerline, 37' AGL/53' MSL. Fence 95' from DER, 410' left of centerline, 6' AGL/13' MSL. Multiple trees beginning 994' from DER, 55' right of centerline, up to 91' AGL/96' MSL. **Rwy 28R,** multiple trees beginning 1745' from DER, 23' left of centerline, up to 91' AGL/96' MSL. Multiple trees beginning 2053' from DER, 88' right of centerline, up to 109' AGL/111' MSL. **Rwy 30,** light pole 582' from DER, 483' left of centerline, 16' AGL/26' MSL. **Rwy 33,** multiple trees, buildings and poles beginning 256' from DER, 497' left of centerline, up to 41' AGL/45' MSL. Multiple trees, buildings, poles and towers beginning 762' from DER, 267' right of centerline, up to 39' AGL/51' MSL.

DIVERSE VECTOR AREA (RADAR VECTORS)

ORIG 14289 (FAA)

Rwy 10L, headings as assigned by ATC; requires minimum climb of 340' per NM to 2300. **Rwy 10R,** headings as assigned by ATC; requires minimum climb of 330' per NM to 2300. **Rwys 12, 15,** headings as assigned by ATC. **Rwys 28L, 28R, 30,** headings as assigned by ATC; requires minimum climb of 240' per NM to 2400. **Rwy 33,** headings as assigned by ATC; requires minimum climb of 210' per NM to 2400.

ORLAND, CA

HAIGH FIELD (O37)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 94286 (FAA)

DEPARTURE PROCEDURE: **Rwy 15,** climbing left turn. **Rwy 33,** climbing right turn. **All aircraft** climb via CIC R -238 to GONGS Int. Aircraft departing GONGS Int. 070° CW 240° or 290° CW 360° climb on course. All others climb in GONGS holding pattern (NE, right turns, 238° inbound) to depart GONGS Int at or above: 001° CW 069°, 3200; 241° CW 289°, 2300.

OROVILLE, CA

OROVILLE MUNI (OVE)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 4 17173 (FAA)

TAKEOFF MINIMUMS: **Rwy 2,** std. w/ min. climb of 280' per NM to 1500, or 1000-2½ for VCOA. **Rwy 31,** 300-1⅝ or std. w/ min. climb of 245' per NM to 600.

DEPARTURE PROCEDURE: **Rwy 2, 31,** climbing left turn to 5000 on heading 200° direct ILA VORTAC before proceeding on course. **Rwy 13, 20,** climbing right turn to 5000 on heading 210° direct ILA VORTAC before proceeding on course.

VCOA: Obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Oroville Municipal airport south-westbound at or above 1000, then direct ILA VORTAC before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 2,** ground 170' from DER, 475' right of centerline, 189' MSL. Ground 191' from DER, 489' right of centerline, 190' MSL. Tree 511' from DER, 600' left of centerline, 231' MSL. Tree 513' from DER, 603' left of centerline, 236' MSL. NAVAID 1143' from DER, 348' right of centerline, 215' MSL. Pole 1364' from DER, 740' right of centerline, 255' MSL. Poles beginning 1365' from DER, 537' right of centerline, up to 256' MSL. **Rwy 13,** poles beginning 128' from DER, 292' right of centerline, up to 29' AGL/203' MSL. Vertical structure 177' from DER, 493' left of centerline, 184' MSL. Vehicles on road 210' from DER, 515' left of centerline, 189' MSL. Tree 312' from DER, 554' left of centerline, 205' MSL. **Rwy 20,** vehicles on road 819' from DER, 376' left of centerline, 203' MSL. Poles beginning 902' from DER, 655' right of centerline, up to 36' AGL/217' MSL. **Rwy 31,** sign 32' from DER, 325' left of centerline, 195' MSL. Ground beginning 109' from DER, 410' right of centerline, up to 200' MSL. Trees beginning 641' from DER, 621' left of centerline, up to 244' MSL. Tree 1380' from DER, 466' left of centerline, 264' MSL. T-L tower 1.3 NM from DER, 1826' right of centerline, 144' AGL/444' MSL.

PALO ALTO, CA

PALO ALTO (PAO)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG-B 15288 (FAA)

DEPARTURE PROCEDURE: **Rwy 13**, turn left. **Rwy 31,** turn right. **All aircraft** climb direct SJC VOR/DME before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 13,** building with ship mast 1325' from DER, 450' left of centerline, 60' AGL/67' MSL.

PETALUMA, CA

PETALUMA MUNI (O69)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 14317 (FAA)

TAFEOFF PROCEDURES: **Rwy 11,** std. w/min. climb of 235' per NM to 1500. **Rwy 29,** 300-1¼ or std. w/min. climb of 276' per NM to 400.

DEPARTURE PROCEDURE: **Rwy 11,** climb heading 108° to 1500 then continue climb direct SGD VORTAC. **Rwy 29,** climb heading 289° to 1500 then climbing left turn to 3000 direct SGD VORTAC. All aircraft continue climb to MEA for route of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 11,** tree 1095' from DER, 779' right of centerline, 55' AGL/116' MSL. Sign 69' from DER, 141' right of centerline, 9' AGL/80' MSL. Vertical structure 8' from DER, 248' left of centerline, 10' AGL/81' MSL. Trees 172' from DER, beginning 399' left of centerline, up to 46' AGL/117' MSL. Trees 40' from DER, beginning 465' left of centerline, up to 40' AGL/111' MSL. **Rwy 29,** trees 1091' from DER, beginning 151' right of centerline, up to 91' AGL/172' MSL. Vertical structure 194' from DER, 248' right of centerline, up to 19' AGL/98' MSL. Trees 121' from DER, beginning 282' right of centerline, up to 51' AGL/132' MSL. Trees and buildings 88' from DER, beginning 292' left of centerline, up to 40' AGL/121' MSL. Trees 1363' from DER, 462' left of centerline, up to 96' AGL/177' MSL. Pole 1262' from DER, 90' left of centerline, 41' MSL/ 122' AGL. Poles 2508' from DER, beginning 87' left of centerline, up to 94' AGL/175' MSL.

PLACERVILLE, CA

PLACERVILLE (PVF)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 3 12320 (FAA)

TAKEOFF MINIMUMS: **Rwy 5,** NA-obstacles.

DEPARTURE PROCEDURE: **Rwy 23,** climb to 5000 on HNW R-226 then climbing right turn on HNW R-276 to HNW VOR/DME. Aircraft departing HNW VOR/DME R-180 CW R-303 climb on course; all others climb in HNW VOR/DME holding pattern (hold SW, right turns, 048° inbound) to cross HNW VOR/DME at or above MEA/MCA for direction of flight before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 23,** hangar 20' from DER, 340' right of centerline, 27' AGL/2586' MSL.

PORTERVILLE, CA

PORTERVILLE MUNI (PTV)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2A 18340 (FAA)

TAKEOFF MINIMUMS: **Rwy 12,** std. w/min. climb of 220' per NM to 600.

DEPARTURE PROCEDURE: **Rwy 12**, climbing right turn thence . . . **Rwy 30,** climbing left turn thence . . . ...climb direct TTE VOR/DME. Aircraft departing TTE VOR/DME R-146 CW R-330 climb on course. All other aircraft climb in TTE VOR/DME holding pattern (hold northwest, right turn, 143° inbound) to cross TTE R-331 CW R-060, 8600; R-061 CW R-145, 7000.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** tree 618' from DER, 241' right of centerline, 460' MSL. Trees beginning 776' from DER, 193' left of centerline, up to 467' MSL. Pole 906' from DER, 588' left of centerline, 43' AGL/491' MSL. **Rwy 30,** fence 176' from DER, 499' right of centerline, 6' AGL/436' MSL.

RED BLUFF, CA

RED BLUFF MUNI (RBL)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 4 11041 (FAA)

DEPARTURE PROCEDURE: **Rwy 15,** climb direct RBL VORTAC, thence... **Rwy 33,** climbing right turn direct RBL VORTAC, thence... ...continue climb in RBL holding pattern (S, right turns, 341° inbound) to cross RBL VORTAC at or above MEA for route of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 15,** WSK 5' from DER, 258' right of centerline, 18' AGL/361' MSL. Tree 2065' from DER, 879' left of centerline, 100' AGL/449' MSL. **Rwy 33,** trees beginning 468' from DER, 563' left of centerline, up to 54' AGL/387' MSL. Trees beginning 587' from DER, 493' right of centerline, up to 73' AGL/393' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

REDDING, CA

REDDING MUNI (RDD)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 5C 20030 (FAA)

DEPARTURE PROCEDURE: **Rwy 12,** climb on heading 126° and RBL R-344 to RBL VORTAC to 3000 before proceeding on course. **Rwy 16,** climbing left turn heading 114° and RBL R-344 to RBL VORTAC to 3000 before proceeding on course. **Rwys 30, 34,** climbing right turn heading 114° and RBL R-344 to RBL VORTAC to 3000 before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** trees beginning 45' from DER, 359' left of centerline, up to 23' AGL/515' MSL. Trees, fence, general utility, transmission line beginning 281' from DER, 314' left of centerline, up to 49' AGL/542' MSL. Transmission line 1920' from DER, 677' left of centerline, 60' AGL/543' MSL. Tree 3470' from DER, 541' left of centerline, 109' AGL/590' MSL. **Rwy 16,** tree 152' from DER, 463' right of centerline, 12' AGL/495' MSL. Tree 347' from DER, 584' right of centerline, 46' AGL/527' MSL. **Rwy 30,** terrain 27' from DER, 249' right of centerline, 502' MSL. Aircraft on taxiway, pole, and trees beginning 32' from DER, 68' right of centerline, up to 44' AGL/544' MSL. Aircraft on taxiway, pole, and building beginning 223' from DER, 13' left of centerline, up to 44' AGL/544' MSL. Tree 1410' from DER, 211' left of centerline, 44' AGL/545' MSL. Tree 1556' from DER, 417' right of centerline, 57' AGL/558' MSL. Building and trees beginning 1584' from DER, 267' right of centerline, up to 60' AGL/563' MSL. Tree 1588' from DER, 55' left of centerline, 50' AGL/553' MSL. Trees beginning 1672' from DER, 431' right of centerline, up to 69' AGL/572' MSL. Trees beginning 1793' from DER, 4' right of centerline, up to 74' AGL/576' MSL. Trees beginning 1794' from DER, 78' left of centerline, up to 60' AGL/561' MSL. Trees beginning 1882' from DER, 95' right of centerline, up to 74' AGL/577' MSL. Trees beginning 2093' from DER, 227' right of centerline, up to 82' AGL/583' MSL. Trees, building beginning 2340' from DER, 399' right of centerline, up to 99' AGL/600' MSL. Tree 2788' from DER, 984' left of centerline, 113' AGL/613' MSL. Tree 3256' from DER, 912' right of centerline, 94' AGL/601' MSL. **Rwy 34,** electrical system 37' from DER, 130' right of centerline, 2' AGL/506' MSL. Sign 38' from DER, 125' right of centerline, 4' AGL/508' MSL. Sign 39' from DER, 123' left of centerline, 4' AGL/508' MSL. Signs beginning 98' from DER, 252' left of centerline, up to 5' AGL/510' MSL. Tree 2322' from DER, 1015' left of centerline, 67' AGL/576' MSL. Tree 2386' from DER, 934' left of centerline, 74' AGL/583' MSL. Tree 2455' from DER, 1120' left of centerline, 83' AGL/593' MSL. Trees beginning 2662' from DER, 767' left of centerline, up to 83' AGL/594' MSL. Trees beginning 2817' from DER, 479' left of centerline, up to 86' AGL/596' MSL. Trees beginning 2906' from DER, 828' left of centerline, up to 87' AGL/598' MSL. Trees beginning 2967' from DER, 794' left of centerline, up to 89' AGL/600' MSL. Trees beginning 3137' from DER, 867' left of centerline, up to 96' AGL/608' MSL. Trees beginning 3188' from DER, 792' left of centerline, up to 103' AGL/615' MSL. Tower 3312' from DER, 1032' left of centerline, 108' AGL/622' MSL. Antenna 3312' from DER, 1031' left of centerline, 105' AGL/619' MSL.

REEDLEY, CA

REEDLEY MUNI (O32)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG 19003 (FAA)

DEPARTURE PROCEDURE: **Rwy 16,** climb on a heading between 132° CW to 323° from DER. **Rwy 34**, climb on a heading between 156° CW to 320° from DER.

TAKEOFF OBSTACLE NOTES: **Rwy 16,** vehicles on road, terrain, building and vegetation beginning 26' from DER, 309' left of centerline, up to 15' AGL/402' MSL. Tree 1551' from DER, 778' right of centerline, 431' MSL. Tree 1648' from DER, 893' left of centerline, 461' MSL. Tree 1737' from DER, 210' right of centerline, 434' MSL. Tree 2010' from DER, 189' left of centerline, 453' MSL. Trees beginning 2033' from DER, 615' left of centerline, up to 482' MSL. Tree 2894' from DER, 630' left of centerline, 483' MSL. **Rwy 34,** tree 116' from DER, 376' right of centerline, 403' MSL. Tree 166' from DER, 499' right of centerline, 406' MSL. Vehicles on road and tree beginning 289' from DER, 329' right of centerline, up to 407' MSL.

RIO VISTA, CA

RIO VISTA MUNI (O88)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 19339 (FAA)

DEPARTURE PROCEDURE: **Rwy 7,** climbing left turn direct SAC VORTAC. Continue climb in SAC VORTAC holding pattern (hold, south, right turn, 016° inbound) to cross SAC VORTAC at or above MEA for route of flight. **Rwy 15,** climb to 800 then climbing left turn direct SAC VORTAC. Continue climb in SAC VORTAC holding pattern (hold, south, right turn, 016° inbound) to cross SAC VORTAC at or above MEA for route of flight. **Rwy 25,** climbing right turn direct SAC VORTAC. Continue climb in SAC VORTAC holding pattern (hold, south, right turn, 016° inbound) to cross SAC VORTAC at or above MEA for route of flight. **Rwy 33,** climbing right turn direct SAC VORTAC. Continue climb in SAC VORTAC holding pattern (hold, south, right turn, 016° inbound) to cross SAC VORTAC at or above MEA for route of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 7,** lighting 10' from DER, 107' right of centerline, 2' AGL/24' MSL. Terrain 111' from DER, 491' left of centerline, 27' MSL. **Rwy 15,** pole 9' from DER, 19' left of centerline, 2' AGL/22' MSL. Terrain 42' from DER, 270' right of centerline, 23' MSL. Pole, vehicles on road, building beginning 112' from DER, 438' right of centerline, up to 33' AGL/55' MSL. Poles, vehicles on road beginning 292' from DER, 25' left of centerline, up to 52' MSL. Wind indicator, tree, vehicles on road, buildings, pole beginning 345' from DER, 1' right of centerline, up to 35' AGL/58' MSL. Pole 1462' from DER, 99' left of centerline, 33' AGL/60' MSL. **Rwy 25,** terrain, lighting beginning 0' from DER, 79' left of centerline, up to 26' MSL. Poles, vehicles on road, trees beginning 287' from DER, 186' left of centerline, up to 54' MSL. Tree 940' from DER, 201' left of centerline, 26' AGL/55' MSL. Trees beginning 957' from DER, 3' left of centerline, up to 27' AGL/56' MSL. Pole 1015' from DER, 308' right of centerline, 47' MSL. **Rwy 33,** lighting 10' from DER, 100' right of centerline, 3' AGL/24' MSL. Trees beginning 124' from DER, 252' right of centerline, up to 24' AGL/30' MSL. Pole 1601' from DER, 846' left of centerline, 43' AGL/66' MSL. Pole 1639' from DER, 891' left of centerline, 44' AGL/68' MSL. Trees, building beginning 1912' from DER, 792' left of centerline, up to 66' AGL/92' MSL

SW-2, 30 JAN 2020 to 26 MAR 2020

SACRAMENTO, CA

SACRAMENTO EXECUTIVE (SAC)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG-A 19171 (FAA)

TAKEOFF OBSTACLE NOTES: **Rwy 2,** multiple trees 1128' from DER, 108' left of centerline, up to 76' AGL/96' MSL. Antenna 1376' from DER, 663' left of centerline, 51' AGL/71' MSL. Trees 1858' from DER, 137' right of centerline, 73' AGL/93' MSL. **Rwy 12,** multiple trees 518' from DER, 26' left of centerline, up to 83' AGL/98' MSL. Light pole 507' from DER, 336' left of centerline, 37' AGL/52' MSL. Transmission pole 3971' from DER, 647' left of centerline, 130' AGL/154' MSL. Multiple trees 475' from DER, 476' right of centerline up to 97' AGL/112' MSL. Light poles 711' from DER, 241' right of centerline, 36' AGL/51' MSL. **Rwy 20,** multiple trees beginning 850' from DER, 626' left of centerline, up to 92' AGL/107' MSL. Multiple trees beginning 714' from DER, 515' right of centerline, up to 66' AGL/81' MSL. **Rwy 30,** obstruction light on hangers 460' from DER, 360' right of centerline, 25' AGL/43' MSL. Multiple trees beginning 631' from DER, 195' right of centerline, up to 56' AGL/74' MSL. Multiple trees beginning 1331' from DER, 247' left of centerline, up to 90'/110' MSL. Antenna on building 1543' from DER, 442' left of centerline, 47' AGL/67' MSL.

SACRAMENTO INTL (SMF)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 15008 (FAA)

DEPARTURE PROCEDURE: **Rwy 16L,** climb heading 164° to 700 before turning east.

TAKEOFF OBSTACLE NOTES: **Rwy 16L,** vehicles on road, 225' from DER, crossing runway centerline, 10' AGL/31' MSL. **Rwy 34L,** tree 3656' from DER, 1296' left of centerline, 98' AGL/123' MSL. **Rwy 34R,** pole 1786' from DER, 945' right of centerline, 46' AGL/73' MSL.

DIVERSE VECTOR AREA (RADAR VECTORS)

ORIG 16175 (FAA)

Rwy 16L, heading as assigned by ATC; requires minimum climb of 220' per NM to 700.

SACRAMENTO MATHER (MHR)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG 94006 (FAA)

DEPARTURE PROCEDURE: **Rwys 4L,4R,** climbing right turn direct SAC VORTAC. **Rwys 22L,22R** climb direct SAC VORTAC.

SALINAS, CA

SALINAS MUNI (SNS)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 4 11321 (FAA)

TAKEOFF MINIMUMS: **Rwy 8,** std. w/min climb of 243' per NM to 800 or 1800-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 8,** climbing right turn to intercept SNS VORTAC R-124 to 5500 before proceeding on course or for climb in visual conditions: cross Salinas Muni Airport at or above 1700 then intercept SNS VORTAC R-124 to 5500 before proceeding on course. **Rwy 13,** climbing left turn to intercept SNS VORTAC R-124 to 5500 before proceeding on course. **Rwy 26,** climbing right turn to intercept SNS VORTAC R-264 to 5000 before proceeding on course. **Rwy 31,** climbing left turn to intercept SNS VORTAC R-264 to 5000 before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 8,** trees beginning 1967' from DER, 900' left of centerline, up to 100' AGL/199' MSL. **Rwy 26,** tree, light pole and road beginning 109' from DER, 266' left of centerline, up to 38' AGL/98' MSL. Light pole and road beginning 137' from DER, 281' right of centerline, up to 40' AGL/100' MSL. Poles beginning 909' from DER, 232' right of centerline, up to 52' AGL/102' MSL. Antenna on building, tower and tree beginning 1645' from DER, 426' left of centerline, up to 116' AGL/176' MSL. Microwave tower and tree beginning 1909' from DER, 31' right of centerline, up to 85' AGL/145' MSL. **Rwy 31,** building, road, and trees beginning 170' from DER, 1' right of centerline, up to 79' AGL/159' MSL. Road and trees 205' from DER, 200' left of centerline, up to 63' AGL/133' MSL. Pole and trees beginning 1042' from DER, 5' left of centerline up to 102' AGL/172' MSL. Fence, poles and trees 1109' from DER, 202' right of centerline, up to 78' AGL/158' MSL.

SALINAS MUNI (SNS)

DIVERSE VECTOR AREA (RADAR VECTORS)

ORIG 15064 (FAA)

Rwys 8, 13, heading as assigned by ATC; requires minimum climb of 330' per NM to 5000. **Rwys 26, 31,** heading as assigned by ATC.

SAN ANDREAS, CA

CALAVERAS CO-MAURY RASMUSSEN FIELD (CPU)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 16315 (FAA)

TAKEOFF MINIMUMS: **Rwy 13,** 1800-5 or std. w/min. climb of 300' per NM to 3700.

DEPARTURE PROCEDURE: **Rwy 13,** climb runway heading to 3100, then climbing right turn via LIN R-085 to LIN VOR/DME. **Rwy 31,** climb via heading 311° to 3000, then climbing left turn via Linden (LIN) VOR/DME R-029 to LIN VOR/DME.

TAKEOFF OBSTACLE NOTES: **Rwy 13,** windsock 4' from DER, 129' right of centerline, 14' AGL/1341' MSL. Lights 4' from DER, 68' right of centerline, up to 2' AGL/1330' MSL. Bush 24' from DER, 140' right of centerline, 3' AGL/1331' MSL. Tree 43' from DER, 287' right of centerline, up to 8' AGL/ 1336' MSL. Bush 26' from DER, 96' left of centerline, up to 1' AGL/1329' MSL. **Rwy 31,** tree 19' from DER, 242' left of centerline, up to 30' AGL/1335' MSL. Trees 220' from DER, 375' right of centerline, up to 40' AGL/1345' MSL. Pole 667' from DER, 653' left of centerline, 23' AGL/1326' MSL. Trees 1010' from DER, 651' right of centerline, up to 46' AGL/1351' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

SAN CARLOS, CA

SAN CARLOS (SQL)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1A 18200 (FAA)

TAKEOFF MINIMUMS: **Rwy 30,** N/A- obstacles and ATC. **Rwy 12,** 300-1 ⅜ or std. w/min. climb of 240' per NM to 300.

DEPARTURE PROCEDURE: **Rwy 12,** climb heading 120° to intercept SJC VOR/DME R-281 to SJC VOR/DME before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** terrain 1' from DER, 149' left of centerline, 11' MSL. Dam beginning 117' from DER, 58' left of centerline, up to 3' AGL/12' MSL. Pole 716' from DER, 294' right of centerline, 38' MSL. Transmission line 1676' from DER, 735' right of centerline, 92' AGL/94' MSL. Transmission line 1.1 NM from DER, 2196' left of centerline, 200' AGL/208' MSL.

DIVERSE VECTOR AREA (RADAR VECTORS)

ORIG 16147 (FAA)

Rwy 12, headings as assigned by ATC; requires minimum climb of 470' per NM to 3400.

SAN FRANCISCO, CA

SAN FRANCISCO INTL (SFO)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 9 14205 (FAA)

TAKEOFF MINIMUMS: **Rwys 19L, 19R,** std. w/min. climb of 575' per NM to 2000. **Rwys 28L, 28R,** std. w/min. climb of 351' per NM to 1300.

DEPARTURE PROCEDURE: **Rwys 1L, 1R,** climb heading 014° to 2000, thence …

Rwys 10L, 10R, climbing left turn heading 053° to intercept SFO R-090 eastbound to 2300; thence …

Rwys 19L, 19R, climbing left turn heading 053° to intercept SFO R-090 eastbound to 2600, thence …

Rwys 28L, 28R, climb heading 284° to 2000, thence … … continue climb on course.

TAKEOFF OBSTACLE NOTES: **Rwy 1 L,** ships beginning 1646' from DER, right and left of centerline, up to 150' AGL/150' MSL. **Rwy 1R**, ships beginning 1173' from DER, right and left of centerline, up to 150' AGL/150' MSL. **Rwy 10L,** sign 62' from DER, 300' left of centerline, 4' AGL/15' MSL. Building and rod on building beginning 257' from DER, 560' left of centerline, up to 14' AGL/24' MSL. **Rwy 19L,** multiple poles beginning 548' from DER, 46' left of centerline, up to 20' AGL/480' MSL. Multiple poles and signs beginning 652' from DER, 337' right of centerline, up to 20' AGL/38' MSL. Multiple buildings, transmission towers, poles, trees, signs, electrical system beginning 937' from DER, 11' left of centerline, up to 100' AGL/127' MSL. Multiple buildings, transmission towers, poles, trees, signs, electrical system beginning 887' from DER, 61' right of centerline, up to 100' AGL/128' MSL. Multiple buildings 3831' from DER, 1138' left of centerline, up to 105' AGL/127' MSL. Multiple buildings and trees beginning 3831' from DER, 74' right of centerline up to 100' AGL/167' MSL. **Rwy 19R,** multiple poles, trees, electrical system beginning 454' from DER, 82' right of centerline, up to 40' AGL/60' MSL. Multiple transmission towers, trees beginning 918' from DER, 7' left of centerline, up to 80' AGL/96' MSL. Poles and electrical system 1188' from DER, 1' right of centerline, 44' AGL/50' MSL. Multiple transmission towers, trees beginning 1617' from DER, 16' right of centerline, up to 80' AGL/85' MSL. **Rwy 28L,** sign 19' from DER, 500' right of centerline, 5' AGL/9' MSL. Obstruction lights on DME beginning 277' from DER, 162' left of centerline, up to 16' AGL/26' MSL. Obstruction light on localizer beginning 219' from DER, on centerline, up to 10' AGL/17' MSL. Multiple poles, electrical system beginning 824' from DER, 300' left of centerline, up to 40' AGL/56' MSL.

SAN FRANCISCO, CA (CON'T)

SAN FRANCISCO INTL (SFO) (CON'T)

Rwy 28L (CON'T), multiple buildings, transmission towers, tank and pole beginning 1305' from DER, 370' left of centerline, up to 95' AGL/103' MSL. **Rwy 28R,** multiple signs, beginning 23' from DER, 140' right of centerline, up to 5' AGL/10' MSL. Terrain beginning 58' from DER, 146' right of centerline, up to 10' MSL. Sign, 63' from DER, 250' left of centerline 5' AGL/8' MSL. Terrain beginning 130' from DER, 235' left of centerline, up to 10' MSL. Antenna on building, obstruction light on DME, tree, beginning 556' from DER, 268' right of centerline, up to 35' AGL/43' MSL. Multiple poles beginning 918' from DER, 598' left of centerline, up to 22' AGL/35' MSL. Multiple buildings, trees beginning 1467' from DER, 683' right of centerline, up to 60' AGL/68' MSL. Multiple buildings, transmission towers, trees and electrical system beginning 1826' from DER, 123' left of centerline, up to 95' AGL/103' MSL.

DIVERSE VECTOR AREA (RADAR VECTORS)

AMDT 1 15232 (FAA)

Rwys 1L, 1R, headings as assigned by ATC; requires minimum climb of 420' per NM to 2600. **Rwys 10L, 10R,** headings as assigned by ATC.

SAN JOSE, CA

NORMAN Y MINETA SAN JOSE INTL (SJC)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 6C 16203 (FAA)

TAKEOFF MINIMUMS: **Rwy12 L/R,** 400-2½ or std. w/min. climb of 261' per NM to 500.

DEPARTURE PROCEDURE: **Rwy 12L/R,** climbing right turn to 2000 on Heading 318° and on OAK R-135 to OAK VOR/DME before proceeding on course. **Rwy 30L/R,** climb via heading 315° to 2000, then via OAK R-132 to OAK VOR/DME before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 12L,** fence 156' from DER, 57' left of centerline, 14' AGL/73' MSL. Ol on blast fence, 156' from DER, 57' left of centerline, 73' MSL. Pole 191' from DER, 81' left of centerline, 34' AGL/93' MSL. Trees beginning 286' from DER, 161' right of centerline, up to 107' MSL. T-L twr, pole beginning 466' from DER, 228' left of centerline, up to 46' AGL/105' MSL. Tree 1281' from DER, 529' left of centerline, 117' MSL. T-L twr 1731' from DER, 729' left of centerline, 86' AGL/156' MSL. Tree 1799' from DER, 273' left of centerline, 144' MSL. Tree 1887' from DER, 68' right of centerline, 124' MSL. T-L twr 3047' from DER, 543' left of centerline, 73' AGL/147' MSL. Building 1.2 NM from DER, 630' left of centerline, 170' AGL/250' MSL. Building 1.3 NM from DER, 1051' left of centerline, 265' MSL. Building 1.3 NM from DER, 445' left of centerline, 217' AGL/301' MSL. Building 1.3 NM from DER, 51' left of centerline, 228' AGL/309' MSL. Buildings beginning 1.3 NM from DER, 81' left of centerline, up to 312' MSL. Building 1.5 NM from DER, 975' left of centerline, 262' AGL/351' MSL. Building 1.5 NM from DER, 1591' left of centerline, 268' AGL/358' MSL. Buildings beginning 1.5 NM from DER, 82' left of centerline, up to 365' MSL. Buildings beginning 1.6 NM from DER, 280' right of centerline, up to 346' MSL. Buildings beginning 1.6 NM from DER, 350' right of centerline, up to 260' AGL/350' MSL. Building 1.6 NM from DER, 1977' left of centerline, 286' AGL/368' MSL. Buildings beginning 1.6 NM from DER, 640' left of centerline, up to 274' AGL/370' MSL. Building 1.9 NM from DER, 313' right of centerline, 284' AGL/373' MSL. Building 1.9 NM from DER, 282' right of centerline, 281' AGL/372' MSL. **CON'T**

SAN JOSE, CA (CON'T)

NORMAN Y MINETA SAN JOSE INTL (SJC) (CON'T)

Rwy 12R, ol on loc 10' from DER, on centerline, 68' MSL. Ol on blast fence 45' from DER, 115' right of centerline, 75' MSL. Fence 45' from DER, 115' right of centerline, 14' AGL/75' MSL. Tree 269' from DER, 149' right of centerline, 100' MSL. Trees, beginning 285' from DER, 193' left of centerline, up to 107' MSL. Rd 338' from DER, 2' right of centerline, 82' MSL. Tree, pole beginning 519 ' from DER, 279' right of centerline, up to 122' MSL. Trees beginning 1798' from DER, 631' left of centerline, up to 144' MSL. Poles beginning 1948' from DER, 688' right of centerline, up to 59' AGL/128 ' MSL. Tree 2604' from DER, 551' right of centerline, 133' MSL. T-L twr 3046' from DER, 1243' left of centerline, 73' AGL/147' MSL. Tree 3079' from DER, 873' right of centerline, 142' MSL. Building 1.3 NM from DER, 1145' left of centerline, 217' AGL/301' MSL. Building 1.3 NM from DER, 751' left of centerline, 228' AGL/309' MSL. Buildings beginning 1.3 NM from DER, 781' left of centerline, up to 312' MSL. Building 1.5 NM from DER, 1676' left of centerline, 262' AGL/351' MSL. Building 1.5 NM from DER, 2291' left of centerline, 268' AGL/358' MSL. Buildings beginning 1.5 NM from DER, 134' left of centerline, up to 365' MSL. Building 1.6 NM from DER, 2678' left of centerline, 286' AGL/368' MSL. Buildings beginning 1.6 NM from DER, 1340' left of centerline, up to 274' AGL/370' MSL. Building 1.6 NM from DER, 345' right of centerline, 320' MSL. Building 1.9 NM from DER, 386' left of centerline, 284' AGL/373' MSL. Building 1.9 NM from DER, 417' left of centerline, 281' AGL/372' MSL.

Rwy 30L, poles beginning 166' from DER, 494' left of centerline, up to 69' MSL. NAVAID 174' from DER, on centerline, 7' AGL/44' MSL. Fence 184' from DER, 369' right of centerline, 15' AGL/51' MSL. Tree 308' from DER, 424' left of centerline, 71' MSL. Tree, pole beginning 473' from DER, 118' right of centerline, up to 72' MSL. Poles beginning 711' from DER, 544' right of centerline, up to 75' MSL. NAVAID 782' from DER, 350' left of centerline, 47' AGL/83' MSL. Pole 1227' from DER, 607' left of centerline, 48' AGL/86' MSL. Pole 1315' from DER, 548' right of centerline, 49' AGL/80' MSL. Pole 1329' from DER, 743' left of centerline, 57' AGL/94' MSL. Tree 1852' from DER, 179' right of centerline, 85' MSL. Tree 2561' from DER, 738' right of centerline, 108' MSL. Trmsn twr, t-l twr, beginning 2616' from DER, 1130' left of centerline, up to 120' MSL. Pole 2806' from DER, 1215' left of centerline, 135' MSL. Pole 2897' from DER, 614' left of centerline, 113' MSL. Pole, t-l twr, beginning 4145' from DER, 1329' left of centerline, up to 152' MSL. **Rwy 30R**, pole 100' from DER, 449' right of centerline, 40' AGL/75' MSL. Fence 138' from DER 243' right of centerline, 13' AGL/47' MSL. Fence 184' from DER, 329' left of centerline, 15' AGL/51' MSL. Tree 411' from DER, 37' left of centerline, 70' MSL. Tree 473' from DER, 319' left of centerline, 72' MSL. Pole 526' from DER, 580' left of centerline, 26' AGL/61' MSL. Pole 657' from DER, 369' right of centerline, 53' AGL/84' MSL. Vehicle on rd beginning 688' from DER, on centerline, up to 68' MSL. Poles beginning 711' from DER, 57' left of centerline, up to 25' AGL/75' MSL. Pole 961' from DER, 133' right of centerline, 56' AGL/88' MSL. Pole 1315' from DER, 150' left of centerline, 49' AGL/80' MSL. Tree 1852' from DER, 519' left of centerline, 85' MSL. Tree 2561' from DER, 39' right of centerline, 108' MSL. Building 3424' from DER, 146' right of centerline, 96' AGL/124' MSL.

DIVERSE VECTOR AREA (RADAR VECTORS)
AMDT 1 16203(FAA)

Rwy 12L/12R, heading as assigned by ATC; requires minimum climb of 470' per NM to 5600. **Rwys 30L/30R,** heading as assigned by ATC; requires minimum climb of 490' per NM to 5600 and do not exceed 210 KTS until established on assigned heading.

SAN JOSE, CA (CON'T)

REID-HILLVIEW OF SANTA CLARA COUNTY (RHV)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

TAKEOFF MINIMUMS: **Rwys 13L, 13R,** NA - environmental.

DEPARTURE PROCEDURE: Use DECOT DEPARTURE.

SAN MARTIN, CA

SAN MARTIN (E16)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1A 15288 (FAA)

TAKEOFF MINIMUMS: **Rwy 14,** std. w/min. climb of 324' per NM to 2200 or 1700-2½ for climb in visual conditions. **Rwy 32,** std. w/min. climb of 324' per NM to 1600 or 1700-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 14, all aircraft**, climb to 2100 on heading 141°. Aircraft departing northwest on V485, climbing left turn heading 284° to intercept SJC R-121 (V485) to SJC VOR/DME and proceed on course; aircraft departing southeast on V485, climb on SJC R-121 and proceed on course. For climb in visual conditions: cross San Martin airport northwest bound at or above 1900, then climb on SJC R-121 to SJC VOR/DME. When executing VCOA, notify ATC prior to departure. **Rwy 32, all aircraft**, climb to 1600 on heading 321°. Aircraft departing northwest on V485, climbing left turn heading 270° to intercept SJC R-121 (V485) to SJC VOR/DME and proceed on course; aircraft departing southeast on V485, climbing left turn heading 120° to intercept SJC R-121 (V485) southeast bound to GILRO INT and proceed on course. For climb in visual conditions cross San Martin airport northwest bound at or above 1900, then climb on SJC R-121 to SJC VOR/DME. When executing VCOA, notify ATC prior to departure.

TAKEOFF OBSTACLE NOTES: **Rwy 14,** multiple trees, poles and vehicles on road beginning 25' from DER, 800' left of centerline, up to 100' AGL/359' MSL. **Rwy 32,** multiple trees, poles and vehicles on road beginning 17' from DER, 1521' left of centerline, up to 100' AGL/ 399' MSL. Trees beginning 3.9 NM from DER, 1.1 NM right of center, up to 200' AGL/1239' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

SANTA ROSA, CA

CHARLES M SCHULZ-SONOMA COUNTY (STS)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 7 14317 (FAA)

TAKEOFF MINIMUMS: **Rwy 2**, std. with a min. climb of 319' per NM to 2400, or 1200-2½ for climb in visual conditions. **Rwy 32**, std. with a min. climb of 391' per NM to 2500, or 1200-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 2, 32,** climbing left turn heading 164°, thence...

Rwy 14, climbing right turn heading 250°, thence...

Rwy 20, climb on heading 190°, thence…

…intercept and climb on STS R-202 to cross FREES INT at or above MEA for route of flight or continue climb in FREES holding pattern (hold SE, right turns, PYE VORTAC 335° inbound) to MEA for route of flight.

VCOA: **Rwys 2, 32,** obtain ATC approval for climb in visual conditions when requesting IFR clearance. Climb in visual conditions to cross STS VOR/DME southwest bound at or above 1200. Thence…

… Intercept and climb on STS R-202 to cross FREES INT at or above MEA for route of flight or continue climb in FREES holding pattern (hold SE, right turns, PYE VORTAC 335° inbound) to MEA for route of flight.

TAKEOFF OBSTACLE NOTES: **Rwy 2**, trees beginning 492' from DER, 36' left of centerline, up to 60' AGL/156' MSL. Trees beginning 515' from DER, 114' right of centerline, up to 55' AGL/156' MSL. Trees beginning 1000' from DER, 9' left of centerline, up to 100' AGL/178' MSL. Trees beginning 1109' from DER, 135' right of centerline, up to 100' AGL/184' MSL. Trees beginning 2104' from DER, 342' right of centerline, up to 100' AGL/196' MSL. Tree 2119' from DER, 619' right of centerline, up to 100' AGL/173' MSL. **Rwy 14**, tree 1' from DER, 498' right of centerline, 20' AGL/136' MSL. Light structure 6' from DER, 40' left of centerline, 1' AGL/121' MSL. Trees beginning 409' from DER, 602' left of centerline, up to 50' AGL/147' MSL. Trees beginning 1201' from DER, 275' left of centerline, up to 70' AGL/167' MSL. Tree 2194' from DER, 1034' right of centerline, 60' AGL/180' MSL. **Rwy 20**, tree 108' from DER, 462' right of centerline, 40' AGL/162' MSL. Trees beginning 1596' from DER, 403' left of centerline, up to 100' AGL/187' MSL. Trees beginning 1498' from DER, 566' right of centerline, up to 144' AGL/274' MSL. Trees beginning 2841' from DER, 109' left of centerline, up to 123' AGL/228' MSL. **Rwy 32**, trees beginning 67' from DER, 891' right of centerline, up to 55' AGL/158' MSL. Trees beginning 89' from DER, on centerline, up to 55' AGL/153' MSL. Tree 1492' from DER, 319' left of centerline, up to 60' AGL/158' MSL. Tree 3187' from DER, 140' left of centerline, 167' AGL/257' MSL.

SOUTH LAKE TAHOE, CA

LAKE TAHOE (TVL)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 8 18256 (FAA)

TAKEOFF MINIMUMS: **Rwy 18,** std. w/min. climb of 810' per NM to 10800, or alternatively, 1600-3 w/min. climb of 765' per NM to 10800, or 5100-5 for VCOA. **Rwy 36,** 300-1⅜ or std. w/min. climb of 755' per NM to 6500.

DEPARTURE PROCEDURE: **Rwy 18,** climb heading 177° to 7900 then climbing right turn to intercept and climb on SWR R-133 to SWR VOR/DME thence . . . **Rwy 36,** climb heading 357° to intercept and climb on SWR R-113 to SWR VOR/DME thence . . . . . Proceed on course.

VCOA: **Rwy 18,** obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross South Lake Tahoe Airport at or above 11200' MSL then intercept and proceed on SWR R-127 to SWR VOR/DME.

TAKEOFF OBSTACLE NOTES: **Rwy 18,** pole 10' from DER, 40' left of centerline, 2' AGL/6270' MSL. Vehicles on road, sign beginning 16' from DER, 247' right of centerline, up to 6282' MSL. Trees beginning 19' from DER, 378' left of centerline, up to 88' AGL/6354' MSL. Trees, vehicles on road, vegetation, terrain, pole beginning 140' from DER, 20' right of centerline, up to 88' AGL/6355' MSL. Pole, trees beginning 263' from DER, 4' left of centerline, up to 102' AGL/6369' MSL. Trees beginning 917' from DER, 1' left of centerline, up to 111' AGL/6388' MSL. Trees beginning 1095' from DER, 8' right of centerline, up to 107' AGL/6392' MSL. Trees beginning 1702' from DER, on centerline, up to 6403' MSL. Trees beginning 1960' from DER, 6' left of centerline, up to 98' AGL/6412' MSL. Trees, poles beginning 2021' from DER, 1' right of centerline, up to 6416' MSL. Trees beginning 2392' from DER, 8' left of centerline, up to 113' AGL/6418' MSL. Trees, buildings beginning 2441' from DER, 1' left of centerline, up to 6419' MSL. Trees, buildings, vehicles on road, poles, antenna, vegetation beginning 2712' from DER, on centerline, up to 91' AGL/6420' MSL. Tree 2.5 NM from DER, 1451' left of centerline, 7837' MSL. **Rwy 36,** sign 9' from DER, 212' left of centerline, 4' AGL/6256' MSL. Vehicle on road 18' from DER, 360' left of centerline, 6266' MSL. Trees, vehicle on road beginning 51' from DER, 330' right of centerline, up to 47' AGL/6296' MSL. Tree, pole, terrain, fence beginning 142' from DER, 236' right of centerline, up to 50' AGL/6302' MSL. Trees beginning 175' from DER, 210' right of centerline, up to 44' AGL/6312' MSL. Trees beginning 225' from DER, 173' right of centerline, up to 47' AGL/6319' MSL. Trees beginning 459' from DER, 181' right of centerline, up to 58' AGL/6328' MSL. Trees, vehicles on road beginning 593' from DER, 52' right of centerline, up to 59' AGL/6330' MSL. Trees, vehicles on road beginning 768' from DER, 84' right of centerline, up to 71' AGL/6340' MSL. Trees, vehicles on road beginning 953' from DER, 143' right of centerline, up to 67' AGL/6348' MSL. Trees, vehicles on road beginning 1116' from DER, 104' right of centerline, up to 54' AGL/6355' MSL. Tree 1324' from DER, 564' right of centerline, 62' AGL/6370' MSL. Tree 1331' from DER, 761' right of centerline, 61' AGL/6379' MSL. Trees, vehicles on road beginning 1382' from DER, 142' right of centerline, up to 6382' MSL. Trees beginning 1497' from DER, 161' right of centerline, up to 69' AGL/6391' MSL. Trees, vehicles on road, terrain beginning 1520' from DER, 41' left of centerline, up to 6402'MSL. Trees, vehicles on road, fence, NAVAID, poles, tower beginning 1838' from DER, 5' left of centerline, up to 74' AGL/6427' MSL. Trees beginning 5300' from DER, 377' right of centerline, up to 133' AGL/6430' MSL. Trees beginning 1 NM from DER, 703' right of centerline, up to 6436' MSL. Trees beginning 1 NM from DER, 1100' right of centerline, up to 134' AGL/6420' MSL

STOCKTON, CA

STOCKTON METROPOLITAN (SCK)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 19171 (FAA)

TAKEOFF MINIMUMS: **Rwy 29R,** 200-1¼ or std. w/min. climb of 215' per NM to 300 or alternatively, with std. takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later than 1400' prior to DER.

TAKEOFF OBSTACLE NOTES: **Rwy 11L,** building 231' from DER, 401' left of centerline, 8' AGL/39' MSL. Traverse way 413' from DER, 456' left of centerline, 49' MSL. **Rwy 11R,** traverse way 61' from DER, 486' right of centerline, 43' MSL. Lighting 122' from DER, 415' left of centerline, 2' AGL/29' MSL. **Rwy 29L,** traverse way, aircraft parking, electrical system beginning 132' from DER, 235' left of centerline, up to 45' MSL. Buildings beginning 424' from DER, 369' left of centerline, up to 61' MSL. Building 2946' from DER, 1215' left of centerline, 102' MSL. Building 2963' from DER, 1203' left of centerline, 97' AGL/117' MSL. Stack, building beginning 5568' from DER, 1600' right of centerline, up to 150' AGL/171' MSL. **Rwy 29R,** fence, trees beginning 181' from DER, 5' right of centerline, up to 18' AGL/41' MSL. Fence, trees, traverse way, pole beginning 208' from DER, 1' left of centerline, up to 17' AGL/41' MSL. Poles, traverse way beginning 255' from DER, 35' right of centerline, up to 32' AGL/55' MSL. Poles beginning 528' from DER, 305' left of centerline, up to 31' AGL/54' MSL. Pole 653' from DER, 515' left of centerline, 32' AGL/55' MSL. Pole 834' from DER, 693' left of centerline, 38' AGL/60' MSL. Pole 1587' from DER, 857' left of centerline, 48' AGL/69' MSL. Elevator 4480' from DER, 868' right of centerline, 122' AGL/141' MSL. Stack, buildings beginning 4599' from DER, 827' right of centerline, up to 150' AGL/171' MSL. Elevator, building beginning 1 NM from DER 1878' left of centerline, up to 174' AGL/191' MSL.

SUSANVILLE, CA

SUSANVILLE MUNI (SVE)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG 03359 (FAA)

DEPARTURE PROCEDURE: Use AMEDEE DEPARTURE.

TRACY, CA

TRACY MUNI (TCY)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 3 09295 (FAA)

TAKEOFF MINIMUMS: **Rwy 26,** 700-3 or std. w/ a min. climb of 320' per NM to 1000.

DEPARTURE PROCEDURE: **Rwy 8**, climb to 3000 via heading 073° and MOD VOR/DME R-264 to MOD VOR/DME before proceeding on course. **Rwy 12,** climbing left turn to 3000 to intercept MOD VOR/DME R-264 to MOD VOR/DME before proceeding on course. **Rwy 26,** climbing right turn to 3000 via heading 150° and MOD VOR/DME R-264 to MOD VOR/DME before proceeding on course. **Rwy 30,** climbing right turn to 3000 via heading 150° to intercept MOD VOR/DME R-264 to MOD VOR/DME before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 8,** tree 472' from DER, 198' left of centerline, 50' AGL/194' MSL. Fence 167' from DER, 8' right of centerline, 25' AGL/176' MSL. Vehicle on road 241' from DER, 412' left of centerline, 15' AGL/183' MSL. Vehicles on roads starting 241' from DER, 7' right of centerline, up to 15' AGL/189' MSL. Poles starting 403' from DER, 204' left of centerline, up to 54' AGL/208' MSL. Poles starting 727' from DER, 49' right of centerline, up to 54' AGL/212' MSL.

TRACY, CA (CON'T)

TRACY MUNI (TCY) (CON'T)

Rwy 12, trees starting 436' from DER, 251' right of centerline, up to 72' AGL/253' MSL. Conveyor 1995' from DER, 504' left of centerline, 66' AGL/ 270' MSL. Poles starting 832' from DER, 396' right of centerline, up to 56' AGL/240' MSL. Obstruction light on hopper 1934' from DER, 274' right of centerline, 74' AGL/255' MSL. Vehicles on road starting 133' from DER, 272' left of centerline, up to 15' AGL/206' MSL. Fence 32' from DER 405' left of centerline, 25' AGL/194' MSL. **Rwy 26,** tree 1173' from DER, 180' right of centerline, 35' AGL/234'MSL. Trees starting 1067' from DER, 125' left of centerline, up to 35' AGL/794' MSL. Vehicle on road 236' from DER, 150' left of centerline, 15' AGL/214' MSL. Fence 69' from DER, 133' left of centerline, 23' AGL/203' MSL. Rising terrain 11105' from DER, 2814' left of centerline, up to 739' MSL. **Rwy 30,** trees starting 438' from DER, 30' right of centerline, up to 35' AGL/209' MSL. Tree 1079' from DER, 82' left of centerline, 35' AGL/214' MSL. Obstruction light on hopper 985' from DER, 353' right of centerline, 72' AGL/236' MSL. Bush 195' from DER, 364' left of centerline, 25' AGL/189' MSL. Light pole 1149' from DER, 160' left of centerline, 47' AGL/211' MSL. Obstruction light on building 2289' from DER, 65' right of centerline, 74' AGL/238' MSL.

TRAVIS AFB (KSUU)

FAIRFIELD, CA

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

11069

All Rwy: Comply with assigned SID or ATC radar vectors.

DEPARTURE PROCEDURE: **Rwy 3L,** Climb on a heading between 344° CW to 137° from DER. **Rwy 3R,** Climb on a heading between 328° CW to 140° from DER. **Rwy 21L/R,** Climb on a heading between 187° CW to 237° from DER.

TAKEOFF OBSTACLE NOTES: **Rwy 3L,** Potential vehicle, 15' AGL/72' MSL, 616' from DER, 289' left of centerline. Potential vehicle, 15' AGL/71' MSL, 615' from DER, 267' right of centerline. **Rwy 21L,** Light pole 15' AGL/83' MSL, 148' from DER, 546' left of centerline. Light pole 15' AGL/84' MSL, 346' from DER, 547' left of centerline. Light pole 15' AGL/84' MSL, 521' from DER, 548' left of centerline. Light pole 15' AGL/83' MSL, 702' from DER, 549' left of centerline. Light pole 15' AGL/84' MSL, 880' from DER, 549' left of centerline. Light pole 15' AGL/85' MSL, 926' from DER, 661' left of centerline.

TRUCKEE, CA

TRUCKEE-TAHOE (TRK)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 5 15008 (FAA)

TAKEOFF MINIMUMS: **Rwys 11, 20,** NA - obstacles.

DEPARTURE PROCEDURE: **Rwys 2, 29,** use TRUCK DEPARTURE.

TULARE, CA

MEFFORD FIELD (TLR)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG-A 18200 (FAA)

DEPARTURE PROCEDURE: **Rwy 13,** climbing right turn direct VIS VOR/DME. Aircraft departing VIS VOR/DME R-001 CW R-140 continue climb in VIS VOR/DME holding pattern (hold east, RT, 287° inbound) to cross VIS VOR/DME at or above 5400 before proceeding on course. All other aircraft climb on course. **Rwy 31**, climbing left turn direct VIS VOR/DME. Aircraft departing VIS VOR/DME R-001 CW R-140 continue climb in VIS VOR/DME holding pattern (hold east, RT, 287° inbound) to cross VIS VOR/DME at or above 5400 before proceeding on course. All other aircraft climb on course.

TAKEOFF OBSTACLE NOTES: **Rwy 13,** hangars 120' from DER, 525' right of centerline, up to 28' AGL/287 MSL. Trees beginning 371' from DER, 323' right of centerline, 60' AGL/334' MSL. Trees beginning 530' from DER, left and right of centerline, up to 60' AGL/334 MSL. **Rwy 31,** traverse way 83' from DER, 340' right of centerline, 279' MSL. Traverse ways beginning 210' from DER, 376' right of centerline, up to 280' MSL. Traverse way 343' from DER, 415' left of centerline, 280' MSL. Traverse way 492' from DER, 395' left of centerline, 281' MSL. Traverse way 544' from DER, 416' right of centerline, 281' MSL. Traverse way 684' from DER, 458' left of centerline, 283' MSL. Sign 793' from DER, 424' left of centerline, 13' AGL/286' MSL. Pole 1141' from DER, 547' left of centerline, 26' AGL/298' MSL. Sign 1422' from DER, 542' right of centerline, 37' AGL/311' MSL. Tower 3586' from DER, 580' left of centerline, 110' AGL/383' MSL.

UKIAH, CA

UKIAH MUNI (UKI)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 19031 (FAA)

TAKEOFF MINIMUMS: **Rwy 15,** std. w/min. climb of 678' per NM to 3100 or 3100-2½ for climb in visual conditions. **Rwy 33,** std. w/min. climb of 350' per NM to 5000, or 3100-2½ for climb in visual conditions

DEPARTURE PROCEDURE: **Rwy 15,** climb heading 151° to 3100 before proceeding on course. **Rwy 33,** climb heading 345° to 5000, then left turn direct to cross ENI VORTAC at or above 6000.

VCOA: **Rwys 15, 33,** obtain ATC approval for climb in visual conditions when requesting IFR clearance. Climb in visual conditions to cross UKIAH MUNI airport at or above 3700 before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 15,** buildings and signs beginning 34' from DER, 493' right of centerline, up to 30' AGL/629' MSL. Road with vehicles beginning 70' from DER, 245' right of centerline, up to 15' AGL/624' MSL. Road with vehicles beginning 111' from DER, 256' left of centerline, up to 15' AGL/629' MSL. Poles and trees beginning 275' from DER, 357' right of centerline, up to 15' AGL/712' MSL. Trees and poles beginning 527' from DER, 452' left of centerline, up to 100' AGL/698' MSL. Trees beginning 1.2 NM from DER, 2023' right of centerline, up to 100' AGL/1073' MSL. Trees beginning 1.5 NM from DER, 1715' right of centerline, up to 100' AGL/1160' MSL. Trees beginning 2.4 NM from DER, 77' left of centerline, up to 100' AGL/1644' MSL. Trees beginning 3.5 NM from DER, 2704' right of centerline, up to 100' AGL/2331' MSL. **Rwy 33,** poles and trees beginning 27' from DER, 391' right of centerline, up to 100' AGL/679' MSL. Road with vehicles beginning 124' from DER, 147' right of centerline, up to 15' AGL/629' MSL. Trees and poles beginning 461' from DER, 555' right of centerline, up to 100' AGL/679' MSL. Road with vehicles beginning 587' from DER, 313' left of centerline, up to 15' AGL/637' MSL.

UKIAH, CA (CON'T)

UKIAH MUNI (UKI) (CON'T)

Rwy 33 (CON'T), trees, poles and signs beginning 888' from DER, 506' left of centerline, up to 100' AGL/709' MSL. Building 1003' from DER, 553' right of centerline, 42' AGL/649' MSL. Tower 5774' from DER, 1155' left of centerline, 124' AGL/770' MSL. Trees beginning 5909' from DER, 1590' left of centerline, up to 100' AGL/769' MSL.

VACAVILLE, CA

NUT TREE (VCB)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 5 17229 (FAA)

TAKEOFF MINIMUMS: **Rwy 20,** std. w/ min. climb of 410' per NM to 1600, or 1200-2½ for VCOA .

DEPARTURE PROCEDURE: **Rwy 2,** climbing right turn to intercept SAC R-242 to SAC VORTAC to 2000 before proceeding on course. **Rwy 20,** climbing left turn to intercept SAC R-242 to SAC VORTAC to 2000 before proceeding on course.

VCOA: **Rwy 20,** obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Nut Tree airport eastbound at or above 1300 then climb to 2000 on SAC R-242 TO SAC VORTAC, proceed on course.

TAKEOFF OBSTACLE NOTES: **Rwy 2,** parking lot, pole beginning 51' from DER, 290' right of centerline, up to 15' AGL/119' MSL. Fence beginning 99' from DER, 210' left of centerline, up to 118' MSL. Pole, parking lot, tree beginning 137' from DER, 417' left of centerline, up to 148' MSL. Tree 948' from DER, 732' right of centerline, 141' MSL. Pole 1099' from DER, 612' left of centerline, 149' MSL. **Rwy 20,** terrain beginning 8' from DER, 253' right of centerline, up to 117' MSL. Tree 61' from DER, 411' left of centerline, 51' AGL/163' MSL. Terrain 140' from DER, 432' right of centerline, 124' MSL. Tree 144' from DER, 538' left of centerline, 85' AGL/197' MSL. Pole, terrain, fence beginning 206' from DER, 167' right of centerline, up to 12' AGL/130' MSL. Tree 259' from DER, 506' left of centerline, 211' MSL. Pole, ant, tree beginning 362' from DER, 497' left of centerline, up to 125' AGL/239' MSL. Tree 544' from DER, 454' right of centerline, 135' MSL. Tree, road (north) beginning 710' from DER, 393' right of centerline, up to 164' MSL. Tree, pole, ant, terrain, chimney/smokestack, sign beginning 825' from DER, 22' left of centerline, up to 264' MSL. Tree, pole beginning 1576' from DER, 344' right of centerline, up to 190' MSL. T-l tower, pole beginning 1860' from DER, 82' right of centerline, up to 55' AGL/191' MSL. Terrain 2985' from DER, 1295' right of centerline, 195' MSL. Terrain 3087' from DER, 1146' right of centerline, 198' MSL. Terrain 3090' from DER, 1303' right of centerline, 210' MSL. Terrain beginning 3155' from DER, 1128' right of centerline, up to 217' MSL. Tree, terrain beginning 3252' from DER, 535' right of centerline, up to 241' MSL. Terrain beginning 3635' from DER, 54' right of centerline, up to 248' MSL. Terrain 4058' from DER, 110' right of centerline, 254' MSL. Terrain, tree beginning 4104' from DER, 18' right of centerline, up to 263' MSL. Tree 5765' from DER, 1605' right of centerline, 264' MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

VISALIA, CA

VISALIA MUNI (VIS)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 4 19227 (FAA)

DEPARTURE PROCEDURE: **Rwy 12,** climbing right turn to heading 230° to intercept VIS VOR/DME R-151 to PIXEY INT to 3000 before proceeding on course. **Rwy 30,** climbing left turn to heading 230° to intercept VIS VOR/DME R-151 to PIXEY INT to 3000 before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 12,** vehicle on road 175' from DER, 252' right of centerline, 307' MSL. Vehicle on road 178' from DER, 248' left of centerline, 308' MSL. Tree 758' from DER, 616' right of centerline, 62' AGL/356' MSL. Tree 1302' from DER, 817' left of centerline, 61' AGL/356' MSL. Tree 3155' from DER, 737' left of centerline, 85' AGL/380' MSL. **Rwy 30,** sign 17' from DER, 249' left of centerline, 3' AGL/292' MSL. Fence beginning 59' from DER, 416' left of centerline, up to 7' AGL/296' MSL. Trees, vehicle on road beginning 186' from DER, 269' left of centerline, up to 40' AGL/330' MSL. Building 291' from DER, 249' right of centerline, 15' AGL/305' MSL. Trees, vehicle on road beginning 791' from DER, 232' left of centerline, up to 332' MSL. Building 849' from DER, 663' right of centerline, 327' MSL. Tree 2663' from DER, 341' left of centerline, 370' MSL. Tree 3035' from DER, 415' left of centerline, 379' MSL.

WATSONVILLE, CA

WATSONVILLE MUNI (WVI)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 5A 18256 (FAA)

TAKEOFF MINIMUMS: **Rwy 27,** NA - airport obstacles.

DEPARTURE PROCEDURE: **Rwys 2, 9, 20,** use WATSONVILLE DEPARTURE.

TAKEOFF OBSTACLE NOTES: **Rwy 2,** lighting 8' from DER, 84' left of centerline, 1' AGL/159' MSL. Lighting 9' from DER, 84' right of centerline, 158' MSL. Pole 14' from DER, 349' left of centerline, 205' MSL. Pole, building, vehicles on road, tree and fence beginning 15' from DER, 322' left of centerline, up to 50' AGL/213' MSL. Trees beginning 278' from DER, 414' right of centerline, up to 188' MSL. pole, vehicles on road, stack, tree and building beginning 429' from DER, 157' left of centerline, up to 58' AGL/220' MSL. pole, building and tree beginning 808' from DER, 22' right of centerline, up to 40' AGL/198' MSL. Tree and transmission line beginning 1021' from DER, 137' right of centerline, up to 222' MSL. Pole 1174' from DER, 328' right of centerline, 57' AGL/224' MSL. Trees beginning 1275' from DER, 298' right of centerline, up to 242' MSL. Tree 1345' from DER, 320' left of centerline, 236' MSL. Tree 2249' from DER, 371' left of centerline, 264' MSL. **Rwy 9,** tree and pole beginning 1' from DER, 152' left of centerline, up to 157' MSL. Pole 65' from DER, 301' right of centerline, 31' AGL/148' MSL. tree, fence, building, vehicles on road and pole beginning 74' from DER, 251' left of centerline, up to 160' MSL. Pole, tree, building, tank and stack beginning 210' from DER, 139' left of centerline, up to 177' MSL. Pole 231' from DER, 250' right of centerline, 32' AGL/153' MSL. Trees beginning 312' from DER, 560' right of centerline, up to 173' MSL. Tower, pole and tree beginning 828' from DER, 136' left of centerline, up to 52' AGL/181' MSL. Trees beginning 915' from DER, 146' right of centerline, up to 197' MSL. Tree 1815' from DER, 365' left of centerline, 215' MSL. Tower 4697' from DER, 1365' right of centerline, 189' AGL/292' MSL. **Rwy 20,** tree 57' from DER, 500' left of centerline, 153' MSL.

WATSONVILLE, CA (CON'T)

WATSONVILLE MUNI (WVI) (CON'T)

Rwy 20 (CON'T), fence 57' from DER, 268' right of centerline, 7' AGL/143' MSL. Pole 95' from DER, 467' left of centerline, 175' MSL. pole, vehicles on road and tree beginning 96' from DER, 377' left of centerline, up to 50' AGL/183' MSL. Transmission line 848' from DER, 505' left of centerline, 44' AGL/184' MSL. Tree and transmission line beginning 919' from DER, 520' left of centerline, up to 190' MSL. Tree 1153' from DER, 286' right of centerline, 169' MSL. Tree 1207' from DER, 615' left of centerline, 197' MSL. Tree, building and transmission line beginning 1267' from DER, 318' left of centerline, up to 203' MSL. Tree 1336' from DER, 7' right of centerline, 177' MSL. Tree 1337' from DER, 46' right of centerline, 192' MSL. Tree 2201' from DER, 776' right of centerline, 240' MSL.

WEED, CA

WEED (O46)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

ORIG 17173 (FAA)

DEPARTURE PROCEDURE: Use FOBRO (RNAV) DEPARTURE.

WILLITS, CA

ELLS FIELD-WILLITS MUNI (O28)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 04218 (FAA)

DEPARTURE PROCEDURE: **Rwy 16,** use MENDOCINO RNAV DEPARTURE. **Rwy 34,** use FLUEN RNAV DEPARTURE.

WILLOWS, CA

WILLOWS-GLENN COUNTY (WLW)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 2 17173 (FAA)

DEPARTURE PROCEDURE: **Rwy 13,** climbing right turn heading 150 to 1000 thence... **Rwy 16,** climbing left turn heading 145 to 1000 thence... **Rwy 31,** climbing left turn heading 140 to 1000 thence... **Rwy 34,** climbing right turn heading 150 to 1000 thence… ...all aircraft continue climb direct ILA VORTAC before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 13,** vehicles beginning 325' from DER, 563' left of centerline, up to 17' AGL/146' MSL. **Rwy 16,** poles beginning 14' from DER, 409' right of centerline, up to 35' AGL/172' MSL. Tree 232' from DER, 436 left of centerline, 149' MSL. **Rwy 34,** tower 869' from DER, 434' right of centerline, 55' AGL/196 MSL. Pole 909' from DER, 305 right of centerline, 24' AGL/165' MSL.

WOODLAND, CA

WATTS-WOODLAND (O41)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 3 09127 (FAA)

DEPARTURE PROCEDURE: **Rwy 18,** climb heading 185° and ILA R-151 to EMBER INT/ILA 48 DME before proceeding on course. **Rwy 36,** climbing left turn via heading 320° and ILA R-145 to ILA VORTAC before proceeding on course.

TAKEOFF OBSTACLE NOTES: **Rwy 18,** tree 2478' from DER, 283' right of centerline, 100' AGL/249' MSL. Vehicle on road 192' from DER, on centerline, 15' AGL/144' MSL. **Rwy 36,** tree 453' from DER, 69' left of centerline, 100' AGL/224' MSL. Vehicle on road 350' from DER, on centerline, 15' AGL/134' MSL. Tree 4489' from DER, 1688' left of centerline, 100' AGL/234' MSL.

INSTRUMENT APPROACH PROCEDURE CHARTS

IFR ALTERNATE AIRPORT MINIMUMS

Standard alternate minimums for non-precision approaches and approaches with vertical guidance [NDB, VOR, LOC, TACAN, LDA, SDF, VOR/DME, ASR, RNAV (GPS) or RNAV (RNP)] are 800-2. Standard alternate minimums for precision approaches (ILS, PAR, or GLS) are 600-2. Airports within this geographical area that require alternate minimums other than standard or alternate minimums with restrictions are listed below. NA - means alternate minimums are not authorized due to unmonitored facility, absence of weather reporting service, or lack of adequate navigation coverage. Civil pilots see FAR 91. IFR Alternate Minimums: Ceiling and Visibility Minimums not applicable to USA/USN/USAF. Pilots must review the IFR Alternate Minimums Notes for alternate airfield suitability.

NAME	ALTERNATE MINIMUMS

ALTURAS, CA
ALTURAS MUNI (AAT)..... **RNAV (GPS) Rwy 31**
Category B, 900-2.

ARCATA/EUREKA, CA
CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY (ACV)..... **RNAV (GPS) Rwy 1[1]**
RNAV (GPS) Rwy 32[2]
[1]Categories A, B, 900-2; Category C, 900-2½; Category D, 900-2¾.
[2]Category D, 800-2¼.

ATWATER, CA
CASTLE (MER)..... **ILS or LOC Rwy 31**
NA when local weather not available.
NA when control tower closed.

AUBURN, CA
AUBURN MUNI (AUN)..... **RNAV (GPS) Rwy 7**
Category B, 900-2.

BISHOP, CA
BISHOP (BIH)..... **LDA Rwy 17[1]**
RNAV (GPS) Y Rwy 12[2]
RNAV (GPS) Z Rwy 12[3]
[1]Categories A, B, 2300-2; Categories C, D, 2300-3.
[2]Categories A, B 2500-2; Category C, 2500-3.
[3]Categories A, B, 2300-2; Category C, 2300-3.

BYRON, CA
BYRON (C83)..... **RNAV (GPS) Rwy 30**
Category D, 800-2½.

CHICO, CA
CHICO MUNI (CIC)..... **VOR/DME Rwy 31R**
NA when control tower closed except for operators with approved weather reporting service.

NAME	ALTERNATE MINIMUMS

CONCORD, CA
BUCHANAN FIELD (CCR)..... **LDA Rwy 19R[12]**
RNAV (GPS) Rwy 19R[3]
VOR Rwy 19R[3]
[1]NA when control tower closed.
[2]Category C, 1000-2¾; Category D, 1300-3.
[3]Categories A, B, 1000-2; Category C, 1000-3; Category D, 1300-3.

COLUMBIA, CA
COLUMBIA (O22)..... **RNAV (GPS) Rwy 35**
NA when local weather not available.
Categories A, B, 1100-2; Category C, 1100-3.

CRESCENT CITY, CA
JACK MC NAMARA FIELD (CEC)..... **RNAV (GPS) Rwy 12**
RNAV (GPS) Rwy 36
VOR Rwy 12
VOR/DME Rwy 12
VOR/DME Rwy 36
NA when local weather not available.

FRESNO, CA
FRESNO CHANDLER EXECUTIVE (FCH)..... **RNAV (GPS) Rwy 12**
NA when local weather not available.

FRESNO YOSEMITE INTL (FAT)..... **ILS Y or LOC Y Rwy 29R[1]**
LOC Y Rwy 11L[2]
TACAN Rwy 11L[3]
TACAN Rwy 29R[2]
[1]LOC, Category E, 900-2¾.
[2]Category E, 900-2¾.
[3]Category E, 900-2.

GRASS VALLEY, CA
NEVADA COUNTY (GOO)..... **RNAV (GPS) Rwy 7**
Category D, 800-2¼.

NAME ALTERNATE MINIMUMS

HAYWARD, CA
HAYWARD
EXECUTIVE (HWD).....**LOC/DME Rwy 28L**[1]
RNAV (GPS) Rwy 28L
VOR/DME-A
NA when local weather not available.
[1]NA when control tower closed.

HOLLISTER, CA
HOLLISTER
MUNI (CVH).....**RNAV (GPS) Rwy 31**
NA when local weather not available.

LINCOLN, CA
LINCOLN RGNL/KARL
HARDER FIELD (LHM).....**RNAV (GPS) Rwy 15**
RNAV (GPS) Rwy 33
NA when local weather not available.

LITTLE RIVER, CA
LITTLE RIVER (LLR).....**RNAV (GPS) Rwy 29**
Category D, 900-2¾.

LIVERMORE, CA
LIVERMORE MUNI (LVK).....**ILS Rwy 25R**[1]
LOC Rwy 25R[23]
RNAV (GPS) Rwy 25R[4]
[1]NA when control tower closed.
[2]NA when tower closed.
[3]LOC, Categories A, B, 1600-2; Categories C, D, 1600-3.
[4]Category D, 1400-3.

MAMMOTH LAKES, CA
MAMMOTH
YOSEMITE (MMH).....**RNAV (GPS) Rwy 27**
Categories A, B, 1300-2; Category C, 1300-3.

MARYSVILLE, CA
YUBA COUNTY (MYV).....**RNAV (GPS) Rwy 14**
RNAV (GPS) Rwy 32
NA when local weather not available.

MODESTO, CA
MODESTO CITY-COUNTY-HARRY SHAM
FIELD (MOD).....**ILS or LOC Rwy 28R**[1]
RNAV (GPS) Rwy 28R[2]
[1]NA when control tower closed.
[2]NA when local weather not available.

MONTEREY, CA
MONTEREY
RGNL (MRY).....**ILS or LOC Rwy 10R**[12]
LOC Rwy 28L[13]
RNAV (GPS) Rwy 10R[6]
RNAV (GPS) Y Rwy 28L[4]
RNAV (RNP) Z Rwy 28L[5]
[1]NA when control tower closed.
[2]LOC, Category C, 1100-3; Category D, 1600-3.
[3]Categories A, B, 1700-2, Categories C, D, 1700-3.
[4]Categories A, B, 900-2, Category C, 1100-3.
[5]Categories A, B, C, 1000-3.
[6]Category C, 1100-3; Category D, 1600-3.

MOUNTAIN VIEW, CA
MOFFET FEDERAL
AFLD (NUQ).....**ILS or LOC Rwy 32R**[12]
LOC Rwy 14L[13]
RNAV (GPS) Rwy 14L[4]
RNAV (GPS) Rwy 14R[4]
RNAV (GPS) Rwy 32L[4]
RNAV (GPS) Rwy 32R[3]
TACAN Rwy 32L[15]
TACAN Rwy 32R[15]
[1]NA when tower closed.
[2]LOC, Category D, 800-2½; Category E, 1000-3.
[3]Category D, 800-2½.
[4]Category D, 800-2¼.
[5]Category D, 800-2½; Category E, 1000-3.

NAPA, CA
NAPA
COUNTY (APC).....**ILS or LOC Z Rwy 1L**[12]
RNAV (GPS) Rwy 6[3]
RNAV (GPS) Y Rwy 1L[4]
VOR Rwy 6[5]
NA when local weather not available.
[1]NA when control tower closed.
[2]LOC, Categories C, D, 1300-3.
[3]Categories A, B, 1000-1¼; Categories C, D, 1300-3.
[4]Categories A, B, C, D, 1300-5.
[5]Categories C, D, 1300-3.

OAKLAND, CA
METROPOLITAN
OAKLAND INTL (OAK).....**ILS or LOC Rwy 12**[1]
ILS or LOC Rwy 30[1]
ILS or LOC/DME Rwy 28R[1]
RNAV (GPS) Rwy 10L[2]
RNAV (GPS) Rwy 10R[2]
RNAV (GPS) Rwy 12[2]
RNAV (GPS) Y Rwy 28L[2]
RNAV (GPS) Y Rwy 28R[2]
RNAV (GPS) Y Rwy 30[2]
VOR Rwy 10R[2]
[1]ILS, Category C, 700-2; Category D, 1400-3; LOC, Category D, 1400-3.
[2]Category D, 1400-3.

NAME — ALTERNATE MINIMUMS

PALO ALTO, CA
PALO ALTO (PAO)..... **RNAV (GPS) Rwy 31**
VOR Rwy 31
NA when control tower closed.

PETALUMA, CA
PETALUMA MUNI (O69)..... **RNAV (GPS) Rwy 29**
NA when local weather not available.

PLACERVILLE, CA
PLACERVILLE (PVF)..... **RNAV (GPS) Rwy 5**
NA when local weather not available.

RED BLUFF, CA
RED BLUFF
MUNI (RBL)..... **RNAV (GPS) Rwy 15**[1]
RNAV (GPS) Rwy 33
VOR Rwy 33
VOR/DME Rwy 15[1]
NA when local weather not available.
[1]Category D, 800-2¼.

REDDING, CA
REDDING
MUNI (RDD)..... **ILS or LOC Rwy 34**[12]
LOC BC Rwy 16[13]
RNAV (GPS) Rwy 16[3]
RNAV (GPS) Rwy 34[3]
VOR Rwy 34[4]
NA when local weather not available.
[1]NA when control tower closed.
[2]LOC, Category D, 900-2¾; Category E, 900-3.
[3]Category D, 900-2¾.
[4]Categories A, B, 1200-2; Categories C, D, 1200-3.

SACRAMENTO, CA
SACRAMENTO
EXECUTIVE (SAC)..... **ILS or LOC Rwy 2**[1]
RNAV (GPS) Rwy 2
VOR Rwy 2
NA when local weather not available.
[1]NA when control tower closed.

SACRAMENTO
INTL (SMF)..... **ILS or LOC Rwy 16L**[3]
ILS or LOC Rwy 34L[2]
RNAV (GPS) Y Rwy 16L[1]
RNAV (GPS) Y Rwy 34R[1]
[1]Category D, 900-2¾.
[2]NA when local weather not available.
[3]ILS, LOC Category D, 900-2¾.

SACRAMENTO
MATHER (MHR)..... **ILS or LOC Rwy 22L**[12]
RNAV (GPS) Rwy 4R[3]
RNAV (GPS) Rwy 22L[34]
[1]NA when control tower closed.
[2]LOC, Category E, 800-2½.
[3]Category D, 800-2¼.
[4]NA when local weather not available.

NAME — ALTERNATE MINIMUMS

SALINAS, CA
SALINAS MUNI (SNS)..... **ILS Rwy 31**[1]
LOC/DME Rwy 31[2]
RNAV (GPS) Rwy 13[12]
RNAV (GPS) Y Rwy 31[12]
RNAV (GPS) Z Rwy 31[1]
VOR Rwy 13[3]
[1]NA when local weather not available.
[2]Category D, 800-2¼.
[3]Category D, 1000-3.

SAN ANDREAS, CA
CALAVERAS CO-MAURY RASMUSSEN
FIELD (CPU)..... **RNAV (GPS) Rwy 31**
Category C, 1100-3.

SAN CARLOS, CA
SAN CARLOS (SQL)..... **RNAV (GPS) Y Rwy 30**[1]
RNAV (GPS) Z Rwy 30[2]
NA when local weather not available.
[1]Categories A, B, 1300-2.
[2]Categories A, B, 900-2.

SAN FRANCISCO, CA
SAN FRANCISCO
INTL (SFO)..... **ILS or LOC Rwy 19L**[1]
ILS or LOC Rwy 28L[2]
RNAV (GPS) Rwy 10L[3]
RNAV (GPS) Rwy 28L[4]
RNAV (GPS) Y Rwy 10R[3]
RNAV (GPS) Z Rwy 28R[5]
RNAV (RNP) Z Rwy 10R[6]
[1]LOC, Categories A, B, 1800-2; Categories C, D, 1800-3.
[2]ILS, Categories A, B, C, D, 800-2;
LOC, Category A, 900-2; Category B, 1000-2; Category C, 1600-3.
[3]Categories A, B, 1200-2, Categories C, D, 1200-3.
[4]Categories A, B, 1100-2; Category C, 1600-3; Category D, 1100-2½.
[5]Category B, 1000-2; Category C, 1600-3.
[6]Categories A, B, C, D, 1100-4.

SAN JOSE, CA
NORMAN Y MINETA SAN JOSE
INTL (SJC)..... **ILS or LOC Rwy 12R**
ILS or LOC Rwy 30L
NA when control tower closed.

SAN MARTIN, CA
SAN MARTIN (E16)..... **RNAV (GPS) Rwy 32**
Categories A, B, 1000-2.

NAME	ALTERNATE MINIMUMS	NAME	ALTERNATE

SANTA ROSA, CA

CHARLES M SCHULZ-SONOMA COUNTY (STS)..... **ILS or LOC/DME Rwy 32[12]**
RNAV (GPS) Rwy 2[3]
RNAV (GPS) Rwy 14[3]
RNAV (GPS) Rwy 32[3]
VOR/DME Rwy 14[34]

[1]NA when control tower closed.
[2]ILS, LOC, Category C, 1000-3; Category D, 1300-3.
[3]Category C, 1000-3; Category D, 1300-3.
[4]NA when local weather not available.

STOCKTON, CA

STOCKTON METROPOLITAN (SCK)..... **ILS or LOC Rwy 29R**
NA when control tower closed.

SUSANVILLE, CA

SUSANVILLE MUNI (SVE)..... **RNAV (GPS) Rwy 29**
Categories A, B, 1700-2; Categories C, D, 1700-3.

TRUCKEE, CA

TRUCKEE-TAHOE (TRK)..... **RNAV (GPS)-A[1]**
RNAV (GPS) Rwy 11[2]
NA when local weather not available.
[1]Categories A, B, 1600-2; Category C, 1800-3.
[2]Categories A, B, 1900-2; Category C, 1900-3.

UKIAH, CA

UKIAH MUNI (UKI)..... **RNAV (GPS)-B[1]**
VOR-A[2]
[1]Categories A, B, 2000-2; Categories C, D, 2000-3.
[2]Categories A, B, 2800-2; Categories C, D, 2800-3.

VACAVILLE, CA

NUT TREE (VCB)..... **RNAV (GPS) Rwy 20[1]**
VOR-A[2]
[1]Category C, 900-2½; Category D, 1300-3.
[2]Categories A, B, 900-2; Category C, 900-2½; Category D, 1300-3.

VISALIA, CA

VISALIA MUNI (VIS)..... **ILS or LOC Rwy 30**
RNAV (GPS) Rwy 12
RNAV (GPS) Rwy 30
VOR Rwy 12
NA when local weather not available.

WATSONVILLE, CA

WATSONVILLE MUNI (WVI)..... **RNAV (GPS) Rwy 2[1]**
VOR-A[23]
[1]Category D, 1000-3.
[2]NA when local weather not available.
[3]Categories A, B, 1200-2; Categories C, D, 1200-3.

SW-2, 30 JAN 2020 to 26 MAR 2020

RADAR INSTRUMENT APPROACH MINIMUMS

LEMOORE NAS (KNLC), (REEVES FIELD), CA (Amdt 6, 19311 USN) ELEV 229

RADAR - (E) 125.95 270.8x 314.0x 317.575x 322.45x 323.15x 336.4x 346.375x 348.75x 353.55x 363.7x 370.875x 377.075x

	RWY	GS/TCH/RPI	CAT	DH/ MDA-VIS	HAT/ HATh/ HAA	CEIL-VIS
PAR[1 4]	32L[2 6]	3.0°/40/766	ABCDE	**328**/16	100	(100-¼)
	14L	3.0°/54/1019	ABCDE	**320**/24	100	(100-½)
	32R[5]	3.0°/45/857	ABCDE	**322**/24	100	(100-½)
	14R[5]	3.0°/51/979	ABCDE	**329**/24	100	(100-½)
ASR[4]	32L[3 7]		ABCDE	**540**/24	312	(400-½)
	14L		ABCDE	**560**/55	340	(400-1)
	14R[5]		AB	**640**/55	411	(500-1)
			CDE	**640**/60	411	(500-1⅛)
	32R[5]		AB	**760**/55	538	(600-1)
			CDE	**760**-1½	538	(600-1½)
CIR[8]	ALL RWYS		AB	**680**-1	451	(500-1)
			C	**680**-1½	451	(500-1½)
			DE	**780**-2	551	(600-2)
CIR ASR	32R		AB	**760**-1	531	(600-1)
			C	**760**-1½	531	(600-1½)
			DE	**780**-2	551	(600-2)

[1]No-NOTAM MP: PAR-Rwy 14R-32L 1600-2400Z++ Mon, Rwy 14L-32R 1600-2400Z++ Wed.
[2]When ALS inop, increase CAT ABCDE RVR to 24 and vis to ½ mile.
[3]When ALS inop, increase CAT ABCDE RVR to 55 and vis to 1 mile.
[4]Simultaneous approaches authorized.
[5]Pattern at 2800 ft.
[6]Caution: WCH group 4: 15 ft less than required 20 ft.
[7]Step Down Fix at 3 NM from THLD, 1180 min.
[8]Circling authorized only from ASR and PAR w/o GS.

SW-2, 30 JAN 2020 to 26 MAR 2020

RADAR INSTRUMENT APPROACH MINIMUMS

RADAR MINS
19311

N1

19283

LAND AND HOLD-SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold-Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold-short operations and markings.

CITY/AIRPORT	LDG RWY	HOLD-SHORT POINT	AVBL LDG DIST
NAPA, CA			
NAPA COUNTY (APC)	24	01L-19R	3,700 feet
SANTA ROSA, CA			
CHARLESM SCHULZ-SONOMA COUNTY (STS)	02	14-32	4,608 feet

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

19283

19283

HOT SPOTS

An "airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on an airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles or polygons designated as "HS 1", "HS 2", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION*
ATWATER, CA		
CASTLE (MER)	HS 1	Twy A, Twy A1, Twy B, and Twy G complex int.
	HS 2	Twy A and southeast ramp, traffic congestion.
BEALE AFB, CA		
BEALE AFB (BAB)	HS 1	Twy B, high-speed U-2 mobile traffic when Rwy 15 in use.
	HS 2	Twy E, high-speed U-2 mobile traffic when Rwy 33 in use.
	HS 3	Twy F, in the vicinity of Twy C, Twy L, and Twy K. Frequent U-2 and high speed mobile traffic, slope of the twy limits visibility in both directions.
CONCORD, CA		
BUCHANAN FIELD (CCR)	HS 1	Rwy 32L and run-up area, Twy J.
	HS 2	Complex int at Rwy 01R-19L, Twy J, Twy A, Twy C, and Twy K.
	HS 3	Rwy 32L apch, Twy A.
HAYWARD, CA		
HAYWARD EXECUTIVE (HWD)	HS 1	Rwy 10L-28R, Twy E and Twy A.
	HS 2	Area not visible from ATCT.
	HS 3	Area not visible from ATCT.
	HS 4	Area not visible from ATCT.
	HS 5	Rwy 28L hold bars on Twy A1 and Twy Z1.
LIVERMORE, CA		
LIVERMORE MUNI (LVK)	HS 1	Rwy 25R, Twy B.
	HS 2	Rwy 25L, Twy C.
	HS 3	Rwy 07L, Twy H.
	HS 4	Rwy 07R, Twy G.
	HS 5	Rwy 25R, Twy G.
	HS 6	Ints of Twy J, Twy A, and Twy G.
NAPA, CA		
NAPA COUNTY (APC)	HS 1	Twy A, Twy C, Twy E and the ramp.
	HS 2	Rwy 24, Twy A.
	HS 3	Rwy 24 and Rwy 01L.
OAKLAND, CA		
METROPOLITAN OAKLAND INTL (OAK)	HS 1	Rwy 28R, Twy A and Twy B.
	HS 2	Rwy 10L-28R, Twy H, Twy G, Twy C and Twy D.
	HS 3	Rwy 10L and Rwy 33, Twy J, Twy P, and Twy C, complex int.
SACRAMENTO, CA		
SACRAMENTO EXECUTIVE (SAC)	HS 1	Inbound Twy A and outbound Twy B.
	HS 2	Portion of Twy E not visible from twr.

(SEE CONTINUATION PAGE FOR MORE LISTINGS)

19283

SW-2, 30 JAN 2020 to 26 MAR 2020

19059

HOT SPOTS

(CONTINUED)

CITY/AIRPORT	HOT SPOT	DESCRIPTION*
SACRAMENTO, CA		
SACRAMENTO INTL (SMF)	HS 1	Area not visible from the twr.
	HS 2	Concentrated north/south ground vehicle traffic crossing Twy W and Twy Y at Twy Y2.
	HS 3	Pilots taxiing south on Twy A sometimes miss the turn onto Twy A13.
SALINAS, CA		
SALINAS MUNI (SNS)	HS 1	Twy A and Twy C int in close proximity of Rwy 08-26.
SAN FRANCISCO, CA		
SAN FRANCISCO INTL (SFO)	HS 1	Complex int Twy B and Twy F.
	HS 2	Rwy 01L-19R, Twy C and Twy E.
	HS 3	Rwy 28R and Twy T.
SAN JOSE, CA		
NORMAN Y. MINETA SAN JOSE INTL (SJC)	HS 1	Twy D crosses Twy W1.
	HS 2	Rwy 30L and Twy D "Run-up Area" near Active rwy.
SAN JOSE, CA		
REID-HILLVIEW OF SANTA CLARA COUNTY (RHV)	HS 1	Numerous inbounds and outbounds at twy intersections Twy D, Twy Z, and Twy Y.
	HS 2	Numerous aircraft maneuvering at twy int of Twy Y, Twy Z, Twy A and the Rwy 31R run-up area. Aircraft sometimes confuse Twy Y for Rwy 13L-31R.
	HS 3	Aircraft sometimes confuse Twy Y for Rwy 13L-31R.
SANTA ROSA, CA		
CHARLES M. SCHULZ-SONOMA COUNTY (STS)	HS 1	Twy A, Twy A5, Twy Z complex int in close proximity to Rwy 14-32.
	HS 2	South run-up area not visible from the twr.
	HS 3	North run-up area east of Twy A and Twy H int in close proximity of Rwy 20 Apch Hold.
	HS 4	Wrong rwy departure risk.
STOCKTON, CA		
STOCKTON METROPOLITAN (SCK)	HS 1	Area not visible from control twr.
TRUCKEE, CA		
TRUCKEE-TAHOE (TRK)	HS 1	Simultaneous ops on Rwy 11-29 and Rwy 02-20.

*See appropriate Chart Supplement HOT SPOT table for additional information.

19059

SW-2, 30 JAN 2020 to 26 MAR 2020

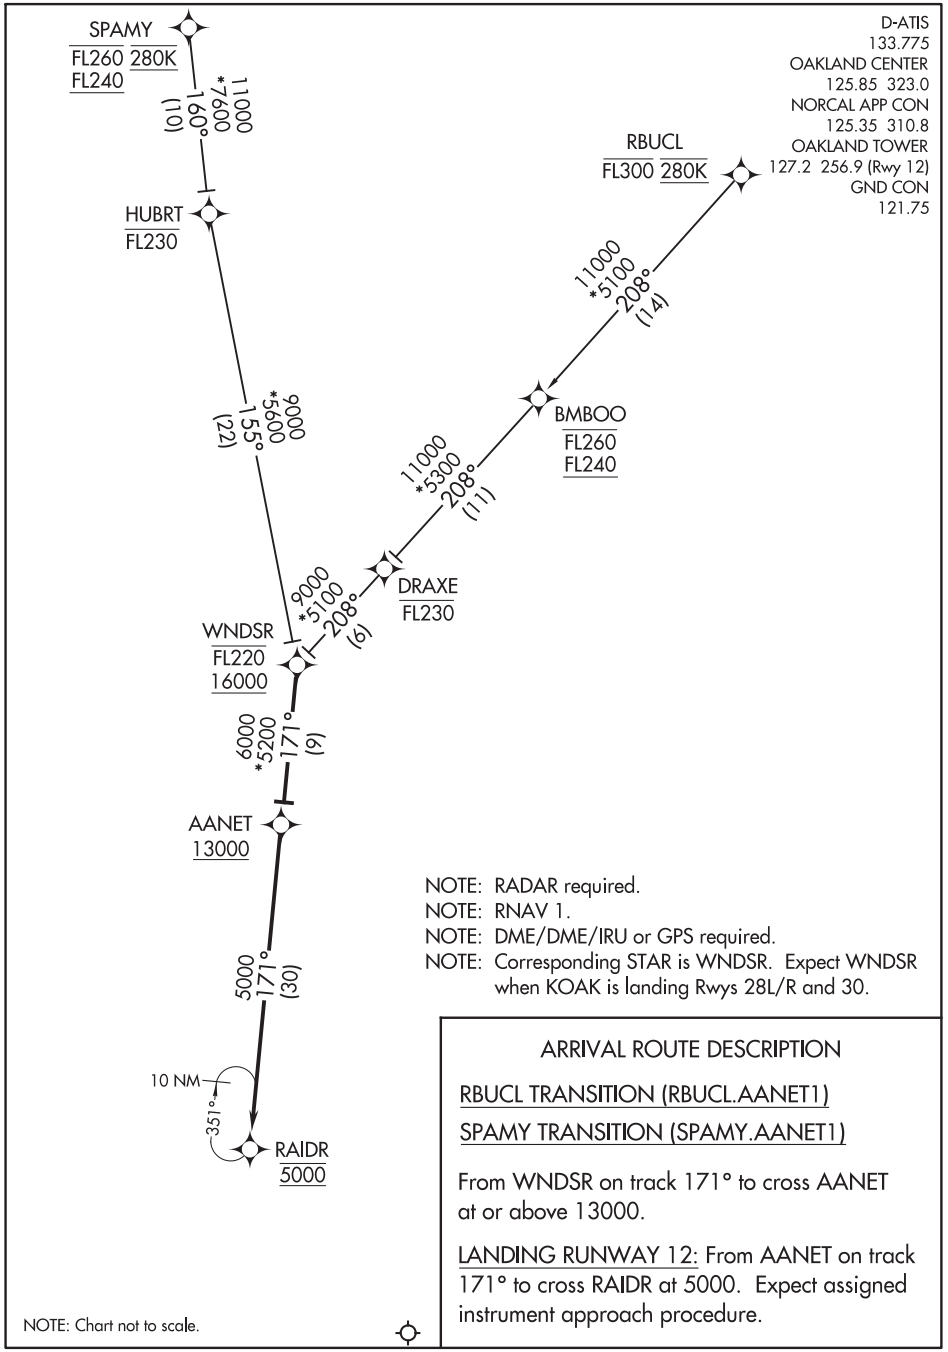

SW-2, 30 JAN 2020 to 26 MAR 2020

(TTE.ALTTA9) 19283

ALTTA NINE ARRIVAL

AL-162 (FAA)

FRESNO YOSEMITE INTL (FAT)
FRESNO, CALIFORNIA

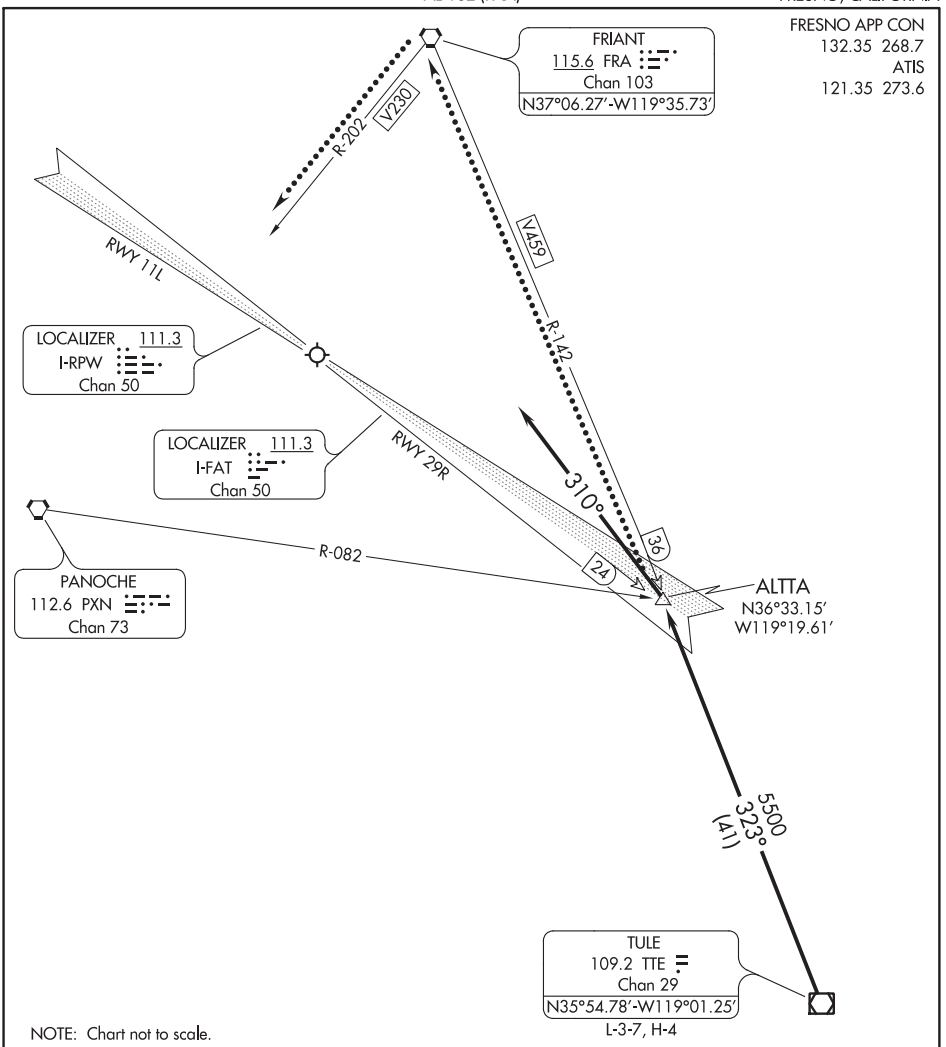

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

From over TULE (TTE) VOR/DME on TTE R-323 and FRIANT (FRA) VORTAC R-142 to ALTTA. Expect ILS or LOC RWY 29R approach. For Rwy 11L operations: Depart ALTTA heading 310° and expect RADAR vectors to LOC Y RWY 11L.

LOST COMMUNICATIONS: Rwy 11L: Proceed to FRA VORTAC on V459, then on V230, execute the LOC Y RWY 11L approach.

ALWYS TWO ARRIVAL (RNAV) Transition Routes

SW-2, 30 JAN 2020 to 26 MAR 2020

(ALWYS.ALWYS2) 18256 AL-375 (FAA)

ALWYS TWO ARRIVAL (RNAV) Arrival Routes

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

OAKLAND CENTER
134.37 281.5
NORCAL APP CON
128.325 254.3
D-ATIS
113.7 115.8 118.85
SAN FRANCISCO TOWER
120.5 269.1
GND CON
121.8

LANDING SFO
269°
BERKS
5000 210K
269° (11)
COGGR
9000 210K
7000
269° (13)
ADDMM
9000 240K
269° (10)
ARRTU
10000 240K
269° (14)
HEFLY
FL190 250K
14000
089° 10 NM
269° (13)
ALWYS
247° 067° 10 NM

N

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Expect "descend via" clearance from Oakland Center. Northern California TRACON will assign landing runway.

NOTE: Chart not to scale.

ARRIVAL ROUTE DESCRIPTION

LANDING RUNWAYS 19L/R: From ALWYS on track 269° to cross HEFLY between 14000 and FL190 and at 250K, then on track 269° to cross ARRTU at 10000 and at 240K, then on track 269° to cross ADDMM at 9000 and at 240K, then on track 269° to cross COGGR between 7000 and 9000 and at 210K, then on track 269° to cross BERKS at or above 5000 and at 210K, then on track 269°. Expect ILS or RNAV (GPS) approach to Rwy 19L or RADAR vectors to final approach course.

ALWYS TWO ARRIVAL (RNAV) Arrival Routes
SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

(ALWYS.ALWYS2) 13SEP18

SW-2, 30 JAN 2020 to 26 MAR 2020

AMRVR TWO ARRIVAL (RNAV)

(AMRVR.AMRVR2) 13SEP18

SACRAMENTO, CALIFORNIA

SACRAMENTO MATHER (MHR)

NORCAL APP CON
127.4 317.5
ATIS
118.325
MATHER TOWER ★
120.65 282.25

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbojet aircraft only.
NOTE: RADAR required for non-GPS equipped aircraft.

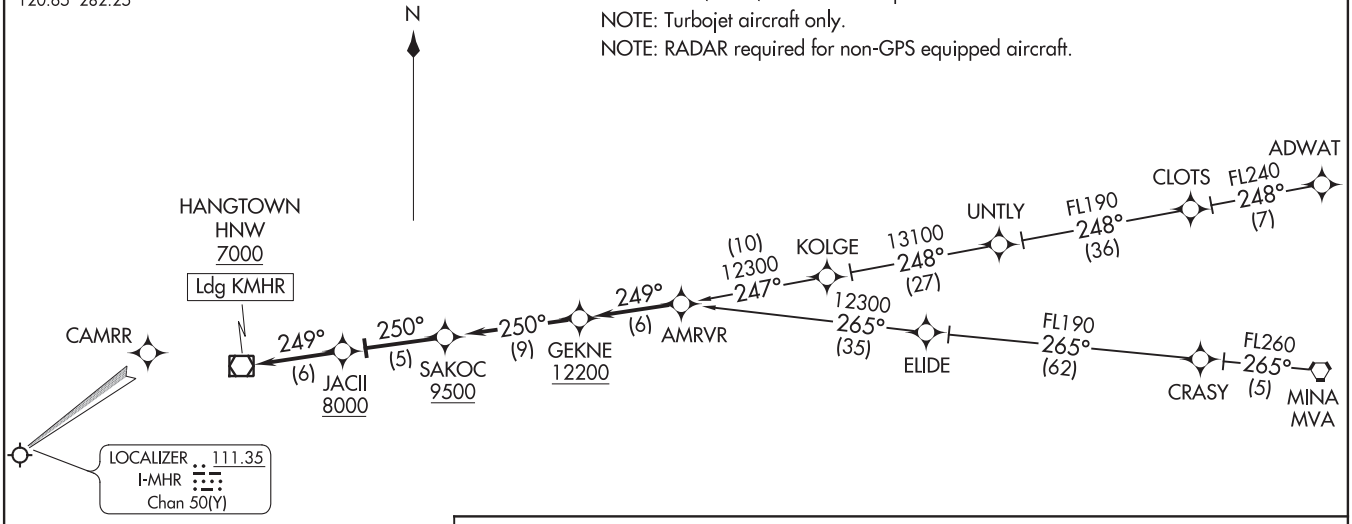

ARRIVAL ROUTE DESCRIPTION

ADWAT TRANSITION (ADWAT.AMRVR2)

MINA TRANSITION (MVA.AMRVR2)

. . . . From AMRVR on track 249° to cross GEKNE at or above 12200, then on track 250° to cross SAKOC at or above 9500, then on track 250° to cross JACII at or above 8000, then on track 249° to cross HNW VOR/DME at or above 7000. Expect ILS approach Runway 22L or visual approach.

NOTE: Chart not to scale.

(AMRVR.AMRVR2) 18256

AMRVR TWO ARRIVAL (RNAV)

AL-356 (FAA)

SACRAMENTO MATHER (MHR)

SACRAMENTO, CALIFORNIA

Z5

(BANND.BANND2) 18144 AL-294 (FAA) METROPOLITAN OAKLAND INTL (OAK)

BANND TWO ARRIVAL (RNAV) Transition Routes

OAKLAND, CALIFORNIA

(CONTINUED ON FOLLOWING PAGE)

SW-2, 30 JAN 2020 to 26 MAR 2020

BANND TWO ARRIVAL (RNAV) Transition Routes
OAKLAND, CALIFORNIA

(BANND.BANND2) 24MAY18 METROPOLITAN OAKLAND INTL (OAK)

ARRIVAL ROUTE DESCRIPTION
LANDING RUNWAY 12: From BANND on track 277° to cross SULRR at or below 13000, then on track 264° to cross KEENR at 8000, then on track 262° to cross LOHGN at 6000 and at 230K, then on track 261° to cross WHYEE at or above 5000, then on track 261° to cross HIRMO at 4000, then on track 261°. Expect RADAR vectors to final approach course.
OAKLAND CENTER
134.37 281.5
NORCAL APP CON
124.8 263.15
D-ATIS
133.775
OAKLAND TOWER
127.2 256.9 (Rwy 12)
GND CON
121.75 (Rwy 12)
N
KOAK Ldg Rwy 12
261°
HIRMO
4000
261°
(5)
WHYEE
5000
261°
(4)
LOHGN
6000 230K
262°
(11)
KEENR
8000
264°
(17)
SULRR
13000
277°
(17)
BANND
FL180 270K
NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
SAN FRANCISCO INTL
NORMAN Y MINETA SAN JOSE INTL
NOTE: Chart not to scale.

(LOZIT.BDEGA3) 18256

BDEGA THREE ARRIVAL (RNAV)

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

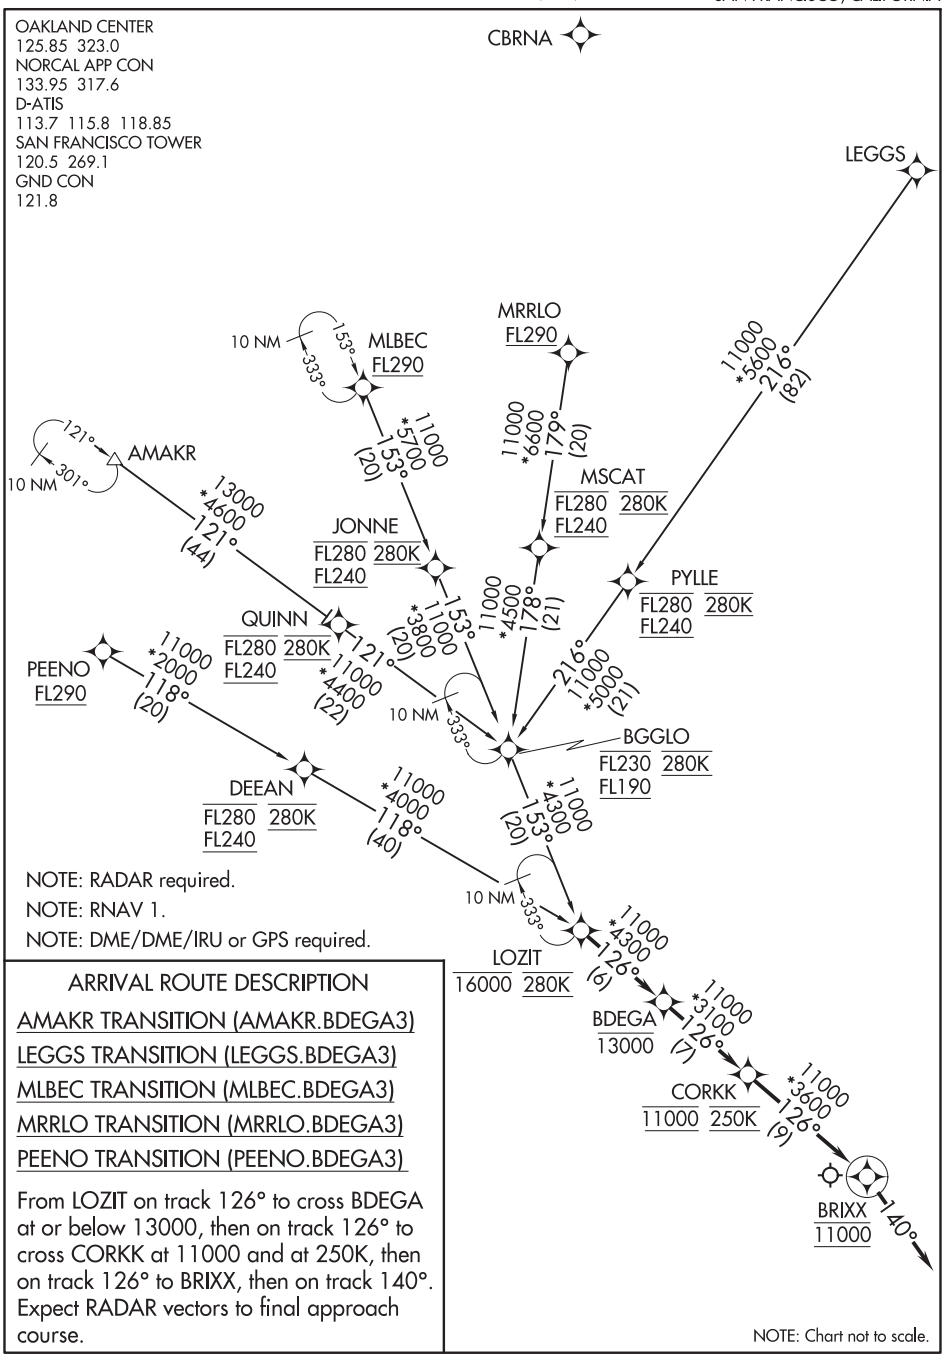

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

AMAKR TRANSITION (AMAKR.BDEGA3)

LEGGS TRANSITION (LEGGS.BDEGA3)

MLBEC TRANSITION (MLBEC.BDEGA3)

MRRLO TRANSITION (MRRLO.BDEGA3)

PEENO TRANSITION (PEENO.BDEGA3)

From LOZIT on track 126° to cross BDEGA at or below 13000, then on track 126° to cross CORKK at 11000 and at 250K, then on track 126° to BRIXX, then on track 140°. Expect RADAR vectors to final approach course.

BDEGA THREE ARRIVAL (RNAV)

(LOZIT.BDEGA3) 13SEP18

SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

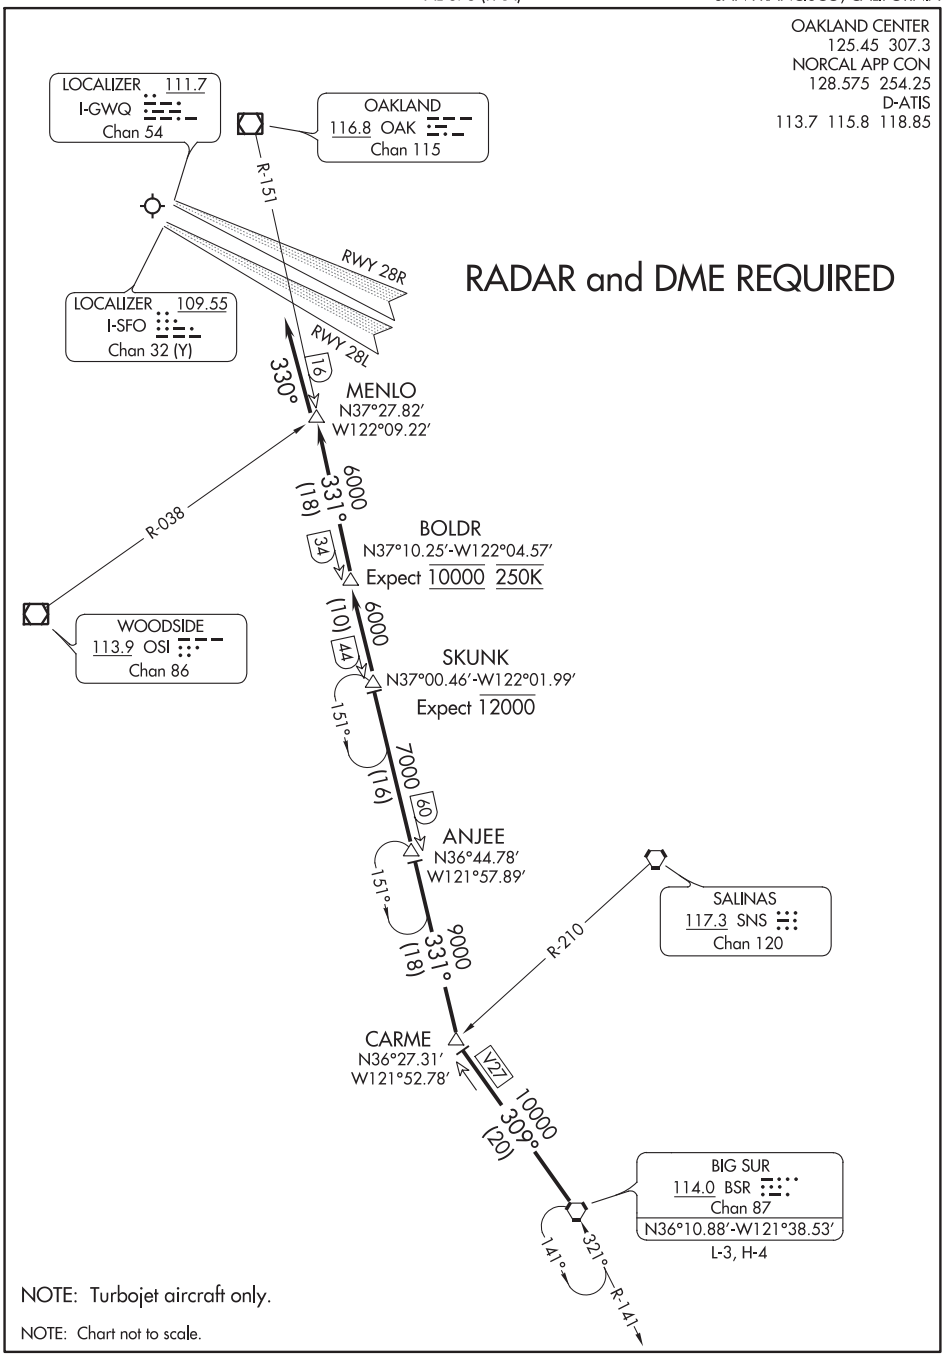

SW-2, 30 JAN 2020 to 26 MAR 2020

(BMBER.BMBER1) 19339

BMBER ONE ARRIVAL (RNAV)

AL-5320 (FAA)

CONCORD, CALIFORNIA

BMBER ONE ARRIVAL (RNAV)

CONCORD, CALIFORNIA

(BMBER.BMBER1) 05DEC19

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

NURAY TRANSITION (NURAY.BMBER1)

PEMKE TRANSITION (PEMKE.BMBER1)

RPARK TRANSITION (RPARK.BMBER1)

LANDING KSUU, KCCR: From BMBER on track 265° to cross JOSBA between 10000 and 11000, then on track 267° to cross RAAAF at 6000 and at or below 230K, then on heading 303° or as assigned by ATC. Expect RADAR vectors to final approach course.

LOST COMMUNICATIONS

KSUU: From RAAAF, proceed on track 318° to cross SEATO at 6000. Execute ILS or LOC RWY 21L or TACAN RWY 3L approach. If unable, hold at SEATO as depicted, maintain 6000 feet.

KCCR: From RAAAF, proceed on track 312° to cross REJOY at 6000 and execute RNAV, LDA, or VOR RWY 19R approach.

SW-2, 30 JAN 2020 to 26 MAR 2020

(PYE.BRINY2) 17173

BRINY TWO ARRIVAL

AL-693 (FAA)

NORMAN Y MINETA SAN JOSE INTL (SJC)
SAN JOSE, CALIFORNIA

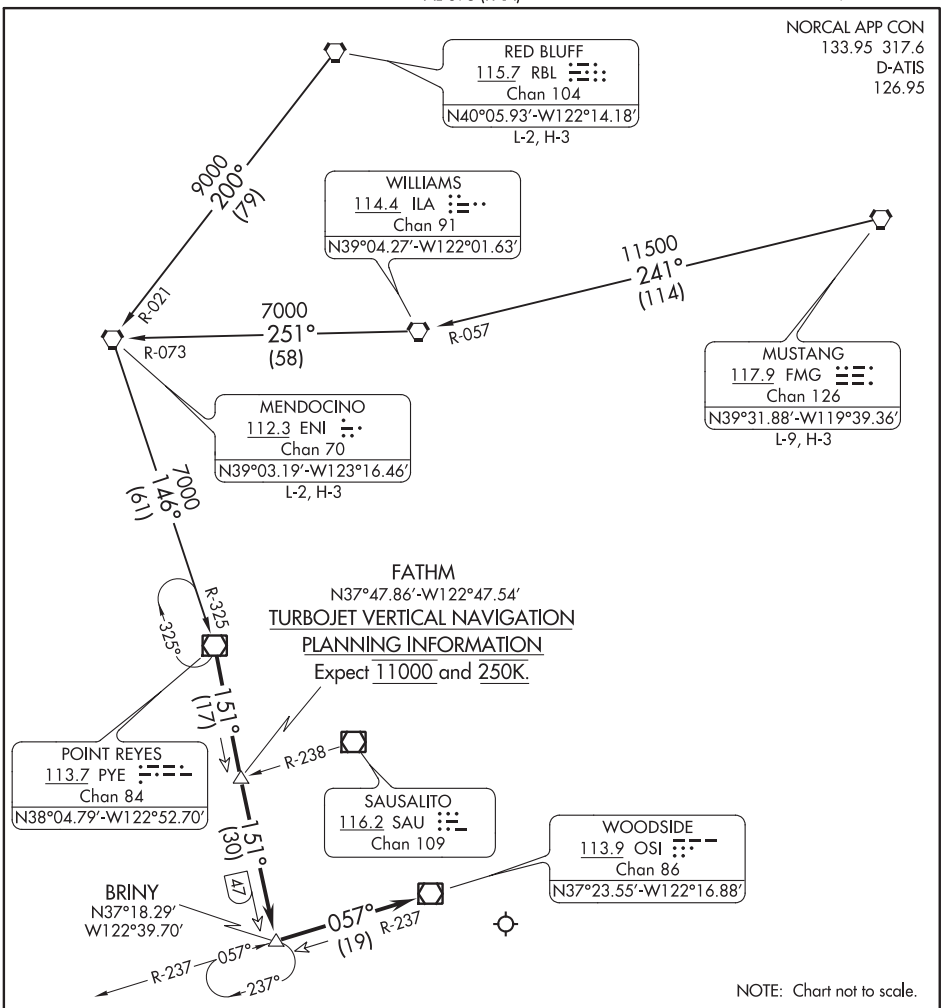

ARRIVAL ROUTE DESCRIPTION

MENDOCINO TRANSITION (ENI.BRINY2): From over ENI VORTAC via ENI R-146 and PYE R-325 to PYE VOR/DME. Thence . . . .

MUSTANG TRANSITION (FMG.BRINY2): From over FMG VORTAC via FMG R-241 to ILA VORTAC then via ILA R-251 to ENI VORTAC, then via ENI R-146 to PYE VOR/DME. Thence . . . .

RED BLUFF TRANSITION (RBL.BRINY2): From over RBL VORTAC via RBL R-200 and ENI R-146 to PYE VOR/DME. Thence . . . .

. . . . From over PYE VOR/DME via PYE R-151 to BRINY INT/DME, then via OSI R-237 to OSI VOR/DME. Expect RADAR vectors to Rwy 12R final approach course.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

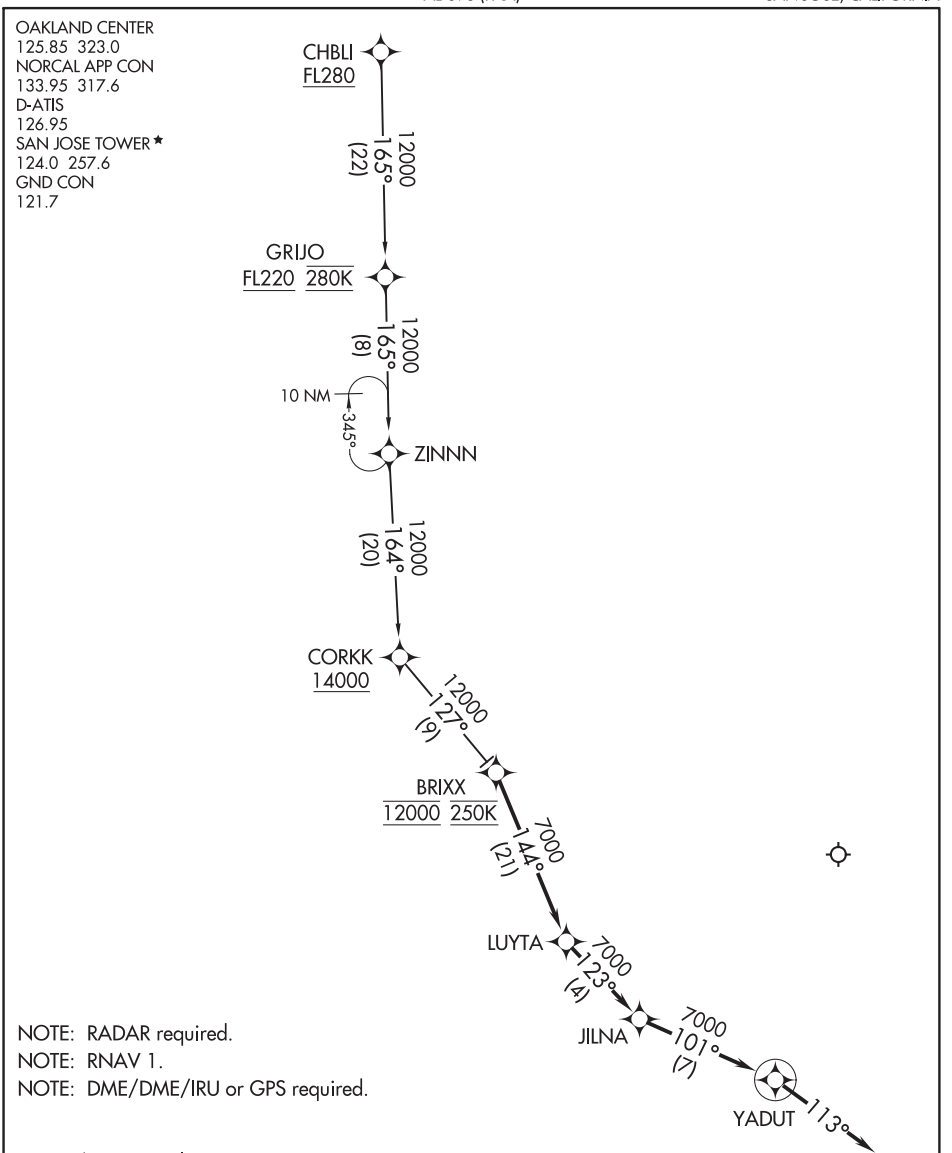

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

CHBLI TRANSITION (CHBLI.BRIXX2)

From BRIXX on track 144° to LUYTA, then on track 123° to JILNA, then on track 101° to YADUT, then on track 113°. Expect RADAR vectors to final approach course.

(CCR.CCR2) 17173

CONCORD TWO ARRIVAL

AL-5490 (FAA)

SACRAMENTO INTL (SMF)
SACRAMENTO, CALIFORNIA

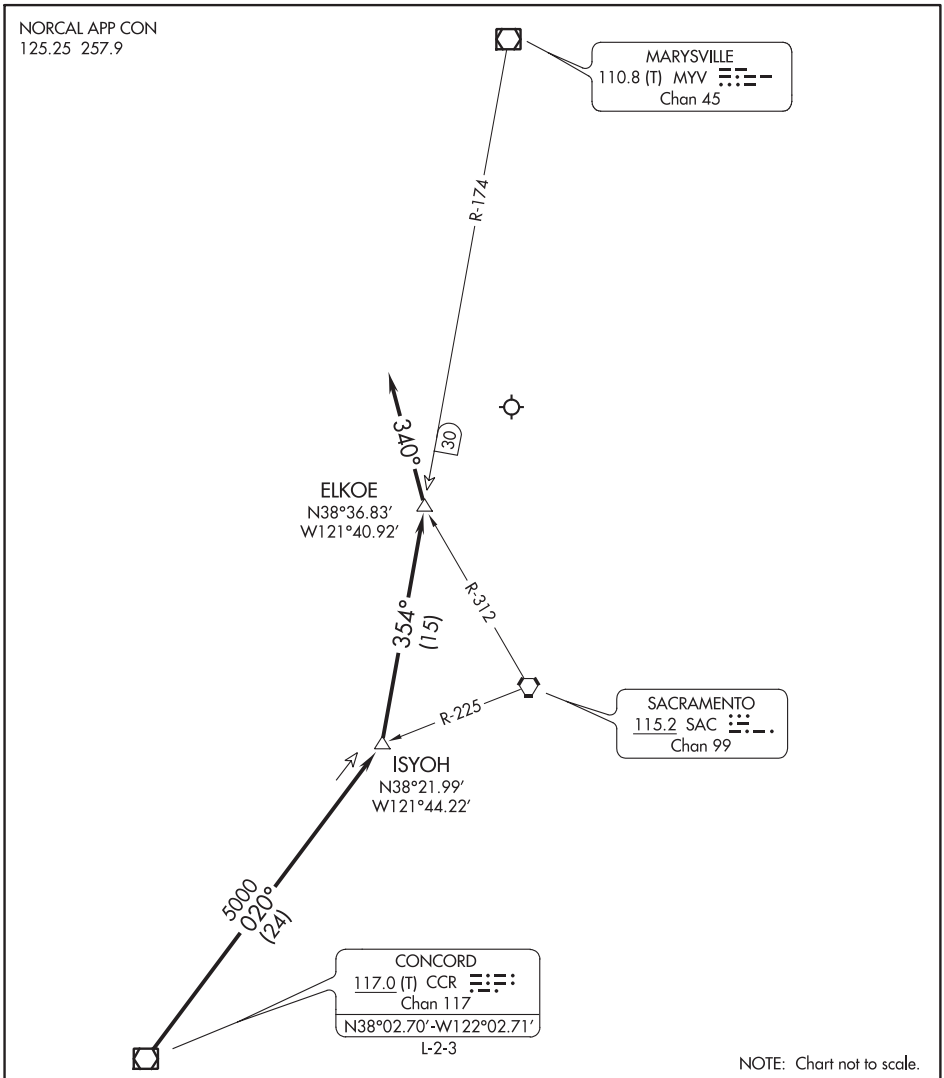

ARRIVAL ROUTE DESCRIPTION

From over CCR VOR/DME via CCR R-020 to ISYOH INT, then via MYV R-174 to ELKOE INT, then on heading 340°. Expect RADAR vectors to final approach course.

CONCORD TWO ARRIVAL

(CCR.CCR2) 15NOV12

SACRAMENTO, CALIFORNIA
SACRAMENTO INTL (SMF)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DYAMD FIVE ARRIVAL (RNAV) Transition Routes

OAKLAND CENTER 134.37 281.5
NORCAL APP CON 128.325 254.3
D-ATIS 113.7 115.8 118.85
SAN FRANCISCO TOWER 120.5 269.1
GND CON 121.8

N

INYOE
248°
068°
16 NM

FL220
248°
(79)

FL220
262°
(138)

RUSME

See following page for Arrival Routes

DYAMD
FL270 290K

INYOE TRANSITION (INYOE.DYAMD5)

RUSME TRANSITION (RUSME.DYAMD5)

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Expect to receive "descend via" clearance from Oakland Center. Northern California TRACON will assign landing runway.
NOTE: RADAR required for non-GPS equipped aircraft.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

DYAMD FIVE ARRIVAL (RNAV) Arrival Routes

(DYAMD.DYAMD5) 03JAN19

SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

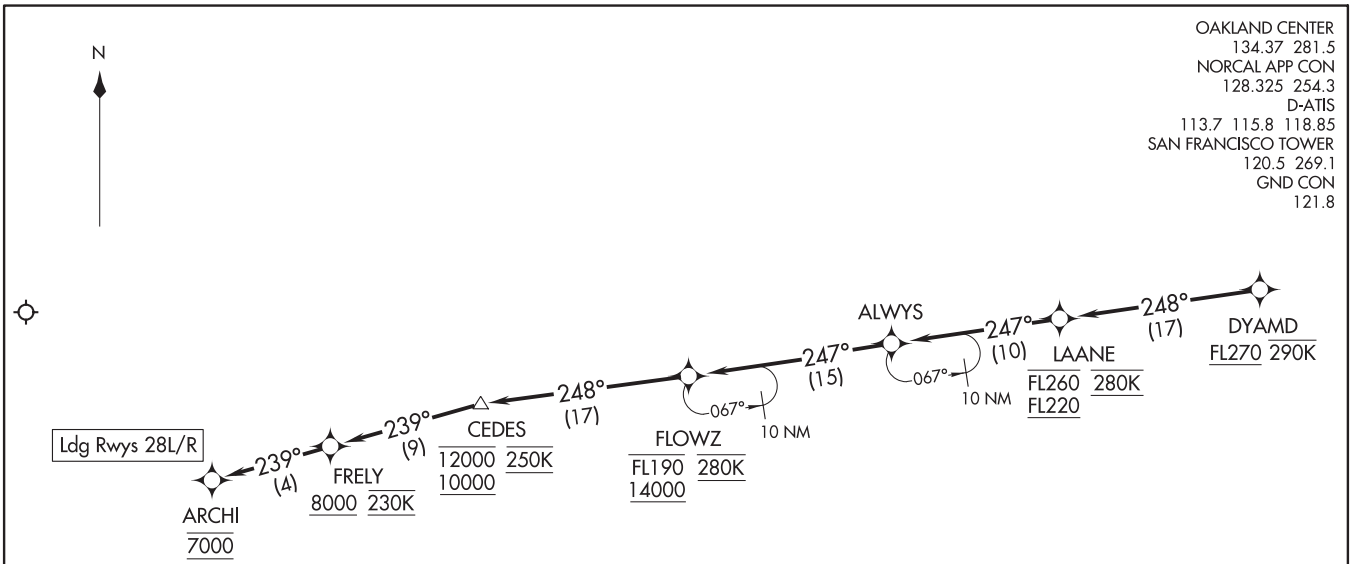

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Expect to receive "descend via" clearance from Oakland Center. Northern California TRACON will assign landing runway.
NOTE: RADAR required for non-GPS equipped aircraft.

NOTE: Chart not to scale.

ARRIVAL ROUTE DESCRIPTION

From DYAMD on track 248° to cross LAANE between FL220 and FL260 and at 280K, then on track 247° to ALWYS.

LANDING RUNWAYS 28L/R: From ALWYS on track 247° to cross FLOWZ between 14000 and FL190 and at 280K, then on track 248° to cross CEDES between 10000 and 12000 and at 250K, then on track 239° to cross FRELY at or above 8000 and at 230K, then on track 239° to cross ARCHI at 7000. Expect assigned instrument approach procedure.

(DYAMD.DYAMD5) 19003
DYAMD FIVE ARRIVAL (RNAV) Arrival Routes
SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

AL-375 (FAA)

Z16

ARRIVAL ROUTE DESCRIPTION

RGOOD TRANSITION (RGOOD.EMZOH3)

From EMZOH on track 304° to cross MYJAW at or above FL220 and at 280K, then on track 304° to cross SKIZM between 15000 and FL190.

LANDING RUNWAYS 28L/R: From SKIZM on track 303° to cross MYRIB between 9000 and 10000 and at 240K, then on track 304° to MYHIP, then on track 292° to cross MYNEE at 7000, then on track 292° to cross MYSHN at or above 6200, then on track 292° to cross CYMBL at 5300. Expect assigned instrument approach procedure.

LANDING RUNWAY 30: From SKIZM on track 303° to cross MYRIB between 9000 and 10000 and at 240K, then on track 304° to MYHIP, then on track 292° to cross MYNEE at 7000, then on track 292° to cross MYSHN at or above 6200, then on track 264° to cross FIXME at or above 5200, then on track 264° to cross MYCAF at or above 5000, then on track 264° to cross BIGPD at or above 4500, then on track 264° to cross FRNNY at or above 4100. Expect assigned instrument approach procedure.

(FRLON.FRLON2) 17173

FRLON TWO ARRIVAL (RNAV)

AL-693 (FAA)

NORMAN Y MINETA SAN JOSE INTL (SJC)

SAN JOSE, CALIFORNIA

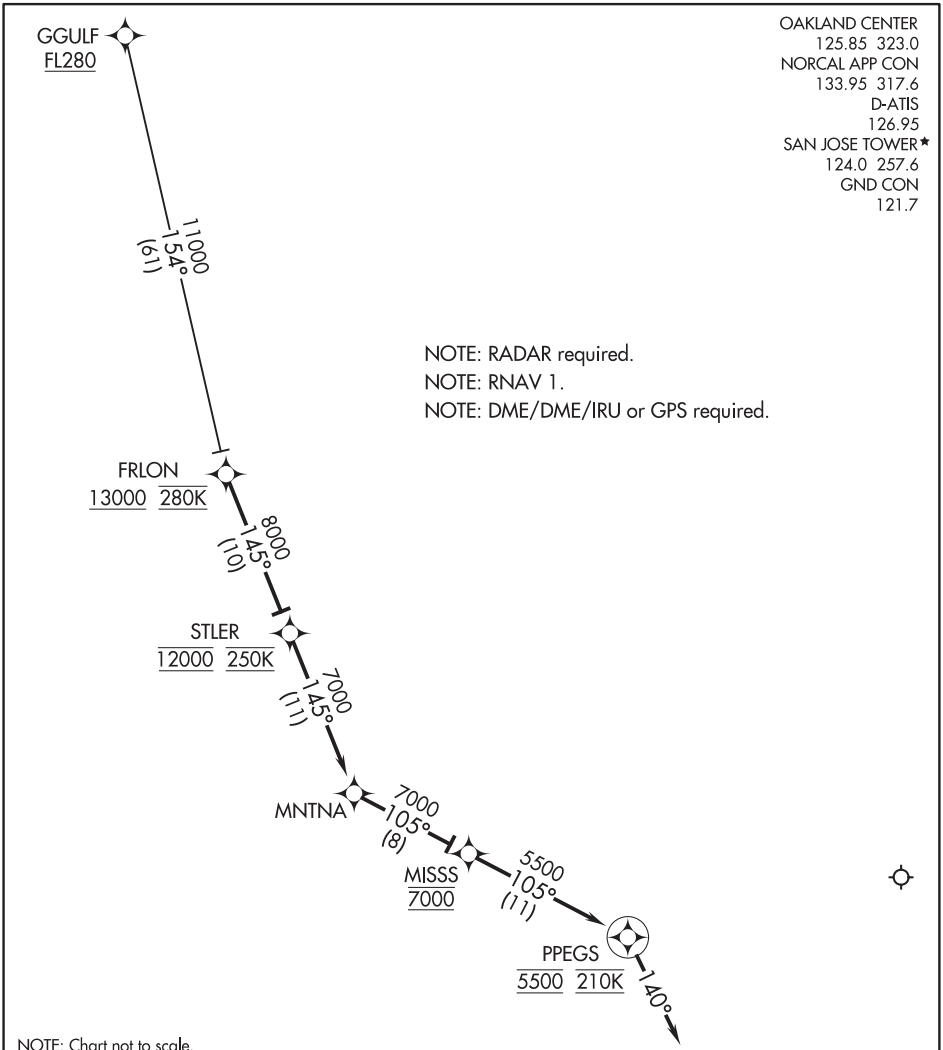

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

GGULF TRANSITION (GGULF.FRLON2)

From FRLON on track 145° to cross STLER at 12000 and at 250K, then on track 145° to MNTNA, then on track 105° to cross MISSS at 7000, then on track 105° to cross PPEGS at 5500 and at 210K, then on track 140°. Expect RADAR vectors to final approach course.

MODESTO NINE ARRIVAL

(MOD.MOD9) 15AUG19

SAN FRANCISCO, CALIFORNIA

SAN FRANCISCO INTL (SFO)

ARRIVAL ROUTE DESCRIPTION

COALDALE TRANSITION (OAL.MOD9): From over OAL VORTAC on OAL R-246 and MOD R-064 to MOD VOR/DME. Thence. . . .

MINA TRANSITION (MVA.MOD9): From over MVA VORTAC on MVA R-204 and OAL R-246 and MOD R-064 to MOD VOR/DME. Thence. . . .

MUSTANG TRANSITION (FMG.MOD9): From over FMG VORTAC on FMG R-182 and MOD R-064 to MOD VOR/DME. Thence. . . .

. . . . From over MOD VOR/DME on MOD R-245 to LEEFF, then on MOD R-245 to GROAN, then on MOD R-245 to CEDES, then on OSI VOR/DME R-056 to ARCHI, then on OSI R-056 to MEHTA. Expect RADAR vectors to final approach course.

LOST COMMUNICATIONS: Intercept and proceed on SFO RWY 28R localizer to CEPIN.

OAKLAND CENTER
134.375 281.5
NORCAL APP CON
128.325 254.3
D-ATIS
113.7 115.8 118.85

MUSTANG
117.9 FMG
Chan 126
N39°31.88′-W119°39.36′
L-9, H-3

MINA
115.1 MVA
Chan 98
N38°33.92′-W118°01.97′
L-9, H-3

COALDALE
117.7 OAL
Chan 124
N38°00.20′-W117°46.23′
L-9, H-3

MODESTO
114.6 MOD
Chan 93
N37°37.64′-W120°57.47′

SCAGGS ISLAND
112.1 SGD
Chan 58

LOCALIZER 111.7
I-GWQ
Chan 54

OAKLAND
116.8 OAK
Chan 115

SAN FRANCISCO
115.8 SFO
Chan 105

WOODSIDE
113.9 OSI
Chan 86

CEPIN
N37°32.16′
W122°10.37′

ARCHI
N37°29.45′
W121°52.53′

CEDES
N37°33.05′
W121°37.48′
Expect 11000

GROAN
N37°35.42′
W121°17.10′

LEEFF
N37°36.52′
W121°07.44′

TROSE
N37°41.95′
W120°24.25′

KYLLA
N37°49.56′
W119°22.09′

INYOE
N37°53.74′
W118°45.90′

MEHTA
N37°27.70′
W121°59.79′

FL240
182°
(115)

FL190
204°
(53)

FL190
246°
(48)

FL190
246°
(29)

FL190
244°
(50)

FL180
244°
(27)

8000
245°
(8)

8000
236°
(13)

6000
(6)

(16)

(8)

R-064
064°
065°
066°
R-151
R-101
R-119
R-056
R-091
SFO
I-GWQ
12
14
16
20
32
33
77
77

N

NOTE: RADAR required.

NOTE: DME required.

NOTE: Chart not to scale.

(MOD.MOD9) 19227

MODESTO NINE ARRIVAL

SAN FRANCISCO INTL (SFO)

SAN FRANCISCO, CALIFORNIA

AL-375 (FAA)

Z19

(OAKES.OAKES2) 17173 AL-294 (FAA)

OAKES TWO ARRIVAL (RNAV) Transition Routes

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

MONOH TRANSITION (MONOH.OAKES2)
MRLET TRANSITION (MRLET.OAKES2)
RUSME TRANSITION (RUSME.OAKES2)

INSLO
TATOO
N
RUSME
MONOH
MRLET
POYSN
MOLLA
OAKES

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.

FL200
246°
(47)

FL200
*16500
267°
(137)

FL200
*11100
179°
(52)

16000
*11400
245°
(31)

16000
*9400
195°
(28)

FL320 280K
FL240

See following page for Arrival Routes.

OAKLAND CENTER
134.37 281.5
NORCAL APP CON
124.8 263.15
D-ATIS
133.775
OAKLAND TOWER
118.3 291.65 (Rwys 28L/R)
127.2 256.9 (Rwy 30)
GND CON
121.9 (Rwys 28L/R)
121.75 (Rwy 30)

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

OAKES TWO ARRIVAL (RNAV) Transition Routes
METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

(OAKES.OAKES2) 15OCT15

OAKES TWO ARRIVAL (RNAV) Arrival Routes

(OAKES.OAKES2) 150CT15

OAKLAND, CALIFORNIA
METROPOLITAN OAKLAND INTL (OAK)

OAKLAND CENTER
134.37 281.5
NORCAL APP CON
124.8 263.15
D-ATIS
133.775
OAKLAND TOWER
118.3 291.65 (Rwys 28L/R)
127.2 256.9 (Rwy 30)
GND CON
121.9 (Rwys 28L/R)
121.75 (Rwy 30)

ARRIVAL ROUTE DESCRIPTION

From OAKES on track 244° to cross GRUDG between FL200 and FL230 and at 280K, then on track 244° to cross BANND at or below FL190.

LANDING RUNWAYS 28L/R: From BANND on track 244° to cross TOOOL between 11000 and 17000 and at 280K, then on track 250° to cross EVOLV between 7000 and 9000, then on track 249° to cross BBUBB at 5000. Expect assigned instrument approach procedure.

LANDING RUNWAY 30: From BANND on track 244° to cross TOOOL between 11000 and 17000 and at 280K, then on track 238° to cross FFIST between 7000 and 9000, then on track 251° to cross PRFCT at or above 5000, then on track 256° to cross PARBB at 4500, then on track 243°. Expect assigned instrument approach procedure.

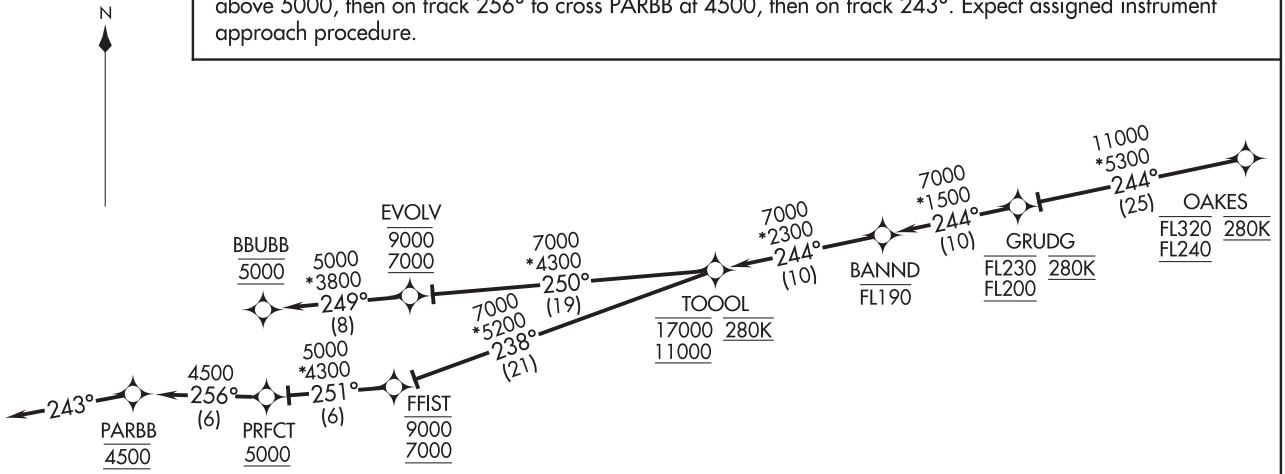

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.

NOTE: Chart not to scale.

(OAKES.OAKES2) 17173 OAKES TWO ARRIVAL (RNAV) Arrival Routes

AL-294 (FAA)
METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

Z21

(OSVEE.OSVEE1) 17117

OSVEE ONE ARRIVAL (RNAV)

AL-488 (FAA)

TRAVIS AFB (KSUU)
FAIRFIELD, CALIFORNIA

ARRIVAL ROUTE DESCRIPTION

LIBBO TRANSITION (LIBBO.OSVEE1)

ROVUE TRANSITION (ROVUE.OSVEE1)

ZONSO TRANSITION (ZONSO.OSVEE1)

From MOLEN on track 055° to OCOVA, thence . . . .

. . . .LANDING RUNWAYS 3L, 21R: From OCOVA on track 054° to cross OSVEE at 7000, then on heading 020°, expect RADAR vectors to final approach course.

LOST COMMUNICATIONS: From OVSEE, proceed direct SEATO. Execute ILS or LOC RWY 21R or TACAN RWY 3L approach. If unable, hold at SEATO as depicted, maintain 6000.

TRAVIS APP CON
126.6 281.45 (N)
119.9 322.325 (S)
TRAVIS TOWER
120.75 254.4
GND CON
121.8 289.4
D-ATIS
135.55 292.125

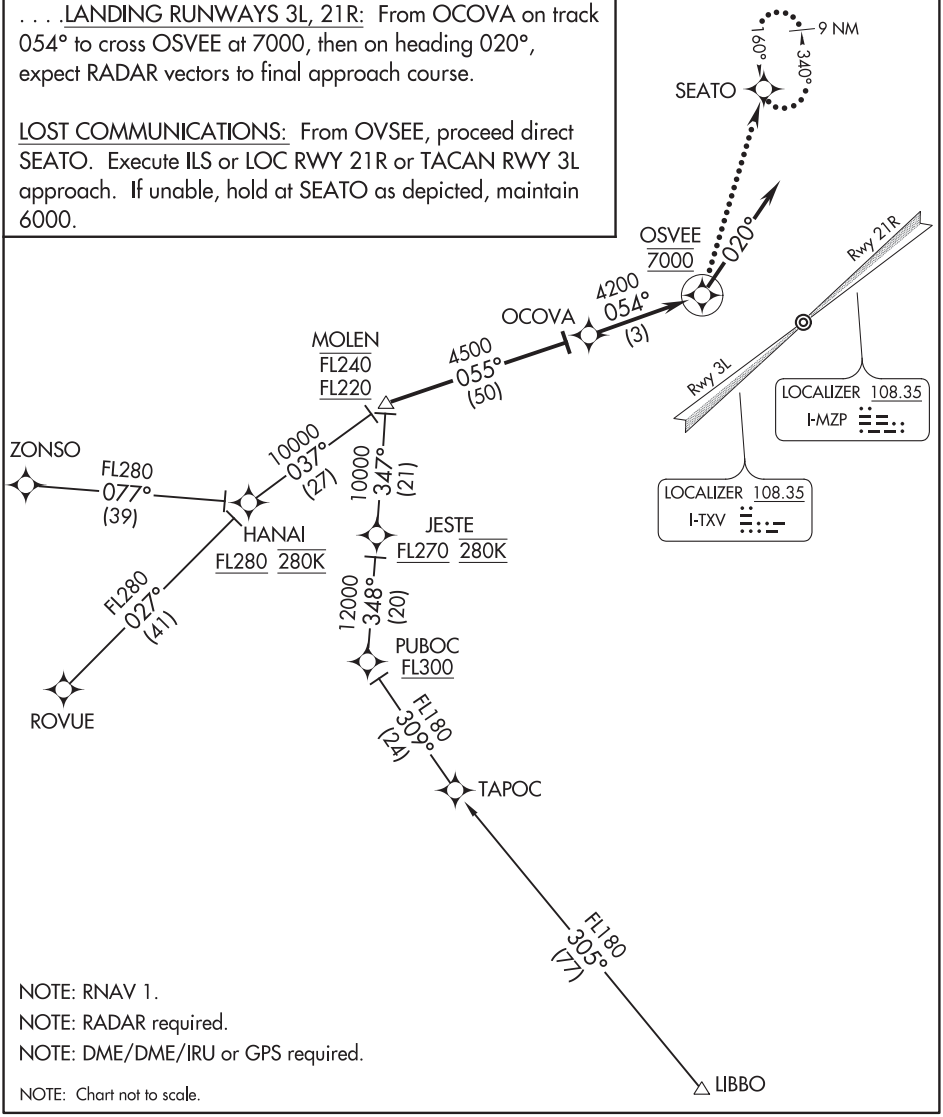

NOTE: RNAV 1.

NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

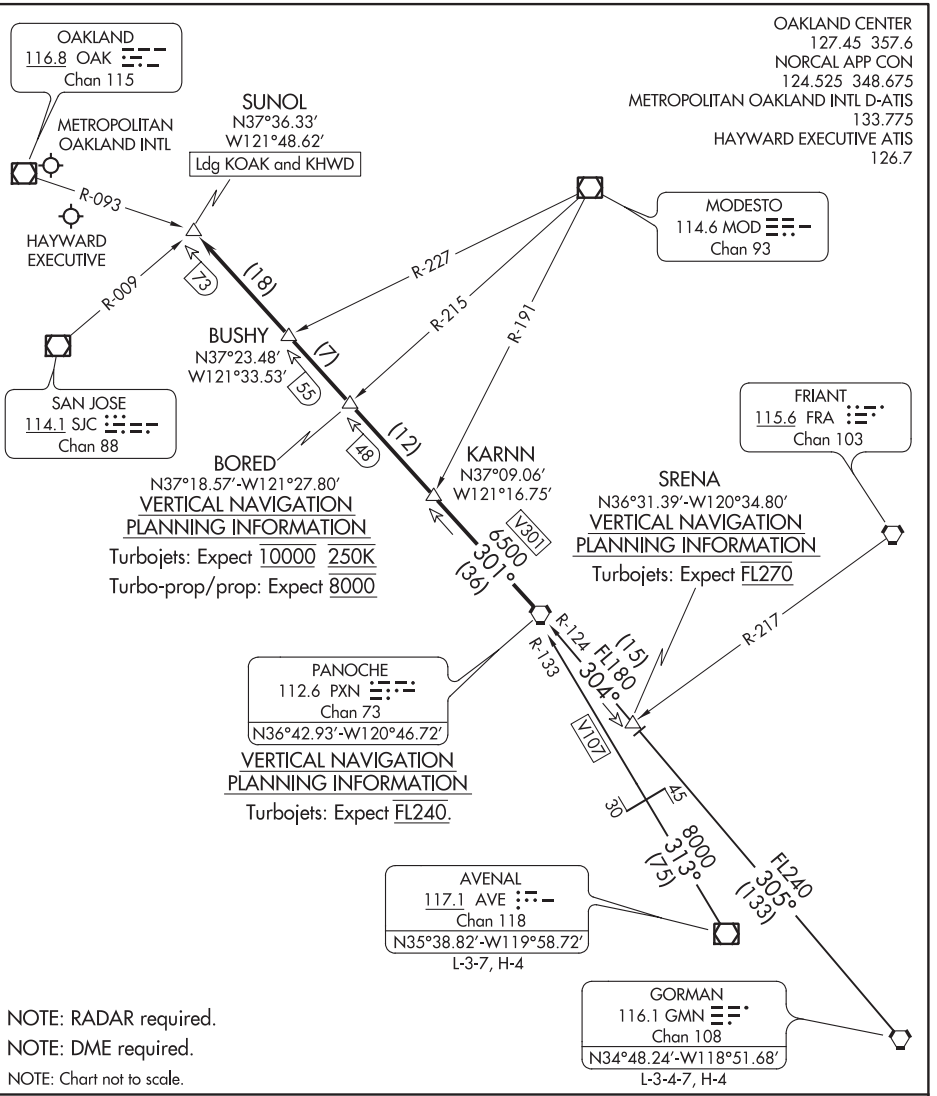

ARRIVAL ROUTE DESCRIPTION

AVENAL TRANSITION (AVE.PXN6): From over AVE VOR/DME on AVE R-313 and PXN R-133 to PXN VORTAC. Thence. . . .

GORMAN TRANSITION (GMN.PXN6): From over GMN VORTAC on GMN R-305 and PXN R-124 to SRENA, then on PXN R-124 to PXN VORTAC. Thence. . . .

. . . .From over PXN VORTAC on PXN R-301 to SUNOL. Expect RADAR vectors to final approach course.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(PEBLL.PEBLL1) 17117

PEBLL ONE ARRIVAL (RNAV)

AL-488 (FAA)

TRAVIS AFB (KSUU)
FAIRFIELD, CALIFORNIA

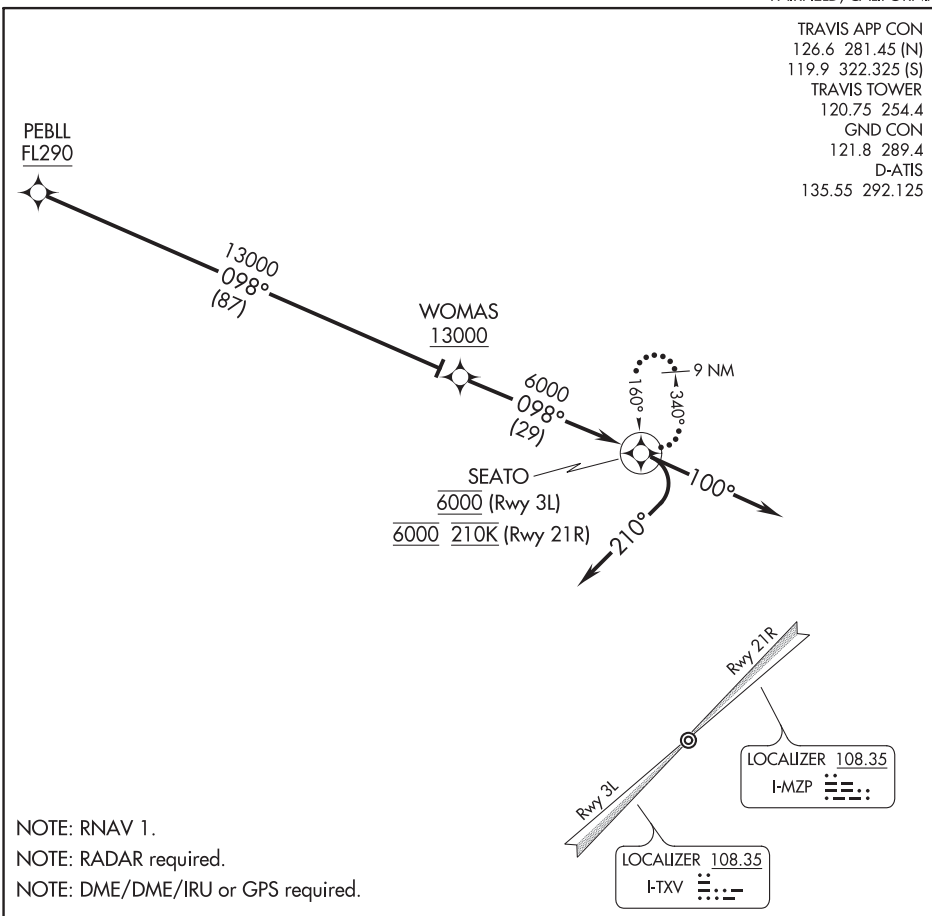

NOTE: RNAV 1.

NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

From PEBLL on track 098° to cross WOMAS at/above 13000, thence. . . .

. . . .LANDING RUNWAY 3L: From WOMAS on track 098° to cross SEATO at 6000, then right turn heading 210°, expect RADAR vectors to final approach course.

. . . .LANDING RUNWAY 21R: From WOMAS on track 098° to cross SEATO at 6000, at 210K, then on heading 100°, expect RADAR vectors to final approach course.

LOST COMMUNICATIONS: From SEATO, execute ILS or LOC RWY 21R or TACAN RWY 3L approach. If unable hold at SEATO as depicted, maintain 6000.

PIRAT TWO ARRIVAL (RNAV)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

(PYE.PYE3) 17173

POINT REYES THREE ARRIVAL

AL-375 (FAA)

SAN FRANCISCO, CALIFORNIA

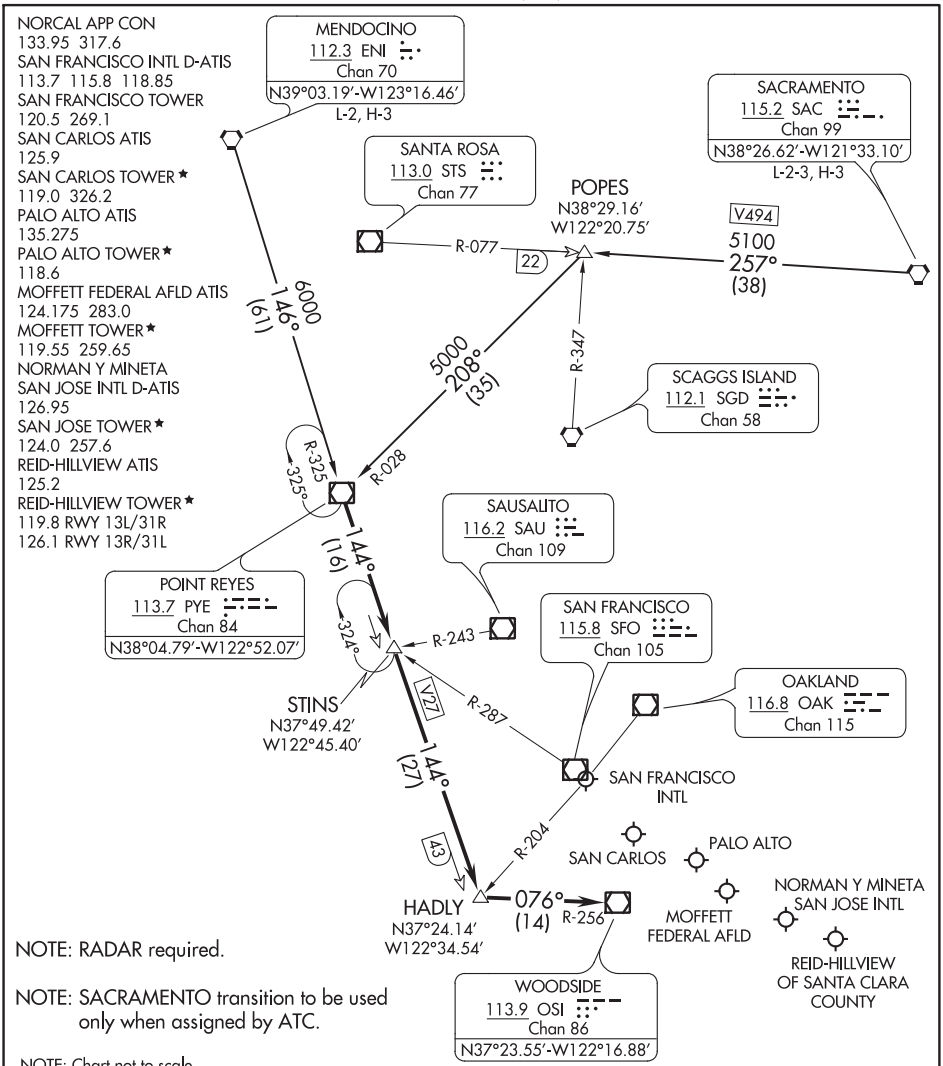

ARRIVAL ROUTE DESCRIPTION

MENDOCINO TRANSITION (ENI.PYE3): From over ENI VORTAC on ENI R-146 and PYE R-325 to PYE VOR/DME. Thence. . . .

SACRAMENTO TRANSITION (SAC.PYE3): From over SAC VORTAC on SAC R-257 and PYE R-028 to PYE VOR/DME. Thence. . . .

. . . .From over PYE VOR/DME on PYE R-144 to HADLY, then on OSI R-256 to OSI VOR/DME. Expect RADAR vectors to final approach course.

POINT REYES THREE ARRIVAL

SAN FRANCISCO, CALIFORNIA

(PYE.PYE3) 22JUN17

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RAZRR FOUR ARRIVAL (RNAV) Arrival Routes

(STUBL.RAZRR4) 21JUL16

NORMAN Y MINETA SAN JOSE INTL (SJC)

SAN JOSE, CALIFORNIA

OAKLAND CENTER
121.25 327.0
NORCAL APP CON
126.475 317.775
D-ATIS
126.95
SAN JOSE TOWER★
124.0 257.6
GND CON
121.7

ARRIVAL ROUTE DESCRIPTION

From STUBL on track 250° to cross RAZRR between FL200 and FL220, then on track 249° to cross OUCHH between 16000 and FL190, then on track 249° to cross NIKKT between 10000 and 14000.

WEST TRANSITION RUNWAYS 30L/R: From NIKKT on track 265° to cross SEKKO at or above 8000 and at 250K, then on track 265° to cross SCOPR at or above 5000, then on track 265° to cross KLIDE at or above 4000 and at 230K. Expect assigned instrument approach procedure.

EAST TRANSITION RUNWAYS 12L/R: From NIKKT on track 240° to cross GOTEE at or below 12000 and at 280K, then on track 240° to SHIKK, then on track 281° to cross TRCOT at or above 9000 and at 240K, then on track 281° to cross GGUGL between 7000 and 8000, then on track 318° to cross GAARY at or above 5800, then on track 318° to cross EDMND at or above 5600, then on track 318° to cross JESEN at or above 4100, then on track 306° to cross HITIR at 4000, then on track 306° to ZORSA, then on track 306°. Expect RADAR vectors to final approach course.

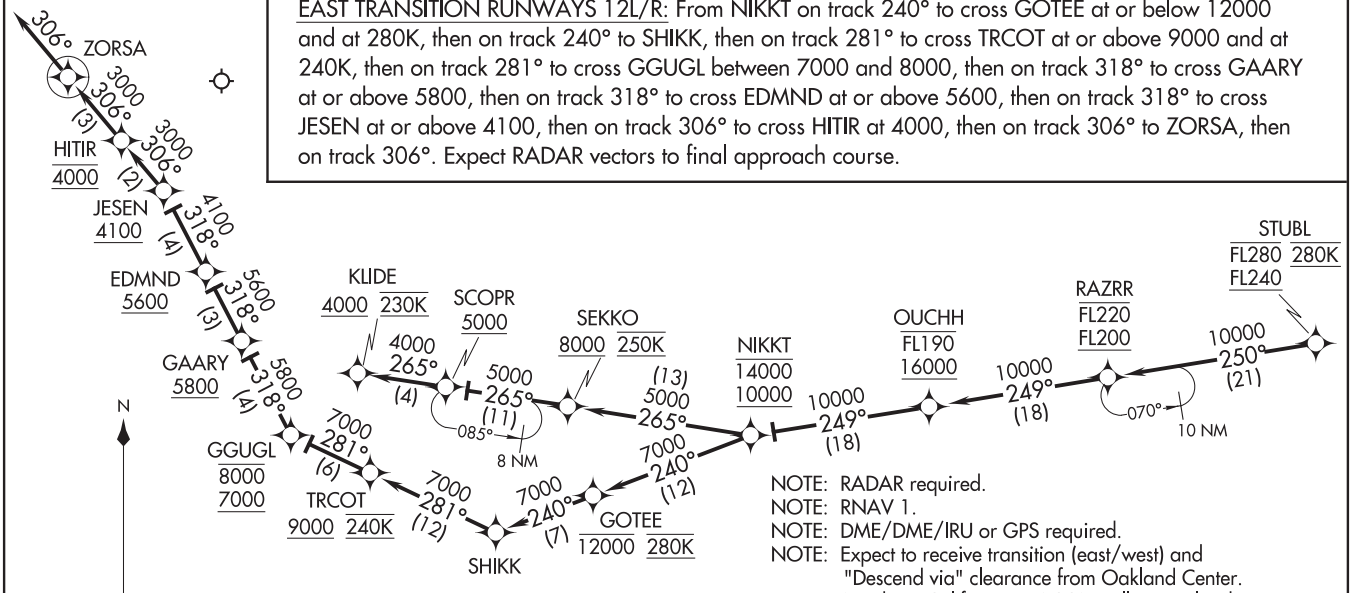

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Expect to receive transition (east/west) and "Descend via" clearance from Oakland Center. Northern California TRACON will assign landing runway.
NOTE: West transition indicates Rwys 30L/R.
NOTE: East transition indicates Rwys 12L/R.
NOTE: Expect west transition unless otherwise advised.

NOTE: Chart not to scale.

(STUBL.RAZRR4) 17173

RAZRR FOUR ARRIVAL (RNAV) Arrival Routes

NORMAN Y MINETA SAN JOSE INTL (SJC)

SAN JOSE, CALIFORNIA

AL-693 (FAA)

Z28

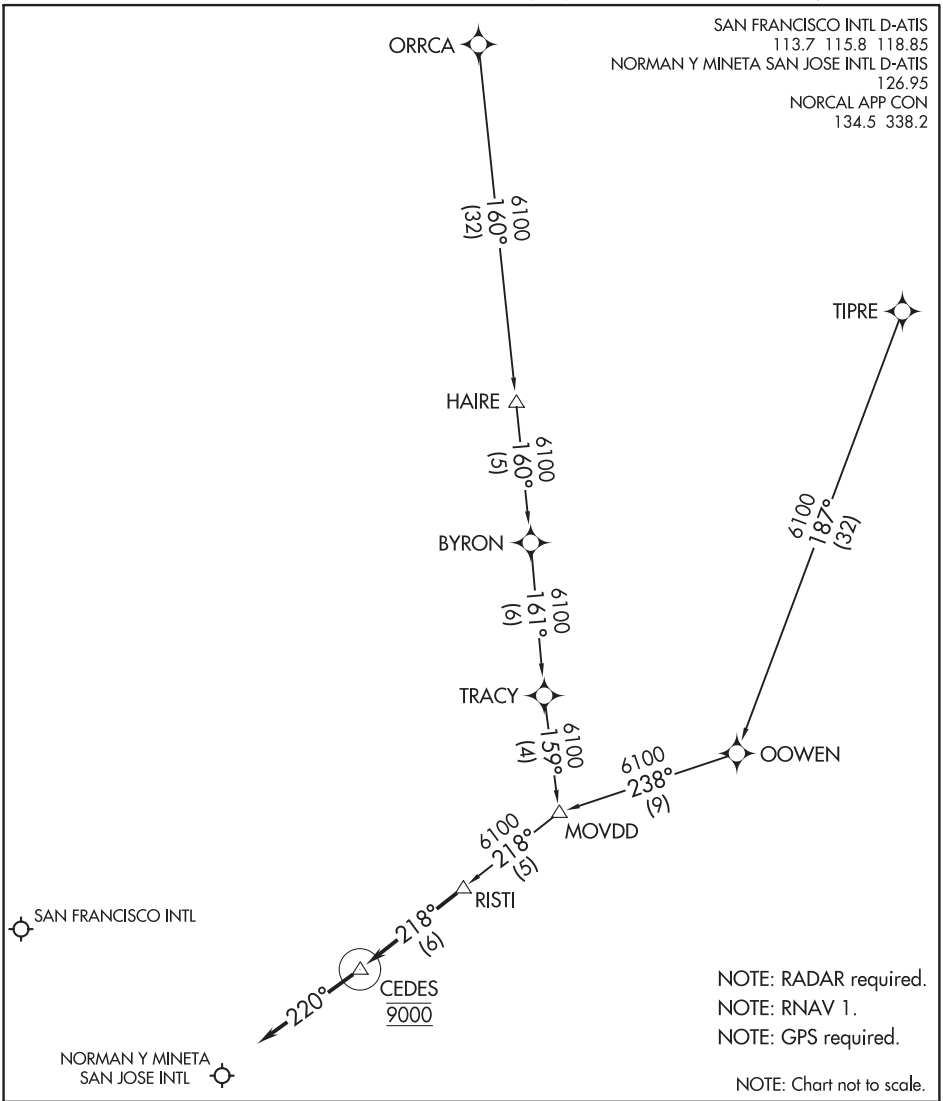

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

ORRCA TRANSITION (ORRCA.RISTI1)

TIPRE TRANSITION (TIPRE.RISTI1)

LANDING KSFO/KSJC: From RISTI on track 218° to cross CEDES at 9000, then on heading 220° or as assigned by ATC. Expect RADAR vectors to final approach course.

(ROBIE.ROBIE5) 19227

ROBIE FIVE ARRIVAL

AL-693 (FAA)

NORMAN Y MINETA SAN JOSE INTL (SJC)
SAN JOSE, CALIFORNIA

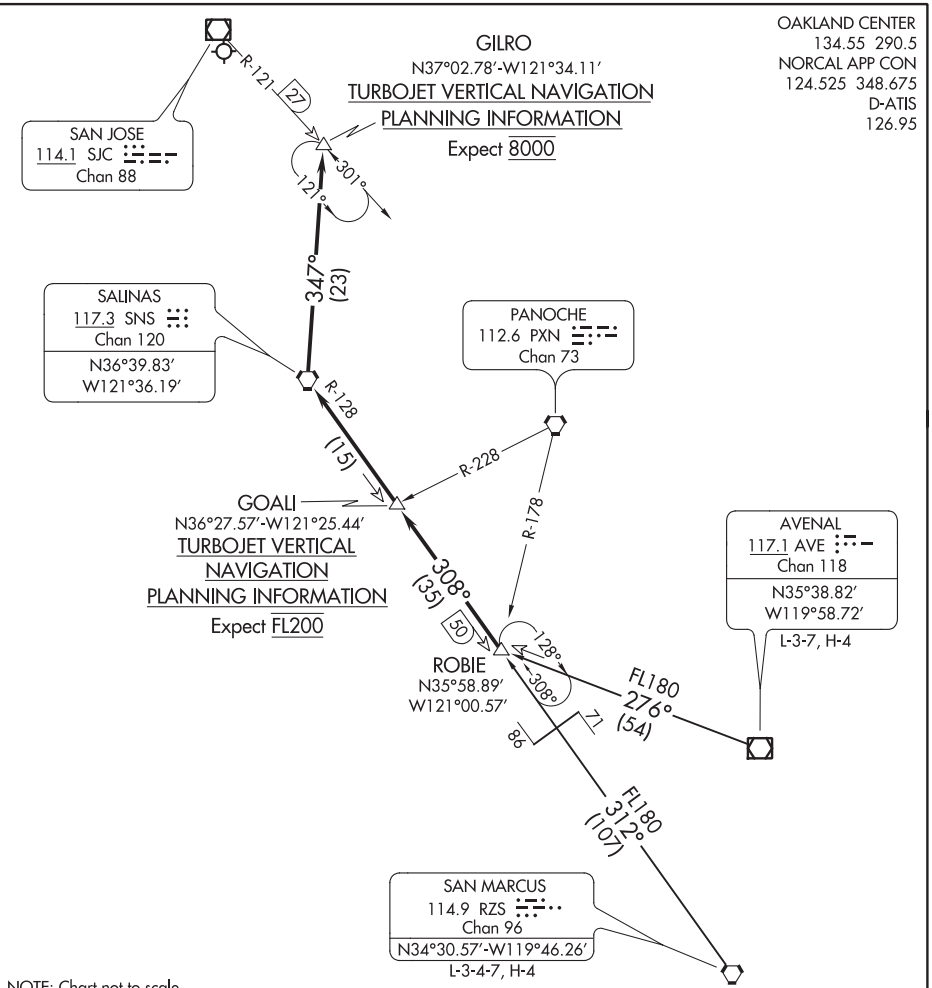

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

AVENAL TRANSITION (AVE.ROBIE5): From over AVE VOR/DME on AVE R-276 to ROBIE. Thence . . . .

SAN MARCUS TRANSITION (RZS.ROBIE5): From over RZS VORTAC on RZS R-312 and SNS R-128 to ROBIE. Thence . . . .

. . . . From over ROBIE on SNS R-128 to SNS VORTAC. Then on SNS R-347 to GILRO. Expect the ILS RWY 30L approach.

FOR RUNWAY 12 OPERATIONS: Expect routing SNS direct SJC VOR/DME and RADAR vectors to final approach course.

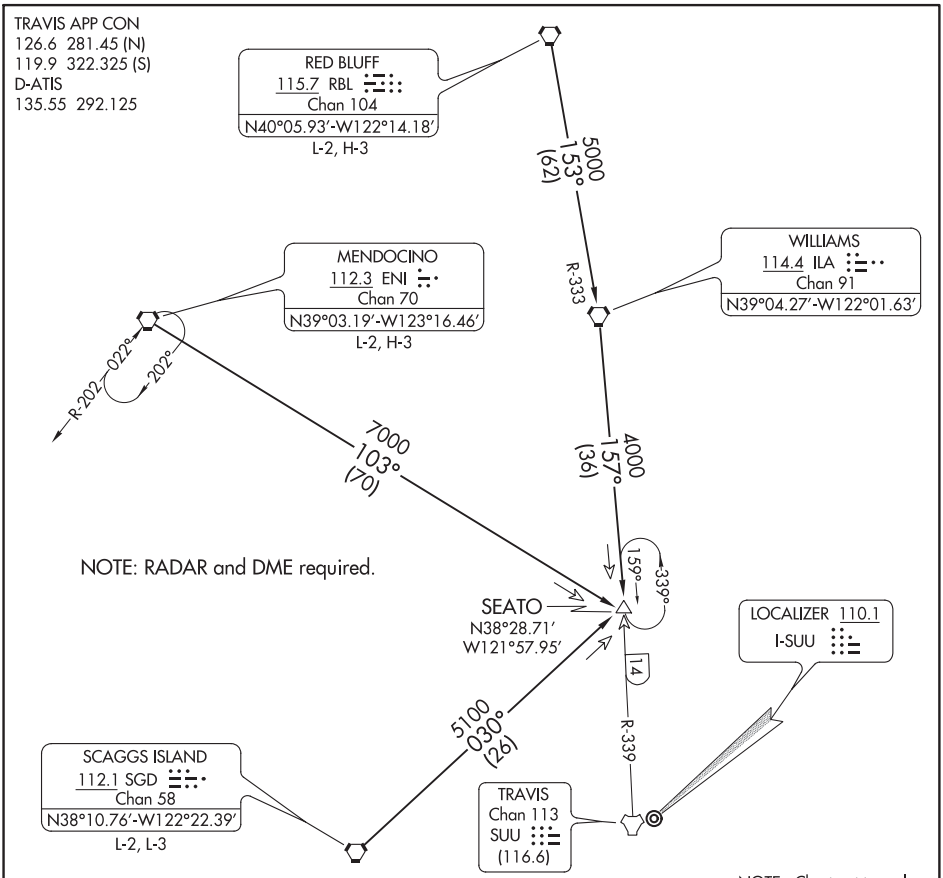

ARRIVAL ROUTE DESCRIPTION

MENDOCINO TRANSITION (ENI.SEATO4): From over ENI VORTAC via ENI R-103 to SEATO INT. Thence . . . .

RED BLUFF TRANSITION (RBL.SEATO4): From over RBL VORTAC via RBL R-153 and ILA R-333 to ILA VORTAC, then via ILA R-157 to SEATO INT. Thence . . . .

SCAGGS ISLAND TRANSITION (SGD.SEATO4): From over SGD VORTAC via SGD R-030 to SEATO INT. Thence . . . .

. . . . From over SEATO INT:
RWY 3L/R: Expect RADAR vectors for ILS or LOC RWY 3L approach.
RWY 21L/R: Expect RADAR vectors for ILS or LOC RWY 21L approach.

LOST COMMUNICATIONS:
RWY 3L via SEATO then TACAN RWY 3L.
RWY 21R via SEATO then TACAN RWY 21R.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(SERFR.SERFR4) 19339

SERFR FOUR ARRIVAL (RNAV)

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND CENTER
134.55 290.5
NORCAL APP CON
128.575 254.25
D-ATIS
113.7 115.8 118.85
SAN FRANCISCO TOWER
120.5 269.1
GND CON
121.8

EDDYY
6000 240K
Ldg Rwy 28L/R

329° (6)

FOLET
8000 240K

329° (20)

EPICK
15000 280K
10000

153° 10 NM

333° (13)

WWAVS
FL190 280K
15000

133° 10 NM

313° (17)

NRRLI
FL200 280K

134° 10 NM

314° (30)

SERFR

134° 10 NM

314°

MAKRS △

STOKD

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Expect to receive "descend via" clearance from Oakland Center. Northern California TRACON will assign landing runway.

ARRIVAL ROUTE DESCRIPTION

From SERFR on track 314° to cross NRRLI at or above FL200 and at 280K, then on track 313° to cross WWAVS between 15000 and FL190 and at 280K, then on track 333° to cross EPICK between 10000 and 15000 and at 280K, then on track 329° to cross FOLET at or above 8000 and at 240K, then on track 329° to cross EDDYY at 6000 and at 240K. Expect assigned instrument approach (Rwy 28L/R).

NOTE: Chart not to scale.

SHARR ONE ARRIVAL (RNAV)

(SHARR.SHARR1) 22JUN17

OAKLAND, CALIFORNIA

ARRIVAL ROUTE DESCRIPTION

MRLET TRANSITION (MRLET.SHARR1)

RPARK TRANSITION (RPARK.SHARR1)

RUSME TRANSITION (RUSME.SHARR1)

LANDING OAK: From SHARR on track 232° to LOCKE, then on track 232° to cross CATTY at 8000, then on heading 280° or as assigned by ATC. Expect RADAR vectors to final approach course.

LANDING HWD: From SHARR on track 232° to LOCKE, then on track 232° to cross CATTY at 8000, then on heading 232° or as assigned by ATC. Expect RADAR vectors to final approach course.

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbojet and turboprop aircraft only.
NOTE: Landing OAK expect runway 10L/R and 12 unless otherwise assigned by ATC.
NOTE: Landing HWD expect runway 28L/R unless otherwise assigned by ATC.

OAKLAND CENTER
134.37 281.5
NORCAL APP CON
124.8 263.15
OAKLAND D-ATIS
133.775
OAKLAND GND CON
121.75 (RWY 12-30)
121.9 (RWYS 10L-28R, 10R-28L, 15-33)
OAKLAND TOWER ★
118.3 291.65 (Rwys 10L-28R, 10R-28L, 15-33)
127.2 256.9 (Rwy 12-30)
HAYWARD ATIS
126.7
HAYWARD GND CON
121.4
HAYWARD TOWER ★
120.2 257.8

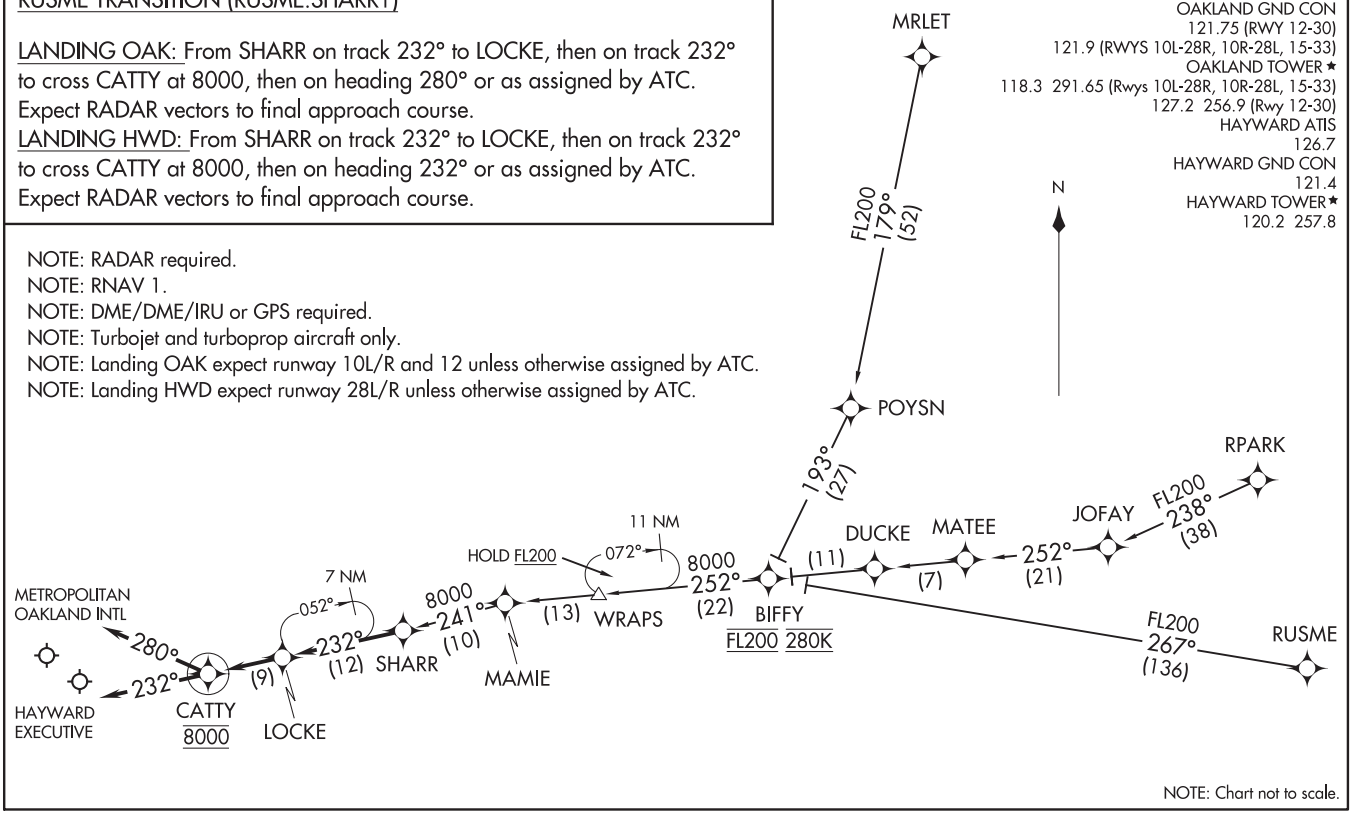

NOTE: Chart not to scale.

(SHARR.SHARR1) 18088

SHARR ONE ARRIVAL (RNAV)

AL-294 (FAA)

OAKLAND, CALIFORNIA

Z33

(SILCN.SILCN4) 17173

SILCN FOUR ARRIVAL (RNAV)

AL-693 (FAA)

NORMAN Y MINETA SAN JOSE INTL (SJC)

SAN JOSE, CALIFORNIA

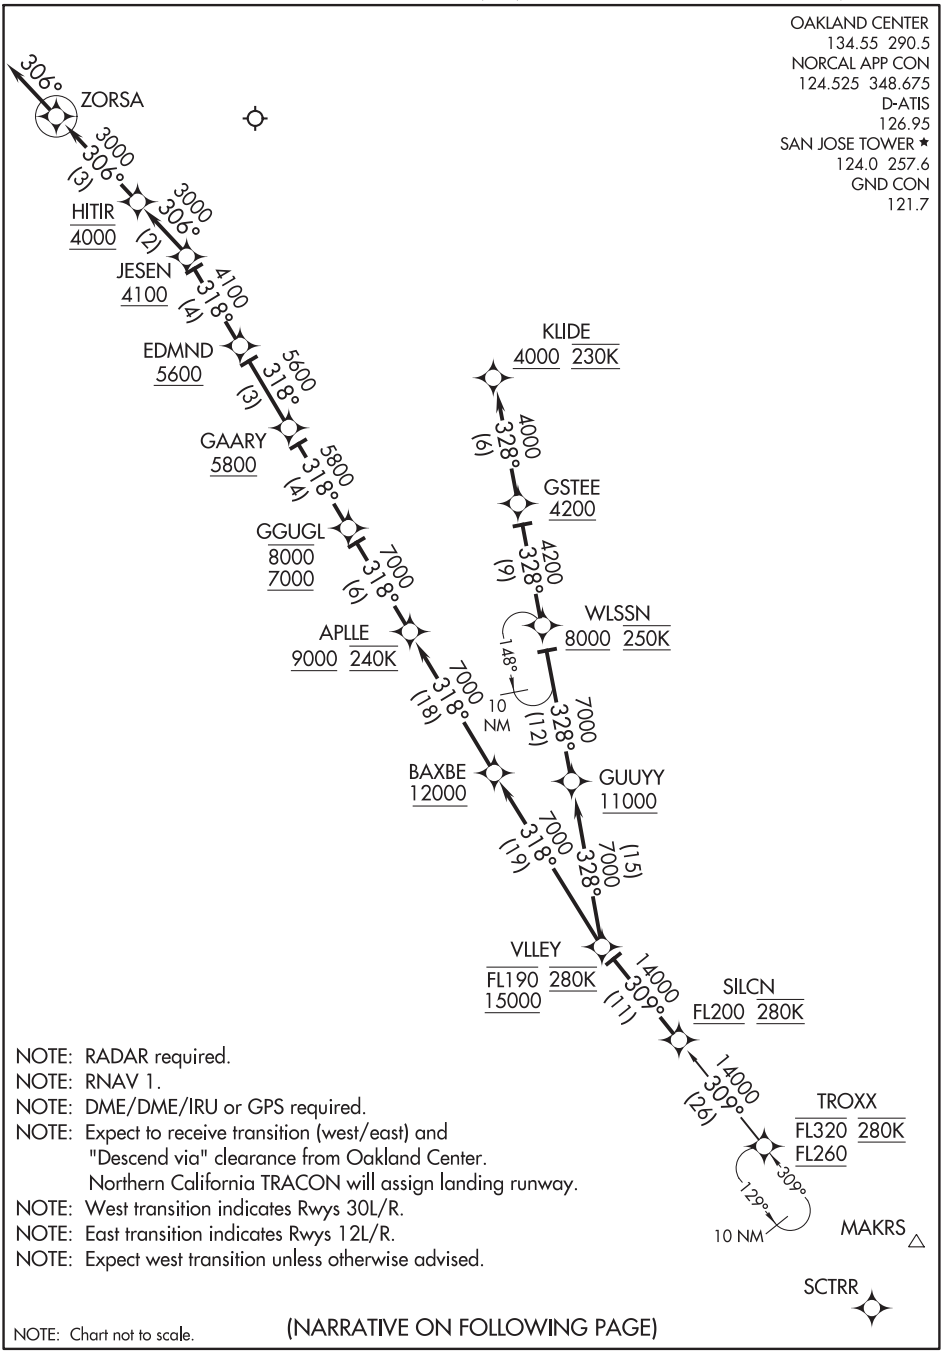

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Expect to receive transition (west/east) and "Descend via" clearance from Oakland Center. Northern California TRACON will assign landing runway.
NOTE: West transition indicates Rwys 30L/R.
NOTE: East transition indicates Rwys 12L/R.
NOTE: Expect west transition unless otherwise advised.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

SW-2, 30 JAN 2020 to 26 MAR 2020

SILCN FOUR ARRIVAL (RNAV)

(SILCN.SILCN4) 21JUL16

SAN JOSE, CALIFORNIA
NORMAN Y MINETA SAN JOSE INTL (SJC)

ARRIVAL ROUTE DESCRIPTION

TROXX TRANSITION (TROXX.SILCN4)

From SILCN on track 309° to cross VLLEY between 15000 and FL190 and at 280K.

WEST TRANSITION RUNWAYS 30L/R: From VLLEY on track 328° to cross GUUYY at or above 11000, then on track 328° to cross WLSSN at or above 8000 and at 250K, then on track 328° to cross GSTEE at or above 4200, then on track 328° to cross KLIDE at or above 4000 and at 230K. Expect assigned instrument approach procedure.

EAST TRANSITION RUNWAYS 12L/R: From VLLEY on track 318° to cross BAXBE at or above 12000, then on track 318° to cross APLLE at or above 9000 and at 240K, then on track 318° to cross GGUGL between 7000 and 8000, then on track 318° to cross GAARY at or above 5800, then on track 318° to cross EDMND at or above 5600, then on track 318° to cross JESEN at or above 4100, then on track 306° to cross HITIR at 4000, then on track 306° to ZORSA, then on track 306°. Expect RADAR vectors to final approach course.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

(SKIZM.SKIZM2) 18144

SKIZM TWO ARRIVAL (RNAV)

AL-294 (FAA)

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Expect to receive "descend via" clearance from Oakland Center. Northern California TRACON will assign landing runway.

ARRIVAL ROUTE DESCRIPTION

MYJAW TRANSITION (MYJAW.SKIZM2)

RGOOD TRANSITION (RGOOD.SKIZM2)

LANDING RUNWAY 12: From SKIZM on track 322° to cross EMAAA between 11000 and 14000, then on track 322° to cross WNDML between 9000 and 10000 and at 240K, then on track 322° to cross FOOTO between 7000 and 8000, then on track 303° to cross BRRZI at 7000, then on track 279° to cross LOHGN at 6000 and at 230K, then on track 261° to cross WHYEE at or above 5000, then on track 261° to cross HIRMO at 4000, then on track 261°. Expect RADAR vectors to final approach course.

SKIZM TWO ARRIVAL (RNAV)
(SKIZM.SKIZM2) 24MAY18
OAKLAND, CALIFORNIA
METROPOLITAN OAKLAND INTL (OAK)
SW-2, 30 JAN 2020 to 26 MAR 2020

SLMMR THREE ARRIVAL (RNAV)
(SLMMR.SLMMR3) 10DEC15
SACRAMENTO, CALIFORNIA
SACRAMENTO INTL (SMF)

(SWR.SWR3) 17117

SQUAW VALLEY THREE ARRIVAL

AL-488 (FAA)

TRAVIS AFB (KSUU)
FAIRFIELD, CALIFORNIA

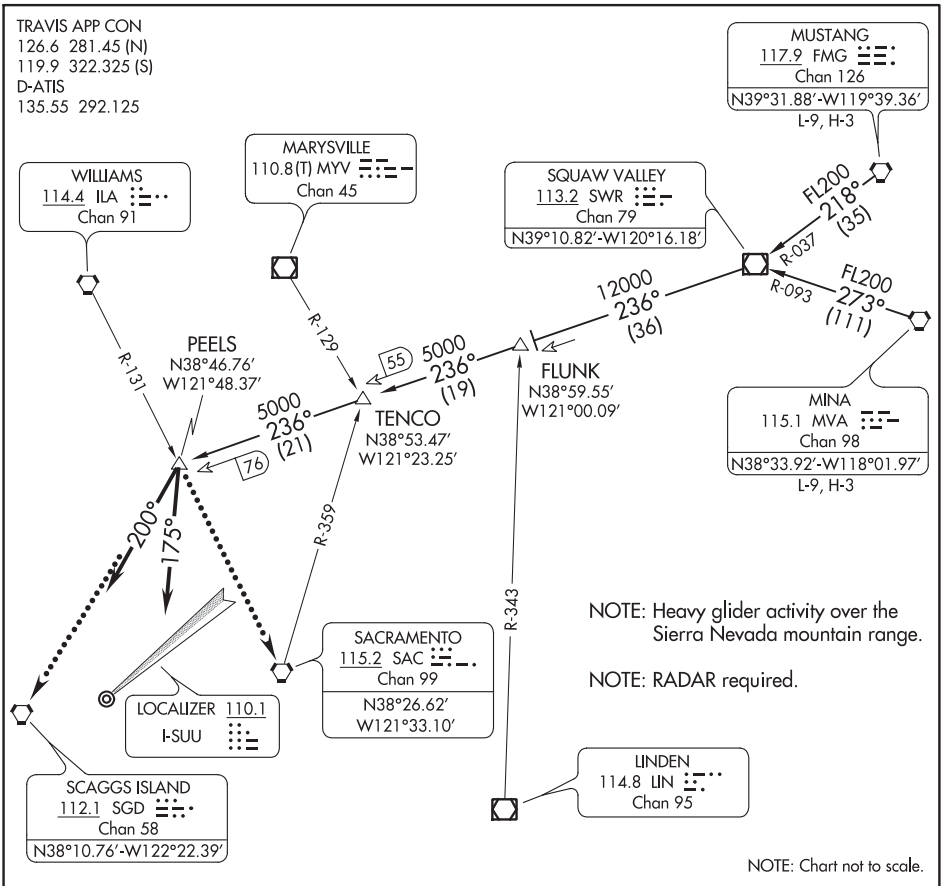

ARRIVAL ROUTE DESCRIPTION

MINA TRANSITION (MVA.SWR3): From over MVA VORTAC on MVA R-273 and SWR R-093 to SWR VOR/DME then on SWR R-236 to PEELS INT. Thence. . . .

MUSTANG TRANSITION (FMG.SWR3): From over FMG VORTAC on FMG R-218 and SWR R-037 to SWR VOR/DME then on SWR R-236 to PEELS INT. Thence. . . .

LANDING RUNWAYS 3L/R

. . . .Depart PEELS INT heading 200° expect RADAR vectors to final approach course.

LANDING RUNWAYS 21L/R

. . . .Depart PEELS INT heading 175° expect RADAR vectors to final approach course.

LOST COMMUNICATIONS

RUNWAY 3L: From over PEELS INT proceed direct SGD VORTAC. Expect ILS or LOC RWY 3L.

RUNWAY 21L: From over PEELS INT proceed direct SAC VORTAC. Expect ILS or LOC RWY 21L.

SQUAW VALLEY THREE ARRIVAL

(SWR.SWR3) 10NOV16

FAIRFIELD, CALIFORNIA
TRAVIS AFB (KSUU)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

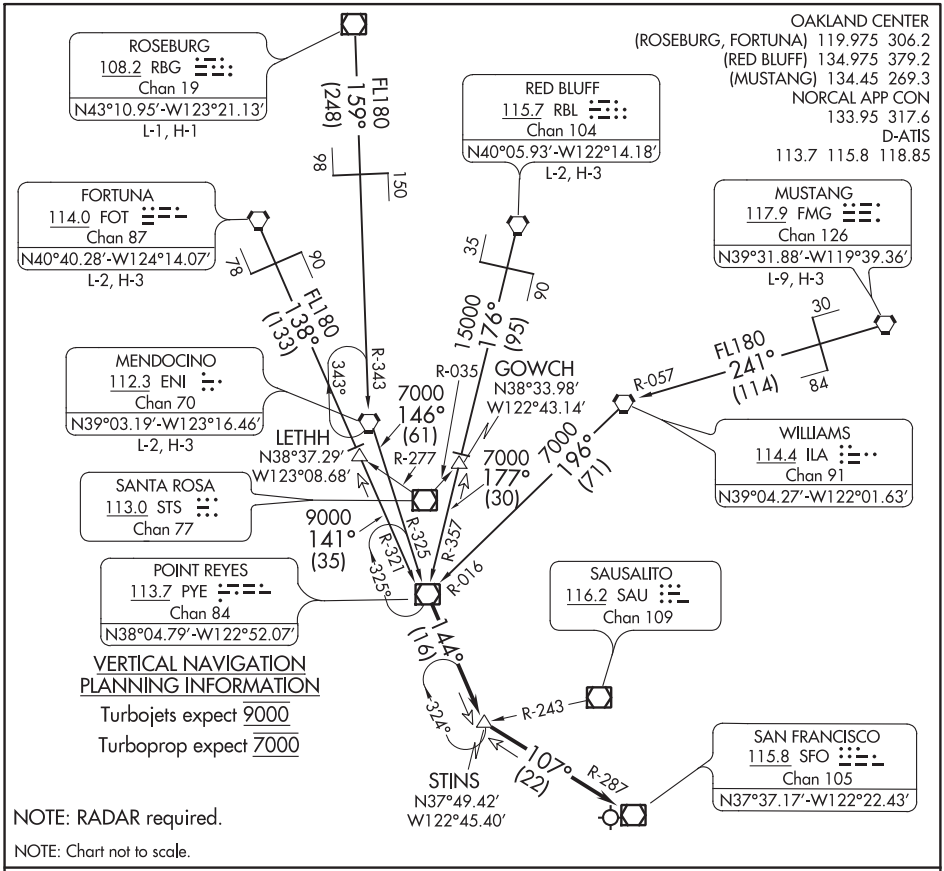

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

FORTUNA TRANSITION (FOT.STINS3): From over FOT VORTAC on FOT R-138 to LETHH INT, then on PYE R-321 to PYE VOR/DME. Thence. . . .

MENDOCINO TRANSITION (ENI.STINS3): From over ENI VORTAC on ENI R-146 and PYE R-325 to PYE VOR/DME. Thence. . . .

MUSTANG TRANSITION (FMG.STINS3): From over FMG VORTAC on FMG R-241 and ILA R-057 to ILA VORTAC, then on ILA R-196 and PYE R-016 to PYE VOR/DME. Thence. . . .

RED BLUFF TRANSITION (RBL.STINS3): From over RBL VORTAC on RBL R-176 to GOWCH INT, then on PYE R-357 to PYE VOR/DME. Thence. . . .

ROSEBURG TRANSITION (RBG.STINS3): From over RBG VOR/DME on RBG R-159 and ENI R-343 to ENI VORTAC, then on ENI R-146 and PYE R-325 to PYE VOR/DME. Thence. . . .

. . . .From over PYE VOR/DME on PYE R-144 to STINS INT, thence on SFO R-287 to SFO VOR/DME. Expect RADAR vectors to final approach course.

(LOZIT.STLER3) 18256

STLER THREE ARRIVAL (RNAV)

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

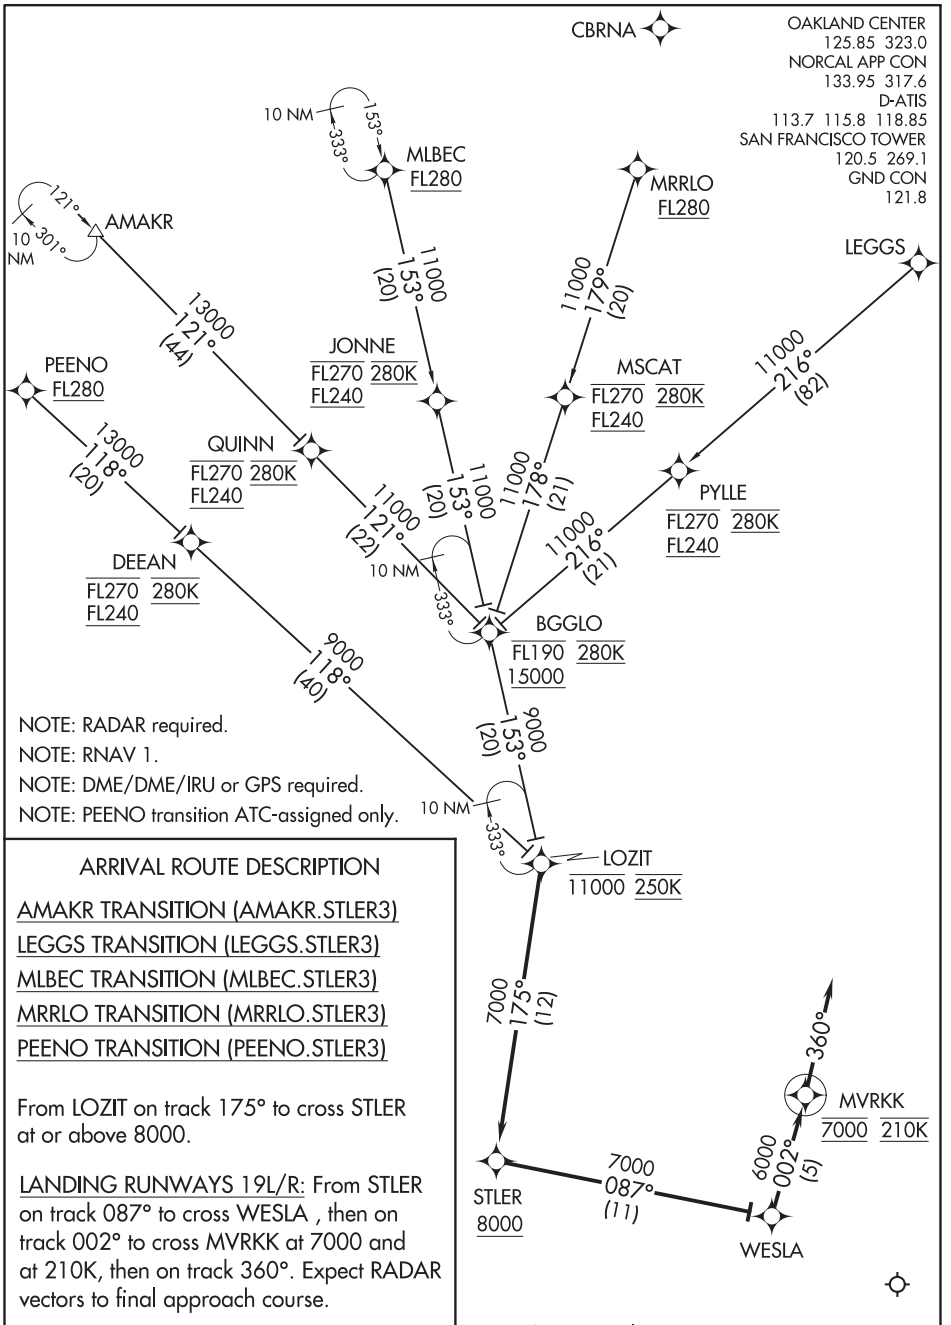

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: PEENO transition ATC-assigned only.

ARRIVAL ROUTE DESCRIPTION

AMAKR TRANSITION (AMAKR.STLER3)
LEGGS TRANSITION (LEGGS.STLER3)
MLBEC TRANSITION (MLBEC.STLER3)
MRRLO TRANSITION (MRRLO.STLER3)
PEENO TRANSITION (PEENO.STLER3)

From LOZIT on track 175° to cross STLER at or above 8000.

LANDING RUNWAYS 19L/R: From STLER on track 087° to cross WESLA , then on track 002° to cross MVRKK at 7000 and at 210K, then on track 360°. Expect RADAR vectors to final approach course.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

STLER THREE ARRIVAL (RNAV)

(LOZIT.STLER3) 13SEP18

SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

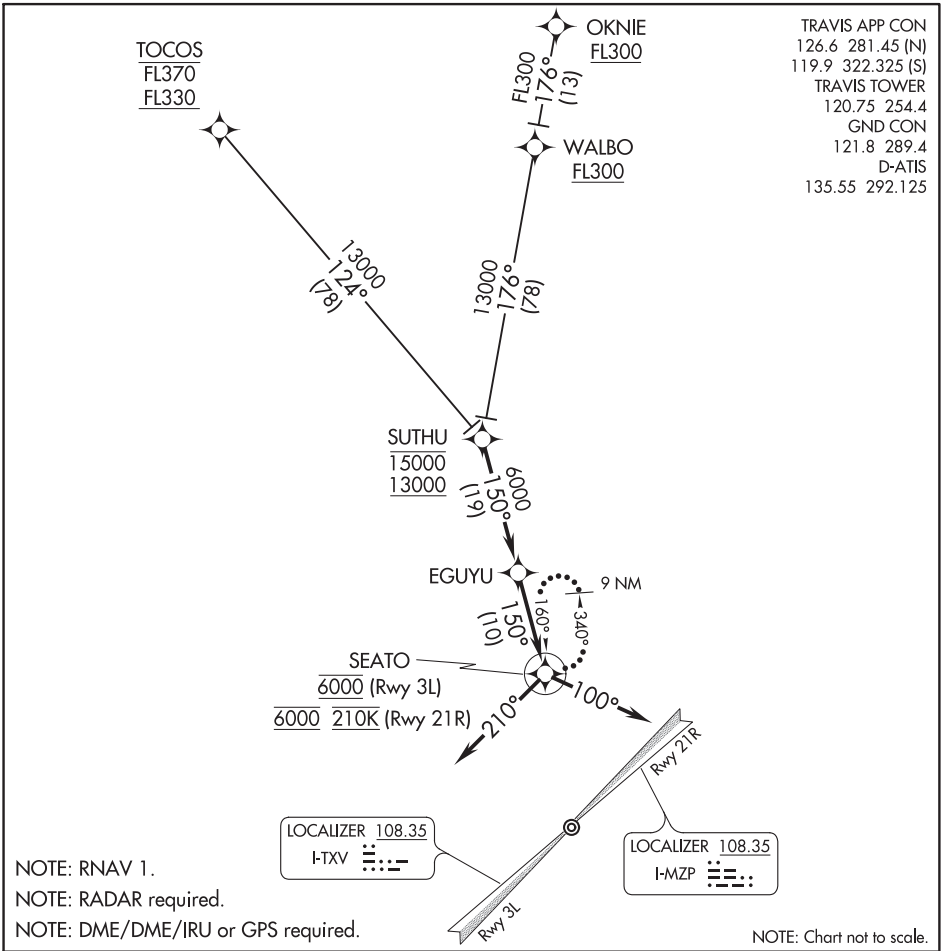

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

OKNIE TRANSITION (OKNIE.SUTHU1)
TOCOS TRANSITION (TOCOS.SUTHU1)

From SUTHU on track 150° to EGUYU, thence. . . .

. . . .LANDING RUNWAY 3L: From EGUYU on track 150° to cross SEATO at 6000, then on heading 210°, expect RADAR vectors to final approach course.

. . . .LANDING RUNWAY 21R: From EGUYU on track 150° to cross SEATO at 6000, at 210K, then on heading 100°, expect RADAR vectors to final approach course.

LOST COMMUNICATIONS: From SEATO, execute ILS or LOC RWY 21R or TACAN RWY 3L approach. If unable hold at SEATO as depicted, maintain 6000.

(SUUTR.SUUTR2) 17173

SUUTR TWO ARRIVAL (RNAV)

AL-5490 (FAA)

SACRAMENTO INTL (SMF)
SACRAMENTO, CALIFORNIA

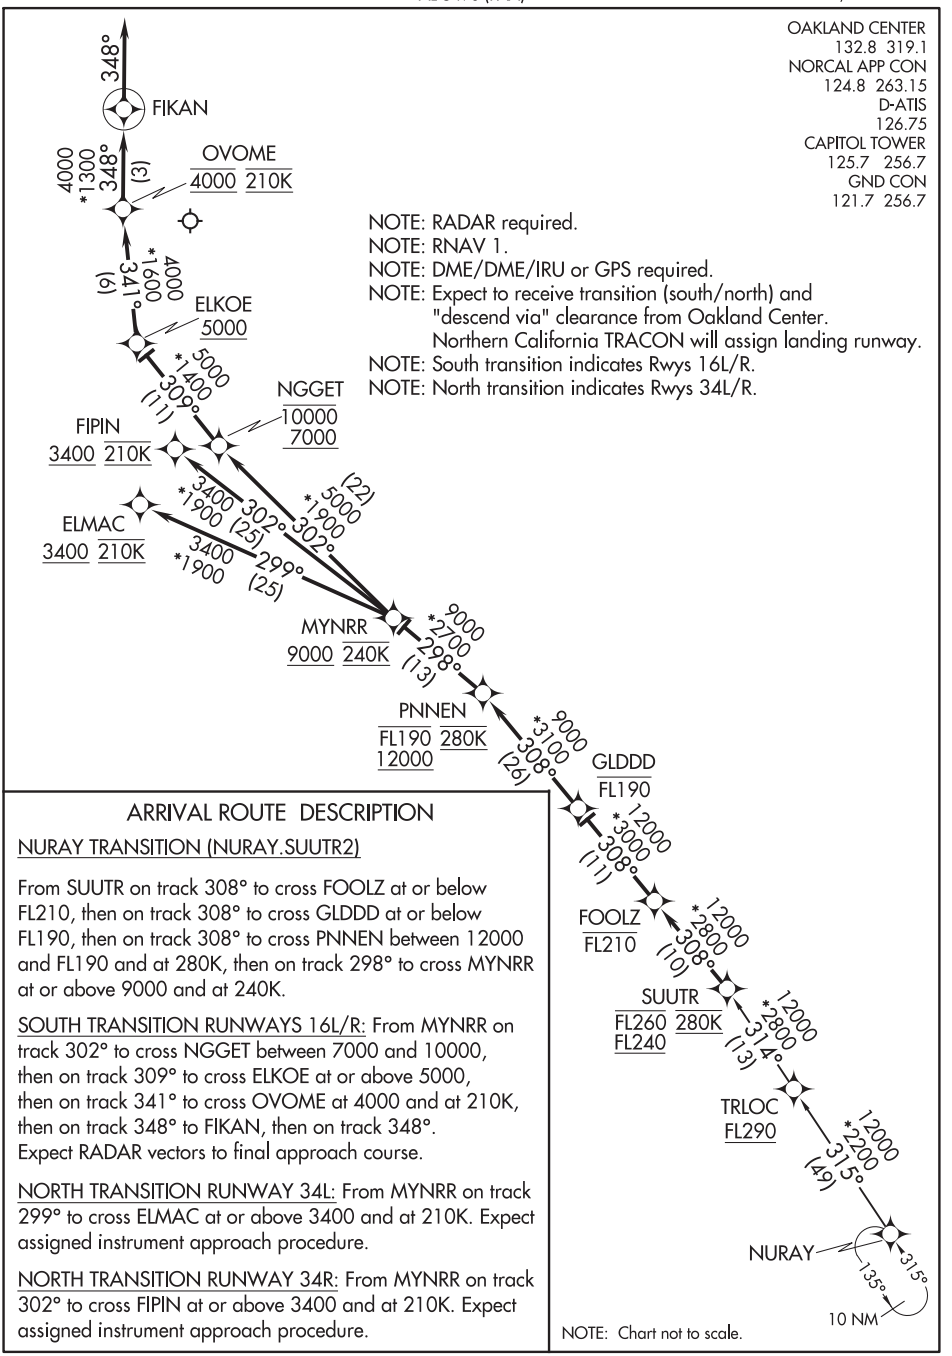

ARRIVAL ROUTE DESCRIPTION

NURAY TRANSITION (NURAY.SUUTR2)

From SUUTR on track 308° to cross FOOLZ at or below FL210, then on track 308° to cross GLDDD at or below FL190, then on track 308° to cross PNNEN between 12000 and FL190 and at 280K, then on track 298° to cross MYNRR at or above 9000 and at 240K.

SOUTH TRANSITION RUNWAYS 16L/R: From MYNRR on track 302° to cross NGGET between 7000 and 10000, then on track 309° to cross ELKOE at or above 5000, then on track 341° to cross OVOME at 4000 and at 210K, then on track 348° to FIKAN, then on track 348°. Expect RADAR vectors to final approach course.

NORTH TRANSITION RUNWAY 34L: From MYNRR on track 299° to cross ELMAC at or above 3400 and at 210K. Expect assigned instrument approach procedure.

NORTH TRANSITION RUNWAY 34R: From MYNRR on track 302° to cross FIPIN at or above 3400 and at 210K. Expect assigned instrument approach procedure.

SW-2, 30 JAN 2020 to 26 MAR 2020

SUUTR TWO ARRIVAL (RNAV)
SACRAMENTO, CALIFORNIA
SACRAMENTO INTL (SMF)

(SUUTR.SUUTR2) 10DEC15

TUDOR TWO ARRIVAL

AL-5490 (FAA)

SACRAMENTO, CALIFORNIA

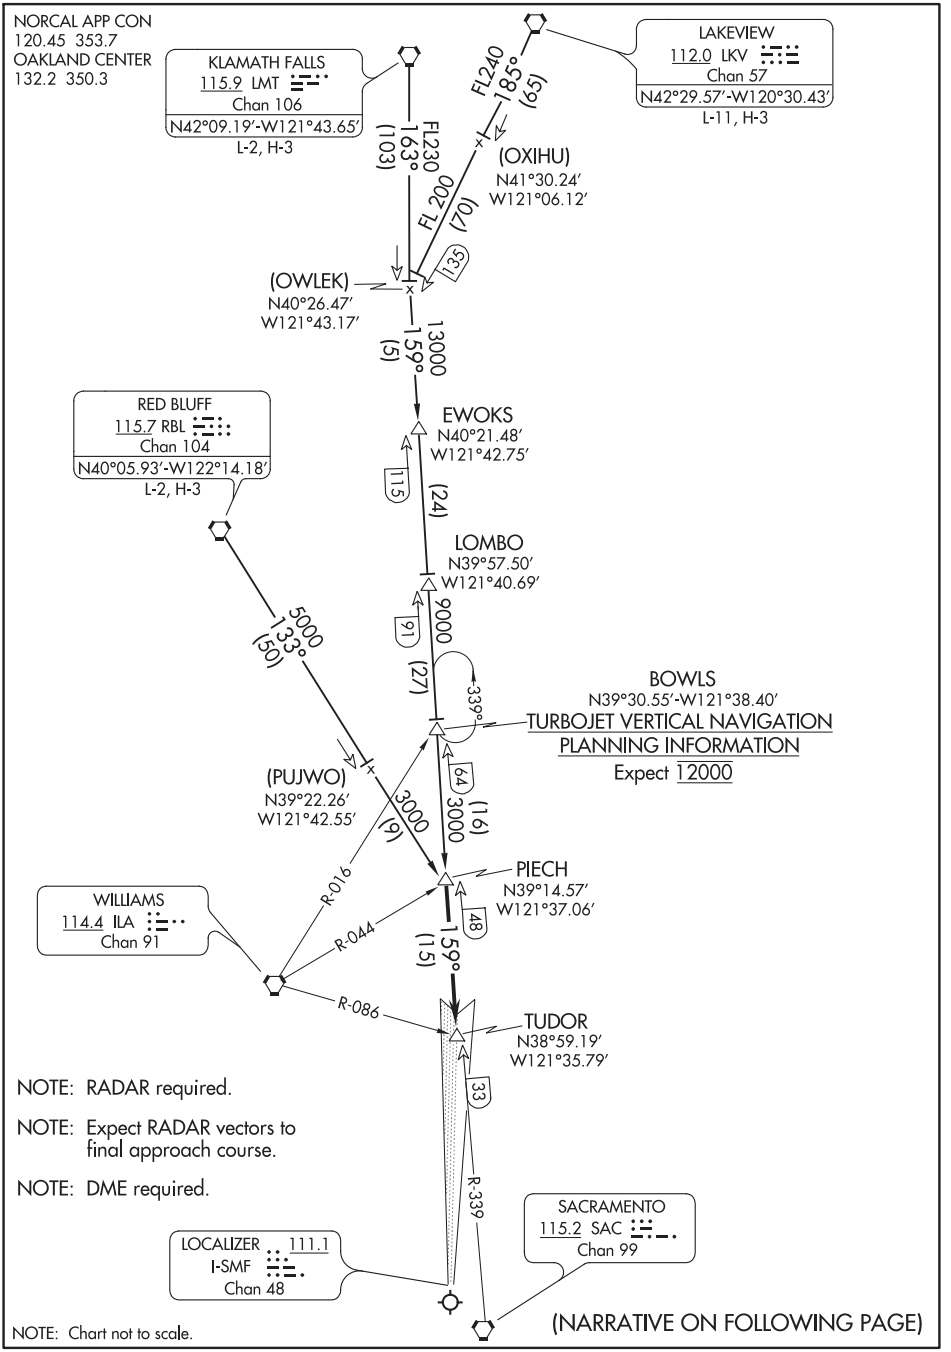

TUDOR TWO ARRIVAL

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

ARRIVAL ROUTE DESCRIPTION

KLAMATH FALLS TRANSITION (LMT.TUDOR2): From over LMT VORTAC via LMT R-163 and SAC R-339 to PIECH INT. Thence . . . .

LAKEVIEW TRANSITION (LKV.TUDOR2): From over LKV VORTAC via LKV R-185 and SAC R-339 to PIECH INT. Thence . . . .

RED BLUFF TRANSITION (RBL.TUDOR2): From over RBL VORTAC via RBL R-133 to PIECH INT. Thence . . . .

. . . . From PIECH INT via SAC R-339 to TUDOR INT/DME. Expect RADAR vectors.

SW-2, 30 JAN 2020 to 26 MAR 2020

WEBGO ONE ARRIVAL (RNAV)

(WEBGO.WEBGO1) 10JAN13

TRAVIS APP CON
126.6 281.45 (N)
119.9 322.325 (S)
TRAVIS TOWER
120.75 254.4
GND CON
121.8 289.4
D-ATIS
135.55 292.125

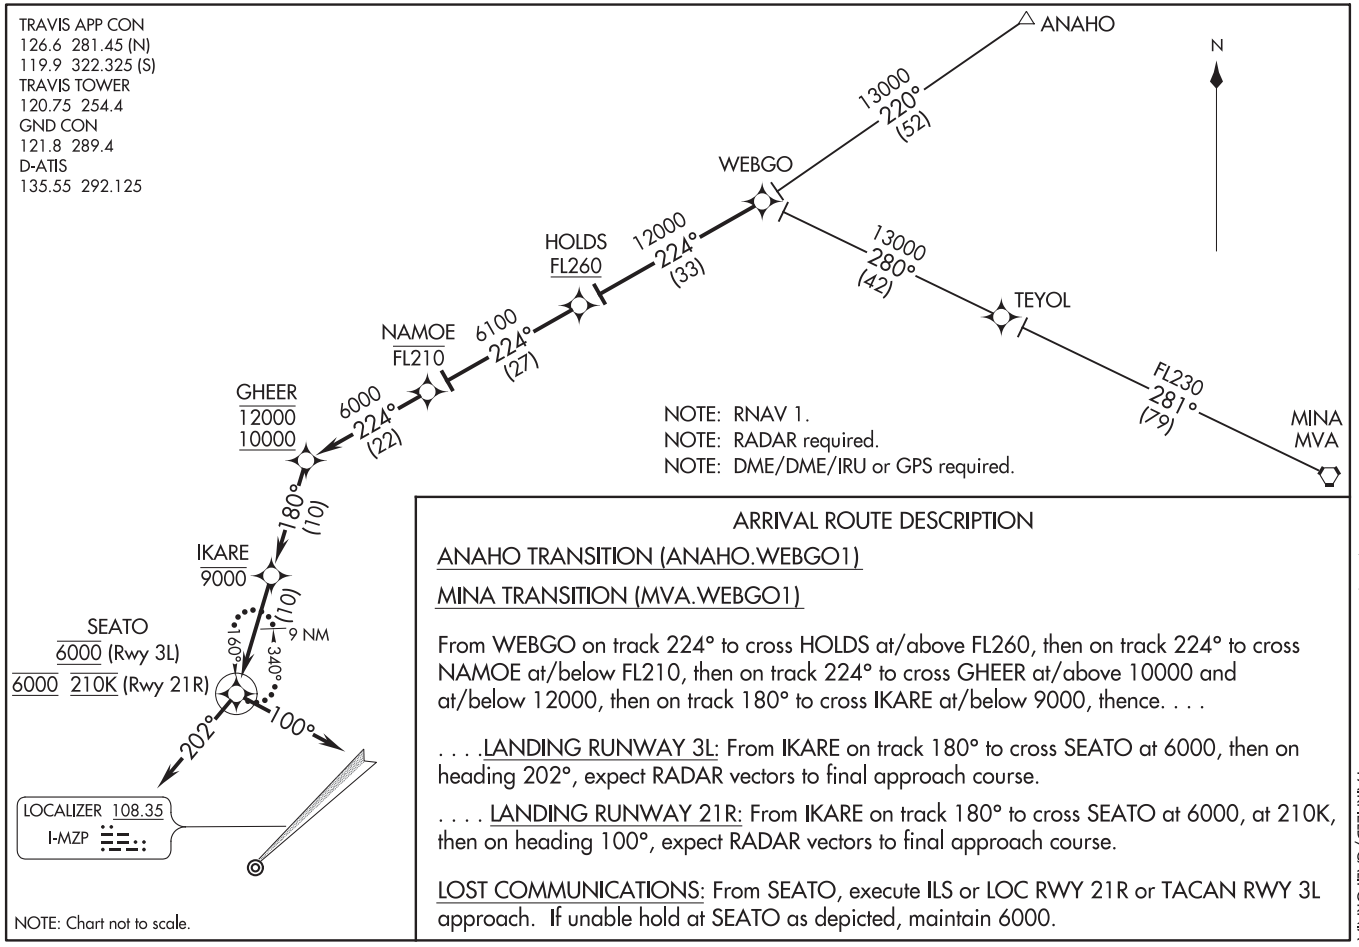

ARRIVAL ROUTE DESCRIPTION

ANAHO TRANSITION (ANAHO.WEBGO1)

MINA TRANSITION (MVA.WEBGO1)

From WEBGO on track 224° to cross HOLDS at/above FL260, then on track 224° to cross NAMOE at/below FL210, then on track 224° to cross GHEER at/above 10000 and at/below 12000, then on track 180° to cross IKARE at/below 9000, thence. . . .

. . . .LANDING RUNWAY 3L: From IKARE on track 180° to cross SEATO at 6000, then on heading 202°, expect RADAR vectors to final approach course.

. . . . LANDING RUNWAY 21R: From IKARE on track 180° to cross SEATO at 6000, at 210K, then on heading 100°, expect RADAR vectors to final approach course.

LOST COMMUNICATIONS: From SEATO, execute ILS or LOC RWY 21R or TACAN RWY 3L approach. If unable hold at SEATO as depicted, maintain 6000.

FAIRFIELD, CALIFORNIA
TRAVIS AFB (KSUU)

Z45

(WEBGO.WEBGO1) 17117
WEBGO ONE ARRIVAL (RNAV)

AL-488 (FAA)

TRAVIS AFB (KSUU)
FAIRFIELD, CALIFORNIA

(WNDSR.WNDSR2) 17173

WNDSR TWO ARRIVAL (RNAV)

AL-294 (FAA)

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

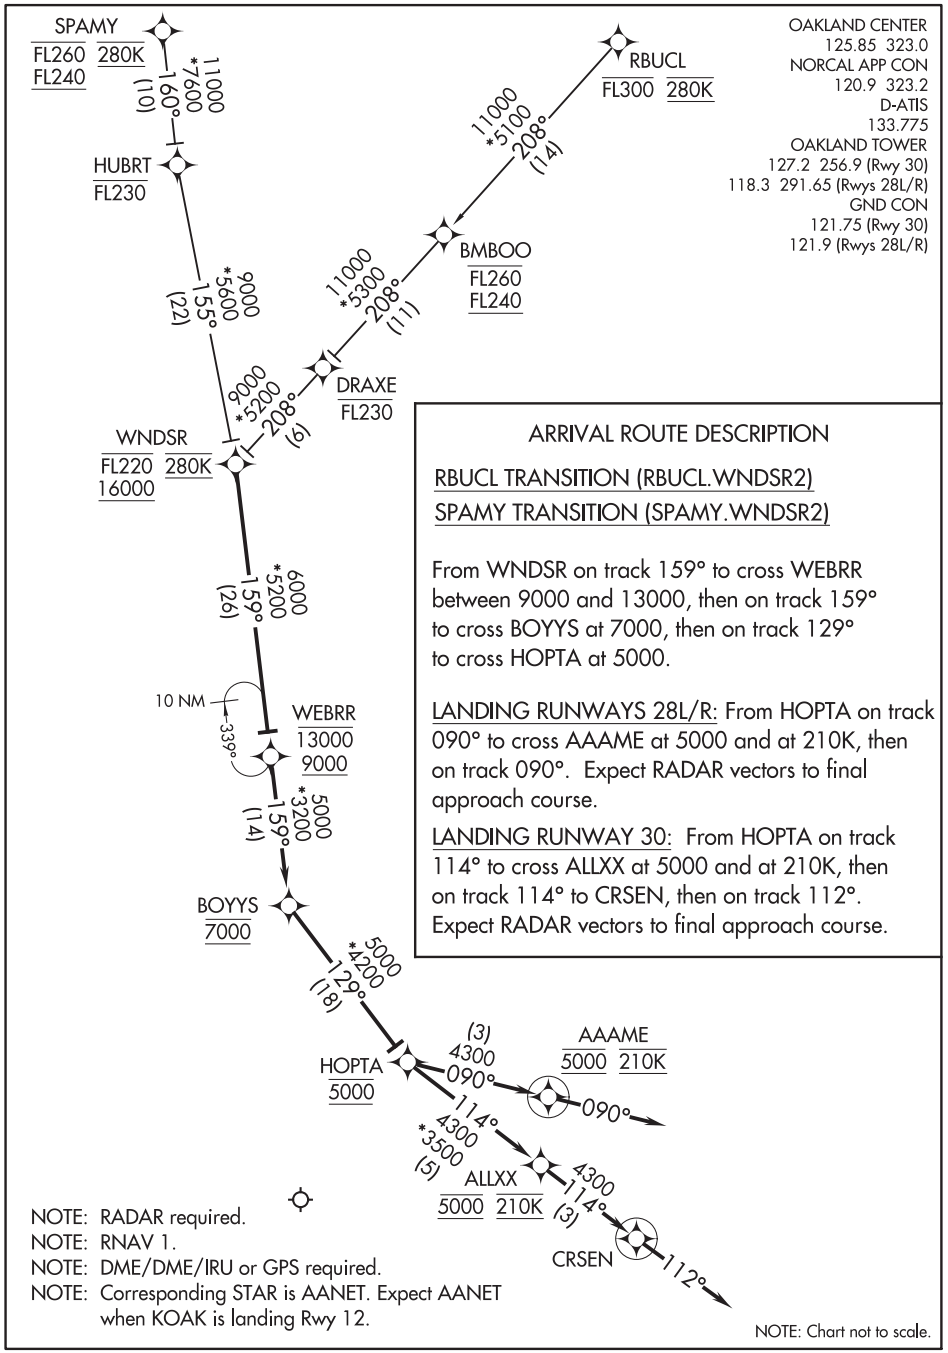

ARRIVAL ROUTE DESCRIPTION

RBUCL TRANSITION (RBUCL.WNDSR2)
SPAMY TRANSITION (SPAMY.WNDSR2)

From WNDSR on track 159° to cross WEBRR between 9000 and 13000, then on track 159° to cross BOYYS at 7000, then on track 129° to cross HOPTA at 5000.

LANDING RUNWAYS 28L/R: From HOPTA on track 090° to cross AAAME at 5000 and at 210K, then on track 090°. Expect RADAR vectors to final approach course.

LANDING RUNWAY 30: From HOPTA on track 114° to cross ALLXX at 5000 and at 210K, then on track 114° to CRSEN, then on track 112°. Expect RADAR vectors to final approach course.

NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Corresponding STAR is AANET. Expect AANET when KOAK is landing Rwy 12.

NOTE: Chart not to scale.

WNDSR TWO ARRIVAL (RNAV)
(WNDSR.WNDSR2) 15OCT15

OAKLAND, CALIFORNIA
METROPOLITAN OAKLAND INTL (OAK)

SW-2, 30 JAN 2020 to 26 MAR 2020

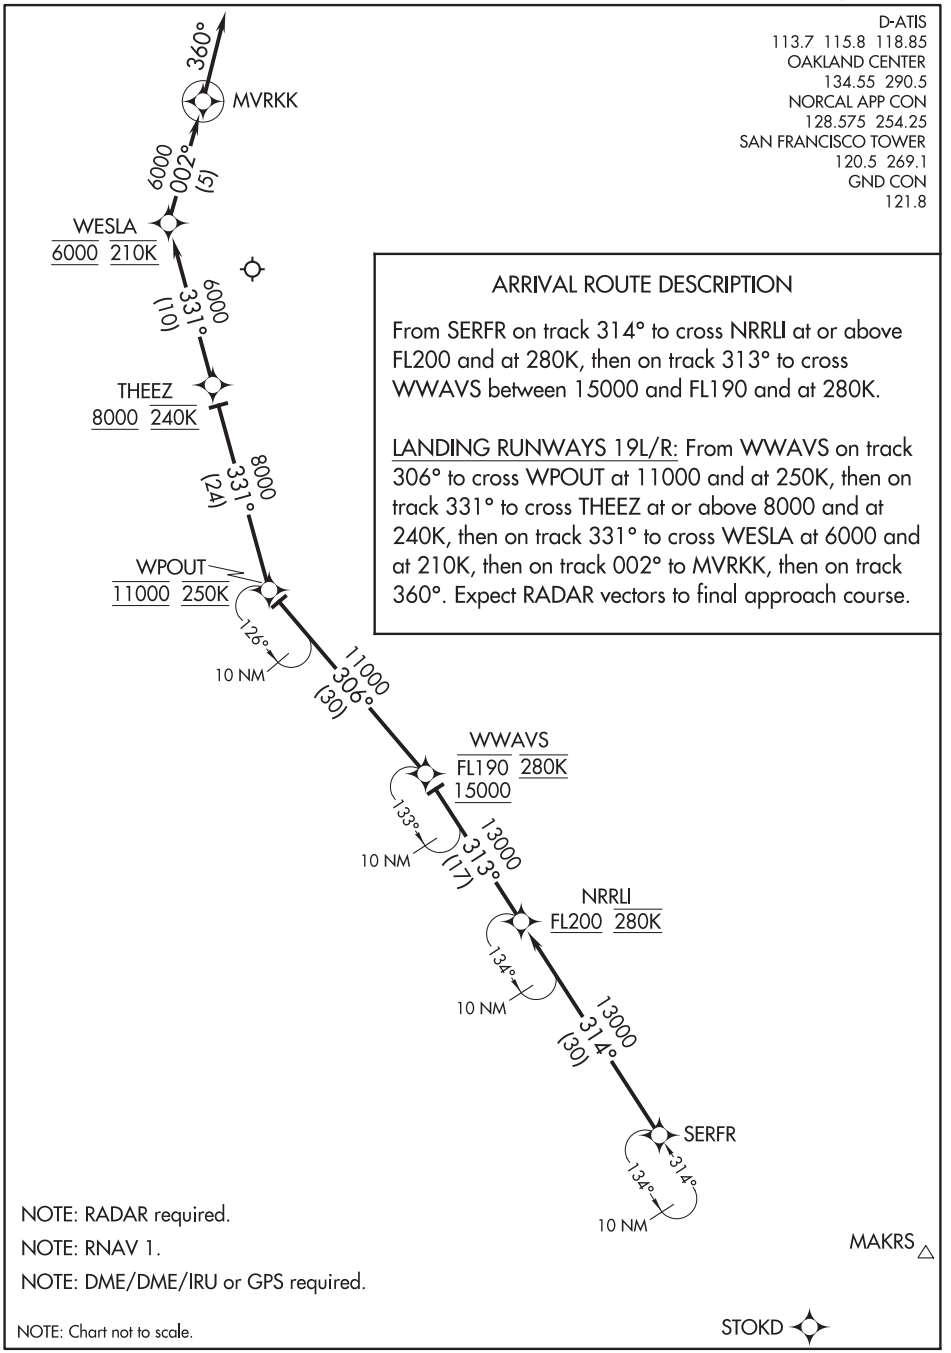
D-ATIS
113.7 115.8 118.85
OAKLAND CENTER
134.55 290.5
NORCAL APP CON
128.575 254.25
SAN FRANCISCO TOWER
120.5 269.1
GND CON
121.8
360°
MVRKK
6000
002°
(5)
WESLA
6000 210K
6000
331°
(10)
THEEZ
8000 240K
8000
331°
(24)
WPOUT
11000 250K
126°
10 NM
11000
306°
(30)
WWAVS
FL190 280K
15000
133°
10 NM
13000
313°
(17)
NRRLI
FL200 280K
134°
10 NM
13000
314°
(30)
SERFR
314°
134°
10 NM
MAKRS
STOKD
ARRIVAL ROUTE DESCRIPTION
From SERFR on track 314° to cross NRRLI at or above FL200 and at 280K, then on track 313° to cross WWAVS between 15000 and FL190 and at 280K.
LANDING RUNWAYS 19L/R: From WWAVS on track 306° to cross WPOUT at 11000 and at 250K, then on track 331° to cross THEEZ at or above 8000 and at 240K, then on track 331° to cross WESLA at 6000 and at 210K, then on track 002° to MVRKK, then on track 360°. Expect RADAR vectors to final approach course.
NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Chart not to scale.

(YOSEM.YOSEM3) 17173

YOSEM THREE ARRIVAL (RNAV)

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

ARRIVAL ROUTE DESCRIPTION

From YOSEM on track 248° to SNORA, then on track 248° to cross ZOMER at/above FL270 and at 280K.

LANDING RUNWAYS 28L/R: From ZOMER on track 247° to cross FRIGG at/below FL190, then on track 249° to cross SOOIE between 11000 and 13000 and at 250K, then on track 248° to cross FAITH at 8000. Expect assigned instrument approach procedure, or expect RADAR vectors to final.

NOTE: RADAR required.

NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: YOSEM3 STAR ATC assigned only.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

YOSEM THREE ARRIVAL (RNAV)
(YOSEM.YOSEM3) 30APR15
SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

WAAS	APP CRS	Rwy Idg	4228
CH 70620	312°	TDZE	4378
W31A		Apt Elev	4378

RNAV (GPS) RWY 31
ALTURAS MUNI (AAT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 54°C (130°F). Rwy 31 helicopter visibility reduction below 1 SM NA. DME/DME RNP- 0.3 NA. Procedure NA at night.

MISSED APPROACH: Climb to 5400, then climbing left turn to 9000 direct BACHS and hold.

ASOS	SEATTLE CENTER	UNICOM
124.175	127.6 346.35	122.8 (CTAF) L

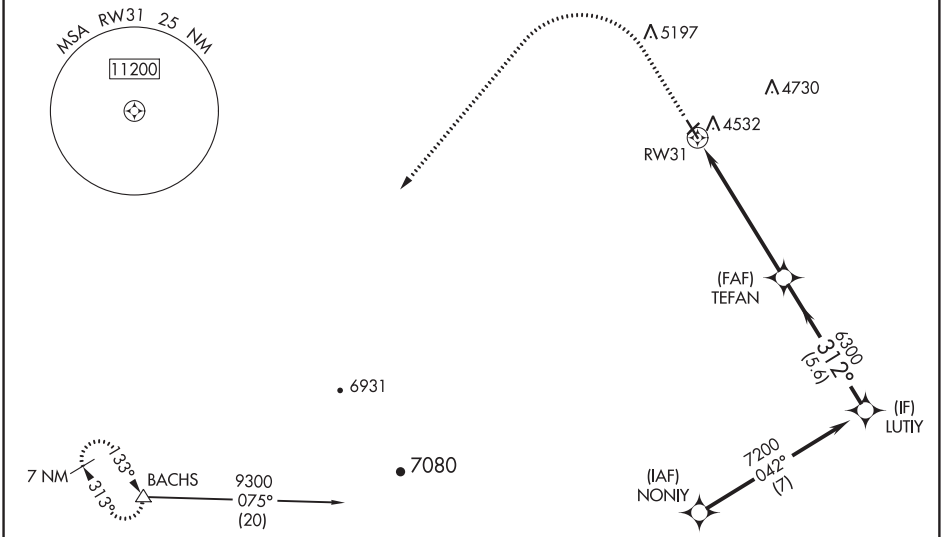

Procedure NA for arrivals at BACHS via V452 northwest bound.

ELEV 4378 TDZE 4378

5400 9000 BACHS

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).

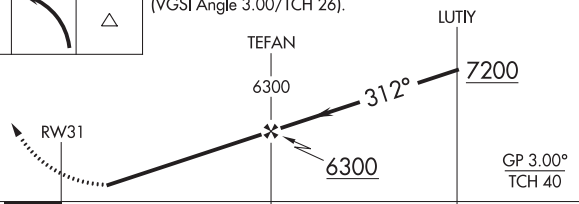

CATEGORY	A	B	C	D
LPV DA	4830-1⅜ 452 (500-1⅜)		NA	
LNAV/VNAV DA	4880-1⅜ 502 (600-1⅜)		NA	
LNAV MDA	5120-1 742 (800-1)	5120-1¼ 742 (800-1¼)	NA	
C CIRCLING	5120-1 742 (800-1)	5200-1¼ 822 (900-1¼)	NA	

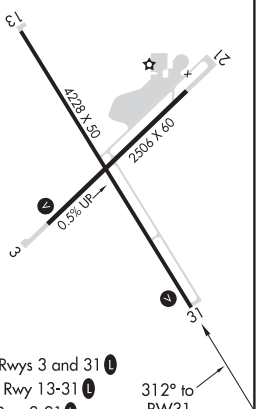

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(BACHS2.BACHS) 16091

BACHS TWO DEPARTURE (OBSTACLE) (RNAV)

SL-6436 (FAA)

ALTURAS MUNI (AAT)
ALTURAS, CALIFORNIA

SEATTLE CENTER
127.6 346.35
CTAF
122.8

TAKEOFF MINIMUMS

Rwy 3: Standard with minimum climb of 340′ per NM to 5900.
Rwy 13: Standard with minimum climb of 230′ per NM to 8200.
Rwy 21: Standard with minimum climb of 365′ per NM to 6000.
Rwy 31: Standard with minimum climb of 450′ per NM to 5800.

NOTE: GPS required.

NOTE: RNAV 1.

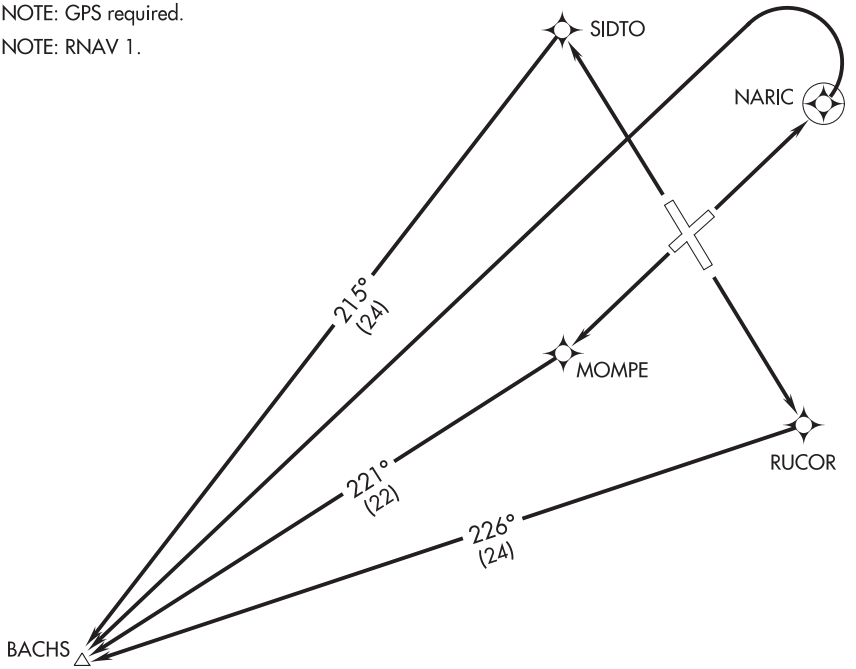

TAKEOFF OBSTACLE NOTES

Rwy 3: Trees, buildings, poles and a road with vehicles beginning 1′ from DER, right and left of centerline, up to 100′ AGL/4659′ MSL.
Rwy 21: Trees and road with vehicles beginning 1′ from DER, right and left of centerline, to 100′ AGL/4469′ MSL.
Rwy 13: Trees and a road with vehicles beginning 1′ from DER, right and left of centerline, up to 100′ AGL/4519′ MSL.
Rwy 31: Trees and road with vehicles beginning 1′ from DER, right and left of centerline, up to 100′ AGL/4469′ MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 3: Climb to 9000 direct NARIC, then climbing left turn direct BACHS.

TAKEOFF RUNWAY 13: Climb to 9000 direct RUCOR, turn right via 226° track to BACHS.

TAKEOFF RUNWAY 21: Climb to 9000 direct MOMPE, then via 221° track to BACHS.

TAKEOFF RUNWAY 31: Climb to 9000 direct SIDTO, turn left via 215° track to BACHS.

SW-2, 30 JAN 2020 to 26 MAR 2020

TOP ALTITUDE: ASSIGNED BY ATC

SEATTLE CENTER
127.6 346.35
CTAF 122.8

TAKE OFF MINIMUMS
Rwy 3: Standard with minimum climb of 367′ per NM to 11000.
Rwy 13: Standard with minimum climb of 389′ per NM to 11000.
Rwys 21 and 31: NA - ATC.

NOTE: GPS required.
NOTE: RNAV 1

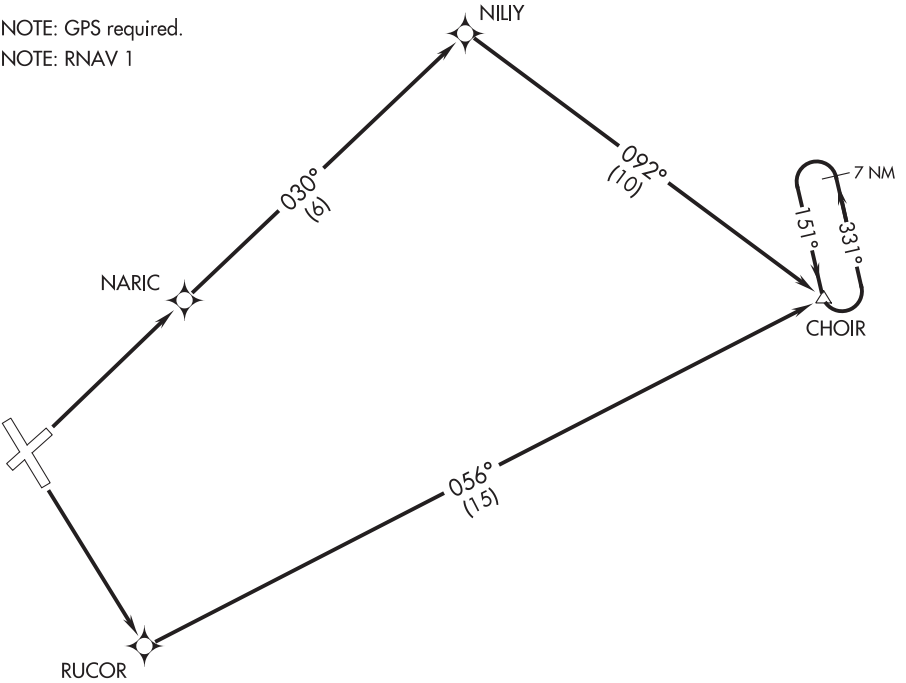

TAKE OFF OBSTACLE NOTES
Rwy 3: Trees, buildings, poles and a road with vehicles beginning 1′ from DER, right and left of centerline, up to 100′ AGL/4659′ MSL.
Rwy 13: Trees and road with vehicles beginning 1′ from DER, right and left of centerline, up to 100′ AGL/4519′ MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKE OFF RUNWAY 3: Climb to 11000 direct NARIC and via 030° track to NILIY and via 092° track to CHOIR, thence....

TAKE OFF RUNWAY 13: Climb to 11000 direct RUCOR and via 056° track to CHOIR, thence....

....climb in holding, (if required) before proceeding on course.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

20030

HERLONG, CALIFORNIA

RNAV (GPS) RWY 27

APCH CRS	Rwy ldg	10,000
266°	TDZE	4012
	Arpt Elev	4012

AL-6624 (USA)

AMEDEE AAF (KAHC)

T NA * Circling NA for CAT CD north of Rwy 9-27.

MISSED APPROACH: Climbing left turn to 10,000 direct JEBED and track 010° to IYELE and hold, continue climb-in-hold to 10,000. When authorized by ATC, climb-in-hold to 14,000.

AWOS-3	OAKLAND CENTER	CTAF
118.825	128.8 285.5	126.2 241.9

When local altimeter setting not received, use Susanville altimeter setting.

VDP NA when using Susanville altimeter setting.

Procedure not authorized at night.

RNP APCH

WIDUT

10,000 130° (12.8)

7 NM

010° 190°

(IAF) IYELE 10,000

8000 190° (7.8)

RENO MOA, NV

6221

7000

6000

5000

6720

4895

5571

5352

4044

4064

4132

4509

5900 (2)

6500 (1.9)

6077

7000 266° (4.6)

(FAF) WEBMA

YESUY

COKGA

(IF) JEBED

RW27

4126

8000 342° (6.2)

4231

(IAF) SEDTO 11,000

MSA RW27 25 NM 10,000

NOT FOR CIVIL USE

11,000 335° (36.4)

MUSTANG FMG

7645

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

10,000 JEBED tr 010° IYELE

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 87).

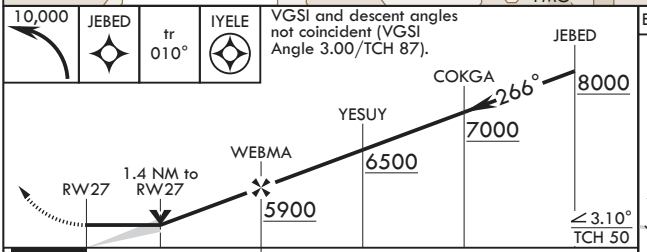

ELEV 4012 TDZE 4012



CATEGORY	A	B	C	D
LNAV MDA	4540-1 528 (600-1)		4540-1½ 528 (600-1½)	
C CIRCLING	4540-1 528 (600-1)	4680-1 668 (700-1)	4680-1¾ 668 (700-1¾)	4680-2 668 (700-2)
SUSANVILLE ALTIMETER SETTING MINIMUMS				
LNAV MDA	4620-1 608 (700-1)		4620-2 608 (700-2)	
C CIRCLING	4620-1 608 (700-1)	4760-1 748 (800-1)	4760-2¼ 748 (800-2¼)	4760-2½ 748 (800-2½)

HERLONG, CALIFORNIA

40°16'N - 120°09'W

AMEDEE AAF (KAHC)

Amdt 2 30JAN20

RNAV (GPS) RWY 27

LOC/DME I-ACV	APP CRS	Rwy Idg	5846
109.5	316°	TDZE	221
Chan 32		Apt Elev	222

ILS or LOC RWY 32

CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY (ACV)

T
A NA — Circling NA northeast of Rwy 14-32. DME required.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct FOT VORTAC and hold.

ASOS	SEATTLE CENTER	UNICOM
118.525	124.85 306.3	123.0 (CTAF) L

ALTERNATE MISSED APCH FIX
ARCATA ACV 115.05 Chan 97 (Y)
R-293 113° 293°

LOCALIZER 109.5 I-ACV Chan 32

CULDU
5700 to VOR/DME 135° (12.6)
5700 to VOMAC 136° (18.7)
1405
251
885
619±
ARCATA ACV 115.05 Chan 97 (Y)
4092
3678
ULAMY I-ACV 6.1
3404
4260
ZUVKU I-ACV 7.5
3988
3690
VOLEW I-ACV 10.3
5074±
3200 316° (2.1)
1937
3700 316° (3.3)
SAWGU INT I-ACV 12.4
2386
JEBGA INT I-ACV 15.7
5484
4700 316° (3.4)
(IF)
VOMAC INT I-ACV 19.1
3086
5700 063° (14.4)
3729
5259
FORTUNA 114.0 FOT Chan 87
2340
4410
5905
2613
(IAF) YAGER I-ACV 28.9
R-341 161° 341°
R-035
R-049
R-063
136°
316°
5700 NOPT
(9.9)

MSA ACV 25 NM
110° 220° 010°
5900
2300
7200

ELEV 222 D TDZ 221

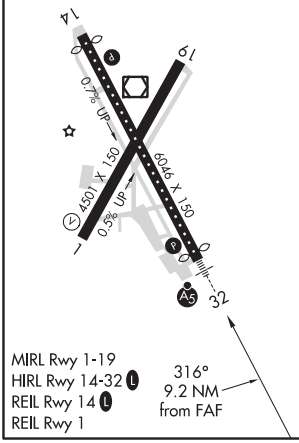

MIRL Rwy 1-19
HIRL Rwy 14-32 L
REIL Rwy 14 L
REIL Rwy 1
316° 9.2 NM from FAF

800 3000 FOT

Use I-ACV DME when on the localizer course.
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 43).

*LOC only

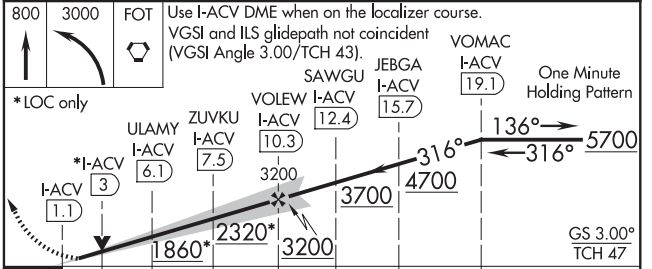

CATEGORY	A	B	C	D
S-ILS 32	441/18 220 (300-½)			
S-LOC 32	880/24 659 (700-½)		880-1⅜ 659 (700-1⅜)	
C CIRCLING	880-1 658 (700-1)		880-1⅞ 658 (700-1⅞)	880-2 658 (700-2)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	4501
CH 63200	013°	TDZE	204
W01A		Apt Elev	222

RNAV (GPS) RWY 1

CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY (ACV)

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3200 direct HIPGI and on track 295° to CULDU and hold.

ASOS	SEATTLE CENTER	UNICOM
118.525	124.85 306.3	123.0 (CTAF) L

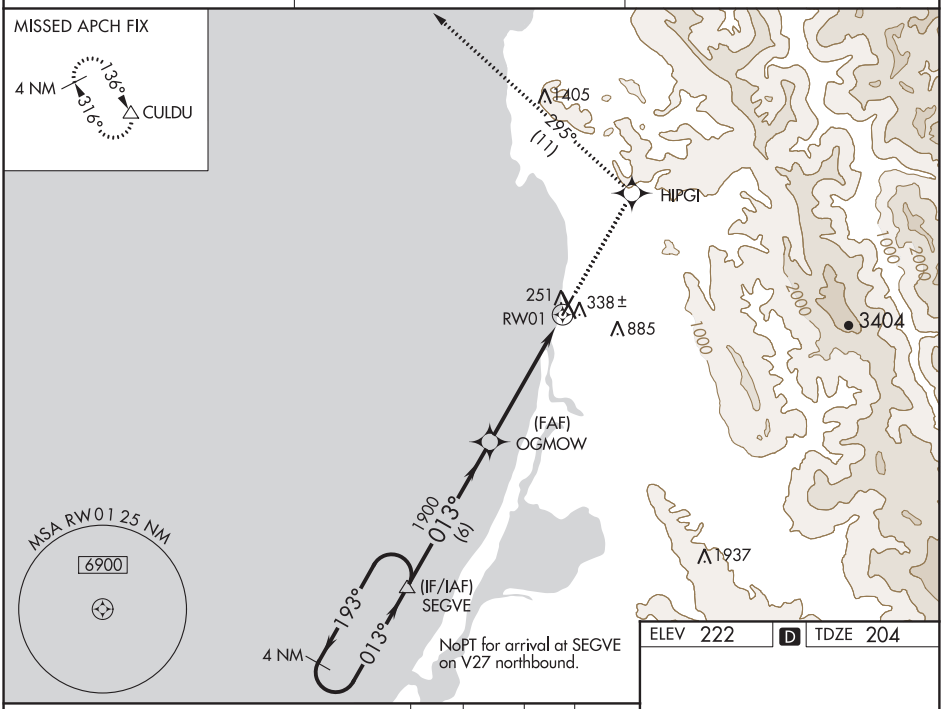

ELEV 222 D TDZE 204

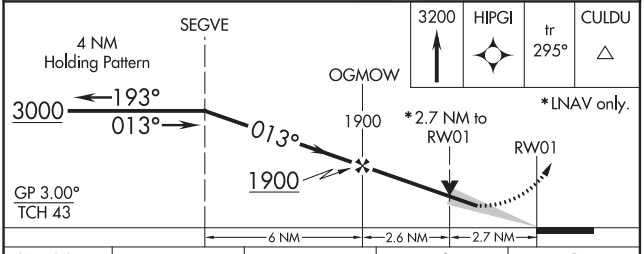

CATEGORY	A	B	C	D
LPV DA	870-2½ 666 (700-2½)			
LNAV/VNAV DA	838-2½ 634 (700-2½)			
LNAV MDA	1080-1 876 (900-1)	1080-1¼ 876 (900-1¼)	1080-2½ 876 (900-2½)	
C CIRCLING	1080-1¼ 858 (900-1¼)		1080-2½ 858 (900-2½)	1080-2¾ 858 (900-2¾)

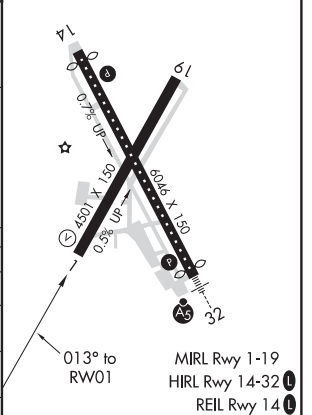

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	5601
CH 62801	136°	TDZE	205
W14A		Apt Elev	222

RNAV (GPS) RWY 14

CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY (ACV)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA. Rwy 14 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing right turn to 3000 direct SEGVE and hold.

ASOS	SEATTLE CENTER	UNICOM
118.525	124.85 306.3	123.0 (CTAF) L

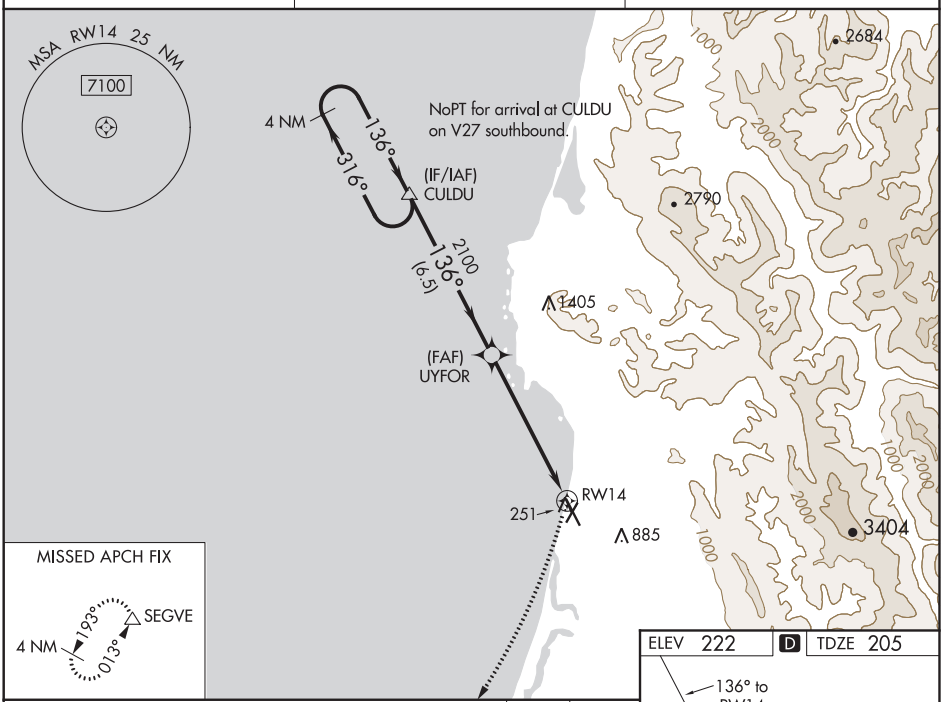

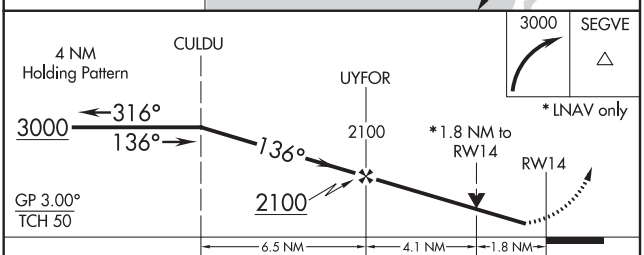

CATEGORY	A	B	C	D
LPV DA	455/45 250 (300-⅞)			
LNAV/VNAV DA	570-1¼ 365 (400-1¼)			
LNAV MDA	820/55 615 (600-1)		820-1¾ 615 (600-1¾)	
C CIRCLING	820-1 598 (600-1)		840-1¾ 618 (700-1¾)	880-2 658 (700-2)

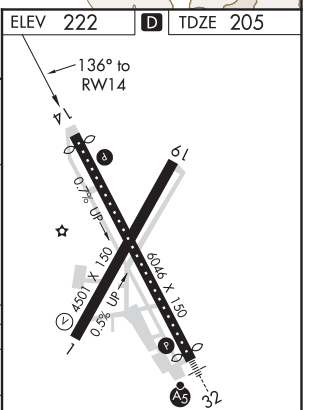

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

ARCATA/EUREKA, CALIFORNIA | AL-519 (FAA) | 19283

WAAS	APP CRS	Rwy Idg	5846
CH 63108	316°	TDZE	221
W32A		Apt Elev	222

RNAV (GPS) RWY 32

CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY (ACV)

T A — Baro-VNAV NA. Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 3000 direct CULDU and hold.

ASOS	SEATTLE CENTER	UNICOM
118.525	124.85 306.3	123.0 (CTAF) L

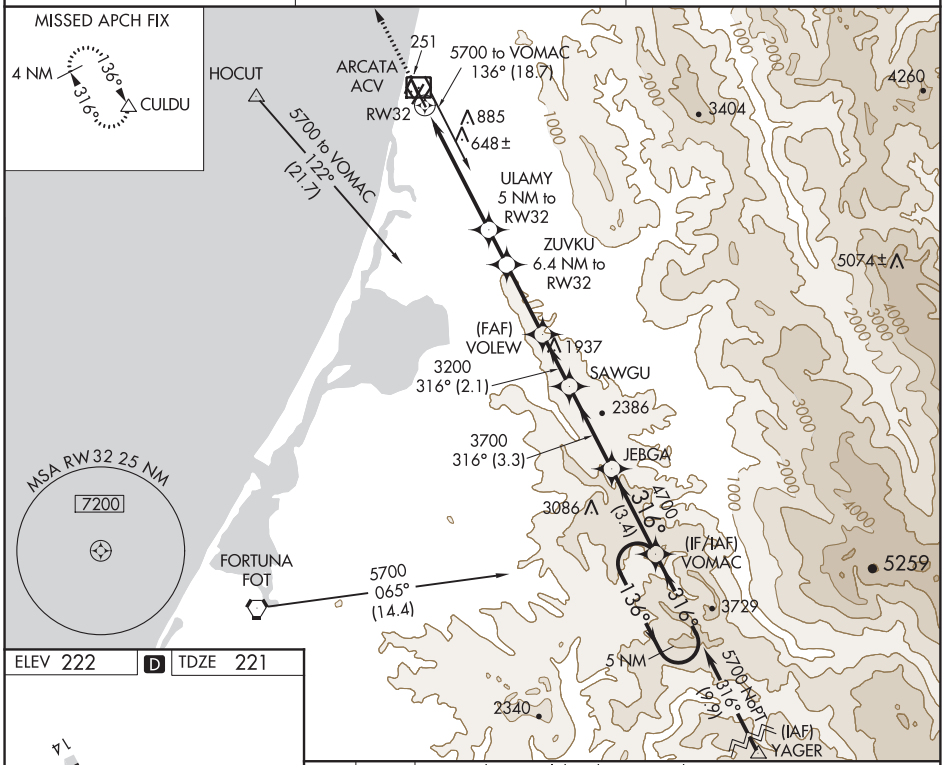

ELEV 222 | D | TDZE 221

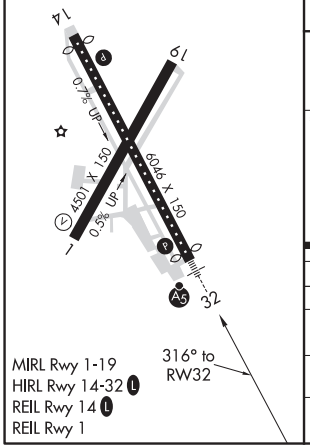

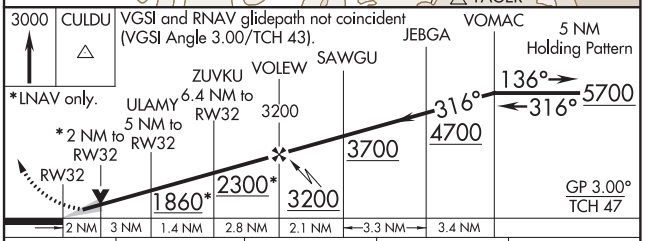

CATEGORY	A	B	C	D
LPV DA	441/18 220 (300-½)			
LNAV/VNAV DA	1056-2½ 835 (900-2½)			
LNAV MDA	900/24 679 (700-½)	900/40 679 (700-¾)	900-1½ 679 (700-1½)	
C CIRCLING	900-1 678 (700-1)		900-2 678 (700-2)	900-2¼ 678 (700-2¼)

ARCATA/EUREKA, CALIFORNIA
Amdt 2A 26APR18

CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY (ACV)
40°59′N-124°07′W

RNAV (GPS) RWY 32

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME ACV	APP CRS	Rwy Idg	5601
115.05	123°	TDZE	205
Chan 97 (Y)		Apt Elev	222

VOR RWY 14

CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY (ACV)

T DME required.
Circling NA northeast of Rwy 14-32.
Rwy 14 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing right turn to 3000 on ACV R-208 to HEXIT INT/ 8.2 DME and hold, continue climb-in-hold to 3000.

ASOS	SEATTLE CENTER	UNICOM
118.525	124.85 306.3	123.0 (CTAF) L

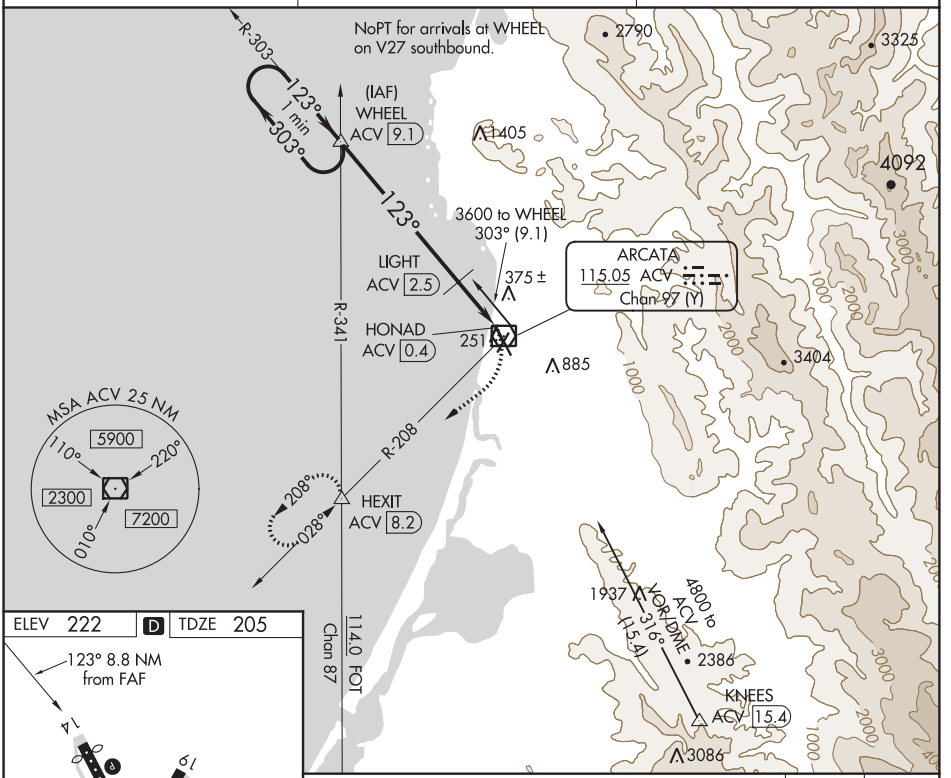

CATEGORY	A	B	C	D
S-14	640/55	435 (500-1)	640-1¼	435 (500-1¼)
C CIRCLING	640-1 418 (500-1)	680-1 458 (500-1)	840-1¾ 618 (700-1¾)	880-2 658 (700-2)

MIRL Rwy 1-19
HIRL Rwy 14-32 L
REIL Rwy 14 L
REIL Rwy 1

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(HOCUT5.HOCUT) 20030
HOCUT FIVE DEPARTURE

CALIFORNIA REDWOOD COAST-HUMBOLDT COUNTY (ACV)
AL-519 (FAA)
ARCATA/EUREKA, CALIFORNIA

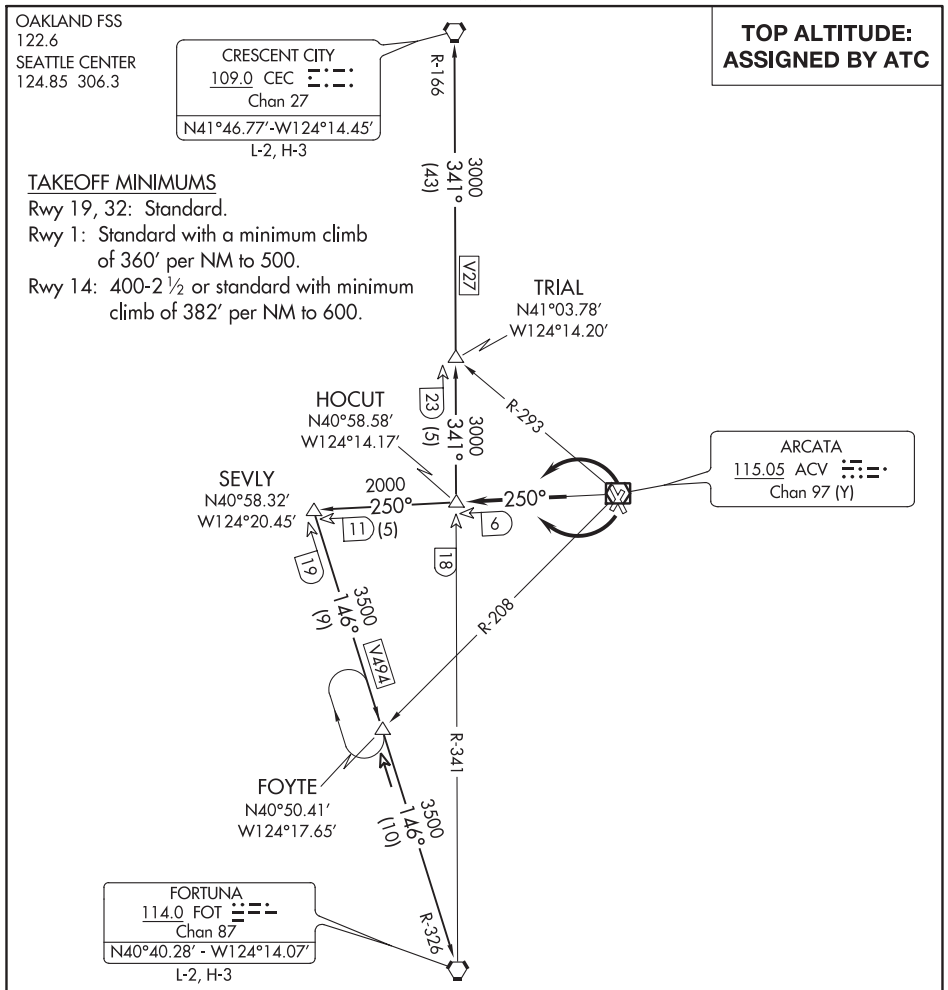

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1 and 32: Climbing left turn on ACV R-250, thence. . . .
TAKEOFF RUNWAYS 14 and 19: Climbing right turn on ACV R-250, thence. . . .
. . . .on (transition) or (assigned route).

CRESCENT CITY TRANSITION (HOCUT5.CEC): From over HOCUT INT on FOT R-341 and CEC R-166 to CEC VORTAC.

FORTUNA TRANSITION (HOCUT5.FOT): From over HOCUT INT on ACV R-250 to SEVLY INT, then via FOT R-326 to FOT VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

LOC I-MER	APP CRS	Rwy Idg	11802
109.5	306°	TDZE	181
		Apt Elev	190

ILS or LOC RWY 31
CASTLE (MER)

DME required for LOC only.

Circling NA southwest of Rwy 13-31. DME from HYP VOR/DME.
Simultaneous reception of I-MER and HYP DME required.

ALSF-1

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct HYP VOR/DME and hold.

ATIS	NORCAL APP CON	CASTLE TOWER ★	GND CON	UNICOM	
124.475	120.95 269.45	118.175 (CTAF) 235.775	133.575	122.95	123.0 L

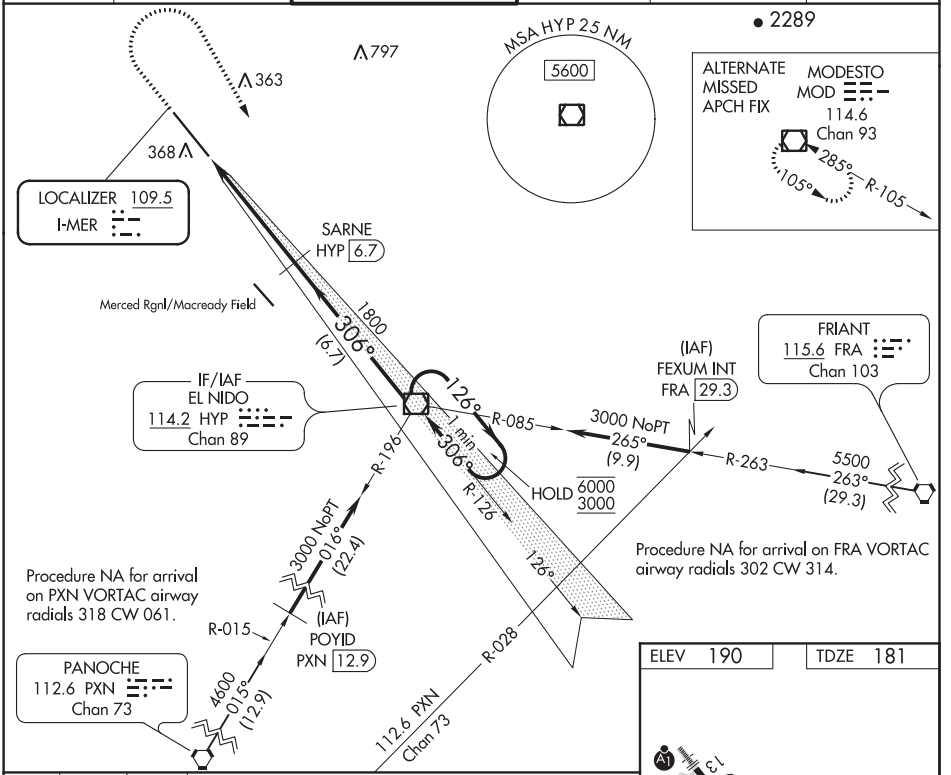

1000	3000	HYP

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

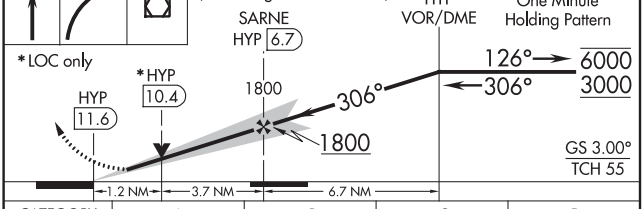

CATEGORY	A	B	C	D
S-ILS 31	381-½ 200 (200-½)			
S-LOC 31	620-½ 439 (500-½)		620-¾ 439 (500-¾)	
C CIRCLING	660-1 470 (500-1)		720-1½ 530 (600-1½)	800-2 610 (700-2)

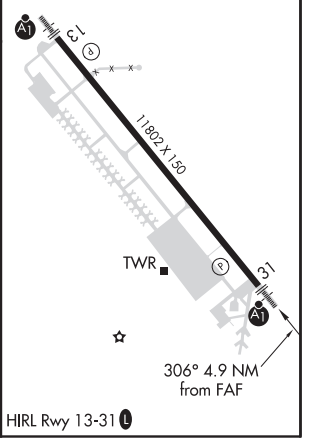

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 13

CASTLE (MER)

WAAS	APP CRS	Rwy Idg	11802
CH 50211	126°	TDZE	190
W13A		Apt Elev	190

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inoperative ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM, increase LNAV Cats A/B visibility to 1 SM, and increase LNAV Cat C/D visibility to 1⅛ SM.

ALSF-1

MISSED APPROACH: Climb to 600 then climbing left turn to 4000 direct TURLO and hold, continue climb-in-hold to 4000.

ATIS	NORCAL APP CON	CASTLE TOWER *	GND CON	UNICOM	
124.475	120.95 269.45	118.175 (CTAF) 235.775	133.575	122.95	123.0 L

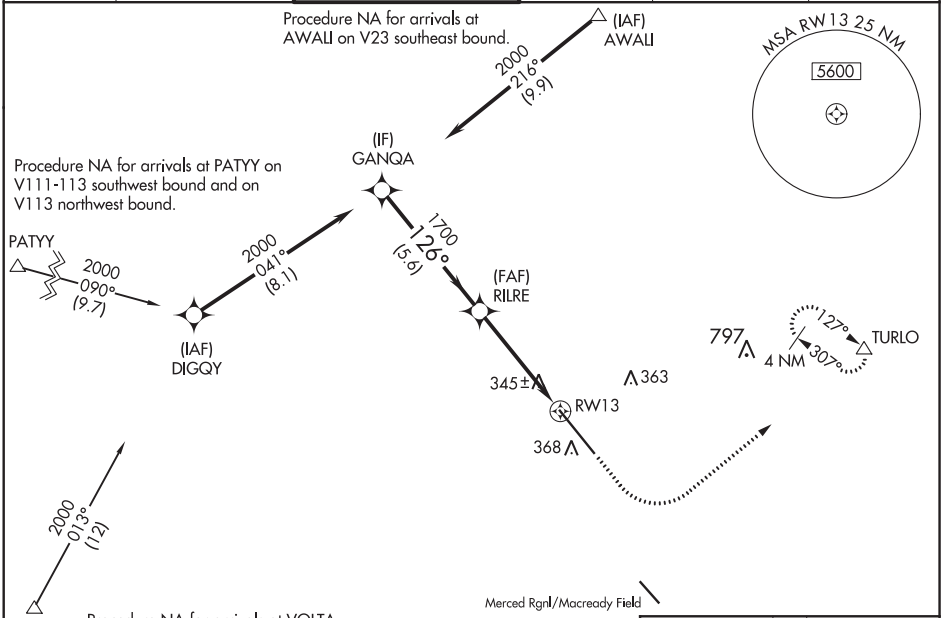

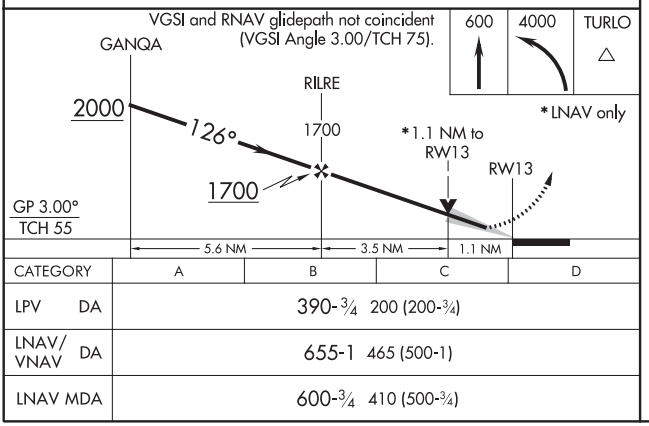

CATEGORY	A	B	C	D
LPV DA	390-¾ 200 (200-¾)			
LNAV/VNAV DA	655-1 465 (500-1)			
LNAV MDA	600-¾ 410 (500-¾)			

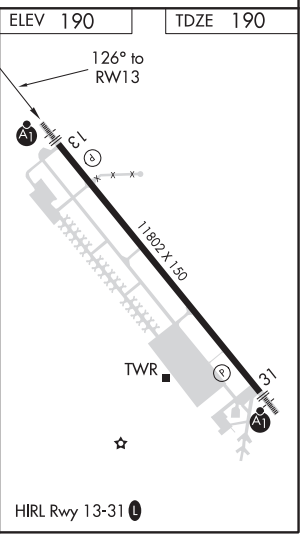

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 31

CASTLE (MER)

WAAS CH 87110 W31A	APP CRS 306°	Rwy Idg 11802 TDZE 181 Apt Elev 190

RNP APCH.

T Circling NA southwest of Rwy 13-31. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inoperative ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM and LNAV Cats C/D visibility to 1 SM.

ALSF-1

MISSED APPROACH: Climb to 4000 direct WENIG and on track 031° to NEBBY and hold, continue climb-in-hold to 4000.

ATIS	NORCAL APP CON	CASTLE TOWER ★	GND CON	UNICOM	
124.475	120.95 269.45	118.175 (CTAF) 235.775	133.575	122.95	123.0 L

MISSED APCH FIX

4 NM 127° 307° NEBBY

WENIG 031° (9.9)

797 363 2289 2880

386 292± RW31

(FAF) SARNE 335

Merced Rgnl/Macready Field

1800 (6) 306°

(IAF) EBTUW 2000 219° (9.8)

VOLTA 2000 101° (22.2)

Procedure NA for arrivals at VOLTA on V113 northwest bound.

(IF) CUMLO

(IAF) NUPUZ 2000 030° (9.9)

MSA RW31 25 NM 5600

2000 009° (15.5)

Procedure NA for arrival on PXN VORTAC airway radials 296 CW 061.

UNIGE

PANOCHE PXN 4500 009° (11)

ELEV 190 TDZE 181

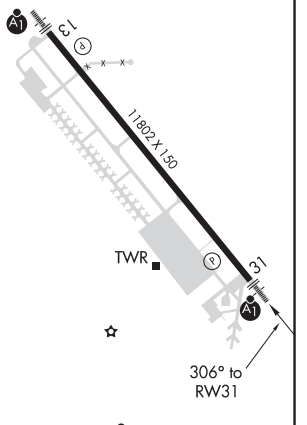

HIRL Rwy 13-31 L

4000	WENIG	tr 031°	NEBBY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

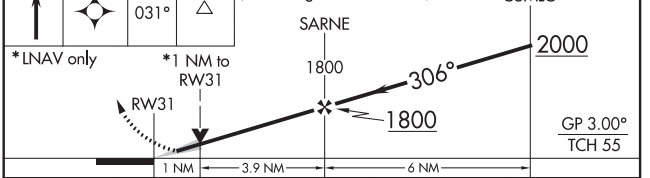

CATEGORY	A	B	C	D
LPV DA	381-½ 200 (200-½)			
LNAV/VNAV DA	498-½ 317 (400-½)			
LNAV MDA	560-½ 379 (400-½)		560-⅝ 379 (400-⅝)	
C CIRCLING	660-1 470 (500-1)		720-1½ 530 (600-1½)	800-2 610 (700-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19115

AIRPORT DIAGRAM

AL-568 (FAA)

CASTLE (MER)
ATWATER, CALIFORNIA

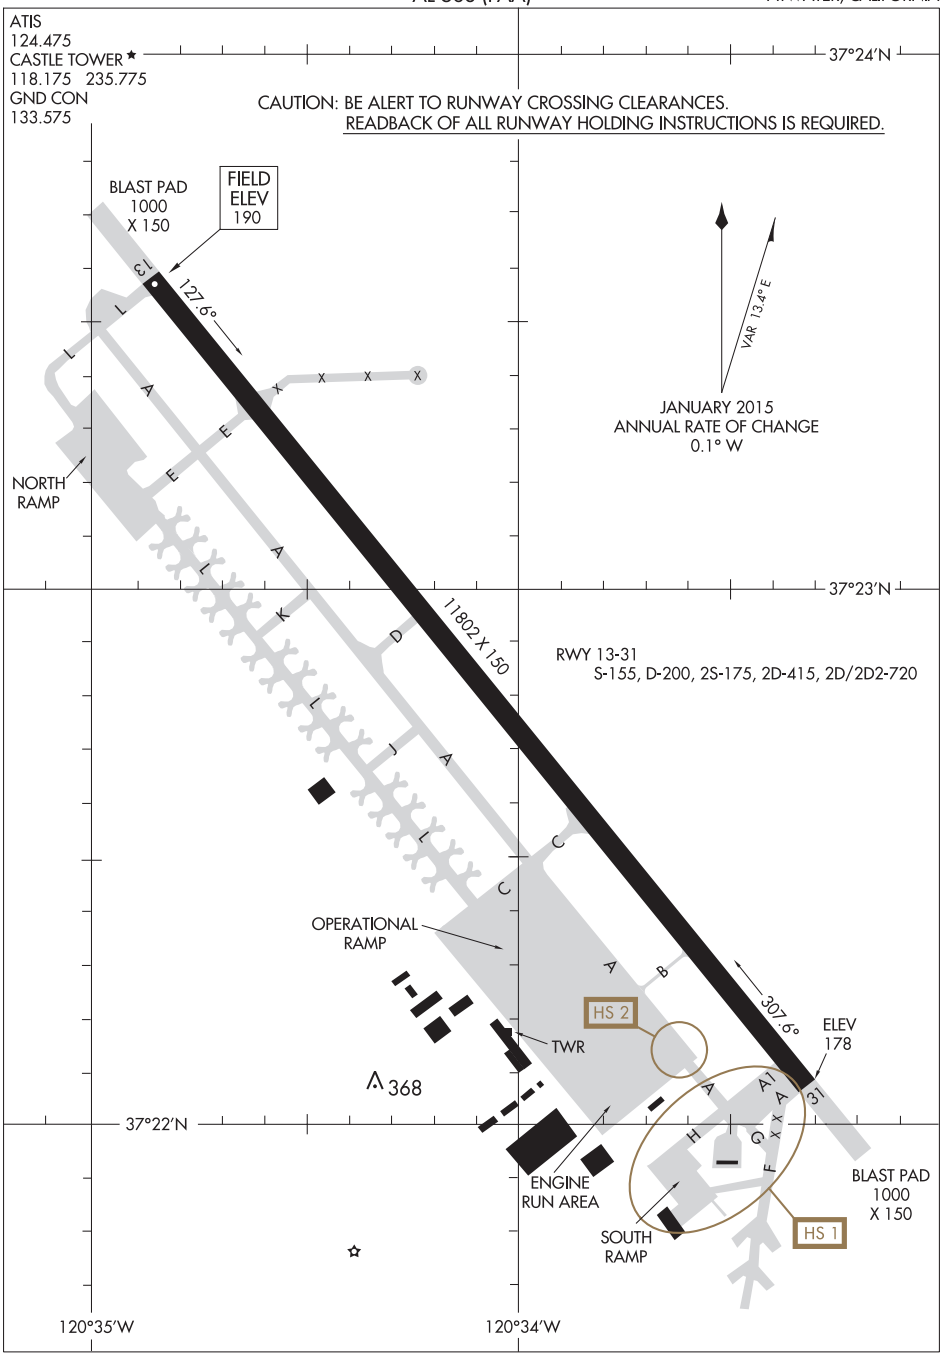

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
19115

ATWATER, CALIFORNIA
CASTLE (MER)

WAAS	APP CRS	Rwy Idg	3500
CH **90515**	**068°**	TDZE	**1532**
W07A		Apt Elev	**1538**

RNAV (GPS) RWY 7
AUBURN MUNI (AUN)

RNP APCH.

Circling Rwy 25 NA at night. Rwy 7 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.

MISSED APPROACH: Climb to 5000 direct AVPEY and left turn on track 311° to EKUJA and on track 289° to MRGGO and hold.

AWOS-3	NORCAL APP CON	UNICOM
119.375	**125.4 317.5**	**122.7** (CTAF) L

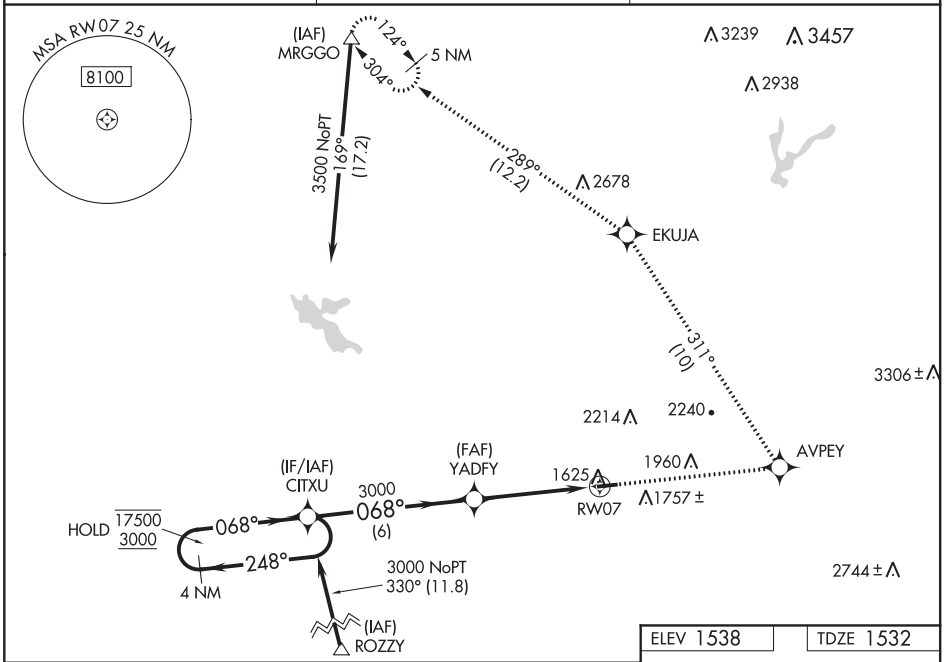

ELEV 1538 TDZE 1532

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).

5000	AVPEY	tr 311°	EKUJA	tr 289°	MRGGO

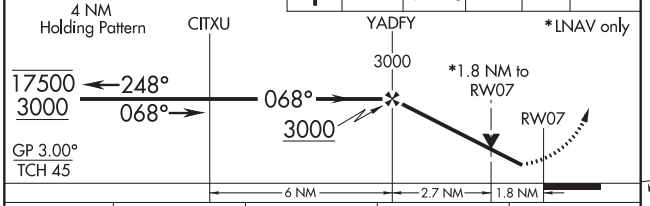

CATEGORY	A	B	C	D
LPV DA	1848-1¼ 316 (400-1¼)		NA	
LNAV/VNAV DA	1968-1¾ 436 (500-1¾)		NA	
LNAV MDA	2100-1 568 (600-1)		NA	
C CIRCLING	2200-1 662 (700-1)	2400-1¼ 862 (900-1¼)	NA	

MIRL Rwy 7-25 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MARYSVILLE, CALIFORNIA

ILS or LOC Y RWY 15

LOC I-BAB	APCH CRS	Rwy ldg	12,001
109.5	145°	TDZE	113
		Arpt Elev	113

AL-771 (USAF)

BEALE AFB (KBAB)

* When ALS inop, increase all CAT RVR to 40 and vis to 3/4 mile.
** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 3/8 miles.
*** Circling not authorized E of Rwy 15-33.

ALSF-1

MISSED APPROACH: Climb to 4400 direct BAB TACAN. Turn right to intercept BAB R-326 and hold, continue climb in hold to 4400.

ATIS★	NORCAL APP CON	TOWER★	GND CON
124.55 273.5	125.4 259.1	119.4 284.75	121.6 257.75

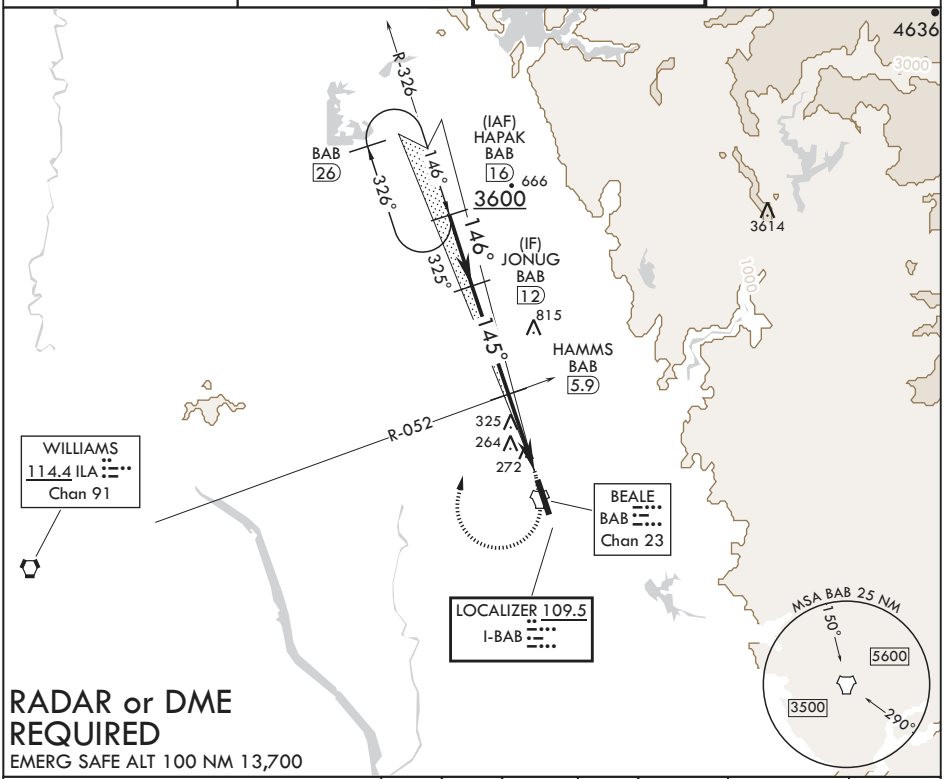

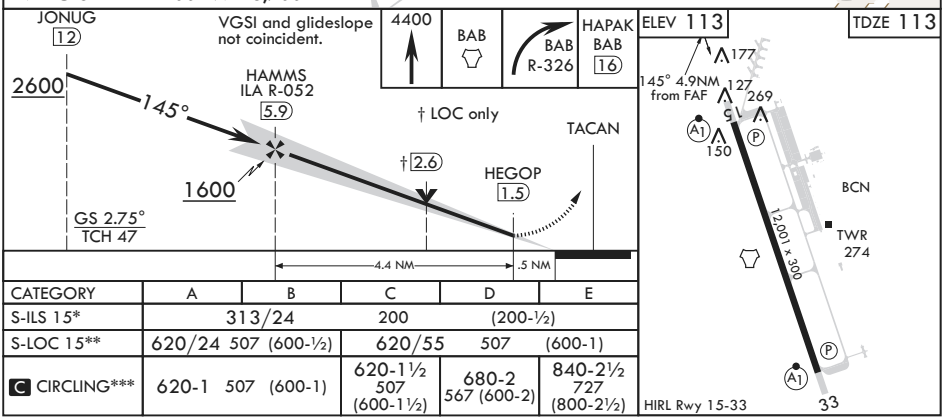

CATEGORY	A	B	C	D	E
S-ILS 15*	313/24		200	(200-½)	
S-LOC 15**	620/24	507 (600-½)	620/55	507	(600-1)
C CIRCLING***	620-1	507 (600-1)	620-1½ 507 (600-1½)	680-2 567 (600-2)	840-2½ 727 (800-2½)

MARYSVILLE, CALIFORNIA

ILS or LOC Y RWY 33

LOC I-MIZ	APCH CRS	Rwy ldg	12,001
109.5	325°	TDZE	105
		Arpt Elev	113

AL-771 (USAF)

BEALE AFB (KBAB)

* When ALS inop, increase CAT ABCDE RVR to 40 and vis to 3/4 mile.
** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE RVR to 60 and vis to 1 1/8 miles.
*** Circling not authorized E of Rwy 15-33.

ALSF-1

MISSED APPROACH: Climb to 3600 intercept BAB TACAN R-326 to HAPAK and hold.

ATIS★	NORCAL APP CON	TOWER★	GND CON
124.55 273.5	125.4 259.1	119.4 284.75	121.6 257.75

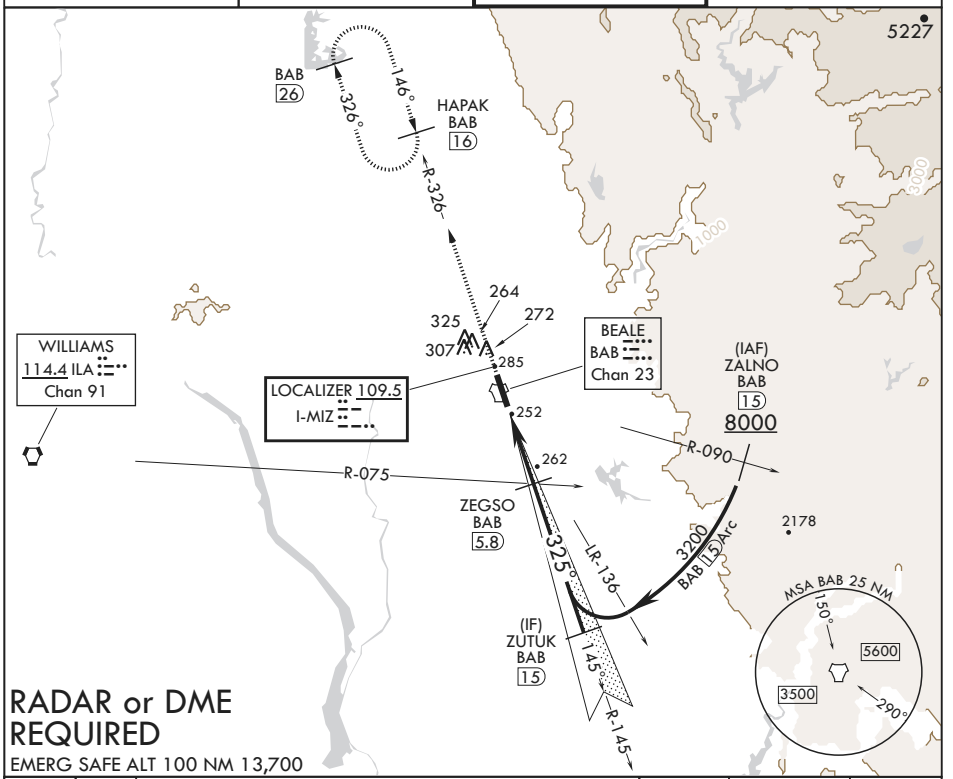

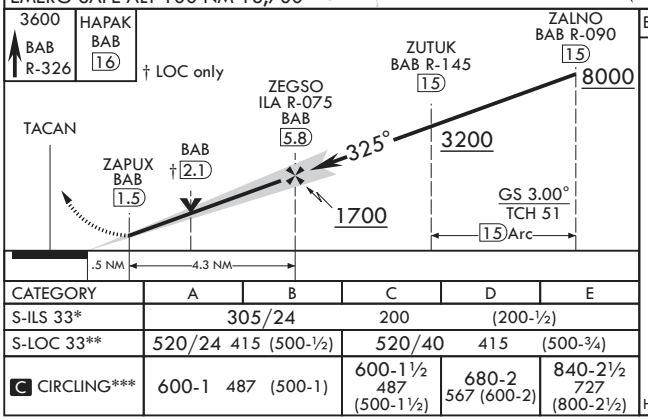

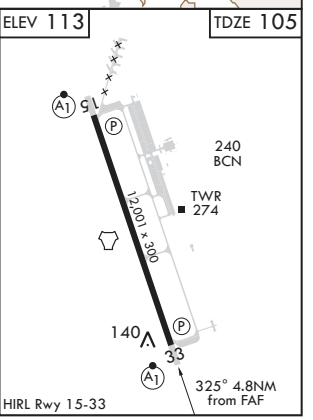

CATEGORY	A	B	C	D	E
S-ILS 33*	305/24		200		(200-½)
S-LOC 33**	520/24	415 (500-½)	520/40	415	(500-¾)
C CIRCLING***	600-1	487 (500-1)	600-1½ 487 (500-1½)	680-2 567 (600-2)	840-2½ 727 (800-2½)

MARYSVILLE, CALIFORNIA

39°08'N - 121°26'W

BEALE AFB (KBAB)

Amdt 5 20JUL17

ILS or LOC Y RWY 33

SW-2, 30 JAN 2020 to 26 MAR 2020

MARYSVILLE, CALIFORNIA

RNAV (GPS) RWY 15

APCH CRS	Rwy ldg	12,001
145°	THRE	113
	Arpt Elev	113

AL-771 (USAF)

BEALE AFB (KBAB)

* When ALS inop, increase vis to 2 1/2 miles.
** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 3/8 miles.
*** Circling not authorized E of Rwy 15-33.

ALSF-1

MISSED APPROACH: Climb direct RADRE, then track 145° to ZUTUK, then turn left and track 105° to RAGTE and hold, maintain 3600.

ATIS★	NORCAL APP CON	TOWER★	GND CON
124.55 273.5	125.4 259.1	119.4 284.75	121.6 257.75

Baro-VNAV NA
below -15°C (5°F)

DME/DME RNP -0.3 NA

4768

9 NM

146°

326°

(IAF)
HAPAK
3600

2600

146°

(3.8)

(IAF/IF)
PELAE

1700

145°

(6)

433

(FAF)
PEDCE

325

286

290

RW15

RADRE

ZUTUK

MISSED APPROACH
9 NM
285°
105°
RAGTE

MSA RW15 25 NM
5600

EMERG SAFE ALT 100 NM 13,700

PELAE

VGSI and descent angles not coincident.

2600

145°

PEDCE

† LNAV only

† 1.6 NM to RW15

RW15

1700

GP 2.75°
TCH 47

5.2 NM

3600 | RADRE | tr 145° | ZUTUK

ELEV 113

THRE 113

219

256

145° to RW15

BCN

TWR
274

12,001 x 300

HIRL Rwy 15-33

33

CATEGORY	A	B	C	D	E
LNAV/VNAV DA*	680-1⅝		567	(600-1⅝)	
LNAV MDA**	620/24 507 (600-½)		620/55	507	(600-1)
C CIRCLING***	620-1 507 (600-1)	640-1 527 (600-1)	660-1½ 547 (600-1½)	680-2 567 (600-2)	840-2½ 727 (800-2½)

SW-2, 30 JAN 2020 to 26 MAR 2020

MARYSVILLE, CALIFORNIA

RNAV (GPS) RWY 33

APCH CRS	Rwy ldg	12,001
325°	THRE	105
	Arpt Elev	113

AL-771 (USAF)

BEALE AFB (KBAB)

* When ALS inop, increase all CAT's vis to 1 7/8 miles.
** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CD vis to 1 1/4 miles.
*** Circling not authorized E of Rwy 15-33.

ALSF-1

MISSED APPROACH: Climb direct SAKEE, then track 326° to HAPAK and hold, maintain 3600.

ATIS★	NORCAL APP CON	TOWER★	GND CON
124.55 273.5	125.4 259.1	119.4 284.75	121.6 257.75

Baro-VNAV NA
below -15°C (5°F)

DME/DME RNP-0.3 NA

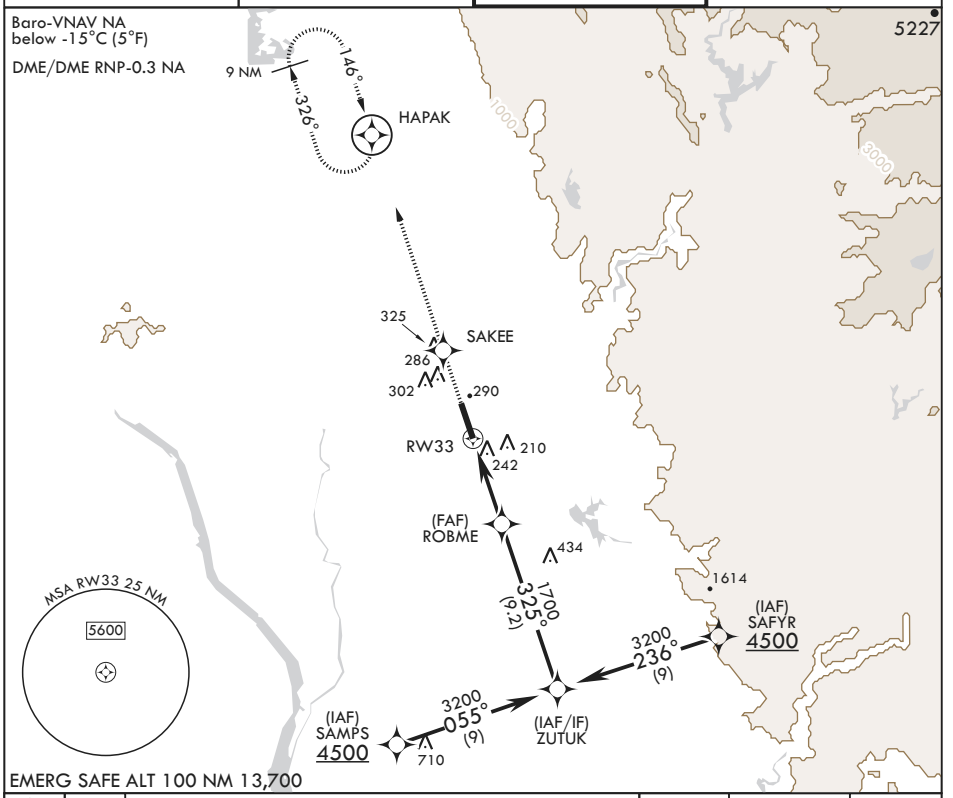

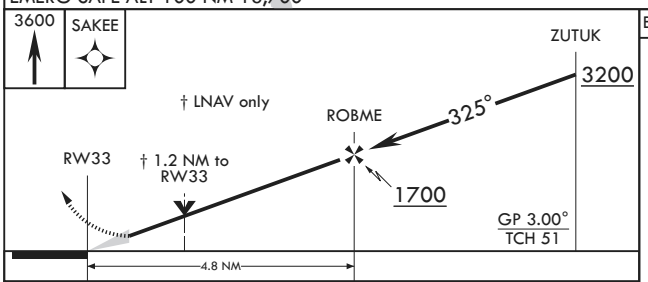

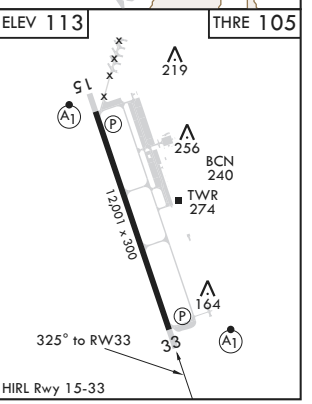

CATEGORY	A	B	C	D
LNAV/VNAV DA*	640-1 3/8	535	(600-1 3/8)	
LNAV MDA**	540/24 435 (500-½)		540/40 435 (500-¾)	
C CIRCLING***	600-1 487 (500-1)	640-1 527 (600-1)	660-1½ 547 (600-1½)	680-2 567 (600-2)

MARYSVILLE, CALIFORNIA

39°08'N - 121°26'W

BEALE AFB (KBAB)

Amdt 1 24MAY18

RNAV (GPS) RWY 33

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

MARYSVILLE, CALIFORNIA

TACAN Y RWY 15

TACAN BAB Chan **23**	APCH CRS **153°**	Rwy ldg **12,001** TDZE **113** Arpt Elev **113**

AL-771 (USAF)

BEALE AFB (KBAB)

* When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 1/2 miles.
** Circling not authorized E of Rwy 15-33.

ALSF-1

MISSED APPROACH: Climb to 4700 direct to BAB TACAN. Turn right to intercept BAB R-333 to ZARAG and hold, continue climb in hold to 4700.

ATIS★	NORCAL APP CON	TOWER★	GND CON
124.55 273.5	**125.4 259.1**	**119.4 284.75**	**121.6 257.75**

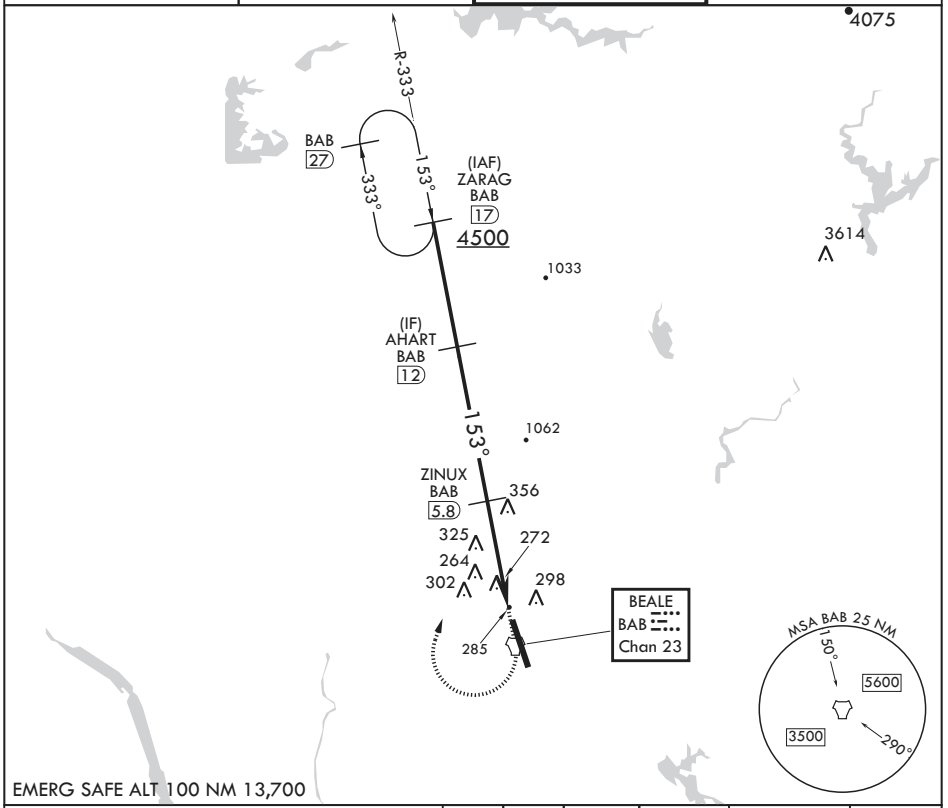

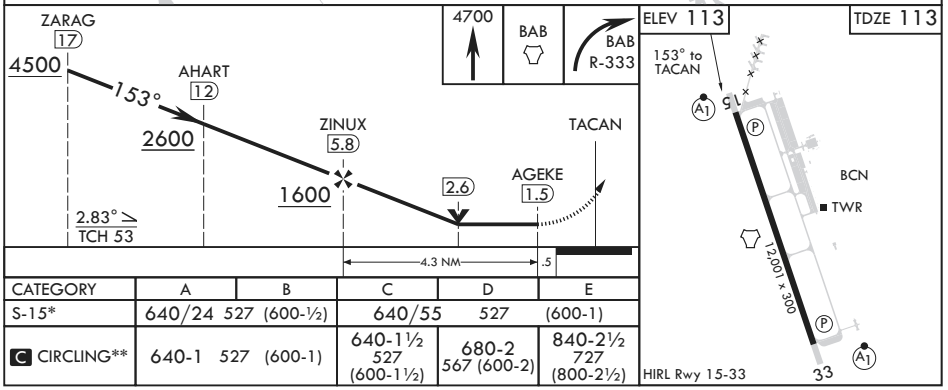

CATEGORY	A	B	C	D	E
S-15*	640/24	527 (600-½)	640/55	527	(600-1)
C CIRCLING**	640-1	527 (600-1)	640-1½ 527 (600-1½)	680-2 567 (600-2)	840-2½ 727 (800-2½)

MARYSVILLE, CALIFORNIA

39°08'N - 121°26'W

BEALE AFB (KBAB)

Amdt 5 20JUL17

TACAN Y RWY 15

SW-2, 30 JAN 2020 to 26 MAR 2020

MARYSVILLE, CALIFORNIA

TACAN Y RWY 33

TACAN BAB Chan 23	APCH CRS 317°	Rwy ldg 12,001 TDZE 105 Arpt Elev 113

AL-771 (USAF)

BEALE AFB (KBAB)

* When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 1/4 miles.
** Circling not authorized E of Rwy 15-33.

ALSF-1

MISSED APPROACH: Climb to 3600 intercept BAB TACAN R-326 to HAPAK and hold.

ATIS★	NORCAL APP CON	TOWER★	GND CON
124.55 273.5	125.4 259.1	119.4 284.75	121.6 257.75

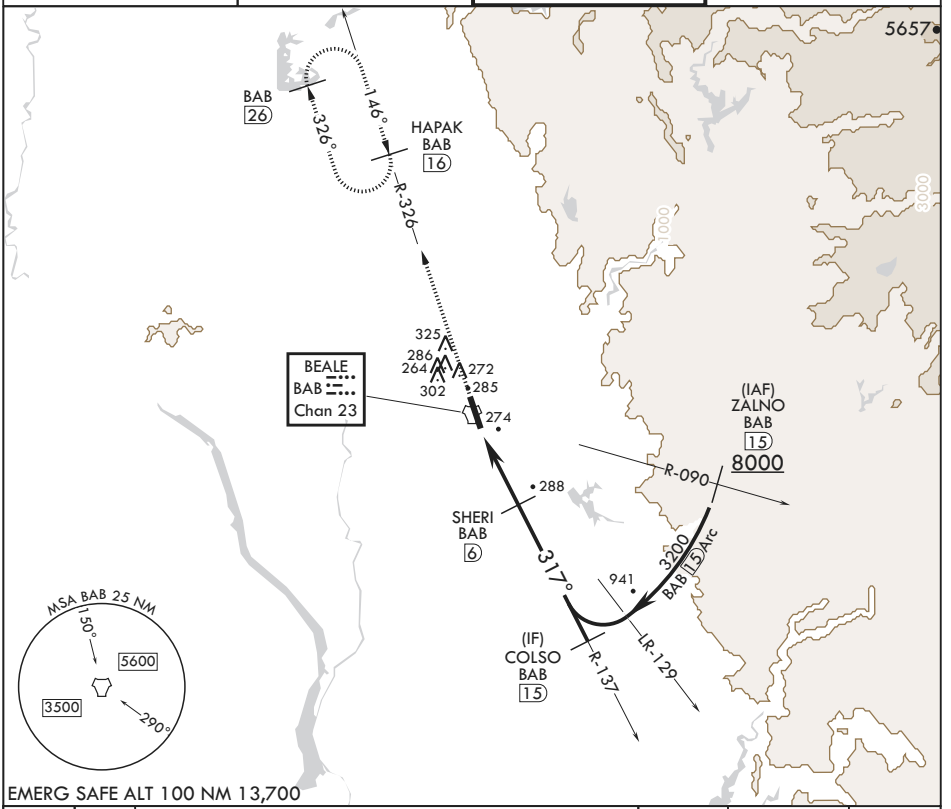

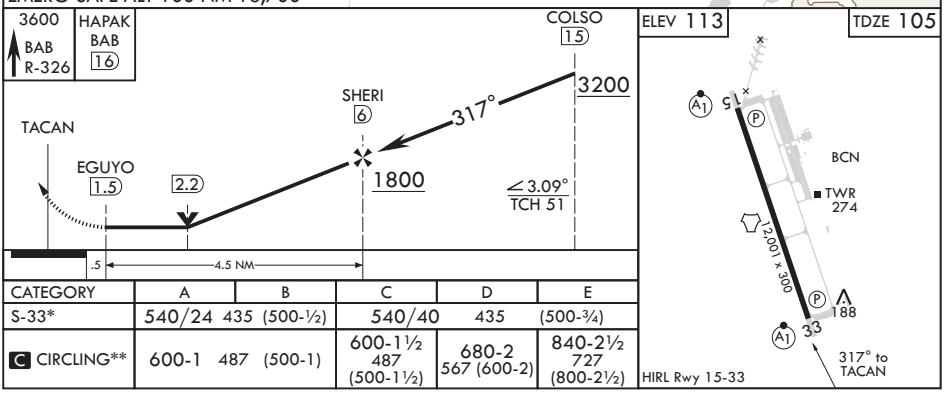

CATEGORY	A	B	C	D	E
S-33*	540/24	435 (500-½)	540/40	435	(500-¾)
C CIRCLING**	600-1	487 (500-1)	600-1½ 487 (500-1½)	680-2 567 (600-2)	840-2½ 727 (800-2½)

MARYSVILLE, CALIFORNIA

39°08'N - 121°26'W

BEALE AFB (KBAB)

Amdt 5 20JUL17

TACAN Y RWY 33

SW-2, 30 JAN 2020 to 26 MAR 2020

17117

AIRPORT DIAGRAM

BEALE AFB (KBAB)

AFD-771 [USAF]

MARYSVILLE, CALIFORNIA

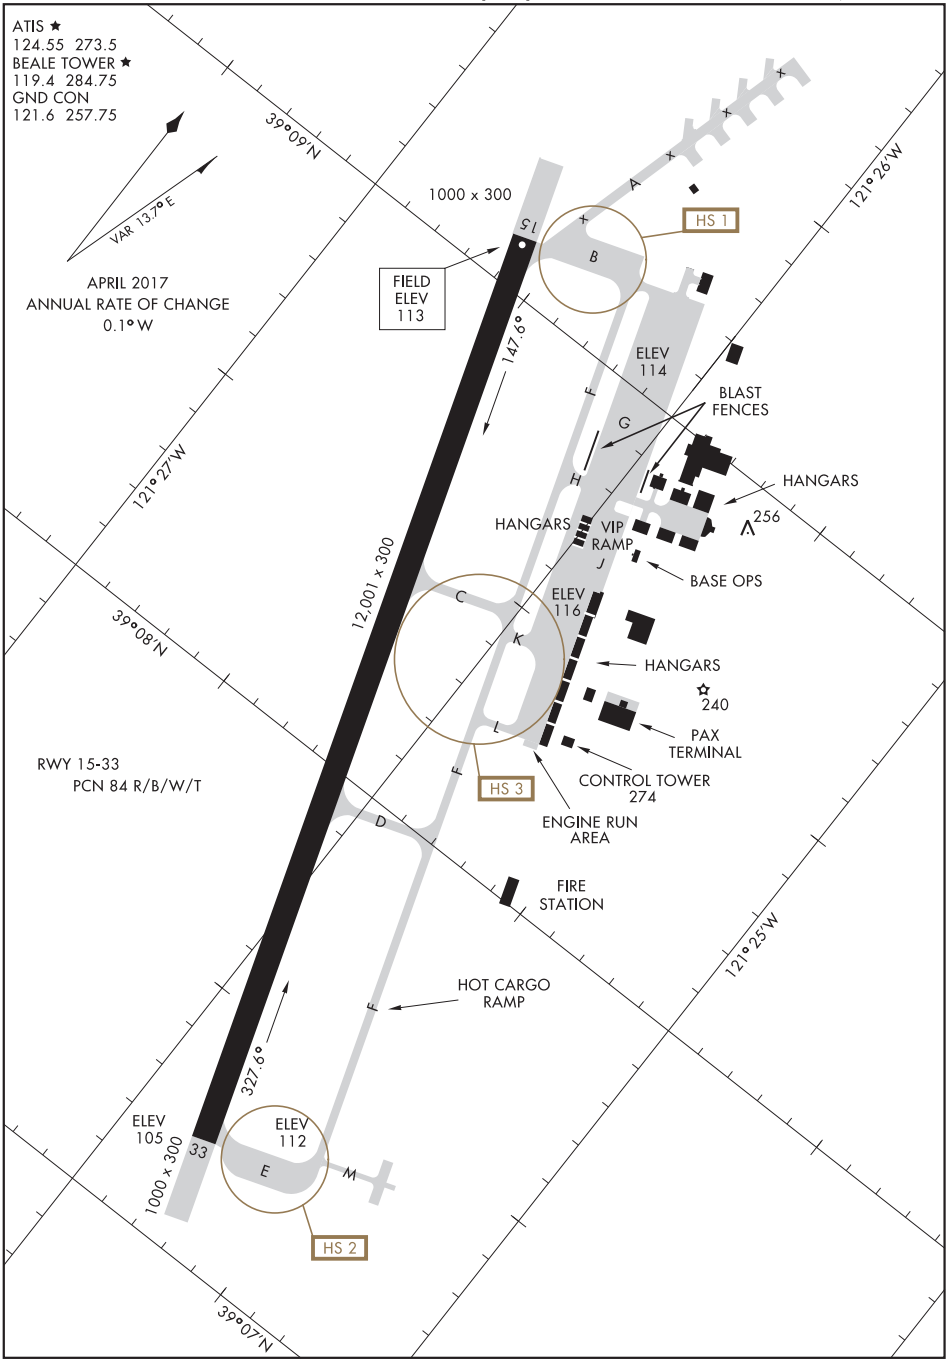

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM

MARYSVILLE, CALIFORNIA

BEALE AFB (KBAB)

PYNUN-SIX DEPARTURE (PYNUN6 • PYNUN)

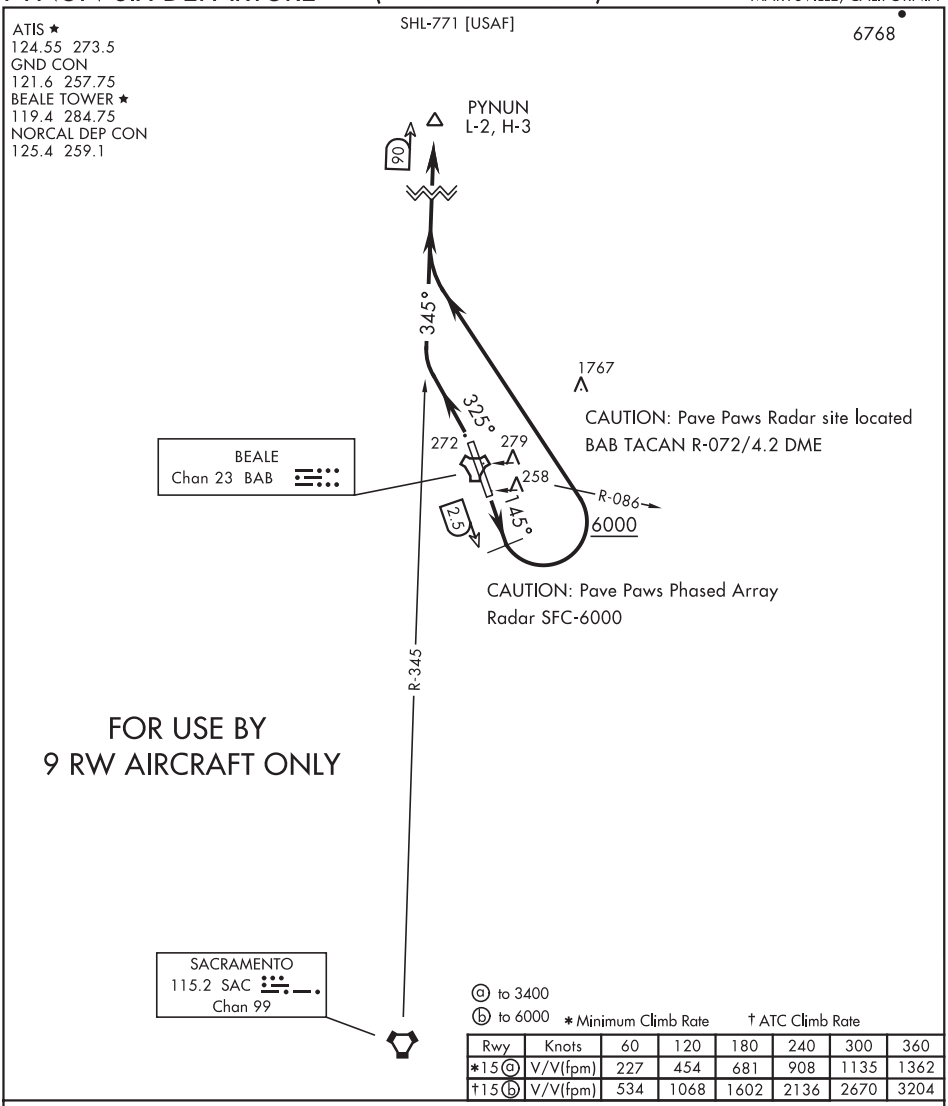

ⓐ to 3400
ⓑ to 6000 ∗ Minimum Climb Rate † ATC Climb Rate

Rwy	Knots	60	120	180	240	300	360
∗15ⓐ	V/V(fpm)	227	454	681	908	1135	1362
†15ⓑ	V/V(fpm)	534	1068	1602	2136	2670	3204

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 15: Fly heading 145° until BAB TACAN 2.5 DME, turn left intercept SAC VORTAC R-345 to PYNUN. Cross BAB R-086 at or above 6000. Then via assigned route.

TAKE-OFF RWY 33: Fly heading 325° intercept SAC VORTAC R-345 to PYNUN. Then via assigned route.

BECKWOURTH, CALIFORNIA

AL-10032 (FAA)

19283

RNAV (GPS) Y RWY 26

NERVINO (Ø2)

APP CRS	Rwy Idg	4651
267°	TDZE	4896
	Apt Elev	4900

T
NA
-14°C

Procedure NA at night. Use Reno/Stead altimeter setting; when not received, use Reno/Tahoe Intl altimeter setting and increase all MDA 180 feet. DME/DME RNP- 0.3 NA. 8, 26 Rwy helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing left turn to 10000 direct FITUN and hold.

AWOS-2	RTS AWOS-3	NORCAL APP CON	UNICOM
119.35	135.175	126.3 353.9	122.8 (CTAF) L

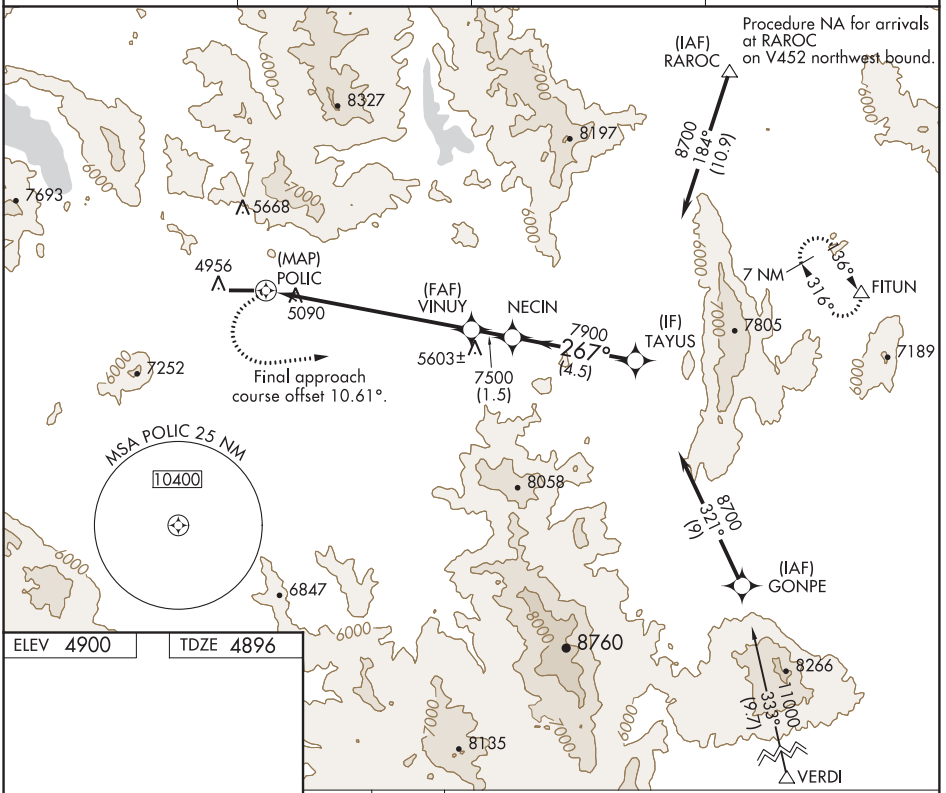

CATEGORY	A	B	C	D
LNAV MDA	7300-1¼ 2404 (2400-1¼)	7300-1½ 2404 (2400-1½)	7300-3 2404 (2400-3)	
CIRCLING	7300-1¼ 2400 (2400-1¼)	7300-1½ 2400 (2400-1½)	7300-3 2400 (2400-3)	

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Z RWY 26

NERVINO (OØ2)

WAAS	APP CRS	Rwy Idg	4651
CH 49203	256°	TDZE	4896
W26A		Apt Elev	4900

T
NA
-14°C

Use Reno/Stead altimeter setting; when not received, use Reno/Tahoe Intl altimeter setting and increase DA 180 feet.
DME/DME RNP -0.3 NA.
Helicopter visibility reduction below ¾ SM not authorized.

MISSED APPROACH: Climb to 10000 direct SIDOY and right turn on track 354° to CUGTI and right turn on track 091° to HALLE and hold.

AWOS-2	RTS AWOS-3	NORCAL APP CON	UNICOM
119.35	135.175	126.3 353.9	122.8 (CTAF) L

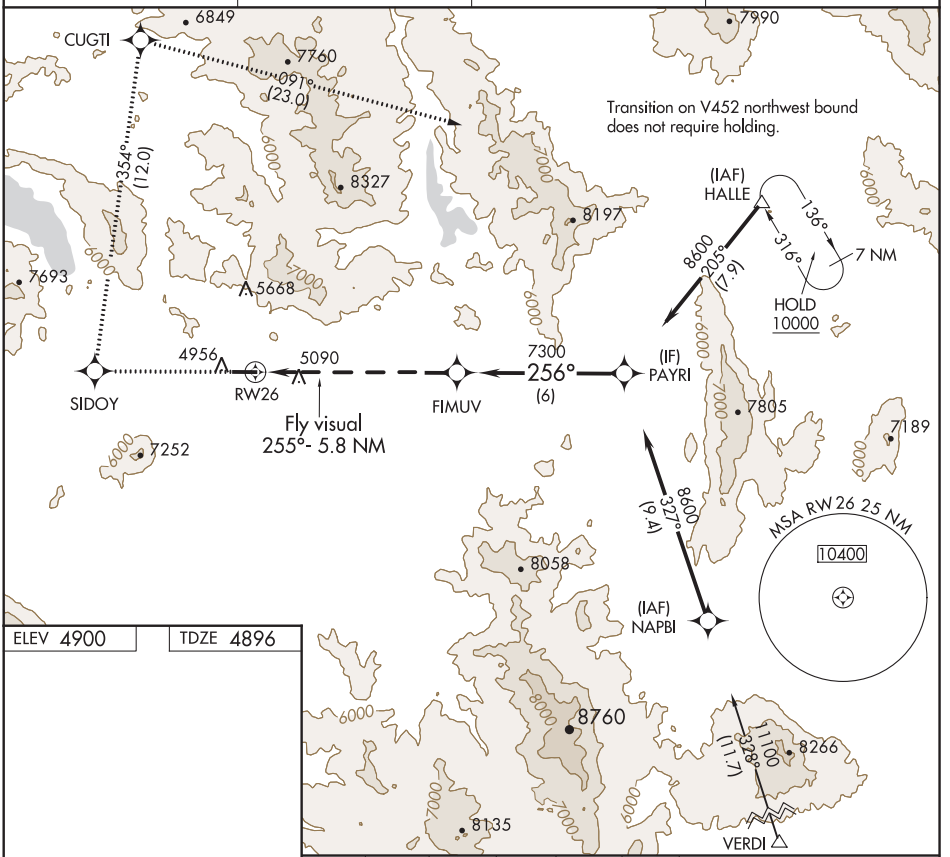

ELEV 4900 | TDZE 4896



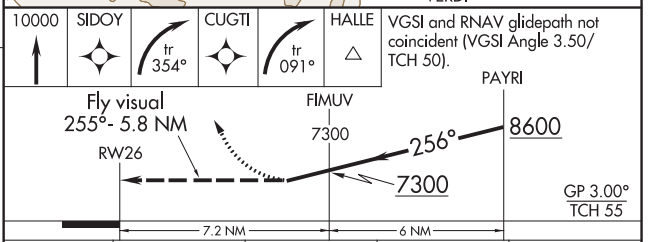

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/ TCH 50).

CATEGORY	A	B	C	D
LPV DA	6787-2 1891 (1900-2)		6787-3 1891 (1900-3)	

MIRL Rwy 8-26 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

BISHOP, CALIFORNIA | AL-5737 (FAA) | 19171

RNAV (RNP) RWY 30

BISHOP (BIH)

APP CRS		
301°	Rwy Idg	7498
	TDZE	4111
	Apt Elev	4124

RNP AR APCH, RF required.

NA For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C.

MISSED APPROACH: Climb to 13000 via 301° track to CASPU, right turn to GULSE, 350° track to HARVU, left turn to JARUT, 323° track to KIPSE, right turn to MOTSE, 345° track to NUBIC, left turn to FASBI, 278° track to NIKOL and hold.

ASOS	OAKLAND CENTER	RIVERSIDE RADIO	UNICOM
119.025	125.75 284.65	122.6	123.0 (CTAF) L

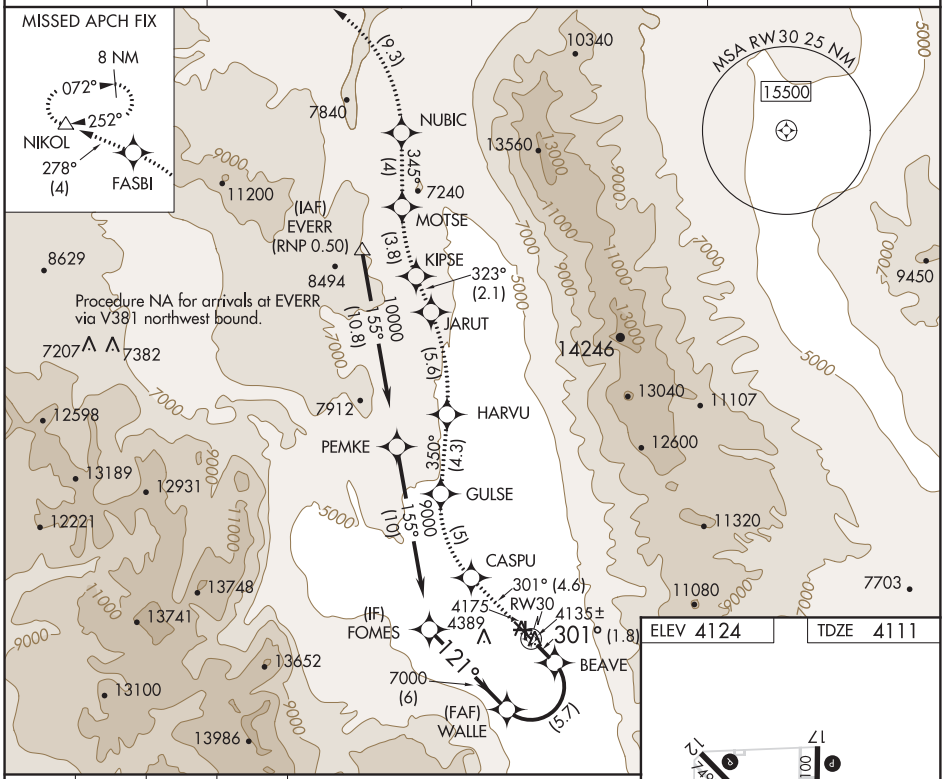

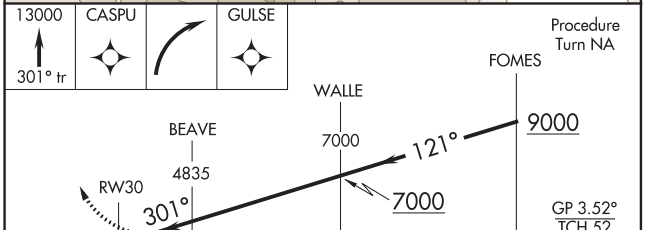

CATEGORY	A	B	C	D
RNP 0.30 DA	4476-1 365 (400-1)			NA

AUTHORIZATION REQUIRED



MIRL Rwys 8-26, 12-30, and 17-35 L
REIL Rwys 12, 17, 30 and 35

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Y RWY 12

BISHOP (BIH)

APP CRS	Rwy Idg	7498
120°	TDZE	4123
	Apt Elev	4124

RNP APCH.

MISSED APPROACH: (Do not exceed 250 KIAS until NEBSE) Climb to 13000 direct KUPLE and on track 160° to ROCOS and on track 115° to PULIE and on track 051° to WEBAT and on track 341° to TEVOC and on track 322° to NEBSE and on track 264° to BIH VOR/DME and hold.

ASOS	OAKLAND CENTER	RIVERSIDE RADIO	UNICOM
119.025	125.75 284.65	122.6	123.0 (CTAF) L

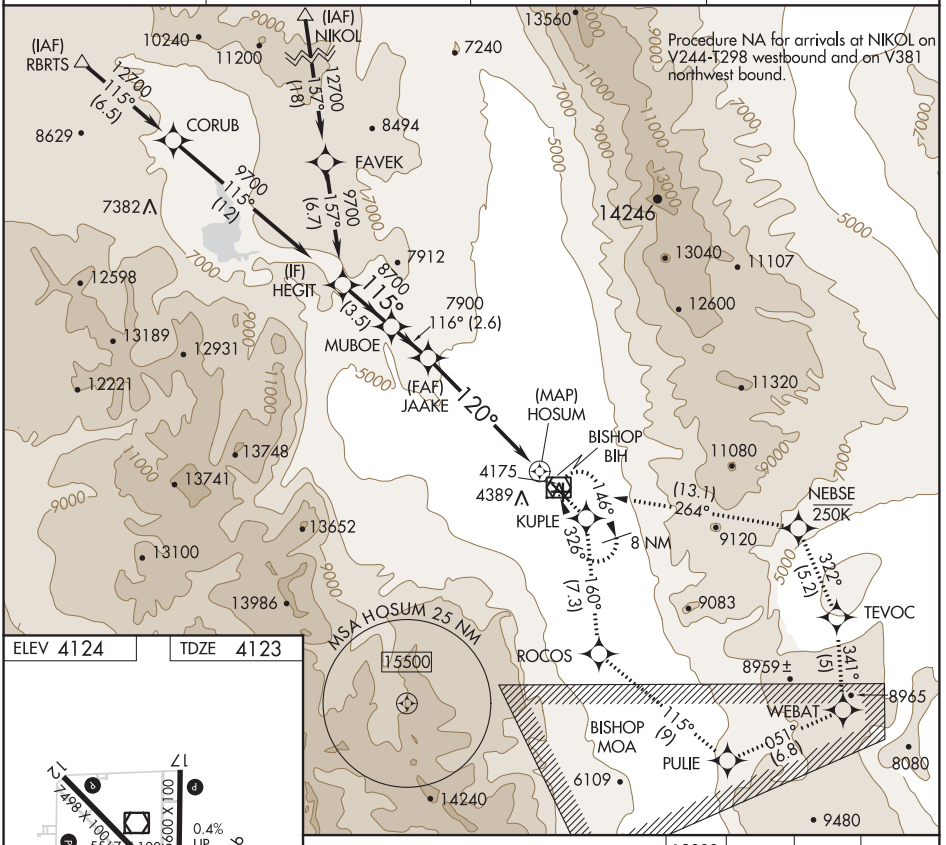

ELEV 4124	TDZE 4123



MIRL Rwys 8-26, 12-30, and 17-35 L
REIL Rwys 12, 17, 30 and 35

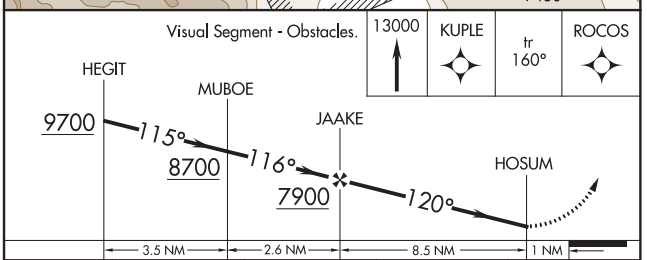

CATEGORY	A	B	C	D
LNAV MDA	6600-1¼ 2477 (2500-1¼)	6600-1½ 2477 (2500-1½)	6600-3 2477 (2500-3)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

BISHOP, CALIFORNIA | AL-5737 (FAA) | 18200

APP CRS	Rwy Idg	7498
120°	TDZE	4123
	Apt Elev	4124

RNAV (GPS) Z RWY 12

BISHOP (BIH)

DME/DME RNP-0.3 NA
Missed approach requires minimum climb of 325 feet per NM to 11000; if unable, see RNAV (GPS) Y RWY 12.

MISSED APPROACH: (Do not exceed 250 KIAS until NEBSE) Climb to 13000 direct KUPLE and on track 160° to ROCOS and on track 115° to PULIE and on track 051° to WEBAT and on track 341° to TEVOC and on track 322° to NEBSE and on track 264° to BIH VOR/DME and hold.

ASOS	OAKLAND CENTER	RIVERSIDE RADIO	UNICOM
119.025	125.75 284.65	122.6	123.0 (CTAF) L

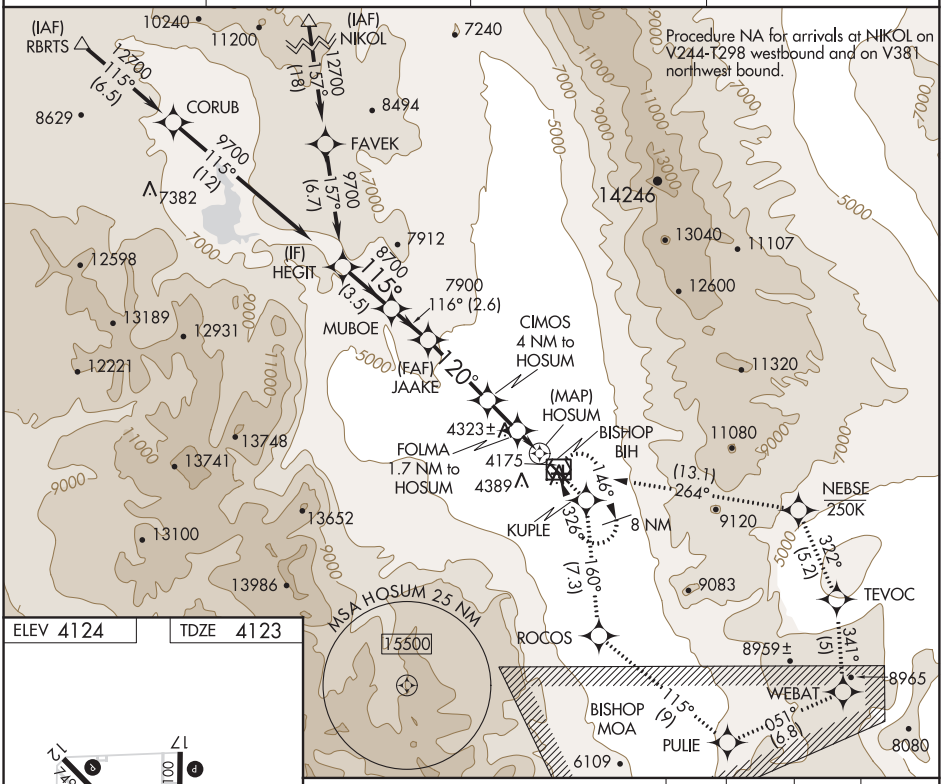

CATEGORY	A	B	C	D
LNAV MDA	4580-1¼ 457 (500-1¼)			NA
CIRCLING	6420-1¼ 2296 (2300-1¼)	6420-1½ 2296 (2300-1½)	6420-3 2296 (2300-3)	NA

MIRL Rwys 8-26, 12-30, and 17-35 L
REIL Rwys 12, 17, 30 and 35

BISHOP, CALIFORNIA
Orig-E 01FEB18

37°22'N-118°22'W

BISHOP (BIH)

RNAV (GPS) Z RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-BIH	APP CRS	Rwy Idg	5600
109.1	141°	TDZE	4113
Chan 28		Apt Elev	4124

LDA RWY 17
BISHOP (BIH)

DME required.

MISSED APPROACH: Climbing right turn to 12500 on heading 355° and on BIH VOR/DME R-328 to JABIM INT/OAL 39.5 DME and hold.

ASOS	OAKLAND CENTER	RIVERSIDE RADIO	UNICOM
119.025	125.75 284.65	122.6	123.0 (CTAF) L

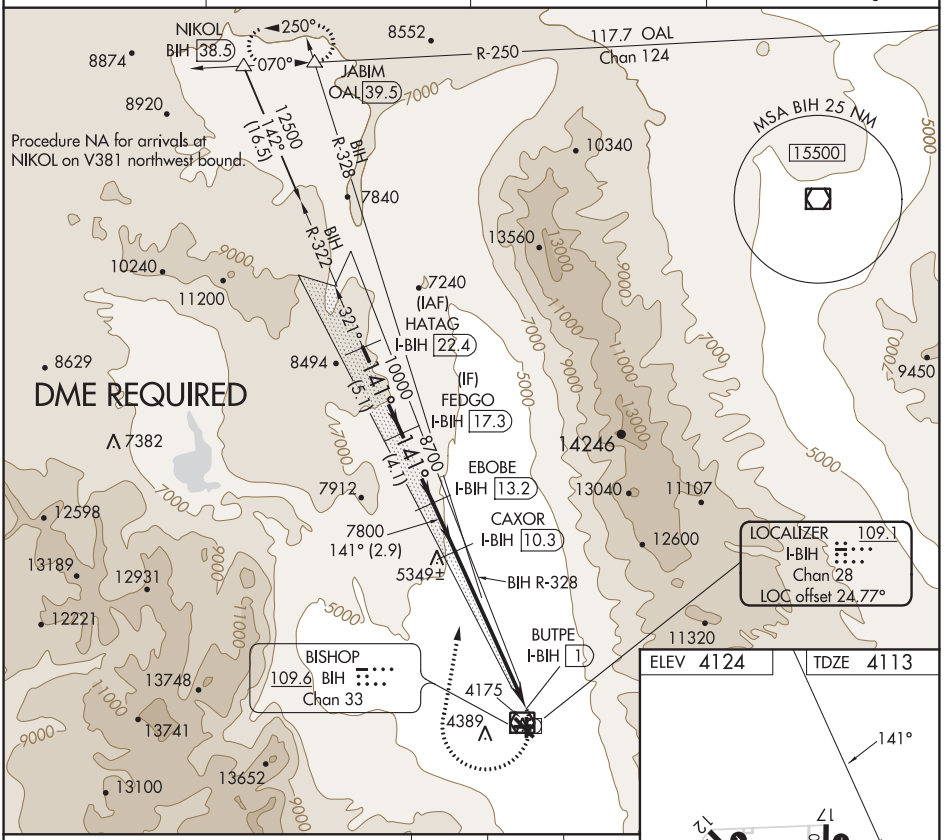

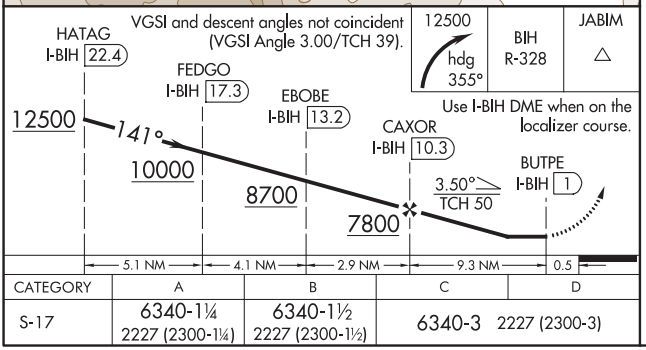

CATEGORY	A	B	C	D
S-17	6340-1¼ 2227 (2300-1¼)	6340-1½ 2227 (2300-1½)	6340-3 2227 (2300-3)	

MIRL Rwys 8-26, 12-30, and 17-35 L
REIL Rwys 12, 17, 30 and 35

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

BYRON, CALIFORNIA | AL-9141 (FAA) | 18032

RNAV (GPS) RWY 30

BYRON (C83)

WAAS	APP CRS	Rwy Idg	4500
CH 65902	300°	TDZE	55
W30A		Apt Elev	79

T A W For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 15°C (59°F). Circling NA southwest of Rwy 12-30. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 1000, then climbing right turn 4000 direct HAIRE and hold, continue climb-in-hold 4000.

AWOS-3	NORCAL APP CON	UNICOM
123.775	123.85 278.3	123.050 (CTAF) L

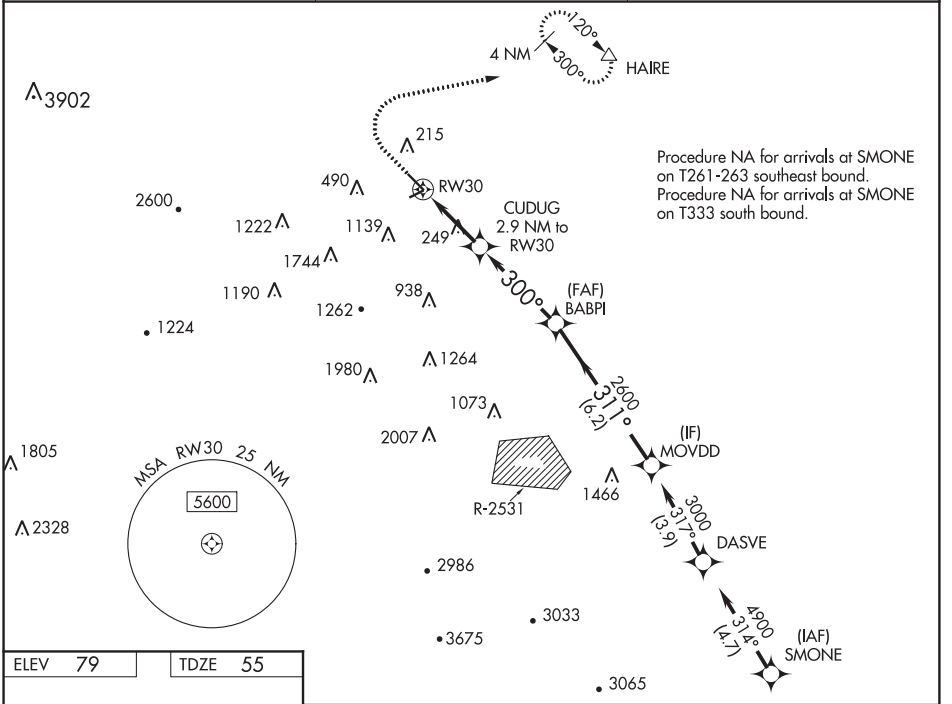

ELEV 79	TDZE 55



REIL Rwy 30 L
MIRL Rwys 5-23 and 12-30 L

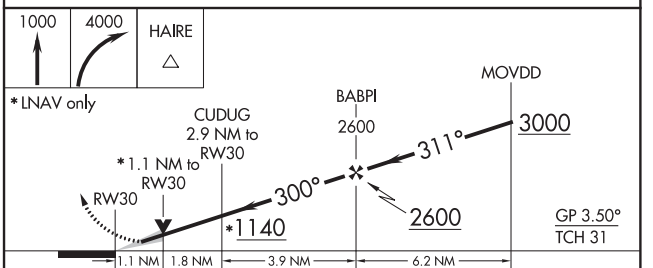

CATEGORY	A	B	C	D
LPV DA	325-⅞ 270 (300-⅞)			
LNAV/VNAV DA	404-1⅛ 349 (400-1⅛)			
LNAV MDA	500-1 445 (500-1)		500-1⅜ 445 (500-1⅜)	
CIRCLING	600-1 521 (600-1)		680-1¾ 601 (700-1¾)	820-2½ 741 (800-2½)

SW-2, 30 JAN 2020 to 26 MAR 2020

ILS or LOC/DME RWY 13L

CHICO MUNI (CIC)

LOC I-CIC	APP CRS		
111.3	131°	Rwy Idg	6724
		TDZE	240
		Apt Elev	240

T A NA — Circling NA east of Rwy 13L/31R. DME from CIC VOR/DME. Simultaneous reception of I-CIC and CIC DME required. When local altimeter setting not received, use Red Bluff Muni altimeter setting and increase all DA 81 feet and all MDA 100 feet. Increase S-LOC 13L Cat. C and D visibility ¼ mile. For inoperative MALSR, increase S-LOC Cat. D visibility ¼ mile. For inoperative MALSR when using Red Bluff Muni altimeter setting, increase S-ILS 13L all Cats. visibility ½ mile.

MALSR (A5)

MISSED APPROACH: Climb to 3600 via CIC VOR/DME R-133 to UNJED/ CIC 11.4 DME and hold, continue climb-in-hold to 3600.

ATIS	OAKLAND CENTER	CHICO TOWER ★	GND CON	UNICOM
119.675	132.2 350.3	121.0 (CTAF) L 239.3	121.9	122.95

Procedure NA for arrivals on Red Bluff VORTAC airway radials 122 CW 161.

IAF RED BLUFF 115.7 RBL Chan 104

3000 NoPT 105° (11.8)

311°

(IF) ZOTWY CIC 14.6 RBL 11.8

R-105

086° 266°

2700 131° (6.1)

131°

(IAF) NORDE CIC 8.5

3600 to NORDE 310° (8.5)

CUBUN CIC 3.6

324±

CHICO 109.8 CIC Chan 35

MSA CIC 25 NM 130° 8300 310° 2600

LOCALIZER 111.3 I-CIC

R-133

3600 313° (11.4)

313°

133°

UNJED CIC 11.4

R-133

DME REQUIRED

ELEV 240 D TDZE 240

286± 131° 7.4 NM from FAF

TWR ☆ 312

13L 13R 31L 31R

3000 X 60 6724 X 150

0.4% UP 0.5% UP

REIL Rwy 31R

HIRL Rwy 13L-31R L

Remain within 10 NM

NORDE CIC 8.5

3600

311°

3100

131°

2700

CUBUN CIC 3.6

CIC 1.1

* LOC only

GS 3.00° TCH 52

2700

*1080

4.9 NM 2.5 NM

3600 CIC R-133

UNJED CIC 11.4

CATEGORY	A	B	C	D
S-ILS 13L	440-½ 200 (200-½)			
S-LOC 13L	580-½ 340 (400-½)			580-¾ 340 (400-¾)
CIRCLING	640-1 400 (400-1)	700-1 460 (500-1)	700-1½ 460 (500-1½)	800-2 560 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

CHICO, CALIFORNIA

AL-557 (FAA)

18032

RNAV (GPS) RWY 13L

CHICO MUNI (CIC)

WAAS	APP CRS	Rwy Idg	6724
CH 65912	131°	TDZE	240
W13A		Apt Elev	240

T
A NA

Inoperative table does not apply to LPV and LNAV Cats A/B/C.
For inoperative MALSR, increase LNAV Cat D visibility to 1¼.
Circling NA east of Rwy 13L/31R. Baro-VNAV NA when using Red Bluff altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Red Bluff Muni altimeter setting and increase all DA 81 feet, and all MDA 100 feet, increase LNAV/VNAV all Cats visibility ¼ mile.
For inoperative MALSR when using Red Bluff altimeter setting, LNAV Cats A/B inoperative table does not apply, increase Cat C visibility ¼ mile.

MALSR

MISSED APPROACH: Climb to 3600 direct UNJED and hold, continue climb-in-hold to 3600.

ATIS	OAKLAND CENTER	CHICO TOWER ★	GND CON	UNICOM
119.675	132.2 350.3	121.0 (CTAF) L 239.3	121.9	122.95

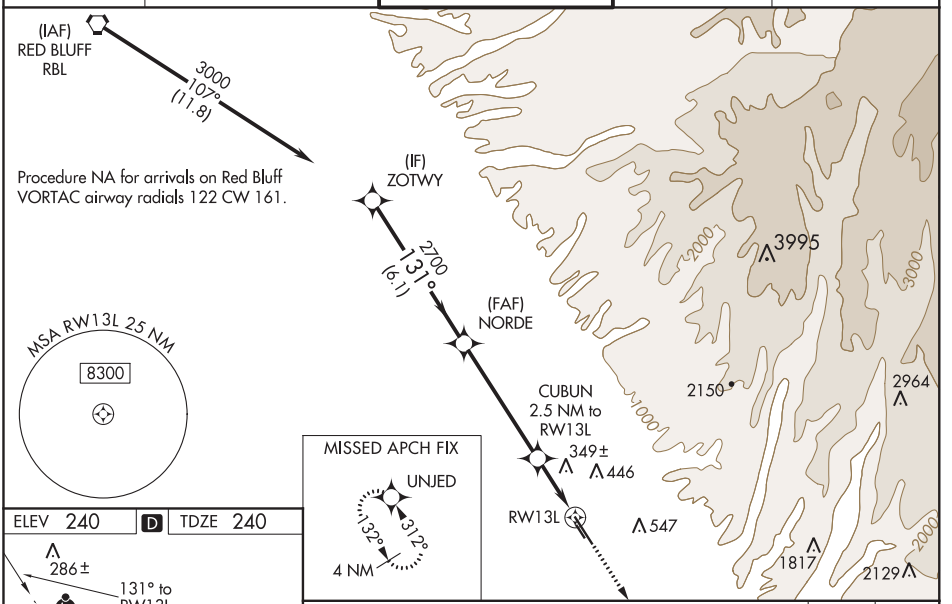

ELEV 240 D TDZE 240

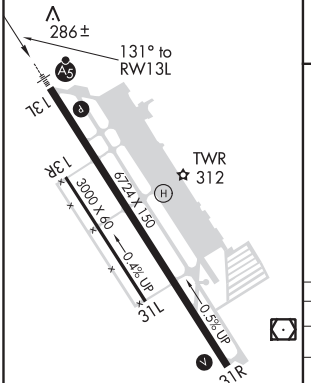

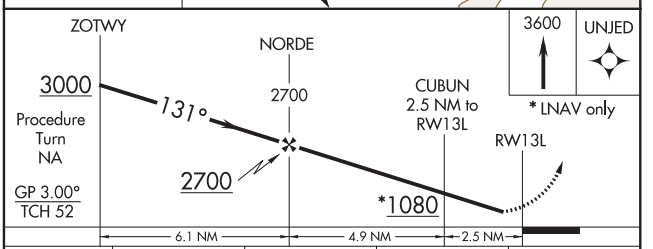

CATEGORY	A	B	C	D
LPV DA	536-1 296 (300-1)			
LNAV/VNAV DA	648-1 408 (500-1)			
LNAV MDA	600-1 360 (400-1)			
CIRCLING	640-1 400 (500-1)	700-1 460 (500-1)	700-1½ 460 (500-1½)	800-2 560 (600-2)

REIL Rwy 31R
HIRL Rwy 13L-31R L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 31R

CHICO MUNI (CIC)

WAAS CH 77912 W31A	APP CRS 311°	Rwy Idg 6724 TDZE 226 Apt Elev 240

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.

MISSED APPROACH: Climb to 3000 direct ZOTWY and hold.

ATIS	OAKLAND CENTER	CHICO TOWER ★	GND CON	UNICOM
119.675	132.2 350.3	121.0 (CTAF) L 239.3	121.9	122.95

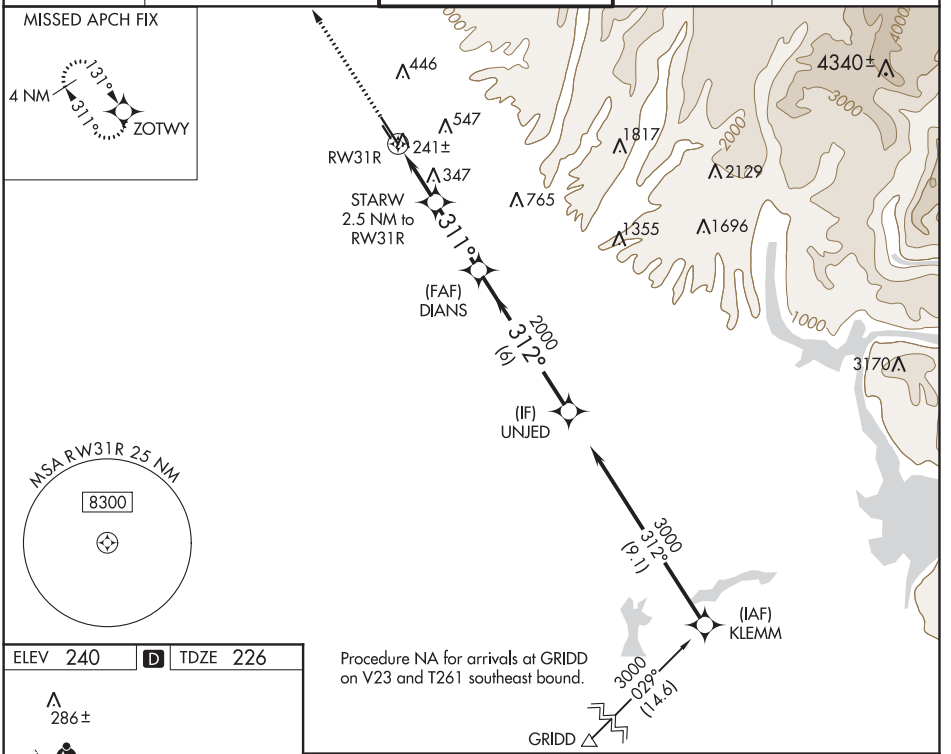

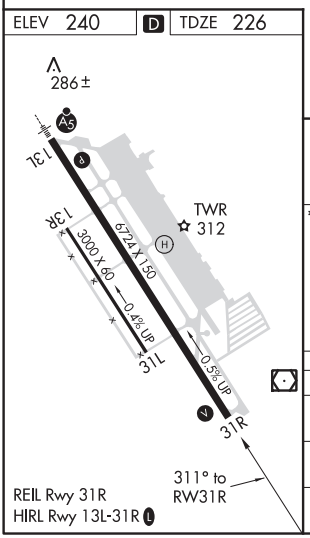

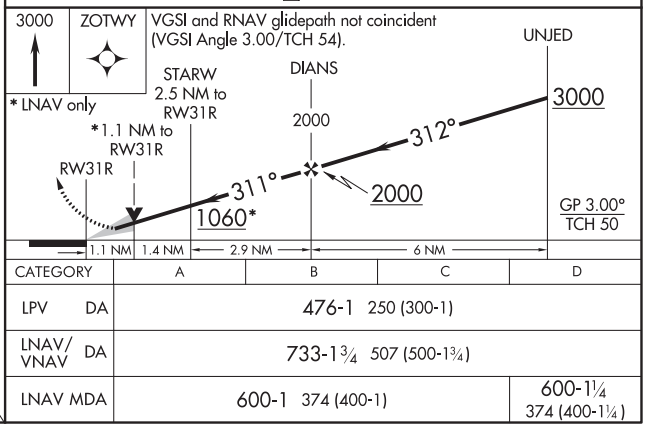

CATEGORY	A	B	C	D
LPV DA	476-1 250 (300-1)			
LNAV/VNAV DA	733-1¾ 507 (500-1¾)			
LNAV MDA	600-1 374 (400-1)			600-1¼ 374 (400-1¼)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

CHICO, CALIFORNIA

AL-557 (FAA)

20030

VOR/DME RWY 31R

CHICO MUNI (CIC)

VOR/DME CIC	APP CRS	Rwy Idg	6724
109.8	327°	TDZE	224
Chan 35		Apt Elev	238

Circling not authorized east of Rwy 13L-31R.
When control tower closed, except for operators with approved weather reporting service, use Red Bluff altimeter setting.

MISSED APPROACH: Climbing left turn to 2000 via CIC R-147 to AYOBI/6 DME and hold.

ATIS	OAKLAND CENTER	CHICO TOWER ★	GND CON	UNICOM
119.675	132.2 350.3	121.0 (CTAF) Ⓛ 239.3	121.9	122.95

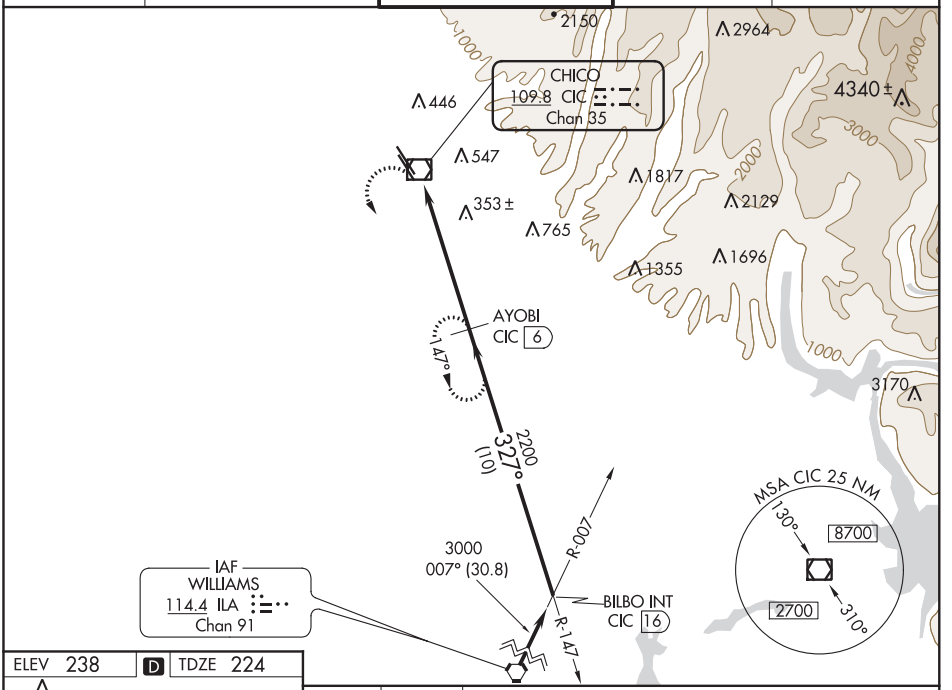

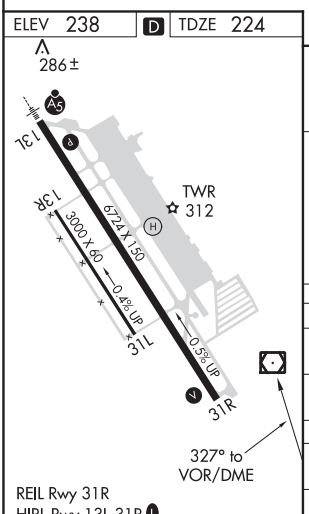

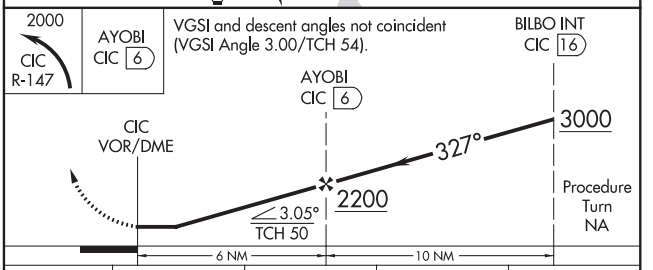

CATEGORY	A	B	C	D
S-31R	760-1	536 (600-1)	760-1½ 536 (600-1½)	760-1¾ 536 (600-1¾)
CIRCLING	760-1	522 (600-1)	760-1½ 522 (600-1½)	800-2 562 (600-2)
RED BLUFF ALTIMETER SETTING MINIMUMS				
S-31R	840-1	616 (700-1)	840-1¾ 616 (700-1¾)	840-2 616 (700-2)
CIRCLING	840-1	602 (700-1)	840-1¾ 602 (700-1¾)	840-2 602 (700-2)

CHICO, CALIFORNIA

Orig-F 02MAY13

39°48′N-121°52′W

CHICO MUNI (CIC)

VOR/DME RWY 31R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

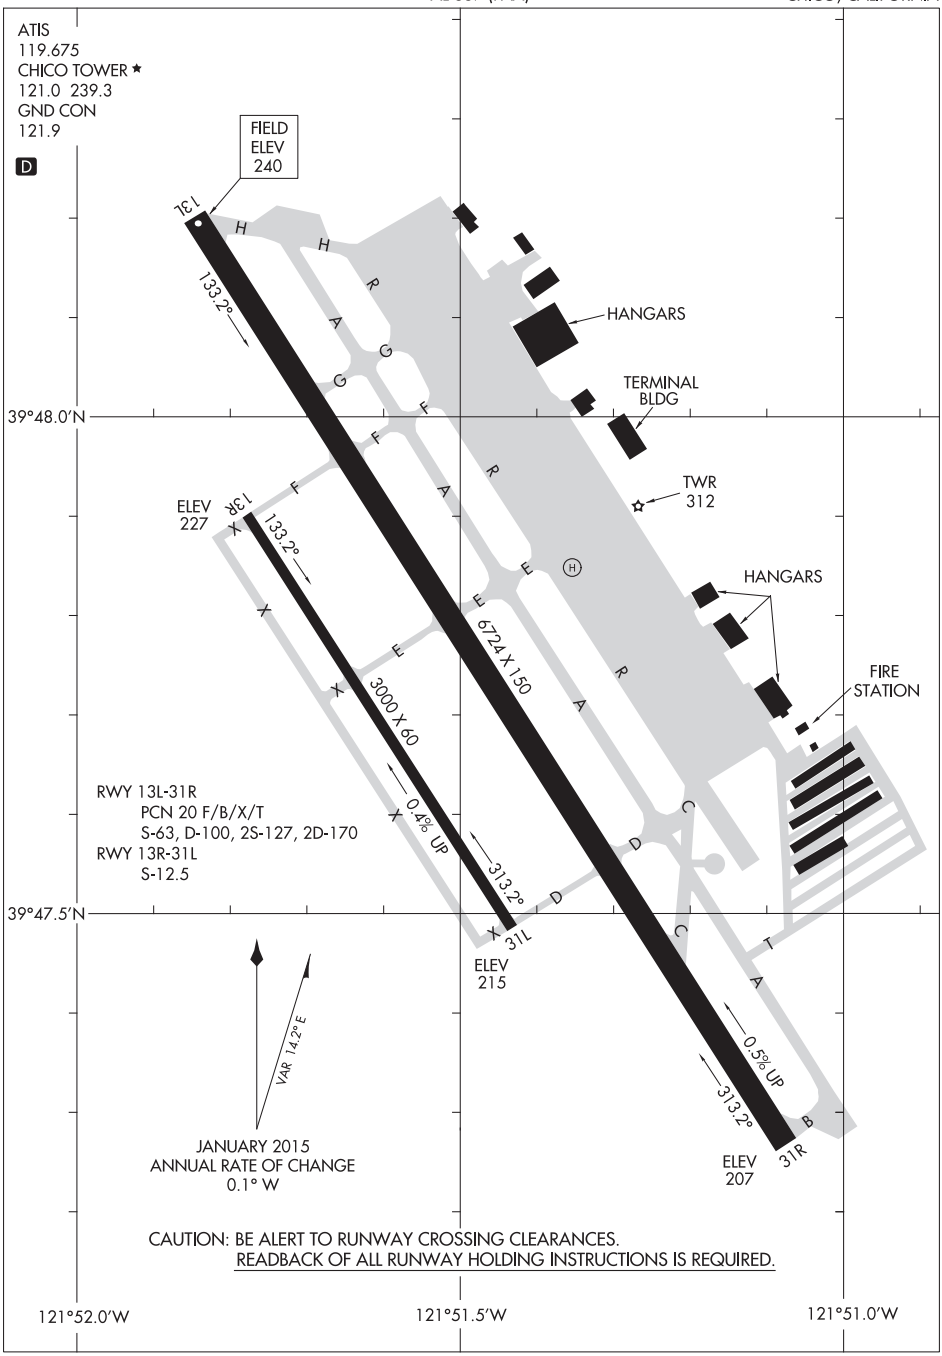

SW-2, 30 JAN 2020 to 26 MAR 2020

(CIC4.CIC) 20030

CHICO FOUR DEPARTURE

AL-557 (FAA)

CHICO MUNI (CIC)
CHICO, CALIFORNIA

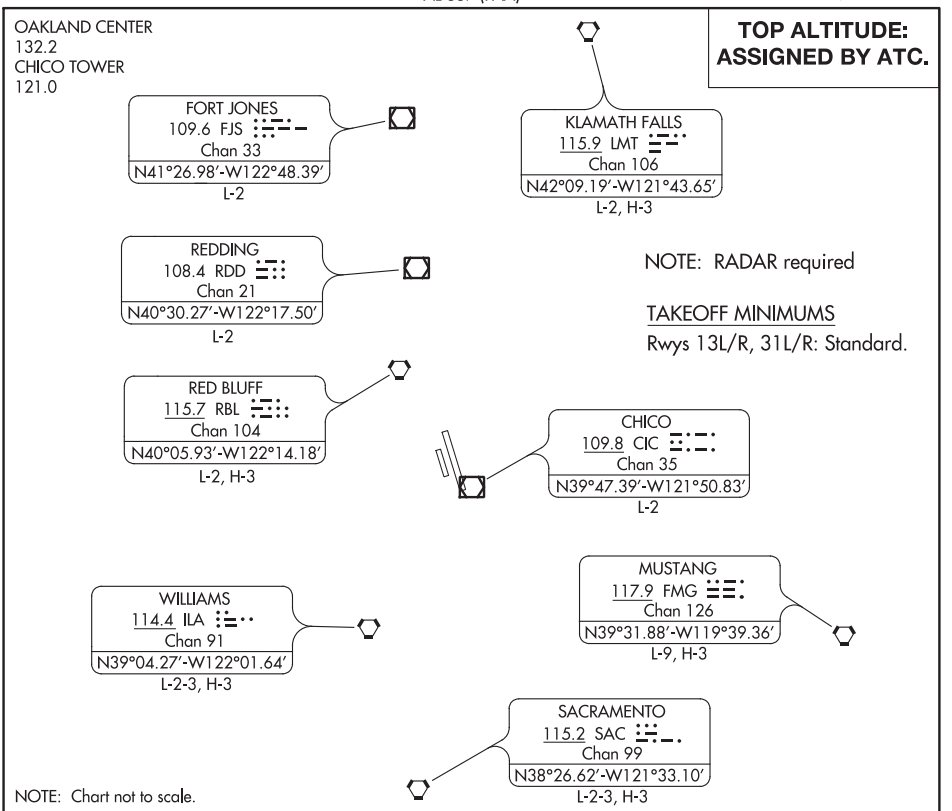

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 13L/R: Climb on a heading between 140° CW 310° from DER to assigned altitude. Thence. . . .

TAKEOFF RUNWAYS 31L/R: Climb on a heading between 320° CCW 132° from DER to assigned altitude. Thence. . . .

. . . .RADAR vectors to assigned route. Maintain assigned altitude, expect filed altitude/flight level 10 minutes after departure.

LOST COMMUNICATIONS

For aircraft assigned a heading between 120° CW through 250°: if not in contact with Oakland Center after reaching 3000, continue climb to 5000 or higher assigned altitude and proceed to ILA VORTAC, thence. . . .

For aircraft assigned a heading between 255° CW through 320°: if not in contact with Oakland Center after reaching 3000, continue climb to 5000 or higher assigned altitude and proceed to RBL VORTAC, thence. . . .

. . . .Proceed on assigned route.

GONGS THREE DEPARTURE

AL-557 (FAA)

ATIS
119.675
OAKLAND CENTER
132.2
CHICO TOWER★
121.0 (CTAF)
GND CON
121.9

TOP ALTITUDE: ASSIGNED BY ATC.

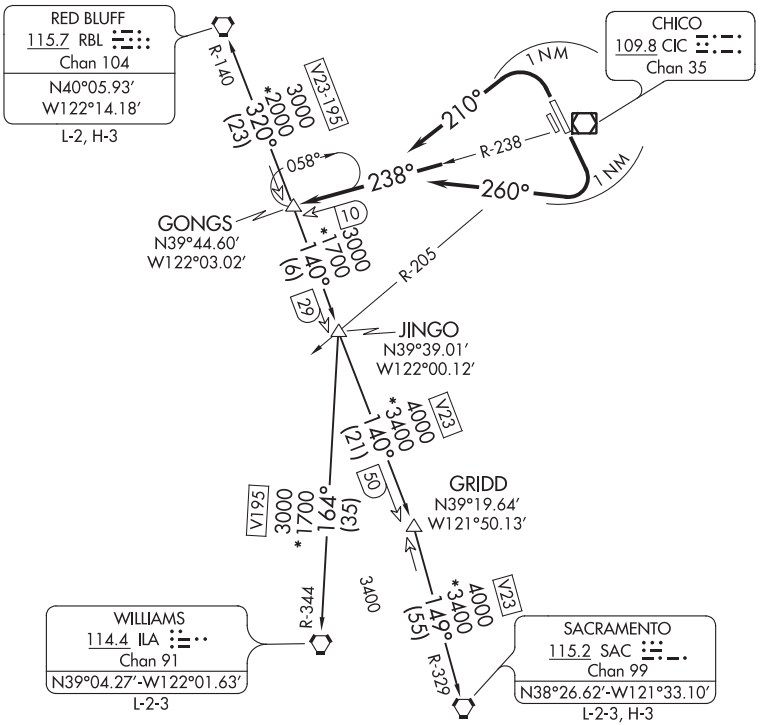

NOTE: DME required for SACRAMENTO TRANSITION.

TAKEOFF MINIMUMS

Rwy 13L/R, 31L/R: Standard with minimum climb of 400 ′ per NM to 700.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 13L/R: Turn right heading 260° within 1 NM of DER. Intercept CIC R-238 to GONGS INT. Thence. . . .

TAKEOFF RUNWAYS 31L/R: Turn left heading 210° within 1 NM of DER. Intercept CIC R-238 to GONGS INT. Thence. . . .

. . . .on transition or assigned route. Maintain ATC assigned altitude.

RED BLUFF TRANSITION (GONGS3.RBL): From over GONGS INT on RBL R-140 to RBL VORTAC.

SACRAMENTO TRANSITION (GONGS3.SAC): From over GONGS INT on RBL R-140 and SAC R-329 to SAC VORTAC.

WILLIAMS TRANSITION (GONGS3.ILA): From over GONGS INT on RBL R-140 and ILA R-344 to ILA VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

CLOVERDALE, CALIFORNIA | AL-9503 (FAA) | 19171

APP CRS	Rwy Idg	2909
314°	TDZE	271
	Apt Elev	272

RNAV (GPS) RWY 32

CLOVERDALE MUNI (O60)

Use Santa Rosa/Charles M Schulz-Sonoma County altimeter setting; when not received procedure NA.
Procedure NA at night. Circling NA east of Rwy 14-32 GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climbing left turn to 6000 direct NATIC WP and hold.

OAKLAND CENTER	UNICOM
127.8 353.5	122.8 (CTAF) L

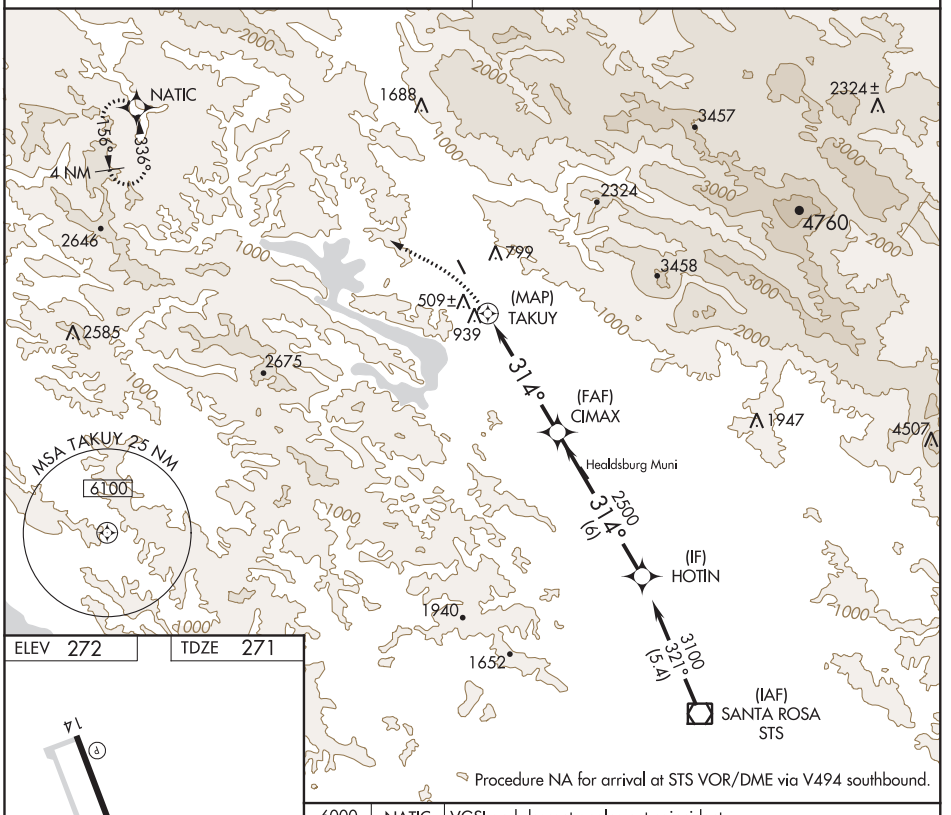

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 272 | TDZE 271

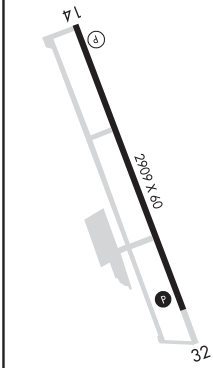

MIRL Rwy 14-32 L
REIL Rwys 14 and 32

6000 | NATIC

VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 40).

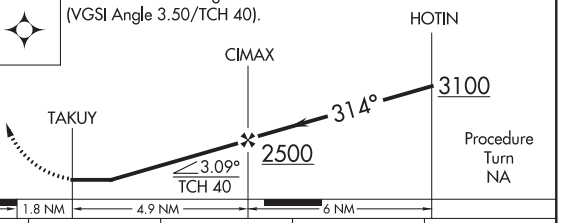

CATEGORY	A	B	C	D
LNAV MDA	1440-2	1169 (1200-2)	1440-3 1169 (1200-3)	NA
CIRCLING	1440-2	1168 (1200-2)	1640-3 1368 (1400-3)	NA

CLOVERDALE, CALIFORNIA
Orig-A 25NOV04

38°47'N-123°00'W

CLOVERDALE MUNI (O60)

RNAV (GPS) RWY 32

APP CRS	Rwy Idg	4289
354°	TDZE	2105
	Apt Elev	2121

RNAV (GPS) RWY 35
COLUMBIA (O22)

RNP APCH.

Circling NA to Rwys 11 and 29. Circling NA east of Rwy 17-35. Procedure NA at night. Rwy 35 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing left turn to 7000 direct HABXU and hold, continue climb-in-hold to 7000.

AWOS-3	NORCAL APP CON	OAKLAND CENTER	UNICOM
124.65	125.1 363.2 (NORTH/WEST)	121.25 327.0 (EAST/SOUTH)	122.975 (CTAF) L

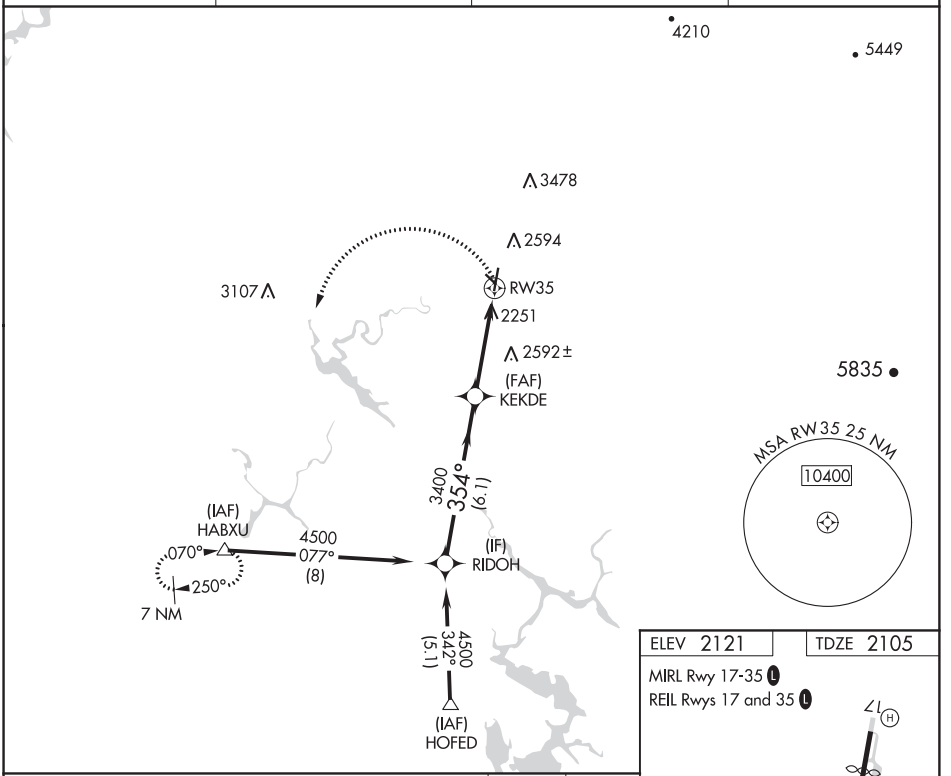

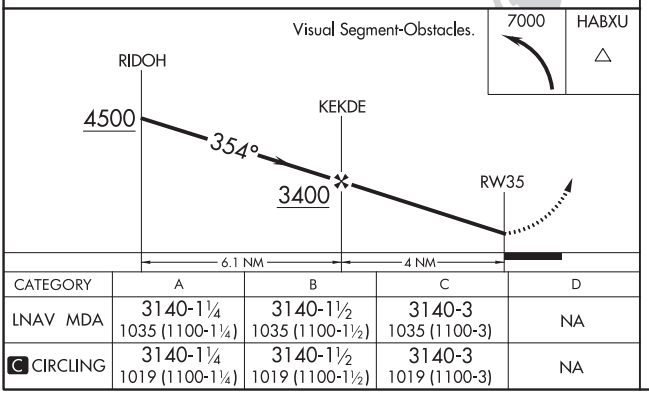

CATEGORY	A	B	C	D
LNAV MDA	3140-1¼ 1035 (1100-1¼)	3140-1½ 1035 (1100-1½)	3140-3 1035 (1100-3)	NA
C CIRCLING	3140-1¼ 1019 (1100-1¼)	3140-1½ 1019 (1100-1½)	3140-3 1019 (1100-3)	NA

ELEV 2121	TDZE 2105

MIRL Rwy 17-35 L
REIL Rwys 17 and 35 L

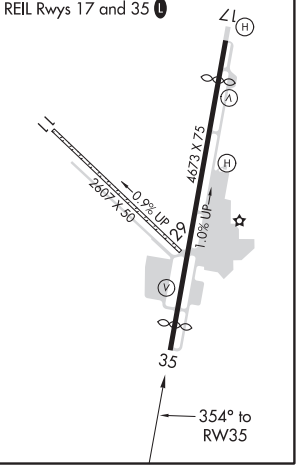

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(FICHU3.HABXU) 20030

FICHU THREE DEPARTURE (OBSTACLE) (RNAV)

AL-6786 (FAA)

COLUMBIA (O22)
COLUMBIA, CALIFORNIA

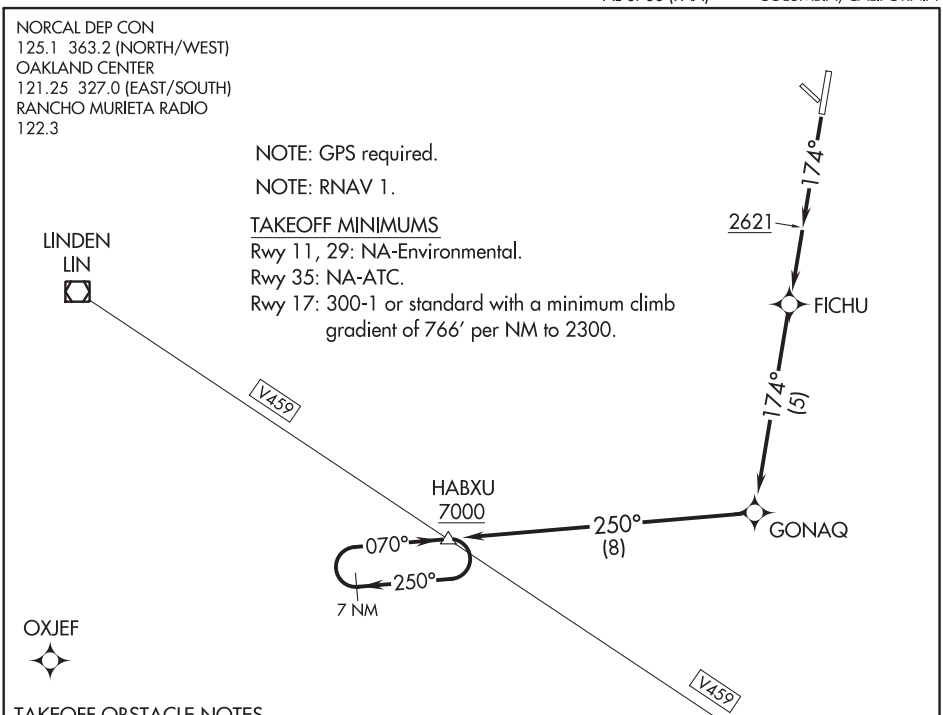

TAKEOFF OBSTACLE NOTES

Rwy 17: Bush 31' from DER, 196' right of centerline, 2083' MSL.
Tree 148' from DER, 387' right of centerline, 2108' MSL.
Trees beginning 180' from DER, 287' left of centerline, up to 2126' MSL.
Tree 262' from DER, 527' right of centerline, 2163' MSL.
Trees beginning 354' from DER, 240' left of centerline, up to 2127' MSL.
Tree, road (N), pole, ground, bush beginning 414' from DER, 46' right of centerline, up to 2188' MSL.
Tree 456' from DER, 325' left of centerline, 2130' MSL.
Trees beginning 492' from DER, 109' left of centerline, up to 2133' MSL.
Trees beginning 725' from DER, 26' left of centerline, up to 2171' MSL.
Trees beginning 1260' from DER, 56' left of centerline, up to 2181' MSL.
Tree 1527' from DER, 893' right of centerline, 2205' MSL.
Tree 1619' from DER, 860' right of centerline, 2220' MSL.
Trees beginning 1664' from DER, 896' right of centerline, up to 2238' MSL.
Tree 2152' from DER, 982' left of centerline, 2212' MSL.
Tree 2195' from DER, 988' left of centerline, 2262' MSL.
Tree 2195' from DER, 987' left of centerline, 2273' MSL.
Tree, tower beginning 5842' from DER, 410' left of centerline, up to 2339' MSL.
Tree 5936' from DER, 557' left of centerline, 2239' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 17: Climb on heading 174° to 2621, then climb direct to FICHU, then on track 174° to GONAQ, then on track 250° to HABXU. Continue climb in hold in HABXU holding pattern to cross HABXU at or above MEA for route of flight.

FICHU THREE DEPARTURE (OBSTACLE) (RNAV)

COLUMBIA, CALIFORNIA
COLUMBIA (O22)

(FICHU3.HABXU) 30JAN20

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	N/A
137°	TDZE	N/A
	Apt Elev	49

RNAV (GPS)-B
COLUSA COUNTY (O∅8)

RNP APCH.

T NA Obtain local altimeter setting on CTAF; when not received, use Sacramento Intl altimeter setting and increase all MDAs 100 feet and Cat C visibility ½ SM. Circling Rwy 31 NA at night.

MISSED APPROACH: Climbing right turn to 2600 direct VACIA and hold.

OAKLAND CENTER	UNICOM
132.2 350.3	122.8 (CTAF) L

Procedure NA for arrivals at JINGO on V23 northbound.

(IAF) JINGO

2600 NoPT 182° (18.9)

TALUM

2600 236° (11.6)

4 NM 137° 317°

(IF/IAF) VACIA

1700 137° (6.3)

(FAF) MORAE

MSA RW13 25 NM 5100

240±

RW13

△ 2353

△ 268

2600 to VACIA 332° (17.1)

WILLIAMS ILA

Procedure NA for arrival on ILA VORTAC airway radials 251 CW 057.

ELEV 49

137° to RW13

△ 183

3034 X 59

13

31

MIRL Rwy 13-31 L

4 NM Holding Pattern

VACIA

MORAE

2600 317° 137° 137°

1700

2.96° TCH 50

RW13

6.3 NM 5.1 NM

CATEGORY	A	B	C	D
C CIRCLING	600-1 551 (600-1)		620-1½ 571 (600-1½)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

COLUSA, CALIFORNIA | AL-5147 (FAA) | 19003

WAAS	APP CRS	Rwy Idg	3034
CH 65840	317°	TDZE	49
W31A		Apt Elev	49

RNAV (GPS) RWY 31
COLUSA COUNTY (O98)

RNP APCH.

T NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 31 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Sacramento Intl altimeter setting: increase LPV DA to 382 feet, increase LNAV/VNAV DA to 550 feet and all visibilities ¼ SM; increase all MDAs 100 feet and LNAV Cat C visibility ¼ SM, Circling Cat C visibility ½ SM. Baro-VNAV NA with Sacramento Intl altimeter setting. Straight-in Rwy 31 NA at night, Circling Rwy 31 NA at night.

MISSED APPROACH: Climb to 600 then climbing right turn to 2600 direct VACIA and hold.

OAKLAND CENTER	UNICOM
132.2 350.3	122.8 (CTAF) L

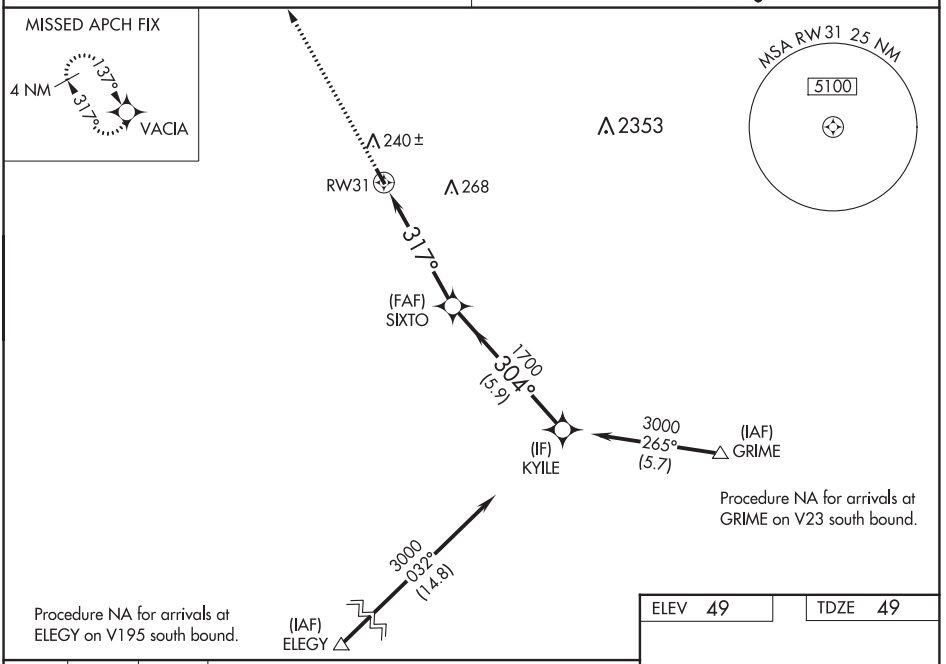

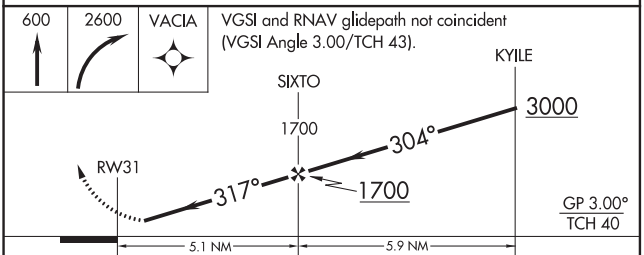

CATEGORY	A	B	C	D
LPV DA	299-1	250 (300-1)		NA
LNAV/VNAV DA	469-1⅛	420 (500-1⅛)		NA
LNAV MDA	500-1	451 (500-1)	500-1⅜ 451 (500-1⅜)	NA
C CIRCLING	600-1	551 (600-1)	620-1½ 571 (600-1½)	NA

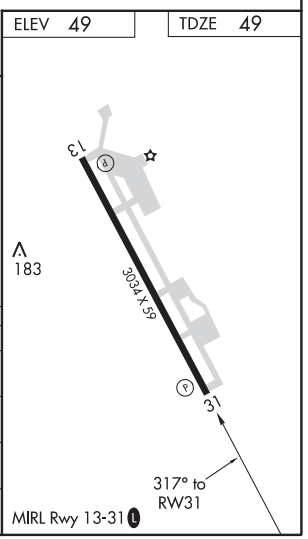

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC ILA 114.4 Chan 91	APP CRS 356°	Rwy Idg N/A TDZE N/A Apt Elev 49

VOR-A
COLUSA COUNTY (0Ø8)

T NA Obtain local altimeter setting on CTAF; when not received, use Sacramento Intl altimeter setting. Circling Rwy 31 NA at night.	MISSED APPROACH: Climb to 1400 then climbing left turn to 3500 direct ILA VORTAC.
OAKLAND CENTER 132.2 350.3	UNICOM 122.8 (CTAF) L

SW-2, 30 JAN 2020 to 26 MAR 2020

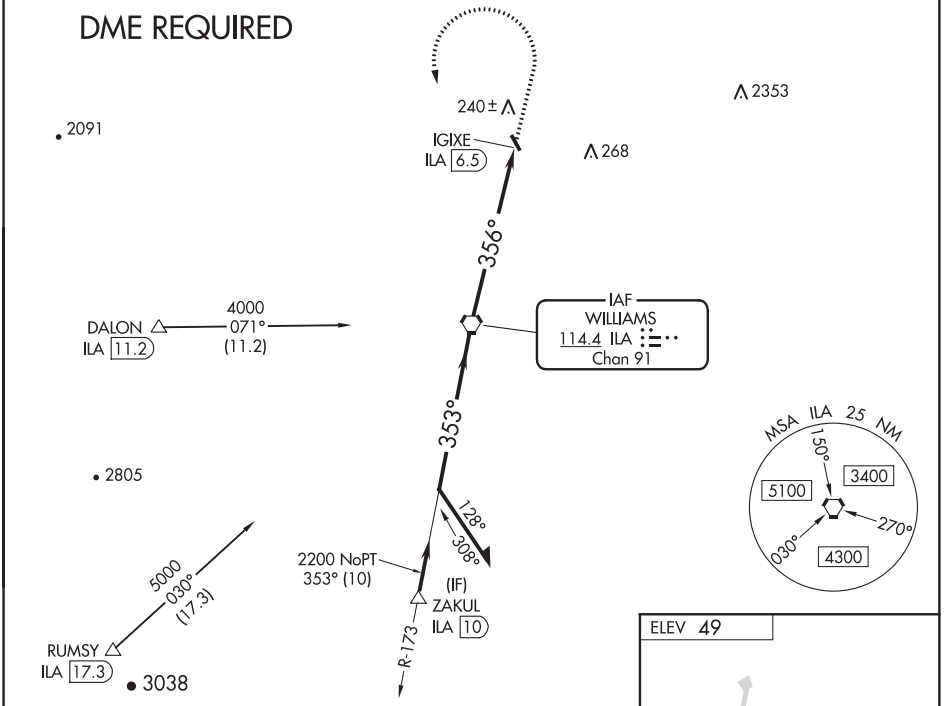

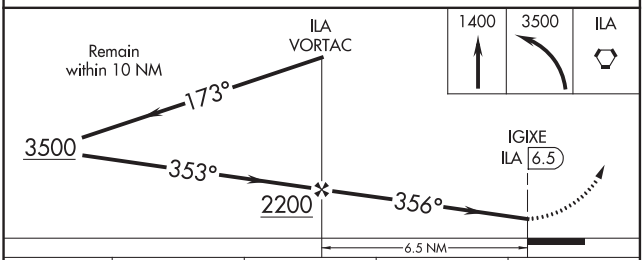

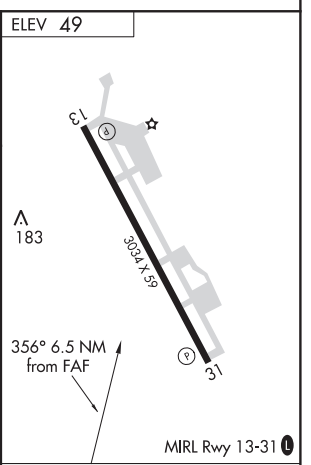

CATEGORY	A	B	C	D
C CIRCLING	600-1	551 (600-1)	620-1½ 571 (600-1½)	NA
SACRAMENTO INTL ALTIMETER SETTING MINIMUMS				
C CIRCLING	700-1	651 (700-1)	720-2 671 (700-2)	NA

FAF to MAP 6.5 NM

Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

CONCORD, CALIFORNIA | AL-5320 (FAA) | 20030

RNAV (GPS) RWY 19R

BUCHANAN FIELD (CCR)

WAAS	APP CRS	Rwy Idg	4400
CH 86424	191°	TDZE	22
W19A		Apt Elev	26

Circling to Rwys 1L, 1R, 32L, 32R and 19L NA at night. Circling NA west of Rwys 1L and 19R. Rwy 19R helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. Inop table does not apply to LPV. For inop ALS, increase LNAV Cat C and D visibilty to 3 SM.

MALS

MISSED APPROACH: (Do not exceed 190K until HASPS) Climb to 500 then climbing right turn to 3000 direct HASPS then on track 057° direct REJOY and hold.

ATIS	TRAVIS APP CON	CONCORD TOWER★	GND CON	CLNC DEL	UNICOM
124.7	119.9 322.325	119.7 (CTAF) L 257.8	121.9	118.75	122.95

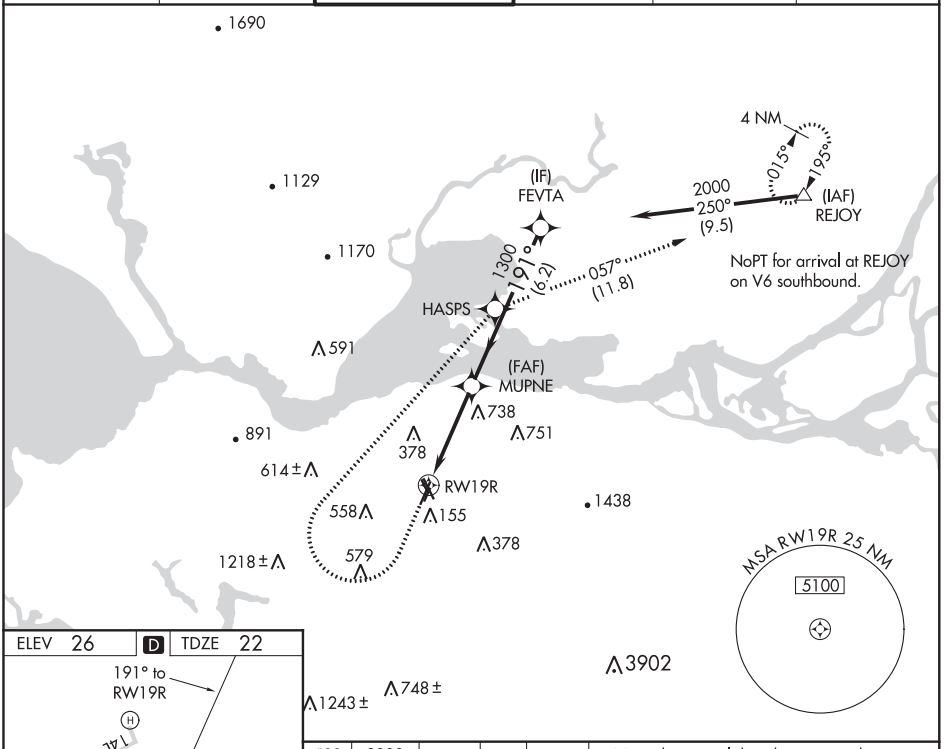

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 26 | D | TDZE 22

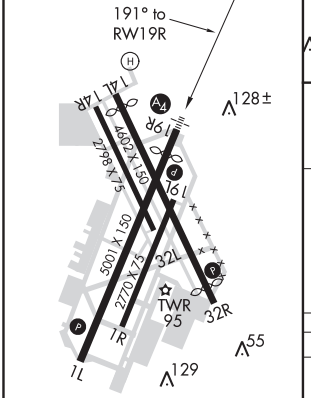

HIRL Rwy 1L-19R
REIL Rwys 1L and 32R
MIRL Rwy 14L-32R

500	3000	HASPS	tr 057°	REJOY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).

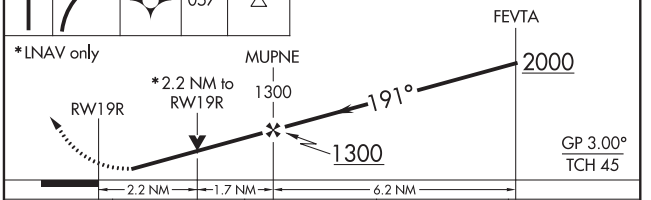

CATEGORY	A	B	C	D
LPV DA	272-¾ 250 (300-¾)			
LNAV MDA	980-1 958 (1000-1)	980-1¼ 958 (1000-1¼)	980-2½ 958 (1000-2½)	
C CIRCLING	980-1¼ 954 (1000-1¼)	980-1½ 954 (1000-1½)	980-3 954 (1000-3)	1300-3 1274 (1300-3)

CONCORD, CALIFORNIA
Amdt 1 22JUN17

37°59'N-122°03'W

BUCHANAN FIELD (CCR)

RNAV (GPS) RWY 19R

LDA RWY 19R
BUCHANAN FIELD (CCR)

LOC/DME I-CCR	APP CRS	Rwy Idg	4400
108.5	185°	TDZE	22
Chan 22		Apt Elev	26

DME or RADAR required.

Circling NA west of Rwy 1L-19R. Circling Rwy 1L, 19L, 32R NA at night. Rwy 19R helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-19R Cats C/D visibility to 2 SM.
*For inop ALS, increase S-19R Cats C/D visibility to 1⅛ SM.

MALS

MISSED APPROACH: Climbing right turn to 3000 direct CCR VOR/DME then on CCR VOR/DME R-044 to REJOY INT/CCR 14.9 DME and hold.
*Missed approach requires minimum climb of 282 feet per NM to 1800.

ATIS	TRAVIS APP CON	CONCORD TOWER*	GND CON	CLNC DEL	UNICOM
124.7	119.9 322.325	119.7 (CTAF) L 257.8	121.9	118.75	122.95

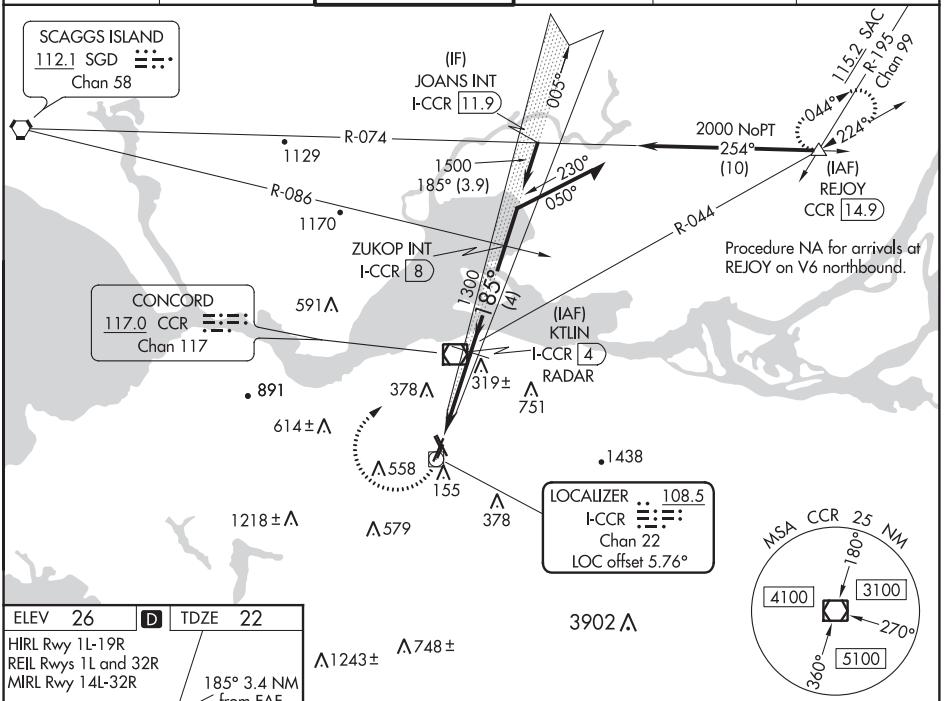

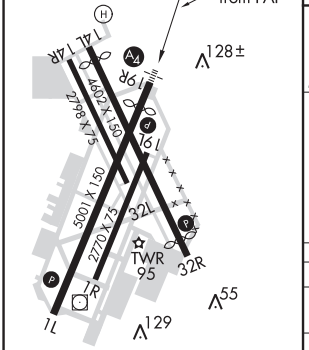

FAF to MAP 3.4 NM

Knots	60	90	120	150	180
Min:Sec	3:24	2:16	1:42	1:22	1:08

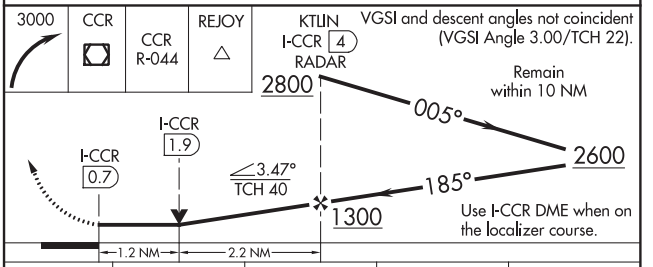

CATEGORY	A	B	C	D
S-19R*	440-¾ 418 (500-¾)		440-1 418 (500-1)	
S-19R	780-¾ 758 (800-¾)	780-1 758 (800-1)	780-1⅞ 758 (800-1⅞)	
C CIRCLING	780-1 754 (800-1)	780-1¼ 754 (800-1¼)	960-2¾ 934 (1000-2¾)	1300-3 1274 (1300-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VOR RWY 19R
BUCHANAN FIELD (CCR)

VOR/DME CCR	APP CRS	Rwy Idg	4400
117.0	172°	TDZE	22
Chan 117		Apt Elev	26

Inop table does not apply. Circling NA west of Rwy 1L-19R. Circling Rwy 1L, 32R NA at night. Rwy 19R helicopter visibility reduction below ¾ SM NA. DME Required.

MALS

MISSED APPROACH: Climbing right turn to 3000 direct CCR VOR/DME then on CCR VOR/DME R-044 to REJOY INT/CCR 14.9 and hold.
* Missed approach requires minimum climb of 320 feet per NM to 1700.

ATIS	TRAVIS APP CON	CONCORD TOWER ★	GND CON	CLNC DEL	UNICOM
124.7	119.9 322.325	119.7 (CTAF) L 257.8	121.9	118.75	122.95

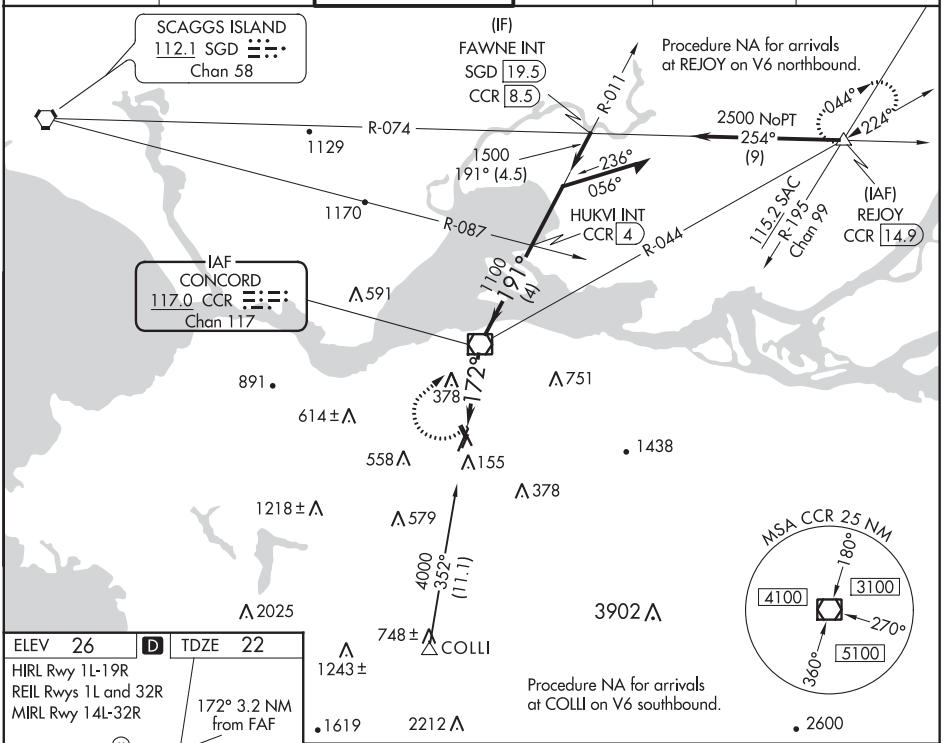

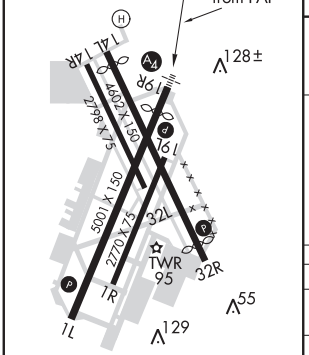

FAF to MAP 3.2 NM					
Knots	60	90	120	150	180
Min:Sec	3:12	2:08	1:36	1:17	1:04

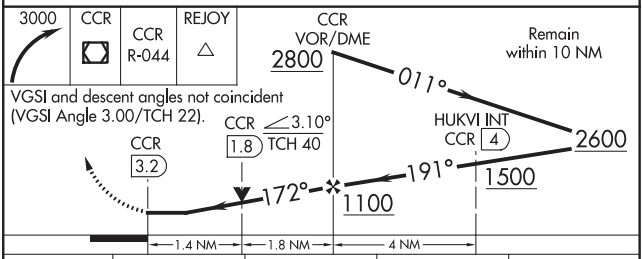

CATEGORY	A	B	C	D
S-19R*	640-1 618 (700-1)		640-1¾ 618 (700-1¾)	
S-19R	1020-1¼ 998 (1000-1¼)	1020-1½ 998 (1000-1½)	1020-3 998 (1000-3)	
C CIRCLING	1020-1¼ 994 (1000-1¼)	1020-1½ 994 (1000-1½)	1020-3 994 (1000-3)	1300-3 1274 (1300-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

AL-5320 (FAA)

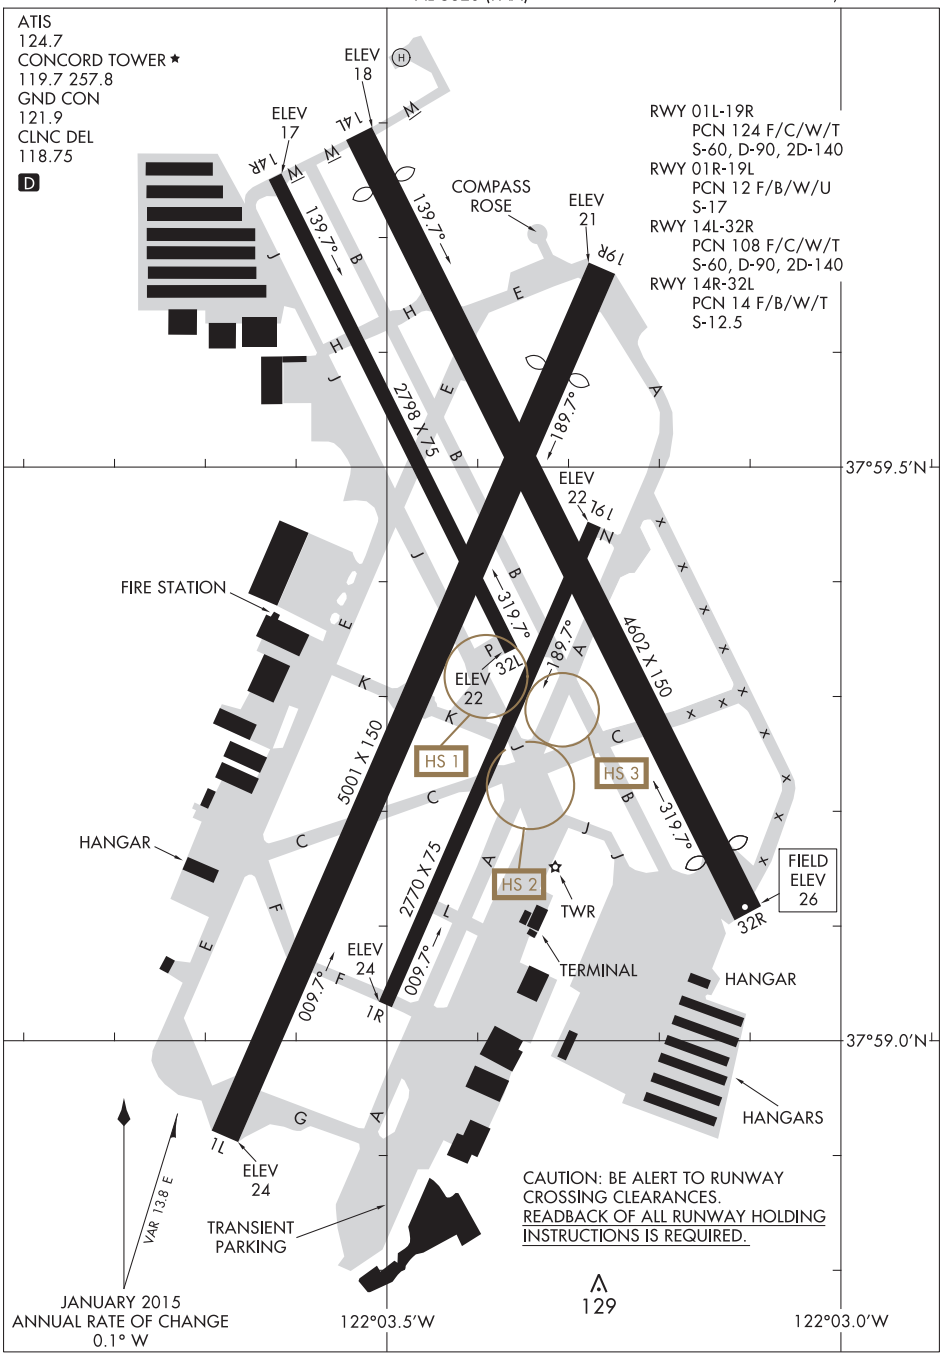

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

(BCHN2.CCR) 17341

BUCHANAN TWO DEPARTURE

AL-5320 (FAA)

BUCHANAN FIELD (CCR)
CONCORD, CALIFORNIA

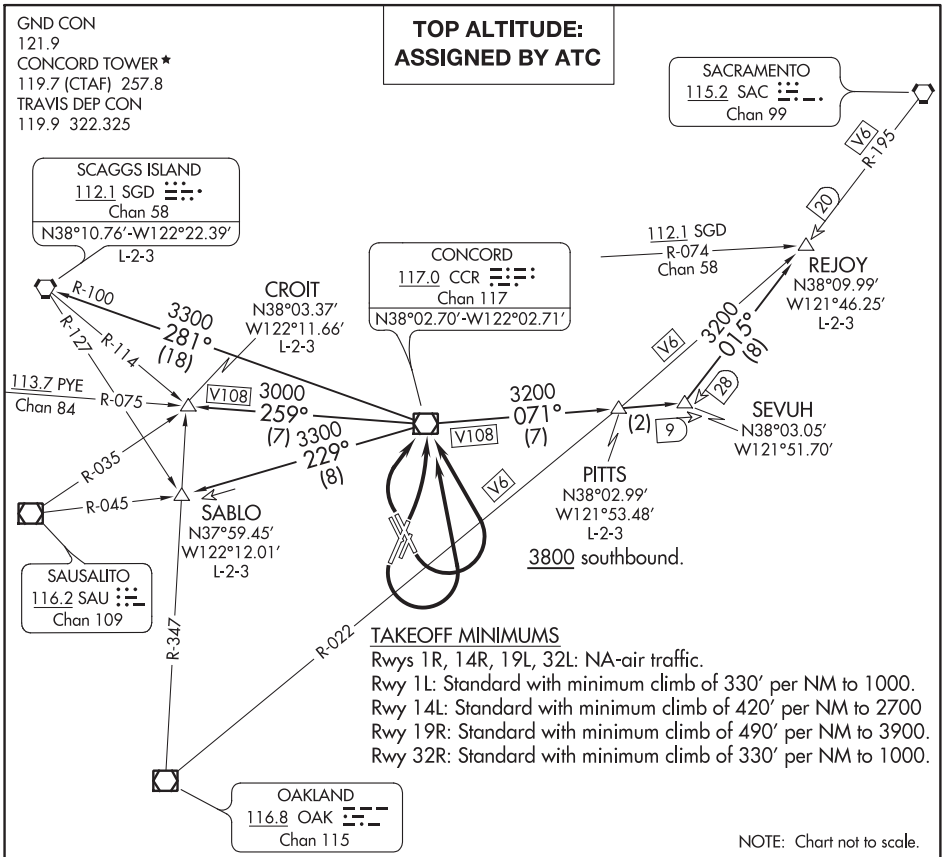

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L, 14L, 19R: Climbing left turn direct CCR VOR/DME, thence. . . .

TAKEOFF RUNWAY 32R: Climbing right turn direct CCR VOR/DME, thence. . . .

. . . .on (transition) or (assigned route).

CROIT TRANSITION (BCHN2.CROIT): From over CCR VOR/DME on CCR R-259 to CROIT INT.

PITTS TRANSITION (BCHN2.PITTS): From over CCR VOR/DME on CCR R-071 to PITTS INT.

REJOY TRANSITION (BCHN2.REJOY): From over CCR VOR/DME on CCR R-071 and SAC R-195 to REJOY INT.

SABLO TRANSITION (BCHN2.SABLO): From over CCR VOR/DME on CCR R-229 to SABLO INT.

SCAGGS ISLAND TRANSITION (BCHN2.SGD): From over CCR VOR/DME on CCR R-281 and SGD R-100 to SGD VORTAC.

LOC I-CEC	APP CRS	Rwy Idg	5002
108.7	119°	TDZE	60
		Apt Elev	61

ILS or LOC RWY 12

JACK MC NAMARA FIELD (CEC)

T NA — DME required. S-ILS 12: ½ mile visibility authorized with use of FD or AP or HUD to DA. Inop table does not apply to S-ILS 12, except with use of FD or AP or HUD to DA. For inop MALSR, increase S-LOC 12 all Cats visibility ¼ mile. When local altimeter setting not received, use Brookings altimeter setting and increase DA to 407 feet and all MDA 100 feet; increase S-LOC 12 Cat C/D, and Circling Cat D visibilities ¼ mile. For inop MALSR, when using Brookings altimeter setting, increase S-ILS 12 all Cats visibility to 1 mile. Night Landing: Rwy 36 operational VGSI required, remain on or above VGSI glidepath until threshold. Circling to Rwy 18, 30 NA at night.

MALSR (A5)

MISSED APPROACH: Climb to 700 then climbing right turn to 3000 on CEC VORTAC R-166 to CHIDE/CEC 11 DME and hold, continue climb-in-hold to 3000.

ASOS	SEATTLE CENTER	OAKLAND RADIO	UNICOM
119.925	124.85 306.3	122.3	122.8 (CTAF) L

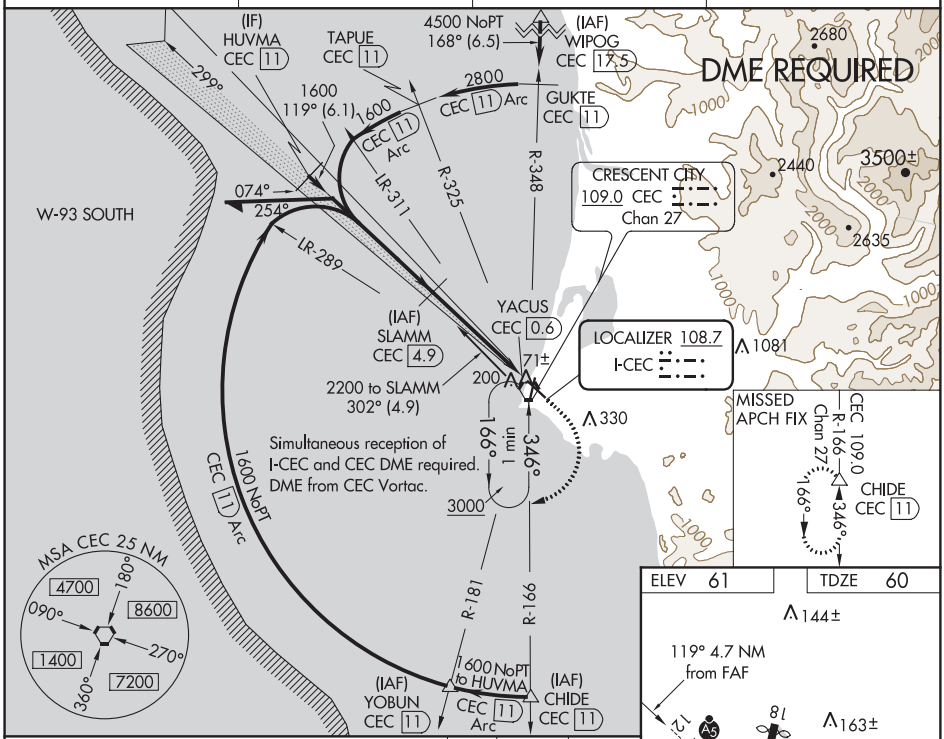

CATEGORY	A	B	C	D
S-ILS 12		310-¾	250 (300-¾)	
S-LOC 12		380-¾	320 (400-¾)	
C CIRCLING	540-1	479 (500-1)	640-1½ 579 (600-1½)	640-2 579 (600-2)

HIRL Rwy 12-30 L
REIL Rwys 18, 30 and 36 L
MIRL Rwy 18-36 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

CRESCENT CITY, CALIFORNIA | AL-34 (FAA) | 17285

WAAS	APP CRS	Rwy Idg	5002
CH 90310	119°	TDZE	60
W12A		Apt Elev	61

RNAV (GPS) RWY 12

JACK MC NAMARA FIELD (CEC)

T A Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Brookings altimeter setting and increase LPV DA to 407 feet, LNAV/VNAV DA to 484 feet and all MDA 100 feet; increase LPV all Cats visibility to ⅞ mile, LNAV/VNAV all Cats visibility to 1⅛ mile, LNAV Cat C/D to 1⅛ mile, and Circling Cat C to 2 miles, Cat D to 2¼ miles. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cat A/B visibility to 1 mile, Cat C/D to 1⅛ mile. For inop MALSR, when using Brookings altimeter setting, increase LPV all Cats visibility to 1⅛ mile, LNAV/VNAV all Cats visibility to 1⅜ mile, and LNAV Cat A/B to 1 mile, Cat C/D to 1¾ mile. VDP and Baro-VNAV NA when using Brookings altimeter setting. Night landing: Rwy 18, 30 NA. Night landing: Rwy 36, operational VGSI required, remain on or above VGSI glidepath until threshold.

MALSR (A5)

MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct CHIDE and hold, continue climb-in-hold to 3000.

ASOS	SEATTLE CENTER	OAKLAND RADIO	UNICOM
119.925	124.85 306.3	122.3	122.8 (CTAF) L

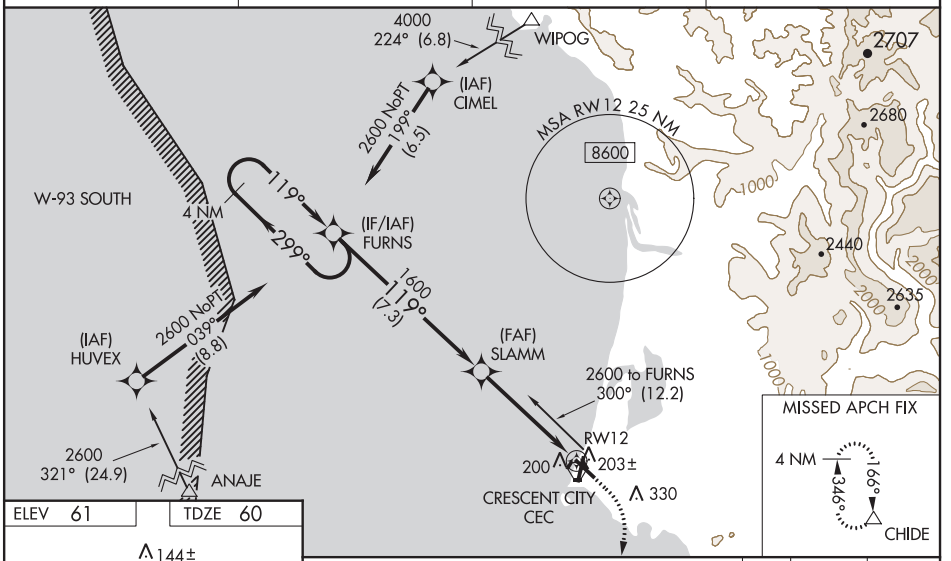

ELEV 61 | TDZE 60

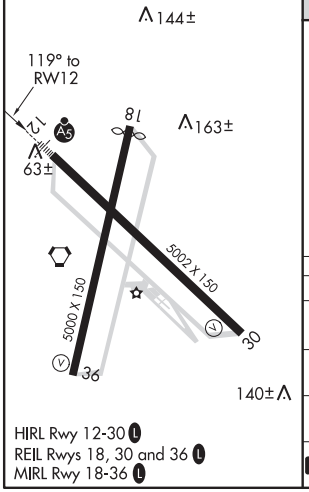

HIRL Rwy 12-30 L
REIL Rwys 18, 30 and 36 L
MIRL Rwy 18-36 L

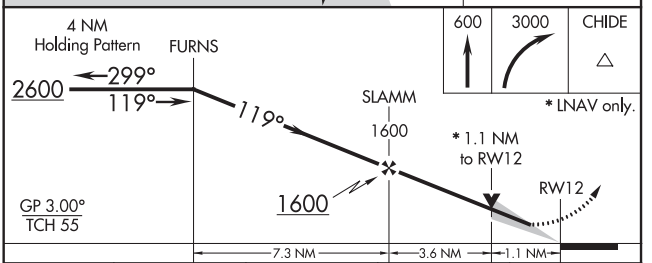

CATEGORY	A	B	C	D
LPV DA	310-¾	250 (300-¾)		
LNAV/VNAV DA	387-¾	327 (400-¾)		
LNAV MDA	460-¾	400 (400-¾)	460-⅞	400 (400-⅞)
C CIRCLING	540-1	479 (500-1)	640-1½ 579 (600-1½)	640-2 579 (600-2)

CRESCENT CITY, CALIFORNIA
Amdt 2 15OCT15

41°47'N-124°14'W

JACK MC NAMARA FIELD (CEC)
RNAV (GPS) RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS CH 72927 W36A	APP CRS 359°	Rwy Idg 5000 TDZE 59 Apt Elev 61

RNAV (GPS) RWY 36

JACK MC NAMARA FIELD (CEC)

Baro-VNAV NA when using Brookings altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Brookings altimeter setting and increase LPV DA to 406 feet and LNAV/VNAV DA to 505 feet and all MDA 100 feet; increase LPV all Cats and LNAV Cat C/D and Circling Cat D visibilities ¼ mile, increase LNAV/VNAV all Cats visibility ⅜ mile, and Circling Cat C visibility ½ mile. Helicopter visibility reduction below 1 SM NA. Night landing: Rwy 36 operational VGSI required, remain on or above VGSI glidepath until threshold. Night landing: Rwy 18, 30 NA at night.

MISSED APPROACH: Climb to 1300 then climbing left turn to 2400 direct CIGCA and hold.

ASOS	SEATTLE CENTER	OAKLAND RADIO	UNICOM
119.925	124.85 306.3	122.3	122.8 (CTAF) L

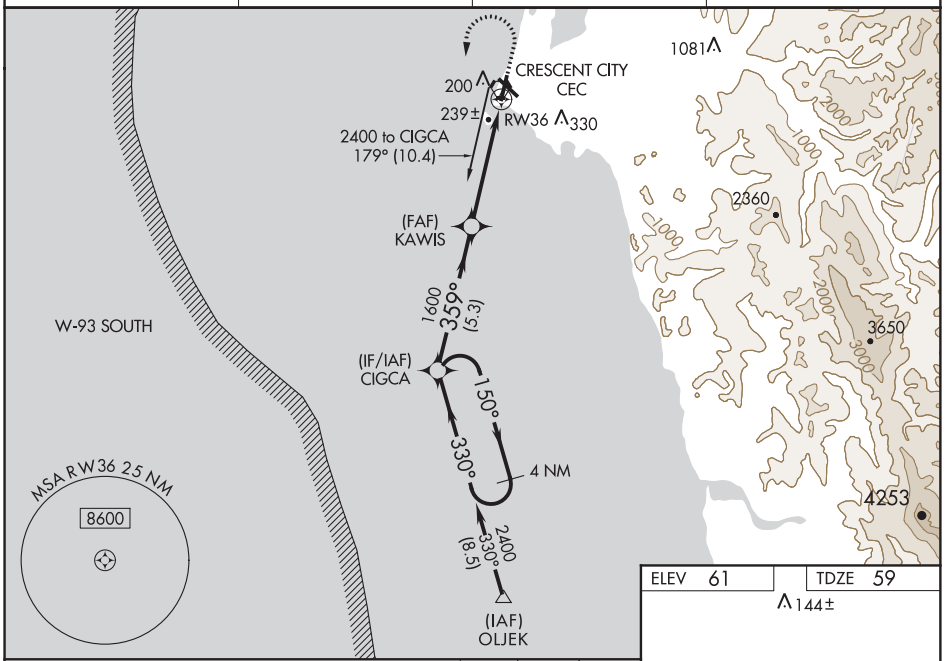

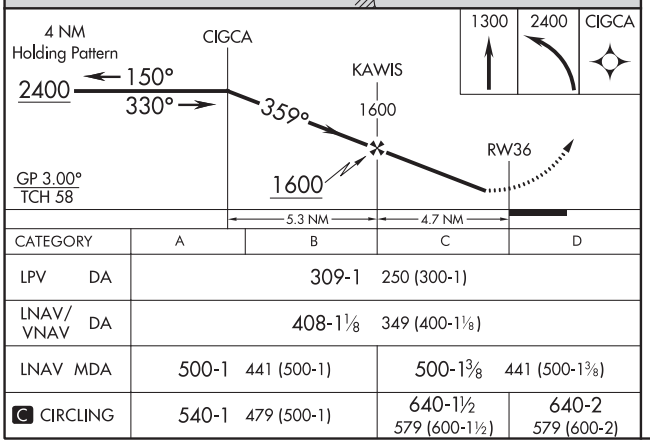

CATEGORY	A	B	C	D
LPV DA	309-1 250 (300-1)			
LNAV/VNAV DA	408-1⅛ 349 (400-1⅛)			
LNAV MDA	500-1 441 (500-1)		500-1⅜ 441 (500-1⅜)	
C CIRCLING	540-1 479 (500-1)		640-1½ 579 (600-1½)	640-2 579 (600-2)

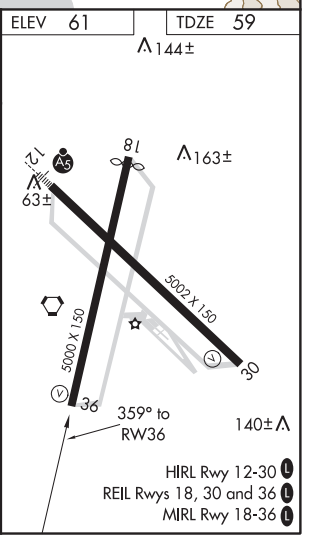

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

CRESCENT CITY, CALIFORNIA AL-34 (FAA) 17285

VORTAC CEC	APP CRS	Rwy Idg	5002
109.0	131°	TDZE	60
Chan 27		Apt Elev	61

VOR/DME RWY 12

JACK MC NAMARA FIELD (CEC)

T A VDP NA with Brookings altimeter setting. When local altimeter setting not received, use Brookings altimeter setting and increase all MDA 100 feet; increase S-12 Cat C/D, and Circling Cat D visibility ¼ mile, and Circling Cat C visibility ½ mile. For inop MALSR, increase S-12 Cats A/B visibility to 1 mile, Cats C/D visibility to 1⅛ mile. For inop MALSR when using Brookings altimeter setting, increase S-12 Cats A/B visibility to 1 mile, Cats C/D visibility to 1⅜ mile. Night Landing: Rwy 18, 30 NA. Night Landing: Rwy 36 operational VGSI required, remain on or above VGSI glidepath until threshold.

MALSR

MISSED APPROACH: Climbing right turn to 3000 on CEC VORTAC R-166 then right turn direct CEC VORTAC and hold.

ASOS	SEATTLE CENTER	OAKLAND RADIO	UNICOM
119.925	124.85 306.3	122.3	122.8 (CTAF) L

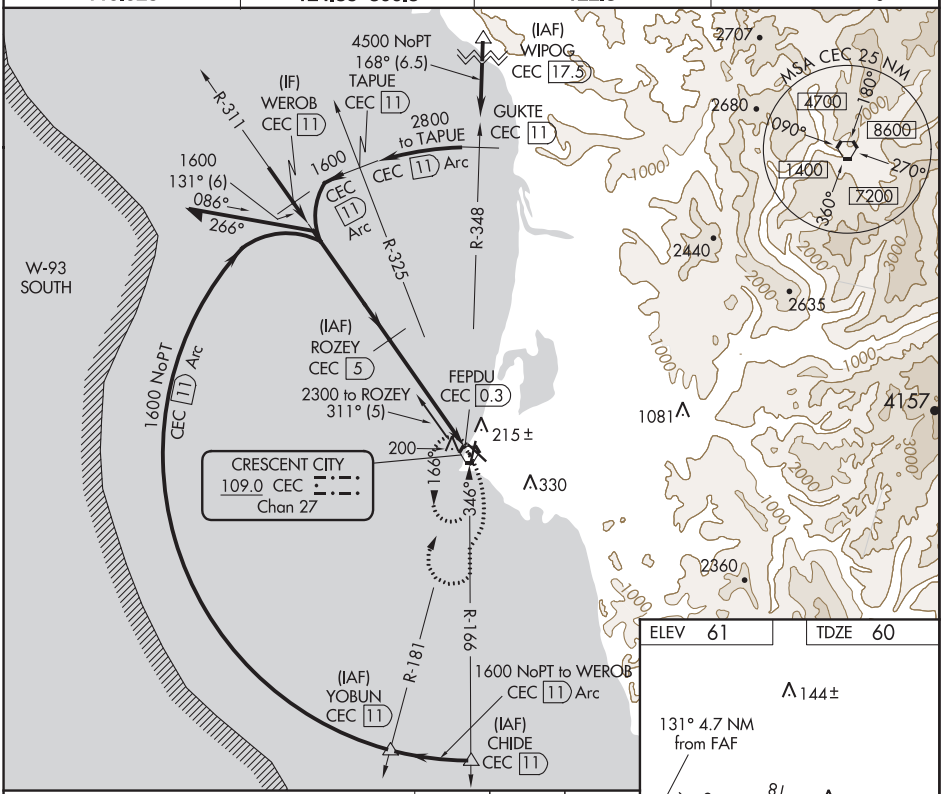

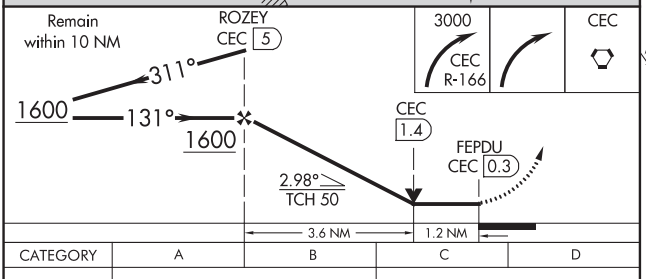



CATEGORY	A	B	C	D
S-12	480-¾	420 (500-¾)	480-1	420 (500-1)
C CIRCLING	540-1	479 (500-1)	640-1½ 579 (600-1½)	640-2 579 (600-2)

HIRL Rwy 12-30 L
REIL Rwys 18, 30 and 36 L
MIRL Rwy 18-36 L

CRESCENT CITY, CALIFORNIA
Amdt 14 15OCT15

41°47'N-124°14'W

JACK MC NAMARA FIELD (CEC)
VOR/DME RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC CEC	APP CRS	Rwy Idg	5000
109.0	346°	TDZE	59
Chan 27		Apt Elev	61

VOR/DME RWY 36
JACK MC NAMARA FIELD (CEC)

When local altimeter setting not received, use Brookings altimeter setting and increase all MDA 100 feet; increase S-36 Cat C/D and Circling Cat D visibilities ¼ mile and Circling Cat C visibility ½ mile. Helicopter visibility reduction below 1 SM NA. Night landing: Rwy 36 operational VGSI required, remain on or above VGSI glidepath until threshold. Night landing: Rwy 18, 30 NA .

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct CEC VORTAC and hold, continue climb-in-hold to 3000.

ASOS	SEATTLE CENTER	OAKLAND RADIO	UNICOM
119.925	124.85 306.3	122.3	122.8 (CTAF) L

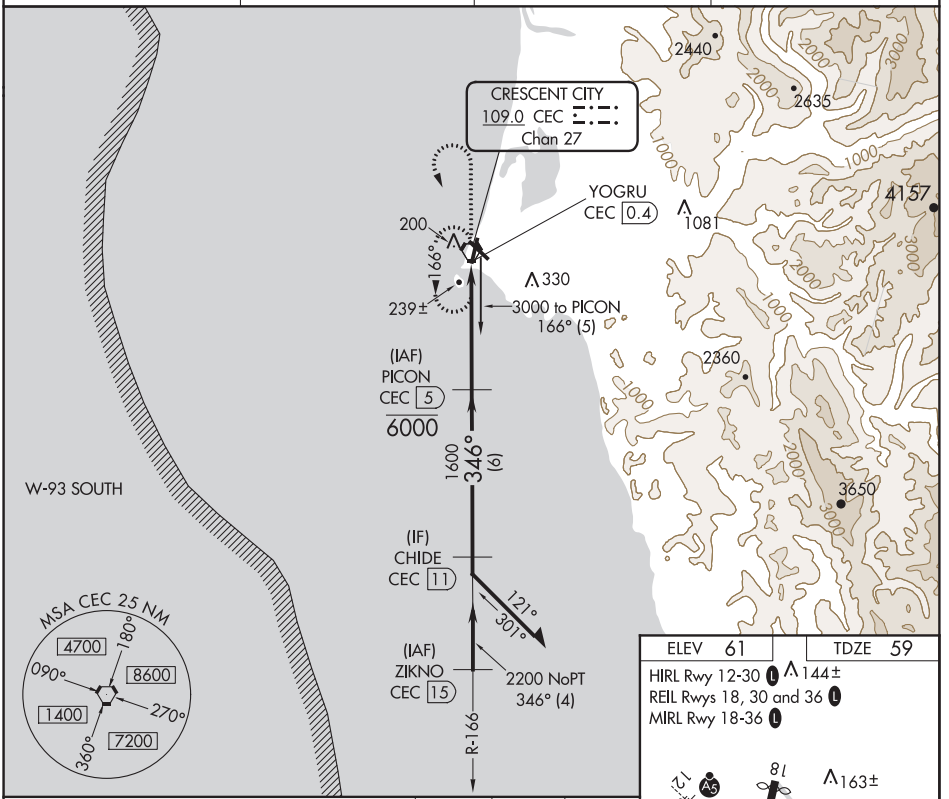

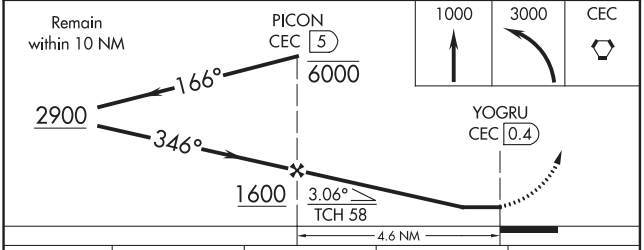

CATEGORY	A	B	C	D
S-36	500-1	441 (500-1)	500-1⅜	441 (500-1⅜)
C CIRCLING	540-1	479 (500-1)	640-1½ 579 (600-1½)	640-2 579 (600-2)

ELEV 61 TDZE 59

HIRL Rwy 12-30 L 144±

REIL Rwys 18, 30 and 36 L

MIRL Rwy 18-36 L

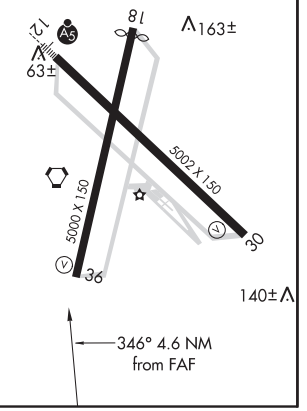

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC CEC	APP CRS	Rwy Idg	5002
109.0	131°	TDZE	60
Chan 27		Apt Elev	61

VOR RWY 12

JACK MC NAMARA FIELD (CEC)

When local altimeter setting not received, use Brookings altimeter setting and increase all MDA 100 feet; increase S-12 Cat C/D visibility ⅜ mile, Circling Cat D visibility ¼ mile and Circling Cat C visibility ½ mile. For inop MALSR increase S-12 Cat A/B visibility to 1 mile, and Cat C/D visibility to 1⅜ mile. For inop MALSR when using Brookings altimeter setting, increase S-12 Cat A/B visibility to 1 mile, and Cat C/D visibility to 1⅝ mile. Night Landing: Rwy 36 operational VGSI required, remain on or above VGSI glidepath until threshold. Night Landing: Rwy 18, 30 NA.

MALSR

MISSED APPROACH: Climbing right turn to 3000 on CEC VORTAC R-166 then right turn direct CEC VORTAC and hold.

ASOS	SEATTLE CENTER	OAKLAND RADIO	UNICOM
119.925	124.85 306.3	122.3	122.8 (CTAF) L

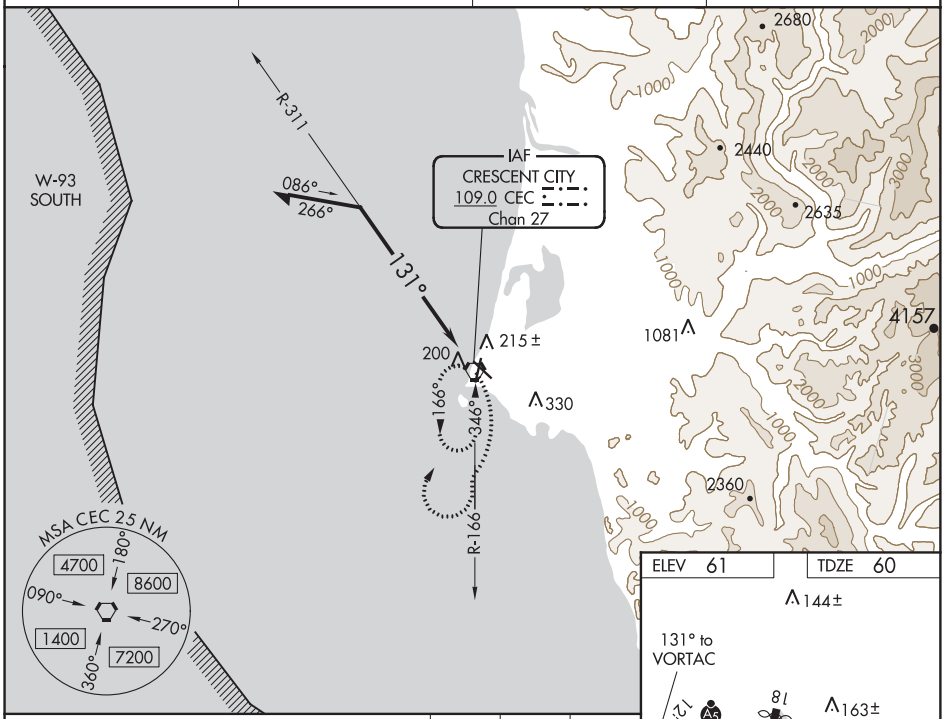

CATEGORY	A	B	C	D
S-12	520-¾	460 (500-¾)	520-1	460 (500-1)
C CIRCLING	540-1	479 (500-1)	640-1½ 579 (600-1½)	640-2 579 (600-2)

HIRL Rwy 12-30 L
MIRL Rwy 18-36 L
REIL Rwys 18, 30 and 36 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 17

UNIVERSITY (EDU)

APP CRS	Rwy Idg	3176
167°	TDZE	64
	Apt Elev	69

DME/DME RNP- 0.3 NA. When local altimeter setting not received, use Travis AFB altimeter setting and increase all MDA 60 feet. Helicopter visibility reduction below 1 SM not authorized. Procedure NA at night.

MISSED APPROACH: Climbing right turn to 2000 direct CODRU and hold.

AWOS-3	TRAVIS APP CON	UNICOM
119.025	126.6 281.45	123.075 (CTAF)

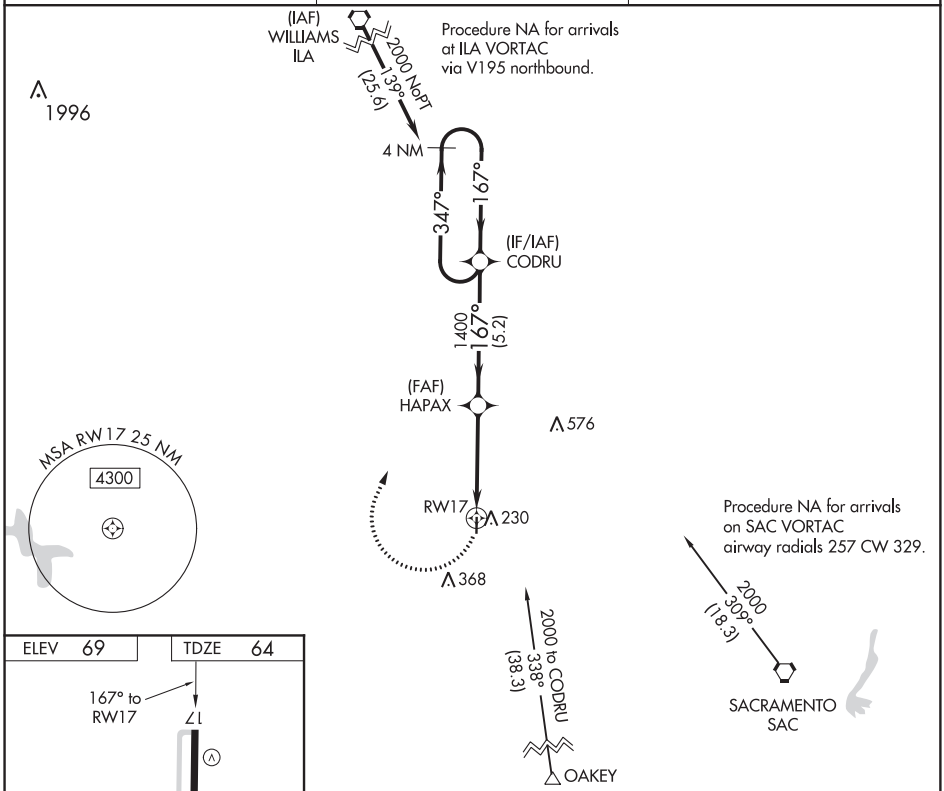

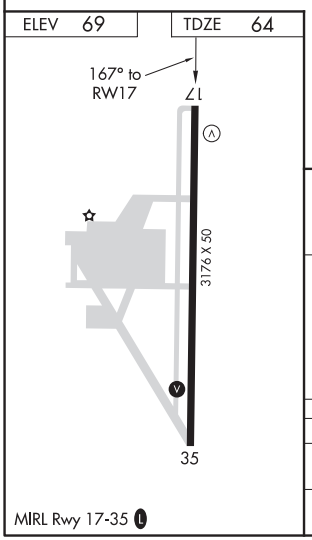

MIRL Rwy 17-35 (L)

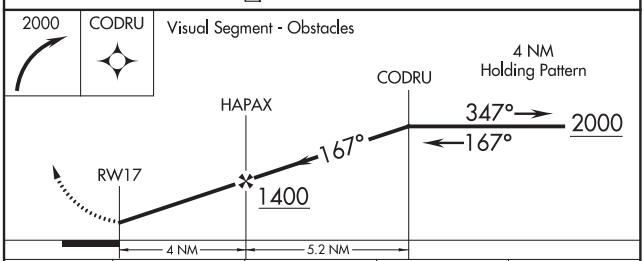

CATEGORY	A	B	C	D
LNAV MDA	520-1	456 (500-1)	NA	
CIRCLING	580-1	511 (600-1)	NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

DAVIS/WOODLAND/WINTERS, CALIFORNIA AL-6512 (FAA) 19255

WAAS	APP CRS	Rwy Idg	6000
CH **99719**	**164°**	TDZE	**99**
W16A		Apt Elev	**100**

RNAV (GPS) RWY 16

YOLO COUNTY (DWA)

RNP APCH.

T NA When local altimeter setting not received, use Travis AFB altimeter setting and increase all DA 50 feet and all MDA 60 feet, and increase LNAV/VNAV all Cats and LNAV Cat C and D visibility ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). Baro-VNAV NA when using Travis AFB altimeter setting.

MISSED APPROACH: Climb to 3600 direct PROAP and hold, continue climb-in-hold to 3600.

AWOS-3	TRAVIS APP CON	UNICOM
125.775	**126.6 281.45**	**123.0** (CTAF) L

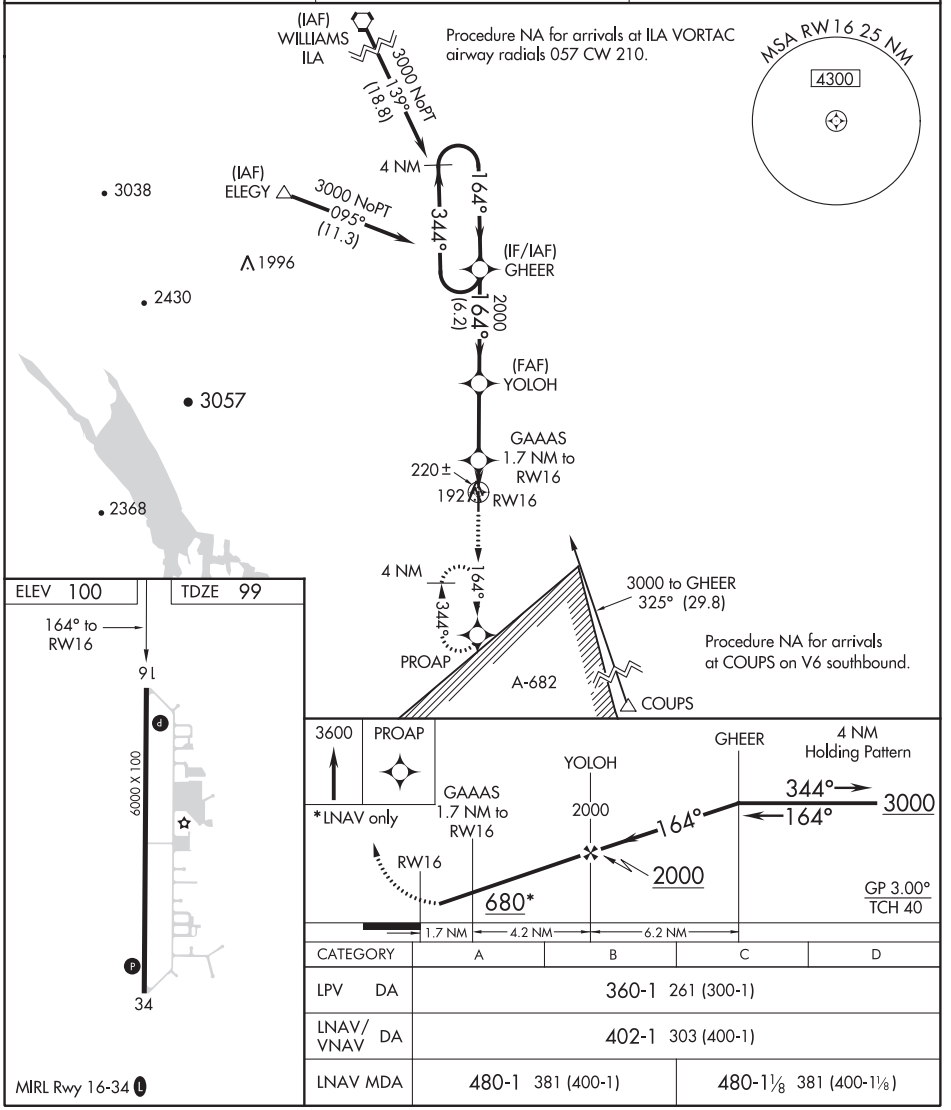

CATEGORY	A	B	C	D
LPV DA	360-1 261 (300-1)			
LNAV/VNAV DA	402-1 303 (400-1)			
LNAV MDA	480-1 381 (400-1)		480-1⅛ 381 (400-1⅛)	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	6000
CH 58319	344°	TDZE	100
W34A		Apt Elev	100

RNAV (GPS) RWY 34

YOLO COUNTY (DWA)

RNP APCH.

T NA When local altimeter setting not received, use Travis AFB altimeter setting and increase all DA 50 feet and all MDA 60 feet, and increase LPV visibility all Cats ⅛ mile, LNAV/VNAV visibility all Cats ¼ mile, and LNAV Cat C and D visibility ½ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). Baro-VNAV NA when using Travis AFB altimeter setting.

MISSED APPROACH: Climb to 3000 direct GHEER and hold.

AWOS-3	TRAVIS APP CON	UNICOM
125.775	126.6 281.45	123.0 (CTAF) L

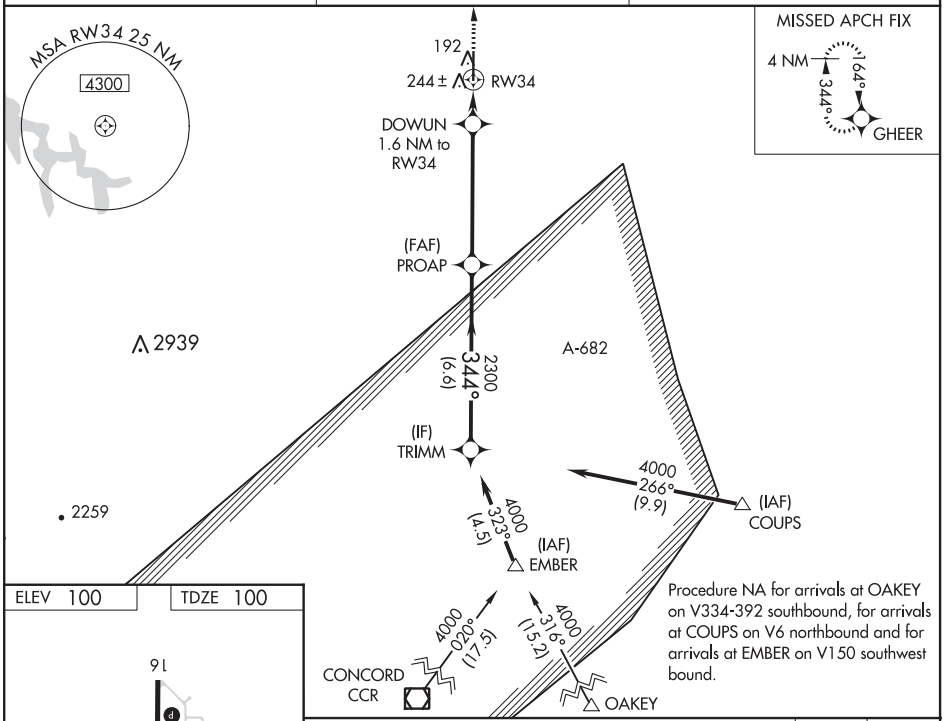

ELEV 100	TDZE 100

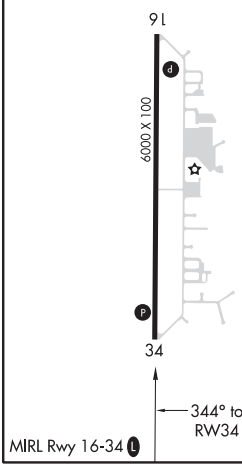

MIRL Rwy 16-34 L

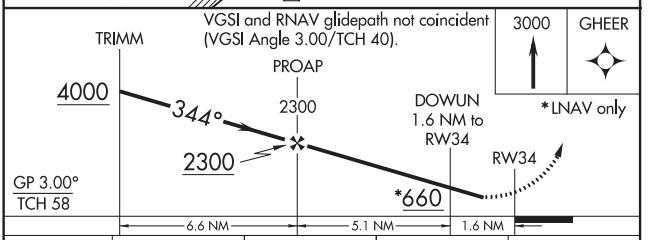

CATEGORY	A	B	C	D
LPV DA	415-1 315 (400-1)			
LNAV/VNAV DA	425-1 325 (400-1)			
LNAV MDA	500-1 400 (400-1)		500-1⅛ 400 (400-1⅛)	

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

EUREKA, CALIFORNIA | AL-5888 (FAA) | 19283

APP CRS	Rwy Idg	3011
115°	TDZE	11
	Apt Elev	11

RNAV (GPS) RWY 12

MURRAY FIELD (EKA)

RNP APCH.

T A NA — Procedure NA at night. Rwy 12 helicopter visibility reduction below 1 SM NA. Use Arcata altimeter setting, when not received use Crescent City altimeter setting and increase all MDA 100 feet and increase LNAV Cat C visibility ¼ SM.

MISSED APPROACH: Climbing right turn to 3000 direct SCUPY and hold.

ACV ASOS	SEATTLE CENTER	UNICOM
118.525	124.85 306.3	122.7 (CTAF) L

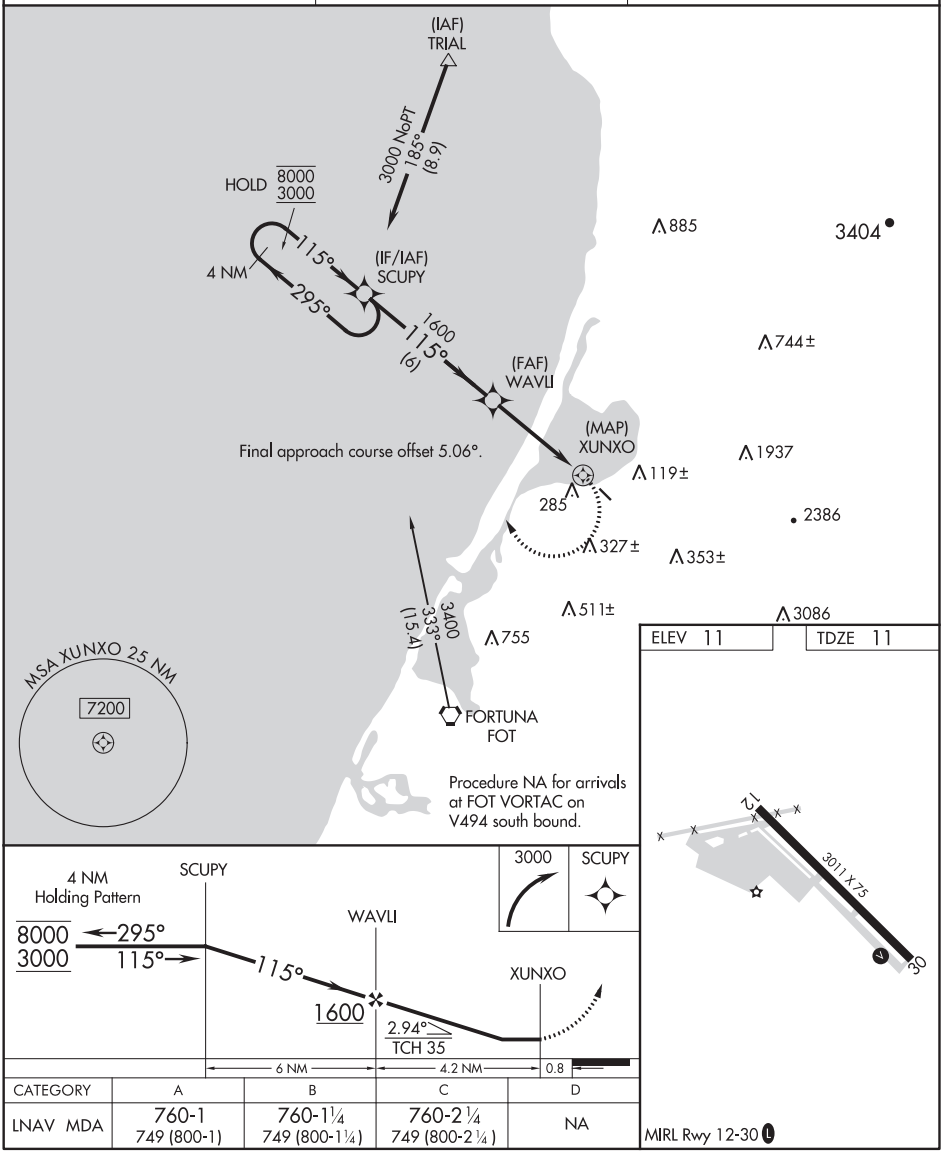

CATEGORY	A	B	C	D
LNAV MDA	760-1 749 (800-1)	760-1¼ 749 (800-1¼)	760-2¼ 749 (800-2¼)	NA

MIRL Rwy 12-30 L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

EUREKA, CALIFORNIA
Orig-B 18JUL19

40°48'N-124°07'W

MURRAY FIELD (EKA)
RNAV (GPS) RWY 12

APP CRS	Rwy Idg	N/A
020°	TDZE	N/A
	Apt Elev	11

RNAV (GPS)-B
MURRAY FIELD (EKA)

RNP Apch.

T
A NA Procedure NA at night. Use Arcata altimeter setting when not received, use Crescent City altimeter setting and increase all MDA 100 feet.

MISSED APPROACH: Climbing left turn to 3000 direct FOT VORTAC and hold.

ACV ASOS	SEATTLE CENTER	UNICOM
118.525	124.85 306.3	122.7 (CTAF) L

885 3404 744± 1937 119± 285 (MAP) MABFI 2386 327± 353± 1700 (3) (FAF) SHUKS 755 511± 3086 CIRTO 2300 020° (3.6) (IF/IAF) FORTUNA FOT 3729 200° 020° 3000 NoPT 320° (4) 4 NM 2340 HOLD 8000 3000 (IAF) TUNGS MSA MABFI 25 NM 7200 2547

ELEV 11

12 30 3011 X 75

4 NM Holding Pattern FOT VORTAC 3000 FOT 8000 3000 200° 020° 020° CIRTO SHUKS MABFI 2300 1700 3.6 NM 3 NM 3 NM

020° to MABFI

MIRL Rwy 12-30 L

CATEGORY	A	B	C	D
CIRCLING	980-1¼ 969 (1000-1¼)	980-1½ 969 (1000-1½)	1060-3 1049 (1100-3)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

EUREKA, CALIFORNIA | AL-5888 (FAA) | 19283

VORTAC FOT	APP CRS	Rwy Idg	N/A
114.0	016°	TDZE	N/A
Chan 87		Apt Elev	11

VOR-A
MURRAY FIELD (EKA)

Procedure NA at night.
NA Use Arcata altimeter setting; when not received, use Crescent City altimeter setting and increase all MDA 100 feet.

MISSED APPROACH: Climbing left turn to 3000 direct FOT VORTAC and hold.

ACV ASOS	SEATTLE CENTER	UNICOM
118.525	124.85 306.3	122.7 (CTAF) L

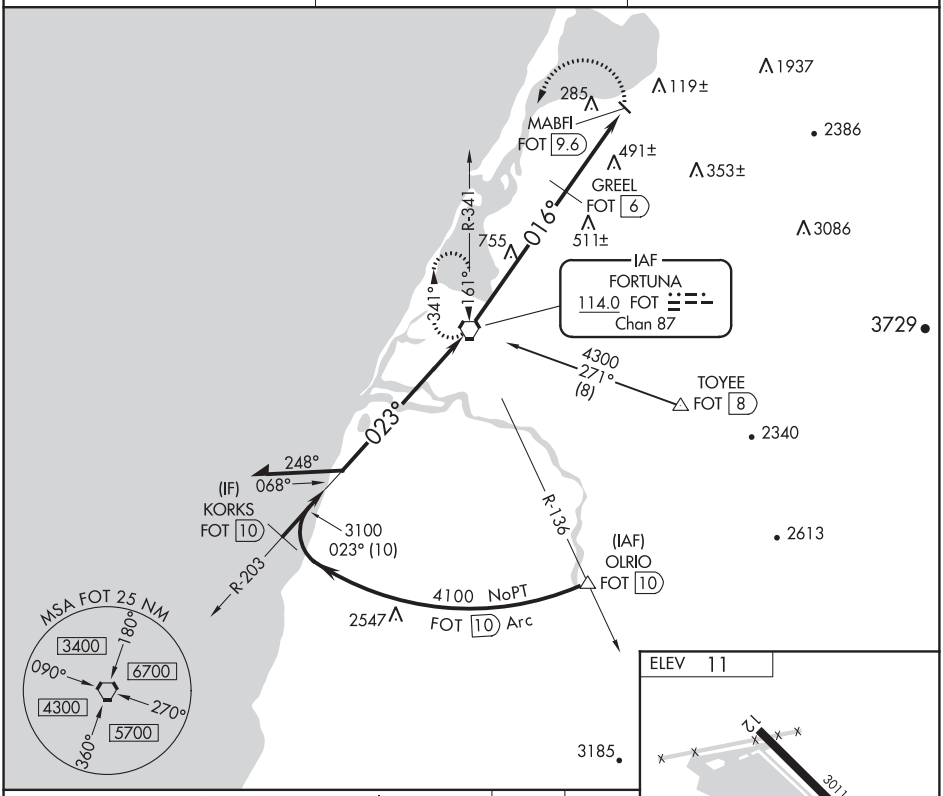

*1400 when using Crescent City altimeter setting.

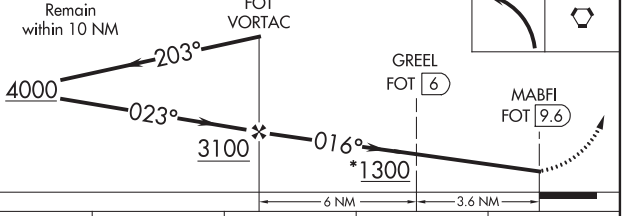

CATEGORY	A	B	C	D
CIRCLING	1300-1¼ 1289 (1300-1¼)	1300-1½ 1289 (1300-1½)	1300-3 1289 (1300-3)	NA
GREEL FIX MINIMUMS				
CIRCLING	860-1 849 (900-1)	880-1¼ 869 (900-1¼)	1060-3 1049 (1100-3)	NA

FAF to MAP 9.6 NM

Knots	60	90	120	150	180
Min:Sec	9:36	6:24	4:48	3:50	3:12

EUREKA, CALIFORNIA
Amdt 7B 19JUL18

40°48'N-124°07'W

MURRAY FIELD (EKA)
VOR-A

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	N/A
044°	TDZE	N/A
	Apt Elev	157

RNAV (GPS)-B

FIREBAUGH (F34)

RNP APCH.

Procedure NA at night. Use Madera altimeter setting, when not received, use Merced Rgnl/Macready Field altimeter setting.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct MENDO and hold.

MAE ASOS	NORCAL APP CON	CTAF
134.725	120.95 269.45	122.9 L

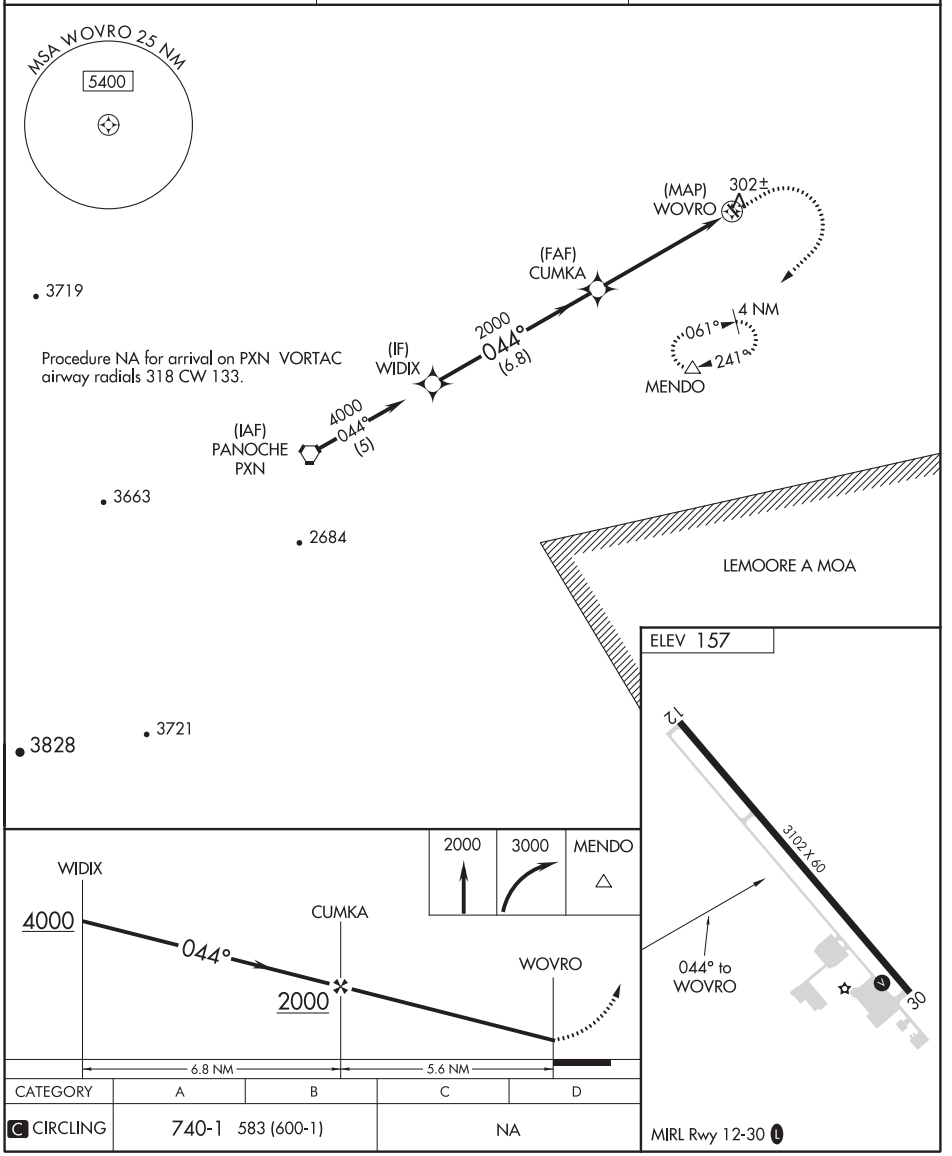

CATEGORY	A	B	C	D
C CIRCLING	740-1 583 (600-1)		NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC PXN 112.6 Chan 73	APP CRS 044°	Rwy Idg N/A TDZE N/A Apt Elev 157

VOR-A
FIREBAUGH (F34)

DME required.

T
ANA
Procedure NA at night.
Use Madera altimeter setting, when not received, use Merced Rgnl/Macready Field altimeter setting.

MISSED APPROACH: Climbing right turn to 4000 on heading 150° and on PXN VORTAC R-061 to MENDO INT/PXN 14 DME and hold, continue climb-in-hold to 4000.

MAE ASOS 134.725	NORCAL APP CON 120.95 269.45	CTAF 122.9 L

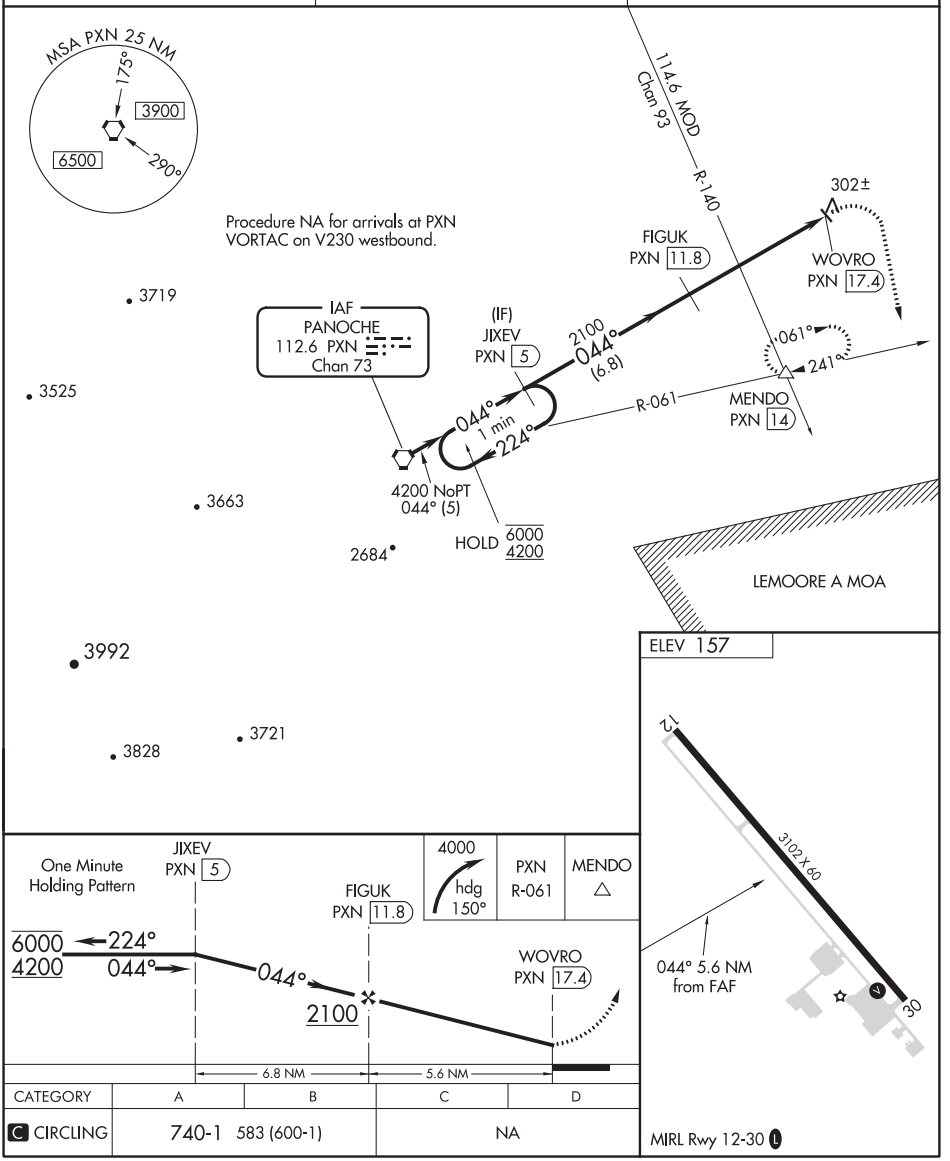

CATEGORY	A	B	C	D
C CIRCLING	740-1 583 (600-1)		NA	

MIRL Rwy 12-30 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	4005
110°	TDZE	382
	Apt Elev	392

GPS RWY 11
ROHNERVILLE (FOT)

NA

When local altimeter setting not received, use Arcata altimeter setting.

MISSED APPROACH: Climbing right turn to 3000 direct FOT VORTAC and hold.

AWOS-3	SEATTLE CENTER	CTAF
133.8	124.85 306.3	122.9 L

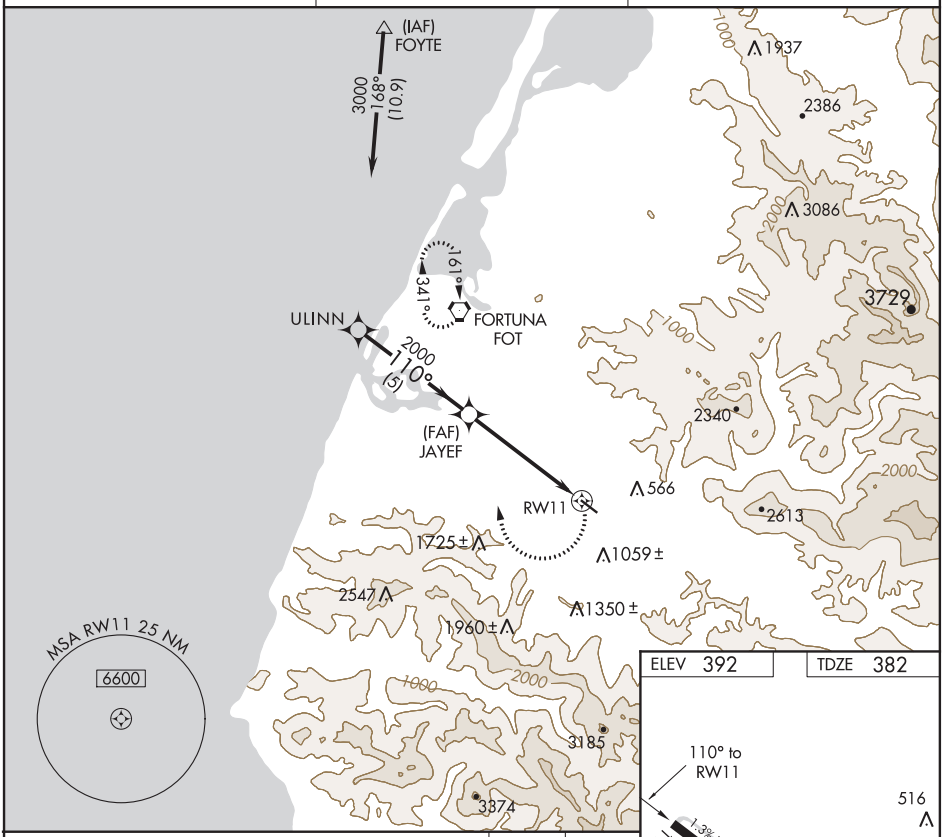

CATEGORY	A	B	C	D
S-11	1140-1 758 (800-1)	1160-1¼ 778 (800-1¼)	1200-2½ 818 (900-2½)	1560-3 1178 (1200-3)
CIRCLING	1140-1 748 (800-1)	1160-1¼ 768 (800-1¼)	1320-2¾ 928 (1000-2¾)	1560-3 1168 (1200-3)

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L

SW-2, 30 JAN 2020 to 26 MAR 2020

FORTUNA, CALIFORNIA | AL-960 (FAA) | 19115

APP CRS	Rwy Idg	4005
276°	TDZE	392
	Apt Elev	392

GPS RWY 29
ROHNERVILLE (FOT)

T
NA

When local altimeter setting not received, use Arcata altimeter setting.

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct FOT VORTAC and hold.

AWOS-3	SEATTLE CENTER	CTAF
133.8	124.85 306.3	122.9 L

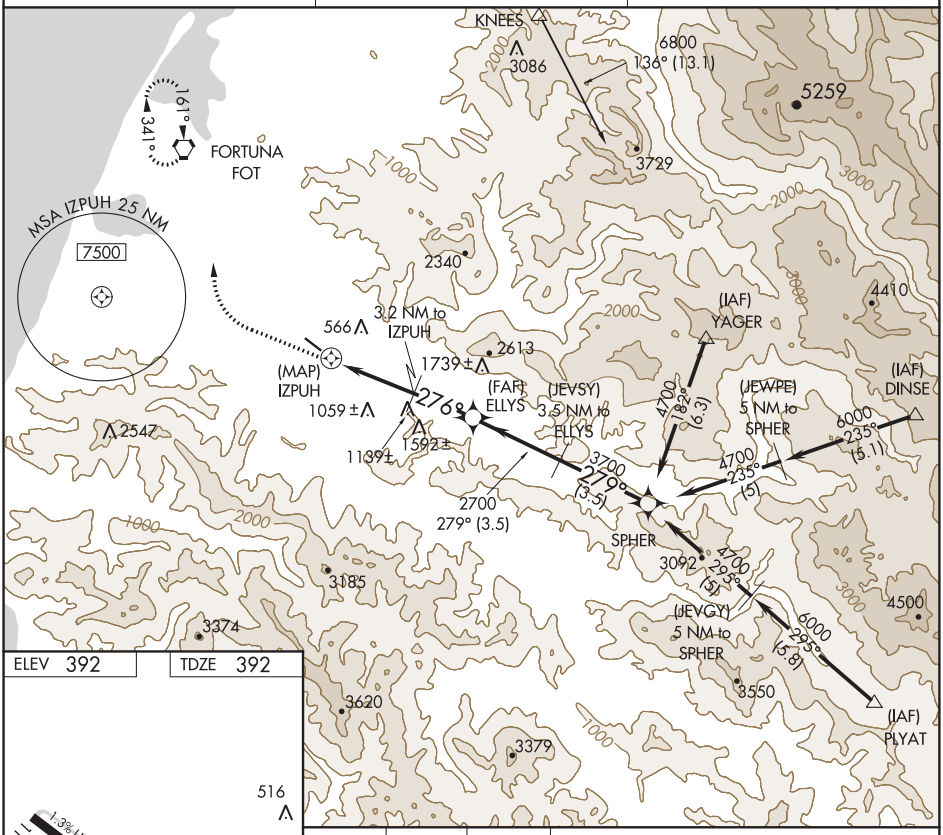

ELEV 392	TDZ 392



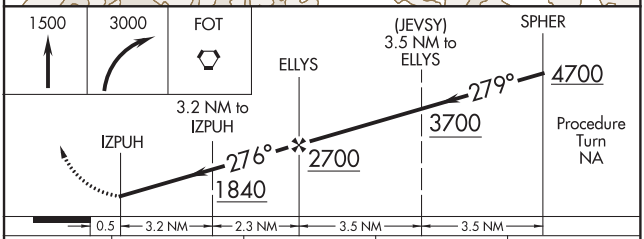

CATEGORY	A	B	C	D
S-29	1160-1 768 (800-1)	1160-1¼ 768 (800-1¼)	1160-2¼ 768 (800-2¼)	1160-2½ 768 (800-2½)
CIRCLING	1160-1 768 (800-1)	1160-1¼ 768 (800-1¼)	1320-2¾ 928 (1000-2¾)	1460-3 1068 (1100-3)

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L

SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC FOT	APP CRS	Rwy Idg	4005
114.0	128°	TDZE	382
Chan 87		Apt Elev	392

VOR RWY 11
ROHNERVILLE (FOT)

▼ NA — When local altimeter setting not received, use Arcata altimeter setting.

MISSED APPROACH: Climbing right turn to 3000 direct FOT VORTAC and hold.

AWOS-3	SEATTLE CENTER	CTAF
133.8	124.85 306.3	122.9 L

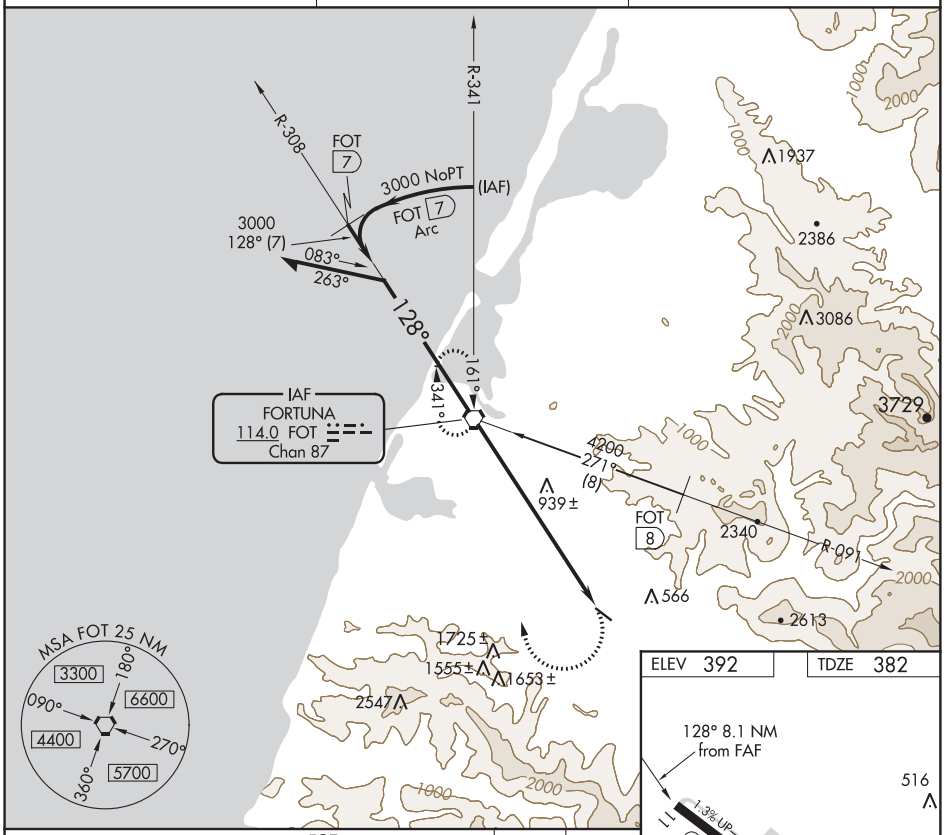

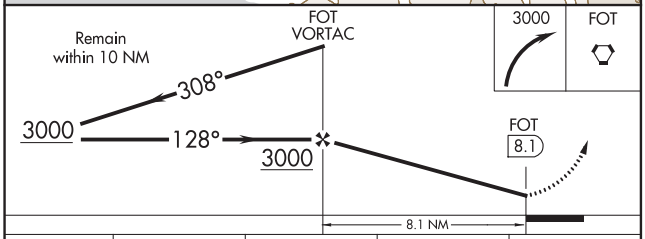

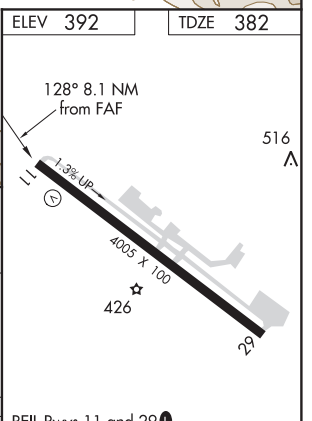

CATEGORY	A	B	C	D
S-11	1640-1¼ (1258 (1300-1¼))	1680-1½ (1298 (1300-1½))	1720-3	1338 (1400-3)
CIRCLING	1640-1¼ (1248 (1300-1¼))	1680-1½ (1288 (1300-1½))	1720-3	1328 (1400-3)

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L

FAF to MAP 8.1 NM					
Knots	60	90	120	150	180
Min:Sec	8:06	5:24	4:03	3:14	2:42

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

FRESNO, CALIFORNIA | AL-161 (FAA) | 19283

RNAV (GPS) RWY 12

FRESNO CHANDLER EXECUTIVE (FCH)

WAAS	APP CRS	Rwy Idg	3212
CH 49242	111°	TDZE	280
W12A		Apt Elev	280

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1° C or above 54°C.
A Rwy 12 helicopter visibility reduction below ¾ SM NA.
Circling Rwy 30 NA at night.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct FRAME and hold.

AWOS-3	FRESNO APP CON	CLNC DEL	UNICOM
135.225	119.0 323.25	119.0	123.0 (CTAF) L

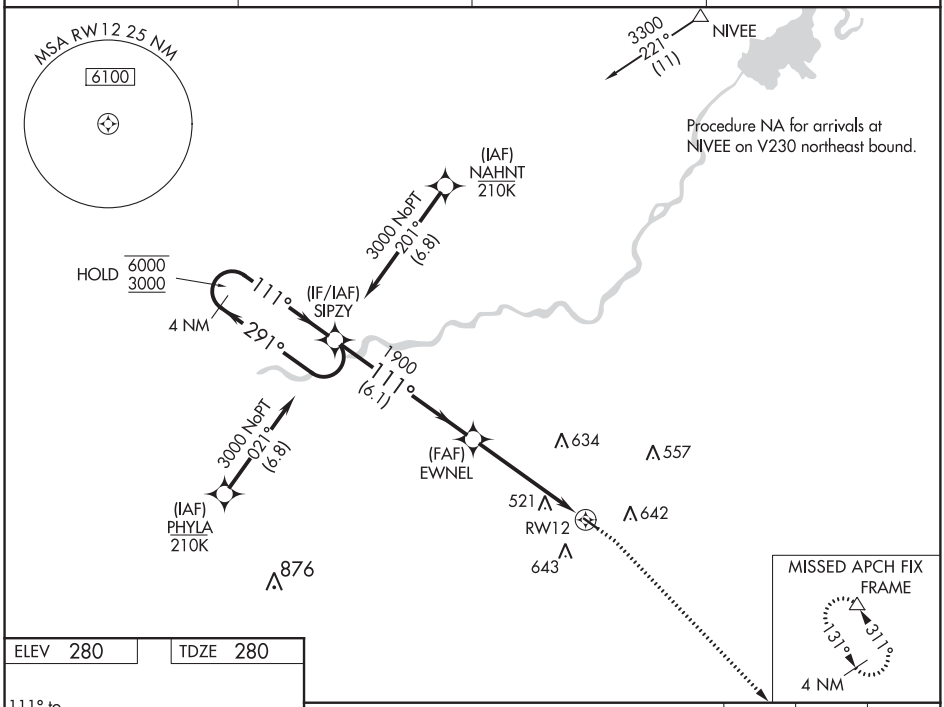

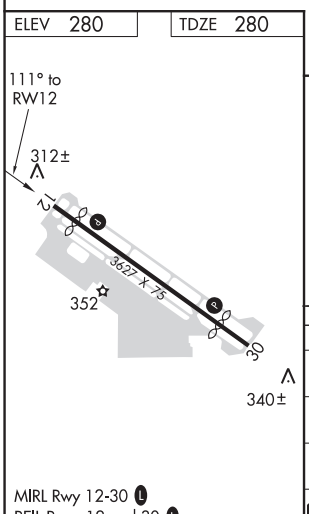

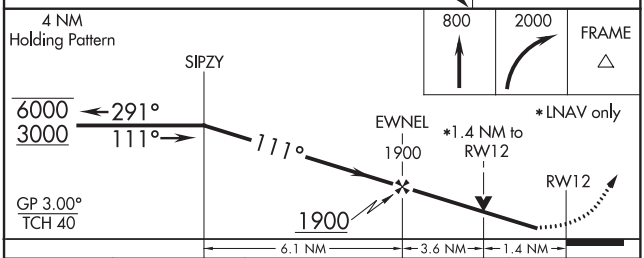

CATEGORY	A	B	C	D
LPV DA	530-¾ 250 (300-¾)			NA
LNAV/VNAV DA	809-1½ 529 (600-1½)			NA
LNAV MDA	780-1 500 (500-1)		780-1⅜ 500 (500-1⅜)	NA
C CIRCLING	960-1 680 (700-1)		960-2 680 (700-2)	NA

MIRL Rwy 12-30 L
REIL Rwys 12 and 30 L

FRESNO, CALIFORNIA
Amdt 1 10OCT19

36°44'N-119°49'W

FRESNO CHANDLER EXECUTIVE (FCH)

RNAV (GPS) RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 30

FRESNO CHANDLER EXECUTIVE (FCH)

APP CRS	Rwy Idg	3089
291°	TDZE	280
	Apt Elev	280

RNP APCH.

Straight-in Rwy 30 NA at night, Circling Rwy 30 NA at night.
Rwy 30 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct FRAME and hold.

AWOS-3	FRESNO APP CON	CLNC DEL	UNICOM
135.225	119.0 323.25	119.0	123.0 (CTAF)

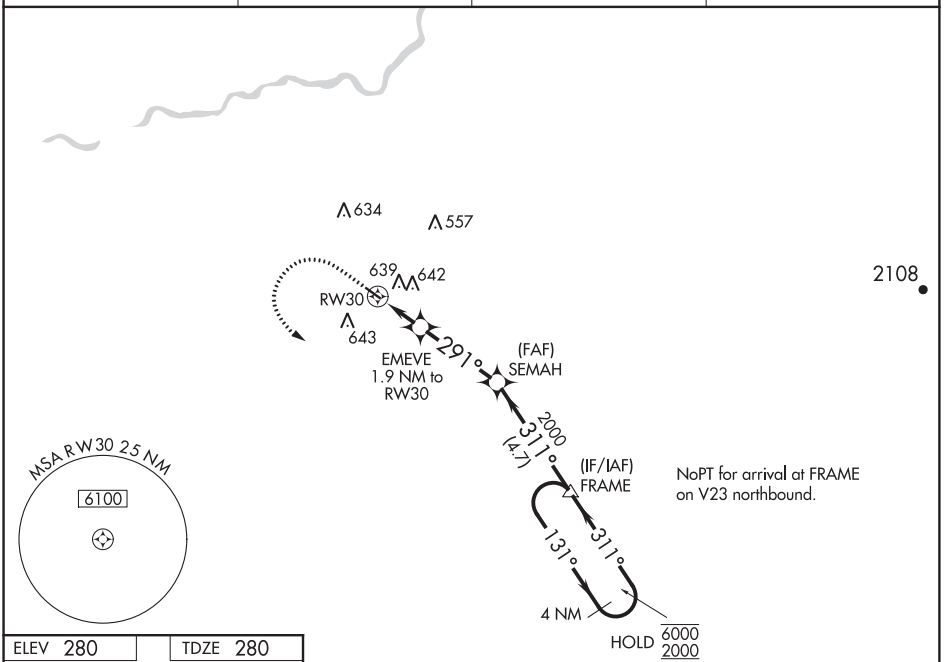

ELEV 280	TDZE 280



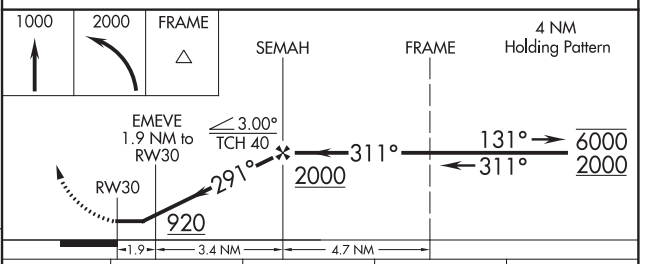

CATEGORY	A	B	C	D
LNAV MDA	800-1	520 (600-1)	800-1⅜ 520 (600-1⅜)	NA
C CIRCLING	960-1	680 (700-1)	960-2 680 (700-2)	NA

MIRL Rwy 12-30
REIL Rwys 12 and 30

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19115

AIRPORT DIAGRAM

FRESNO CHANDLER EXECUTIVE (FCH)
FRESNO, CALIFORNIA

AL-161 (FAA)

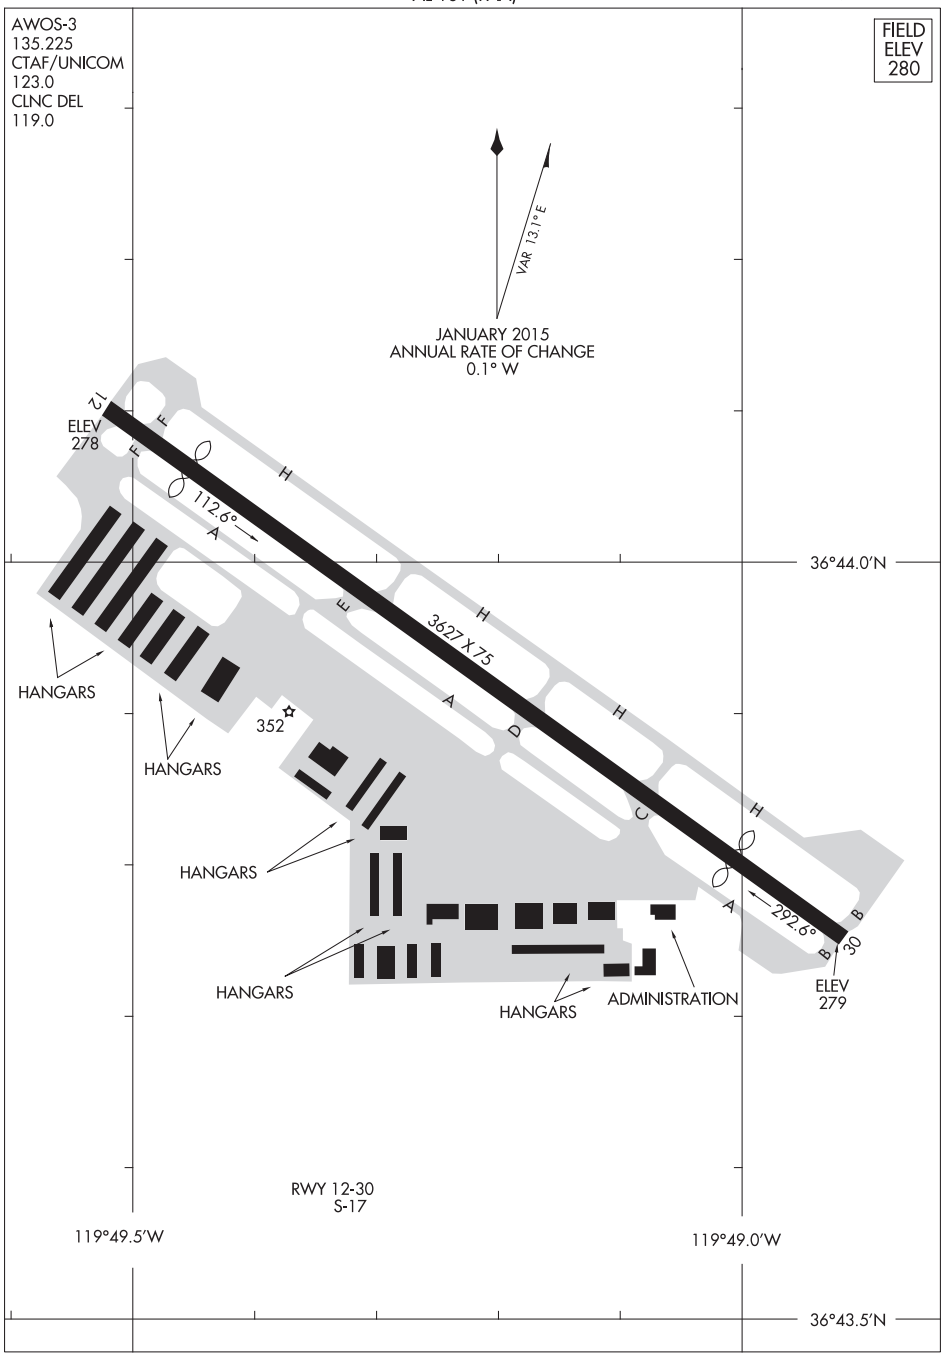

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM

19115

FRESNO, CALIFORNIA
FRESNO CHANDLER EXECUTIVE (FCH)

ILS Y or LOC Y RWY 29R

FRESNO YOSEMITE INTL (FAT)

LOC/DME I-FAT	APP CRS		29R	29L
111.3	292°	Rwy Idg	9227	8008
Chan 50		TDZE	333	331
		Apt Elev	336	336

DME required.

T A For inop ALS, increase S-ILS 29R Cat E visibility to RVR 4000 and S-LOC 29R Cat E visibility to RVR 5500. Hold in lieu of PT NA for Cat E aircraft.

ALSF-2 Rwy 29R

MISSED APPROACH: Climb to 800 then climbing right turn to 5500 on heading 330° and FRA VORTAC R-222 to NIVEE INT/FRA 8 DME and hold, continue climb-in-hold to 5500.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

MISSED APCH FIX
NIVEE INT
FRA 8
114.2 HYP R-094 Chan 89
115.6 FRA Chan 103
042°
222°
R-222

FRIANT
115.6 FRA Chan 103

Procedure NA for arrivals at FRA VORTAC on V230 northeast bound.

LOCALIZER 111.3
I-FAT Chan 50

ZEMUX FRA 18

WILAB I-FAT 3.1

STORI I-FAT 6.1

(IF/IAF) SANGO I-FAT 12.6

(IAF) ALTTA I-FAT 24.1

HOLD 6000 2800

1 min (200K) 292° 112°

2800 NoPT 292° (11.5)

1800 292° (6.5)

4700 155° (18)

R-155

3000 155° (8.7)

M.SA FRA 25 NM
120° 12000
320° 4700

2200±
782
416±
557
505
442
432
634
3112
2108

ALTERNATE MISSED APCH FIX
BLEAR PXN 29.5
112.6 PXN R-061 Chan 73
241°
061°

ELEV 336 D TDZE 29R 333 TDZE 29L 331



REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

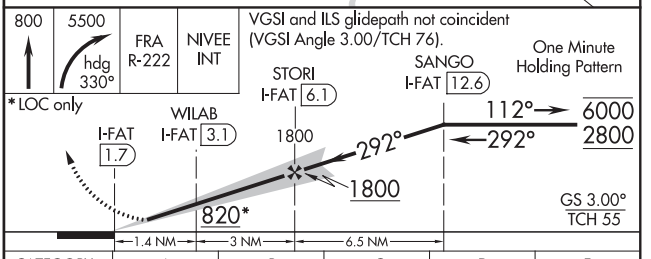

CATEGORY	A	B	C	D	E
S-ILS 29R	533/18 200 (200-½)				
S-LOC 29R	700/24 367 (400-½)		700/35 367 (400-⅝)		
SIDESTEP RWY 29L	700/55 369 (400-1)		700-1½ 369 (400-1½)	700-2 369 (400-2)	
C CIRCLING	820-1 484 (500-1)		920-1½ 584 (600-1½)	920-2 584 (600-2)	1140-2¾ 804 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

FRESNO, CALIFORNIA | AL-162 (FAA) | 19311

LOC/DME I-FAT	APP CRS	Rwy Idg	9227
111.3	292°	TDZE	333
Chan 50		Apt Elev	336

ILS Y RWY 29R (SA CAT I)

FRESNO YOSEMITE INTL (FAT)

DME required.

Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DH.

ALSF-2

MISSED APPROACH: Climb to 800 then climbing right turn to 5500 on heading 330° and FRA VORTAC R-222 to NIVEE INT/FRA 8 DME and hold, continue climb-in-hold to 5500.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

MISSED APCH FIX
NIVEE INT
FRA 8
114.2 HYP R-094 Chan 89
115.6 FRA Chan 103
R-222 042° 222°

FRIANT
115.6 FRA Chan 103

Procedure NA for arrivals at FRA VORTAC on V230 northeast bound.

2200±
MSA FRA 25 NM
120° 12000 320° 4700
3112
4700
155° (18)
R-155
3000
155° (8.7)
782
416±
557
505
442
432
634
2108
LOCALIZER 111.3
I-FAT
Chan 50
ZEMUX
FRA 18
STORI
I-FAT 6.1
1800
292° (6.5)
(IF/IAF)
SANGO
I-FAT 12.6
1 min (200K)
292°
112°
HOLD 6000 2800
(IAF)
ALTTA
I-FAT 24.1
2800 NoPT
292° (11.5)

ALTERNATE MISSED APCH FIX
BLEAR
PXN
29.5
112.6 PXN R-061 Chan 73
241°
061°

ELEV 336 | D | TDZ 333

362
11L
11R
371
9239 X 150
8008 X 150
391
TWR
445
363
29L
29R
404

800	5500 hdg 330°	FRA R-222	NIVEE INT

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 76).

STORI
I-FAT 6.1
SANGO
I-FAT 12.6
One Minute Holding Pattern
1800
292°
112°
292°
6000
2800
1800
GS 3.00°
TCH 55
1049'
4.4 NM
6.5 NM

CATEGORY	A	B	C	D
S-ILS 29R	RA 151/14 150 DA 483			

REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

SA CATEGORY I ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

ILS Y RWY 29R (CAT II & III)

FRESNO YOSEMITE INTL (FAT)

LOC/DME I-FAT	APP CRS	Rwy Idg	9227
111.3	292°	TDZE	333
Chan 50		Apt Elev	336

DME required.

CAT II: RVR 1000 authorized with specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

ALSF-2

MISSED APPROACH: Climb to 800 then climbing right turn to 5500 on heading 330° and FRA VORTAC R-222 to NIVEE INT/FRA 8 DME and hold, continue climb-in-hold to 5500.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

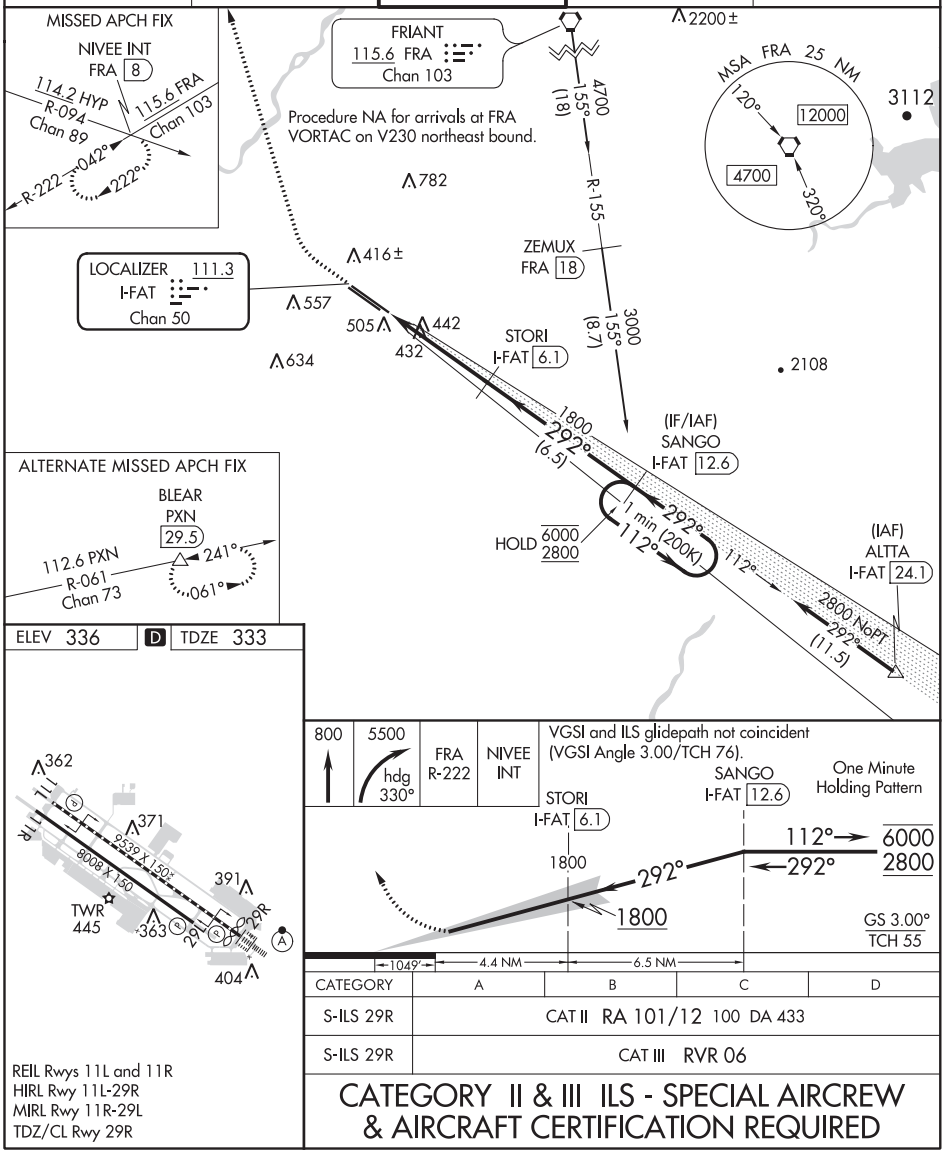

CATEGORY	A	B	C	D
S-ILS 29R	CAT II RA 101/12 100 DA 433			
S-ILS 29R	CAT III RVR 06			

REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 11L

FRESNO YOSEMITE INTL (FAT)

WAAS	APP CRS	Rwy Idg	9279
CH 77505	112°	TDZE	336
W11A		Apt Elev	336

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C .

MISSED APPROACH: Climb to 2600 direct SANGO and hold.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

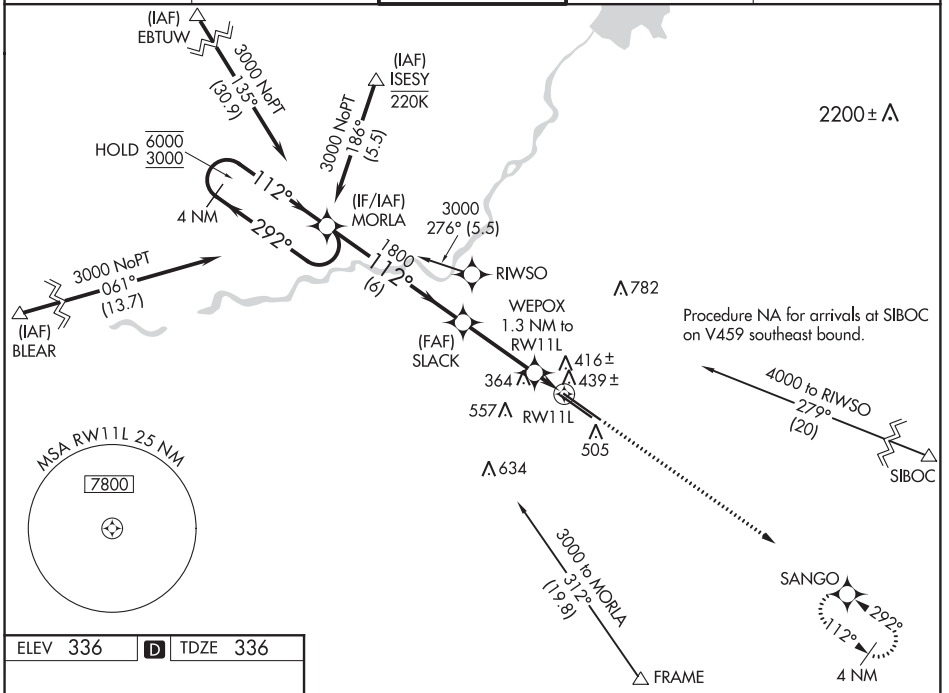



REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

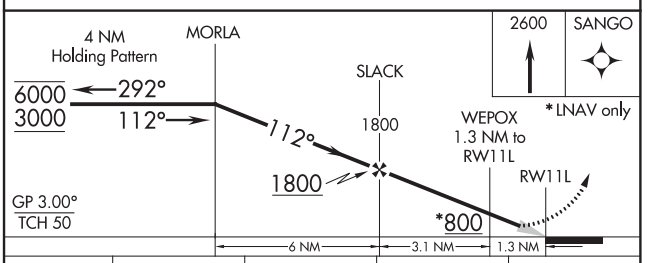

CATEGORY	A	B	C	D
LPV DA	536/40 200 (200-¾)			
LNAV/VNAV DA	620/45 284 (300-⅞)			
LNAV MDA	700/55 364 (400-1)			
C CIRCLING	820-1 484 (500-1)		920-1½ 584 (600-1½)	920-2 584 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS CH 78330 W11B	APP CRS 112°	Rwy Idg 8008 TDZE 333 Apt Elev 336

RNAV (GPS) RWY 11R

FRESNO YOSEMITE INTL (FAT)

RNP APCH.

T Rwy 11R helicopter reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C.

MISSED APPROACH: Climb to 2600 direct IPUJE and hold.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

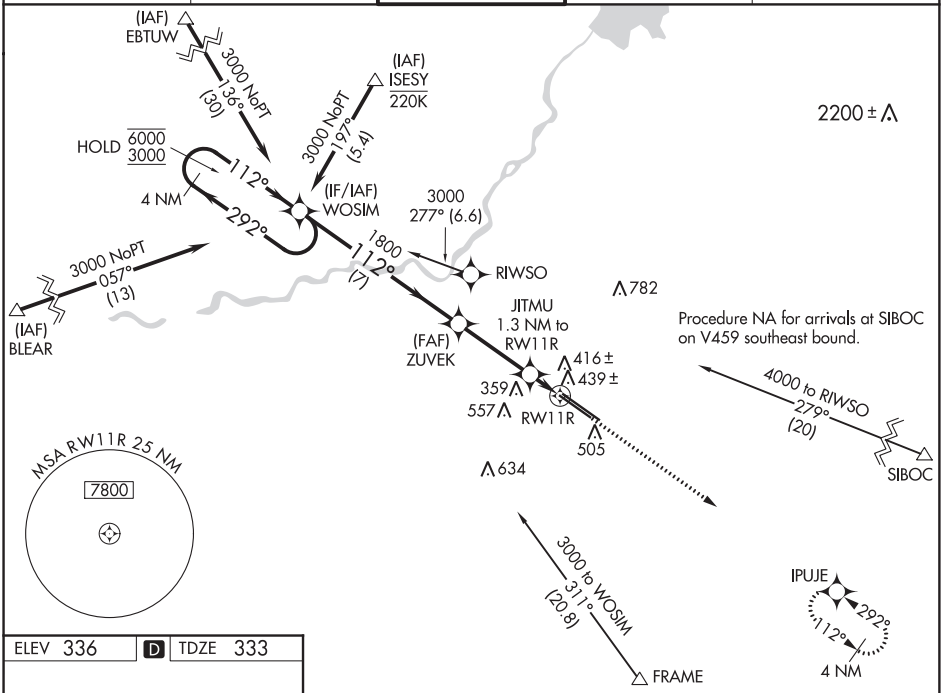

ELEV 336	D	TDZE 333



REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

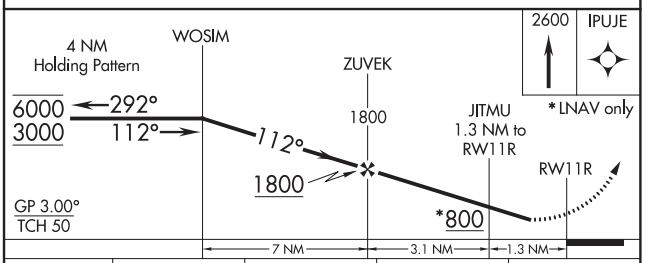

CATEGORY	A	B	C	D
LPV DA	584-¾ 251 (300-¾)			
LNAV/VNAV DA	620-⅞ 287 (300-⅞)			
LNAV MDA	700-1 367 (400-1)			
C CIRCLING	820-1 484 (500-1)		920-1½ 584 (600-1½)	920-2 584 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

FRESNO, CALIFORNIA | AL-162 (FAA) | 19171

WAAS	APP CRS	Rwy Idg	8008
CH 50530	292°	TDZE	331
W29B		Apt Elev	336

RNAV (GPS) RWY 29L

FRESNO YOSEMITE INTL (FAT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct WOSIM and hold.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

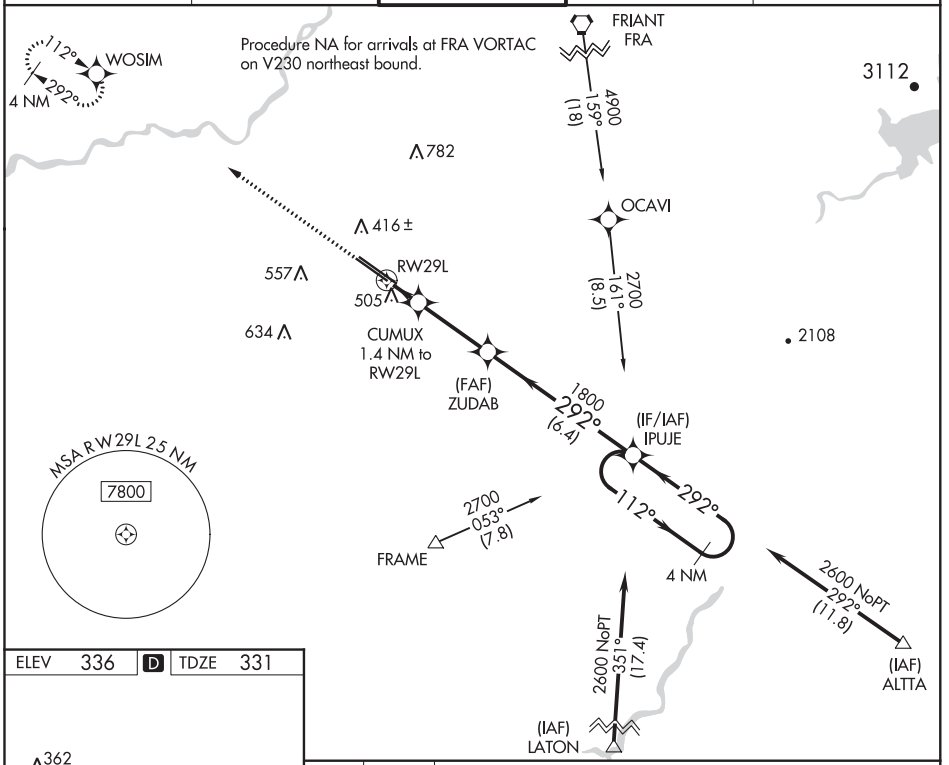

ELEV 336 | D | TDZE 331



REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

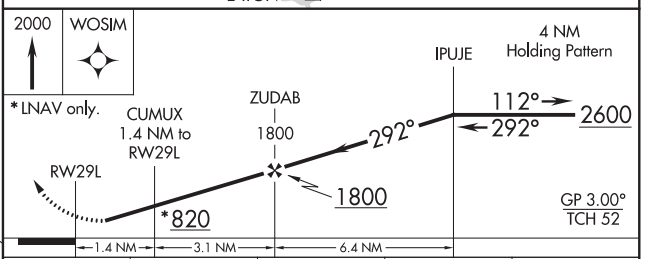

CATEGORY	A	B	C	D
LPV DA	581-¾ 250 (300-¾)			
LNAV/VNAV DA	667-1⅛ 336 (400-1⅛)			
LNAV MDA	760-1 429 (500-1)		760-1¼ 429 (500-1¼)	
C CIRCLING	820-1 484 (500-1)		920-1½ 584 (600-1½)	920-2 584 (600-2)

FRESNO, CALIFORNIA
Amdt 2B 07DEC17

36°47'N-119°43'W

FRESNO YOSEMITE INTL (FAT)
RNAV (GPS) RWY 29L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	9227
CH 81803	292°	TDZE	333
W29A		Apt Elev	336

RNAV (GPS) RWY 29R

FRESNO YOSEMITE INTL (FAT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH: Climb to 2000 direct MORLA and hold.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

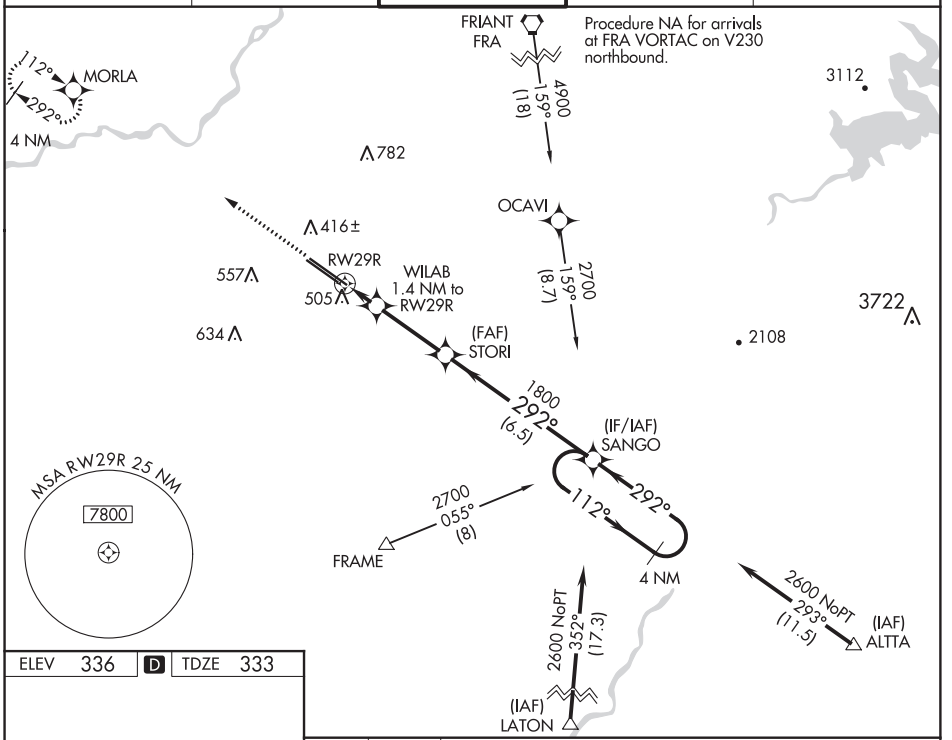

ELEV 336 | D | TDZE 333



REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

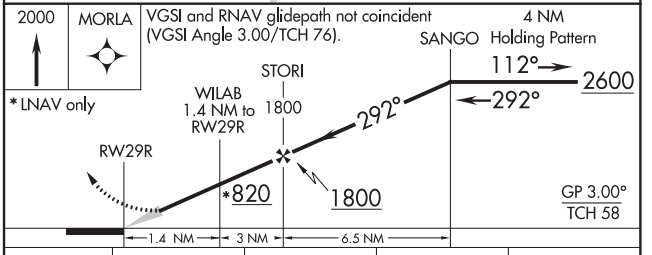

CATEGORY	A	B	C	D
LPV DA	533/18	200 (200-½)		
LNAV/VNAV DA	689/30	356 (400-⅝)		
LNAV MDA	760/24	427 (500-½)	760/40	427 (500-¾)
C CIRCLING	820-1	484 (500-1)	920-1½ 584 (600-1½)	920-2 584 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

FRESNO, CALIFORNIA AL-162 (FAA) 20030

LOC/DME I-RPW	APP CRS		11L	11R
111.3	112°	Rwy Idg	9279	8008
Chan 50		TDZE	336	333
		Apt Elev	336	336

LOC Y RWY 11L

FRESNO YOSEMITE INTL (FAT)

DME required.

MISSED APPROACH: Climb to 2000 then climbing right turn to 4900 on heading 300° and PXN VORTAC R-061 to BLEAR INT/PXN VORTAC 29.5 DME and hold.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

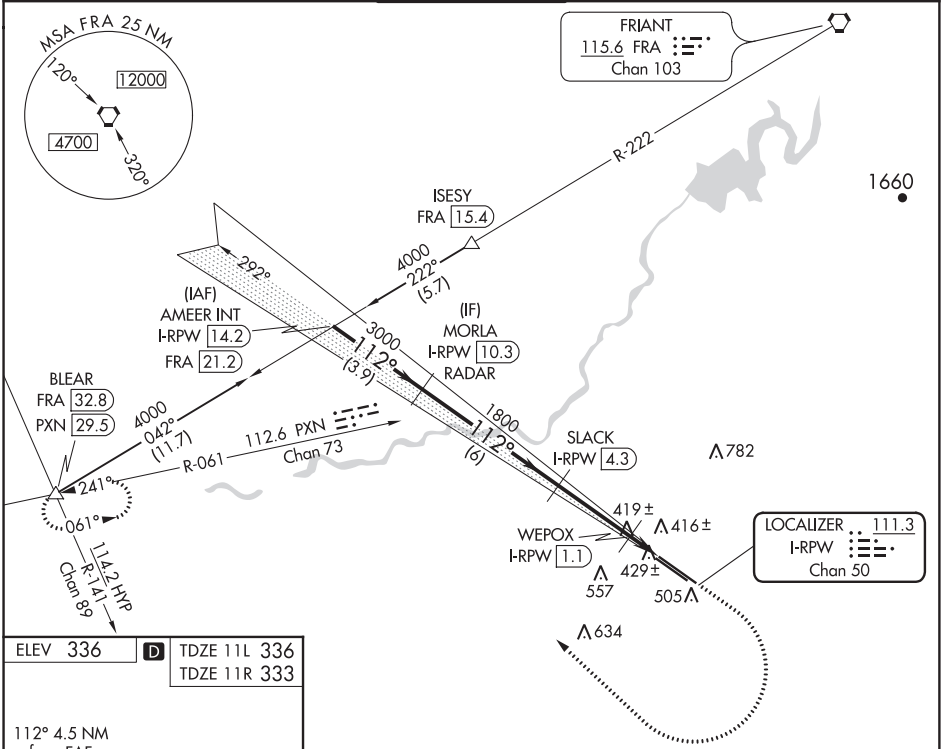

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 336 D TDZE 11L 336 TDZ 11R 333

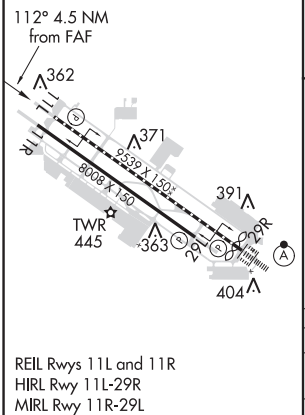

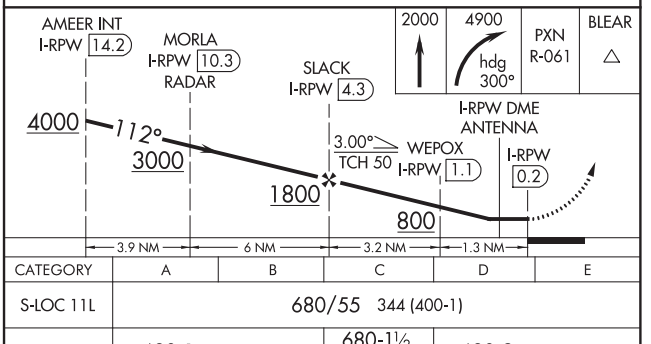

CATEGORY	A	B	C	D	E
S-LOC 11L	680/55 344 (400-1)				
SIDESTEP 11R	680-1 347 (400-1)		680-1½ 347 (400-1½)	680-2 347 (400-2)	

REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

TACAN RWY 11L

FRESNO YOSEMITE INTL (FAT)

TACAN CZQ Chan 76 (112.9)	APP CRS 131°		11L	11R
		Rwy Idg	9279	8008
		TDZE	336	333
		Apt Elev	336	336

DME required.

Rwy 11L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing left turn to 2000 on CZQ TACAN R-124 to SELMA/CZQ 18.6 DME and hold.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

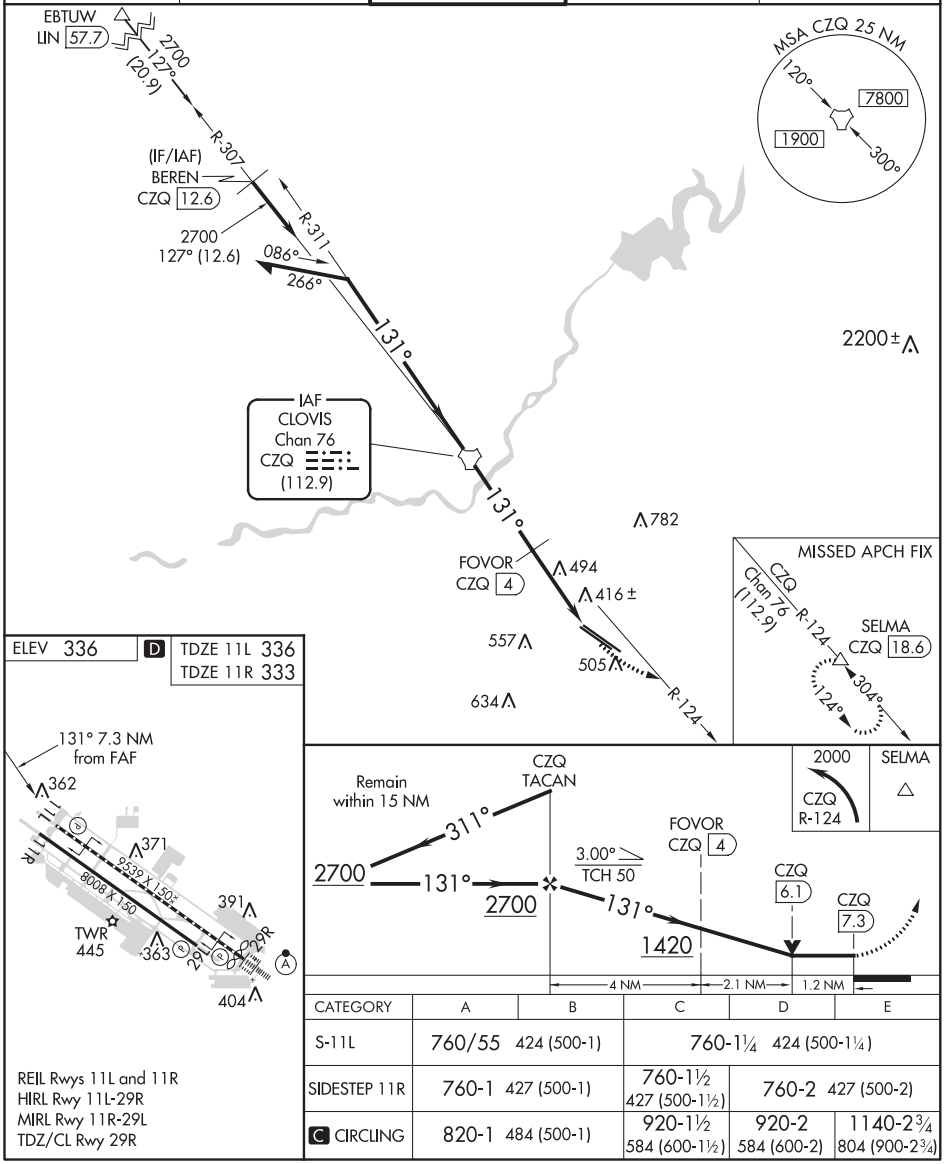

CATEGORY	A	B	C	D	E
S-11L	760/55 424 (500-1)		760-1¼ 424 (500-1¼)		
SIDESTEP 11R	760-1 427 (500-1)		760-1½ 427 (500-1½)	760-2 427 (500-2)	
C CIRCLING	820-1 484 (500-1)		920-1½ 584 (600-1½)	920-2 584 (600-2)	1140-2¾ 804 (900-2¾)

REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

FRESNO, CALIFORNIA AL-162 (FAA) 20030

TACAN RWY 29R

FRESNO YOSEMITE INTL (FAT)

TACAN	APP CRS		29R	29L
CZQ Chan 76 (112.9)	307°	Rwy Idg	9227	8008
		TDZE	333	331
		Apt Elev	336	336

T Rwy 29R helicopter visibility reduction below RVR 4000 NA.
A For inop ALS, increase S-29R Cat A/B visibility to RVR 5500 and Cat E visibility to 1¼ mile.

ALSF-2 Rwy 29R (A)

MISSED APPROACH: Climb to 5500 on heading 330° and FRA VORTAC R-222 to NIVEE INT/FRA 8 DME and hold, continue climb-in-hold to 5500.

ATIS	FRESNO APP CON	FRESNO TOWER	GND CON	CLNC DEL
121.35 273.6	119.6 351.95	118.2 251.1	121.7 348.6	124.35 348.6

OXVEV CZQ 7
R-222 115.6 FRA Chan 103
FRIANT 115.6 FRA Chan 103
Procedure NA for arrivals at FRA VORTAC on V459 northwest bound.
5500 161° (28.3)
CLOVIS Chan 76 CZQ (112.9)
R-127
782
416±
557
505
634
R-161
2108
JULTI CZQ 10.6
URFEZ CZQ 13.1
1800 (6)
307°
(IF/IAF) IXDEB CZQ 19.1
1 min
127°
307°
R-127
HOLD 6000 2000

MISSED APCH FIX
NIVEE INT FRA 8
114.2 HYP R-094 Chan 89
115.6 FRA Chan 103
R-222–042°
222°

ALTERNATE MISSED APCH FIX
OXVEV CZQ 7
127°
307°
R-307 CZQ Chan 76 (112.9)

MSA CZQ 25 NM
120°
7800
1900
300°

ELEV 336 D TDZE 29R 333 TDZE 29L 331

362
371
391
9239 X 150
8008 X 150
TWR 445
363
404
29R

307° 4.4 NM from FAF

5500 hdg 330°	FRA R-222	NIVEE INT

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 76).

One Minute Holding Pattern

CZQ 8.7 — CZQ 9.8 — JULTI CZQ 10.6 — 3.03° TCH 55 — URFEZ CZQ 13.1 — IXDEB CZQ 19.1

980 — 1800 — 307° — 127° 6000 — 307° 2000

1.1 NM | 0.8 NM | 2.5 NM | 6 NM

CATEGORY	A	B	C	D	E
S-29R	760/40 427 (500-¾)				
SIDESTEP 29L	760/55 429 (500-1)		760-1½ 429 (500-1½)	760-2 429 (500-2)	
C CIRCLING	820-1 484 (500-1)		920-1½ 584 (600-1½)	920-2 584 (600-2)	1140-2¾ 804 (900-2¾)

REIL Rwys 11L and 11R
HIRL Rwy 11L-29R
MIRL Rwy 11R-29L
TDZ/CL Rwy 29R

FRESNO, CALIFORNIA Amdt 3 10OCT19

36°47'N-119°43'W

FRESNO YOSEMITE INTL (FAT)

TACAN RWY 29R

SW-2, 30 JAN 2020 to 26 MAR 2020

ATIS 121.35 273.6
FRESNO TOWER 118.2 251.1
GND CON 121.7 348.6
CLNC DEL 124.35 348.6
D
RWY 11L-29R PCN 75 F/A/X/T S-70, D-170, 2S-175, 2D-250
RWY 11R-29L PCN 44 F/A/X/T S-70, D-170, 2S-175, 2D-250
VAR 13.1°E
JANUARY 2015
ANNUAL RATE OF CHANGE 0.1° W
USAF RAMP
MARINE DETACHMENT
AIR CARGO
U.S. FORESTRY
850 X 150
ELEV 332
BAK-14/12B
292.3°
BLAST PAD 1000 X 150
ELEV 330
9539 X 150
8008 X 150
FIELD ELEV 336
ELEV 328
NG RAMP
ANG HANGAR
AIR CARRIER PASSENGER TERMINAL
TWR 445
FIRE STATION
GENERAL AVIATION PARKING
FSDO
1000 X 150
ELEV 333
112.3°
112.2°
CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.
119°42'W
119°43'W
119°44'W
36°47'N
36°46'N

(BULL3.NTELL) 18200

BULLDOG THREE DEPARTURE

AL-162 (FAA)

FRESNO YOSEMITE INTL (FAT)
FRESNO, CALIFORNIA

ATIS
121.35 273.6
CLNC DEL
124.35 348.6
GND CON
121.7 348.6
FRESNO TOWER
118.2 251.1
FRESNO DEP CON
132.35 323.25

TOP ALTITUDE: ASSIGNED BY ATC



TAKEOFF MINIMUMS
Rwys 11L/R, 29L/R: Standard.

NOTE: RADAR required.

FRAME △
N36°36.78′
W119°40.43′
L-3-9

TULE
109.2 TTE
Chan 29
N35°54.78′-W119°01.25′
L-3-7, H-4

AVENAL
117.1 AVE
Chan 118
N35°38.82′-W119°58.72′
L-3-7, H-4

SHAFTER
115.4 EHF
Chan 101
N35°29.07′-W119°05.84′
L-3-7, H-4

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 11L/R: Climb heading 112° thence. . . .

TAKEOFF RUNWAYS 29L/R: Climb heading 292° thence. . . .

. . . .maintain ATC assigned altitude; expect clearance to filed altitude five minutes after departure.

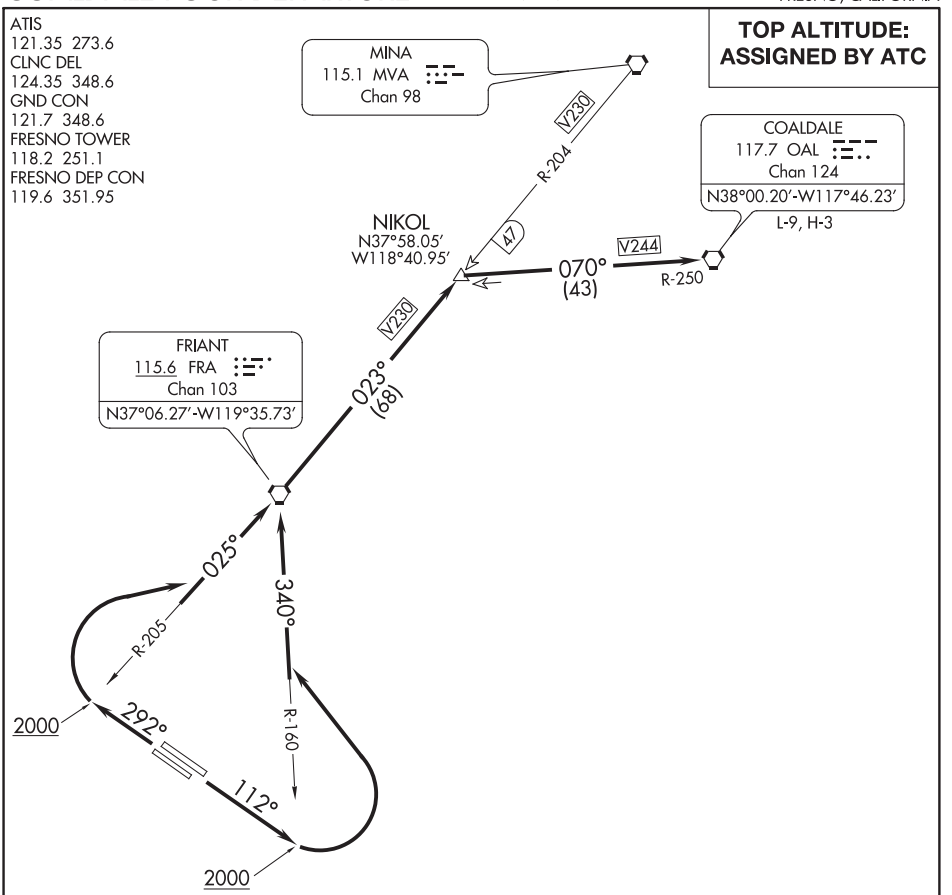

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 11L/R: Climb on heading 112° to 2000', then climbing left turn to intercept FRA R-160 to FRA VORTAC, thence. . . .

TAKEOFF RUNWAYS 29L/R: Climb on heading 292° to 2000', then climbing right turn to intercept FRA R-205 to FRA VORTAC, thence. . . .

. . . .continue climb to 14300 on FRA VORTAC R-023 and MVA VORTAC R-204 to NIKOL INT and on OAL VORTAC R-250 to OAL VORTAC. Maintain ATC assigned altitude.

(YOSE3.NTELL) 18200

YOSEMITE THREE DEPARTURE

AL-162 (FAA)

FRESNO YOSEMITE INTL (FAT)
FRESNO, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

TOP ALTITUDE: ASSIGNED BY ATC

ATIS
121.35 273.6
CLNC DEL
124.35 348.6
GND CON
121.7 348.6
FRESNO TOWER
118.2 251.1
FRESNO DEP CON
119.6 351.95

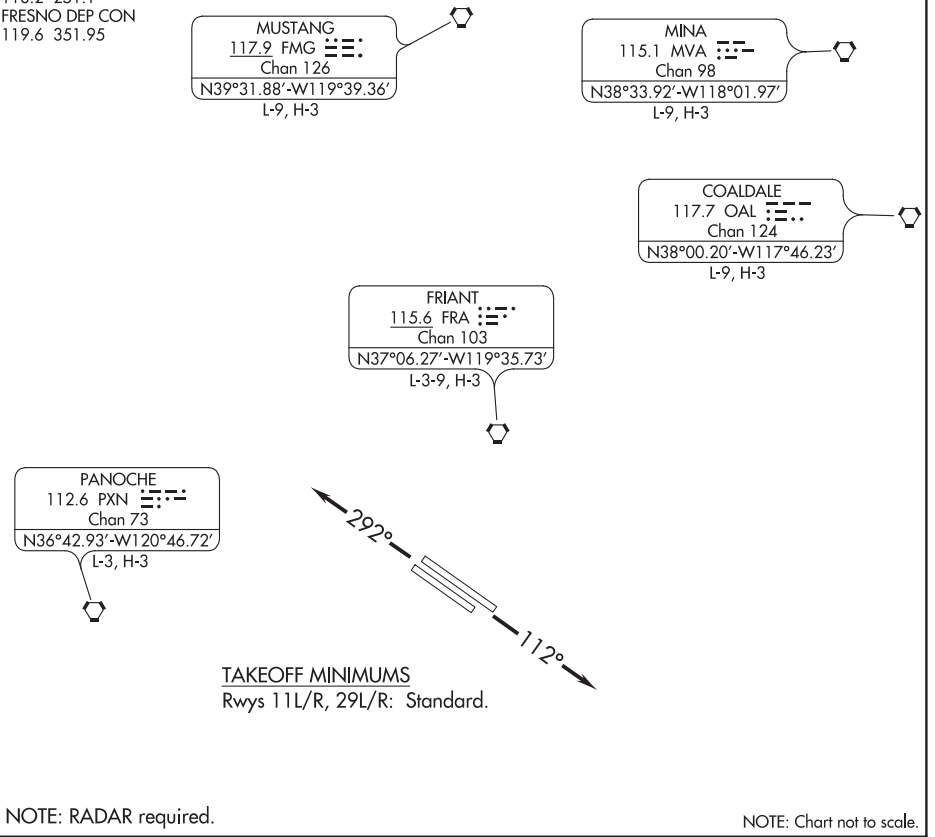

TAKEOFF MINIMUMS
Rwys 11L/R, 29L/R: Standard.

NOTE: RADAR required.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 11L/R: Climb heading 112°, thence. . . .

TAKEOFF RUNWAYS 29L/R: Climb heading 292°, thence. . . .

. . . .maintain ATC assigned altitude; expect clearance to filed altitude five minutes after departure.

LOST COMMUNICATIONS: If not in contact with Fresno Departure Control within two minutes of takeoff, aircraft enroute to FRA, MVA, FMG and OAL proceed direct FRA VORTAC, cross FRA VORTAC at or above 9000, thence via assigned route to filed altitude.

WAAS	APP CRS	Rwy Idg	4657
CH **90240**	**071°**	TDZE	**3131**
W07A		Apt Elev	**3158**

RNAV (GPS) RWY 7

NEVADA COUNTY (GOO)

RNP APCH.

T A Circling NA north of Rwy 7-25. Rwy 7 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Procedure NA at night.

MISSED APPROACH: (Do not exceed 250K until MRGGO) Climb to 3900 then climbing right turn to 6000 direct MRGGO and hold.

AWOS-3	NORCAL APP CON	UNICOM
121.325	**125.4 259.1**	**122.725** (CTAF) L

4322

Procedure NA for arrivals at MRGGO on V332 northwest bound and V200 westbound.





ELEV 3158 TDZE 3131

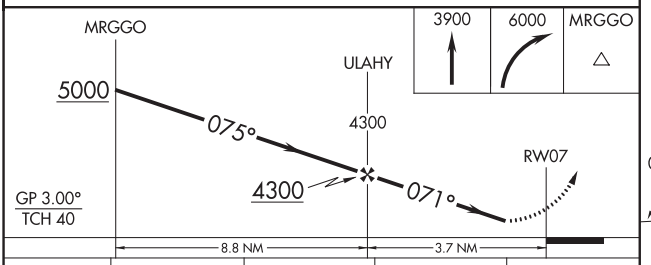



CATEGORY	A	B	C	D
LPV DA	3606-1⅜ 475 (500-1⅜)			
LNAV/VNAV DA	3772-1⅞ 641 (700-1⅞)			
LNAV MDA	3860-1 729 (800-1)		3860-2 729 (800-2)	
C CIRCLING	3860-1 702 (800-1)		3880-2 722 (800-2)	3880-2¼ 722 (800-2¼)

REIL Rwys 7 and 25
MIRL Rwy 7-25 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

GRASS VALLEY, CALIFORNIA | AL-6659 (FAA) | 20002

VOR/DME MYV	APP CRS	Rwy Idg	N/A
110.8	058°	TDZE	N/A
Chan 45		Apt Elev	3158

VOR or GPS-A

NEVADA COUNTY (GOO)

When local altimeter setting not received, use Emigrant Gap altimeter setting. Circling NA north of Rwy 7-25. Procedure NA at night.

MISSED APPROACH: Climbing right turn to 5100 on MYV R-058 to BINNT INT/MYV 13 DME and hold.

AWOS-3	NORCAL APP CON	UNICOM
121.325	125.4 259.1	122.725 (CTAF) L

DME or RADAR REQUIRED

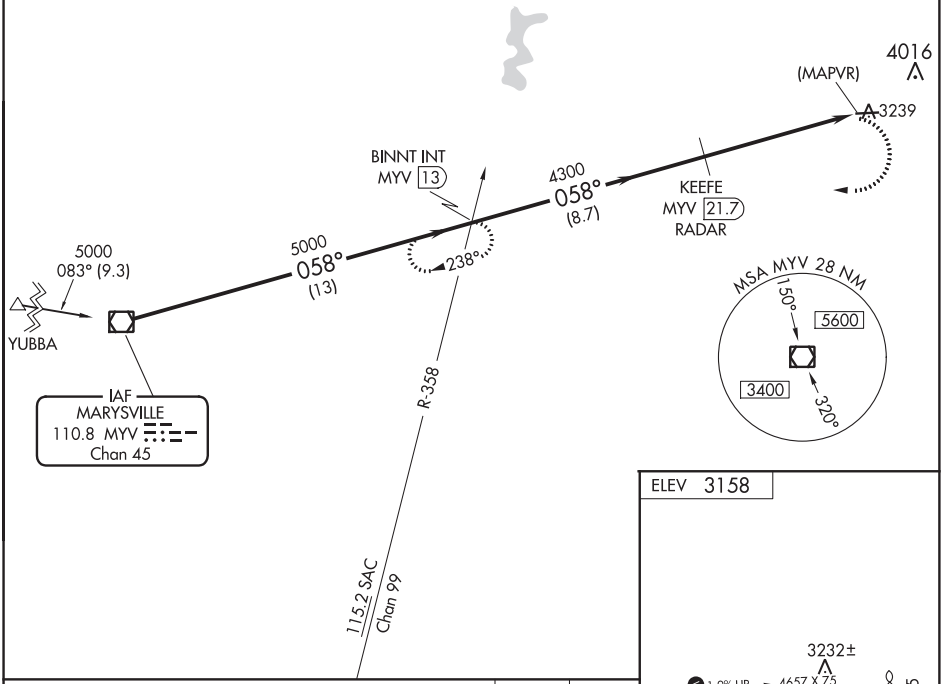

ELEV 3158



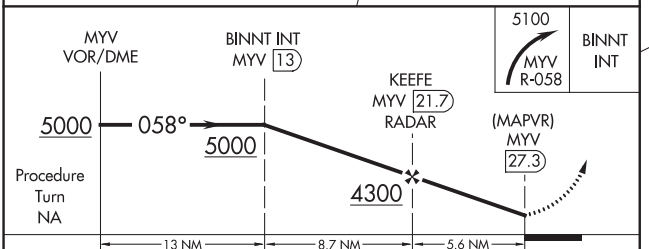

REIL Rwys 7 and 25
MIRL Rwy 7-25 L

CATEGORY	A	B	C	D
C CIRCLING	4280-1¼ 1122 (1200-1¼)	4280-1½ 1122 (1200-1½)	4280-3 1122 (1200-3)	NA

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

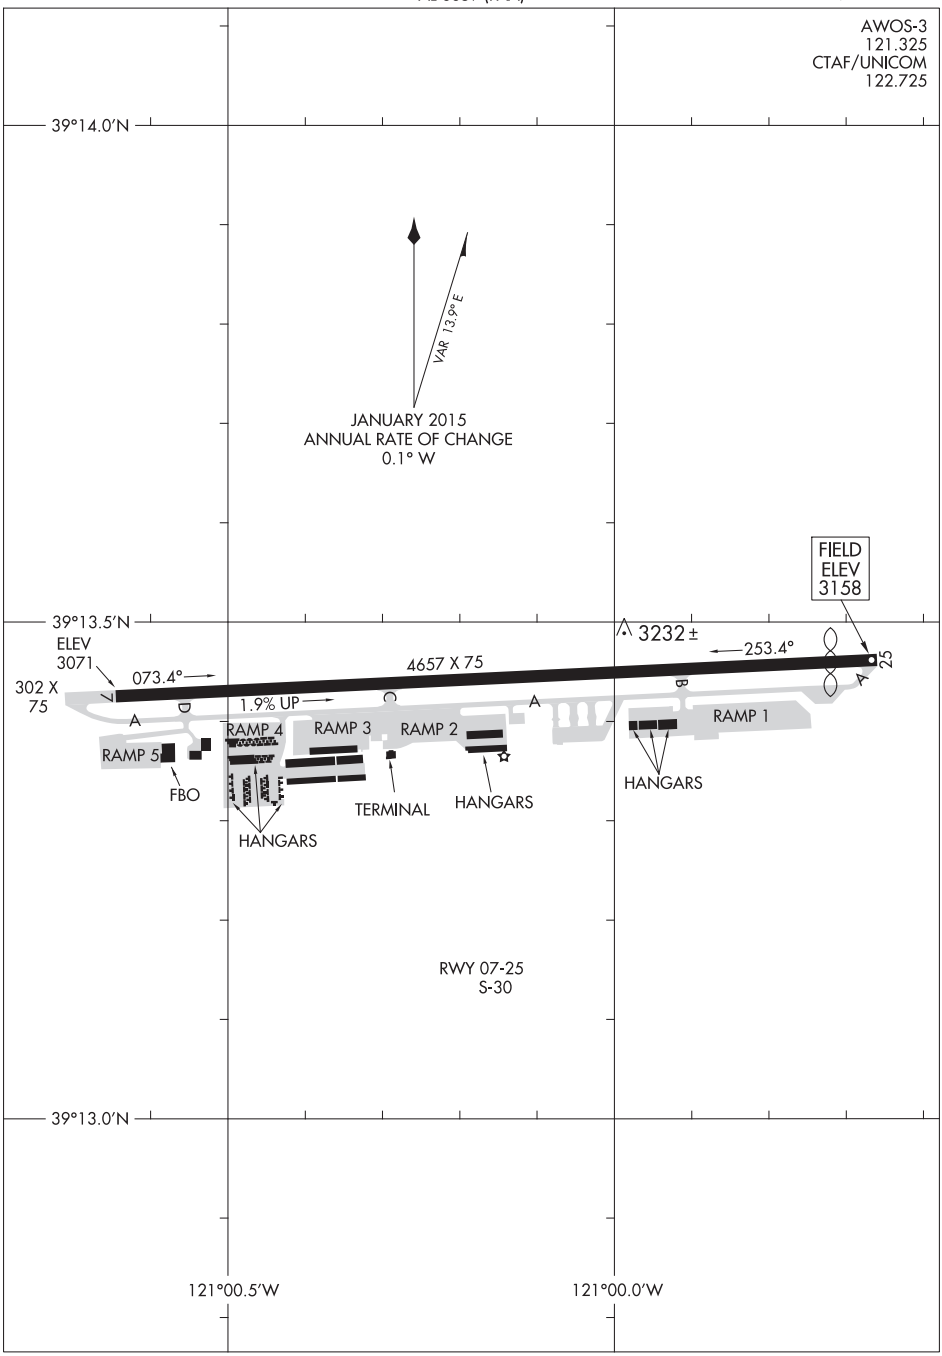

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

GROVELAND, CALIFORNIA

AL-9084 (FAA)

19227

RNAV (GPS) RWY 9

PINE MOUNTAIN LAKE (E45)

APP CRS	Rwy Idg	3624
095°	TDZE	2919
	Apt Elev	2930

RNP APCH.

Use Columbia altimeter setting; when not received, use Castle altimeter setting and increase all MDA 560 feet.

NA

MISSED APPROACH: Climbing right turn to 7000 direct HOFED and hold, continue climb-in-hold to 7000.

OAKLAND CENTER	CTAF
121.25 327.0	122.9 L

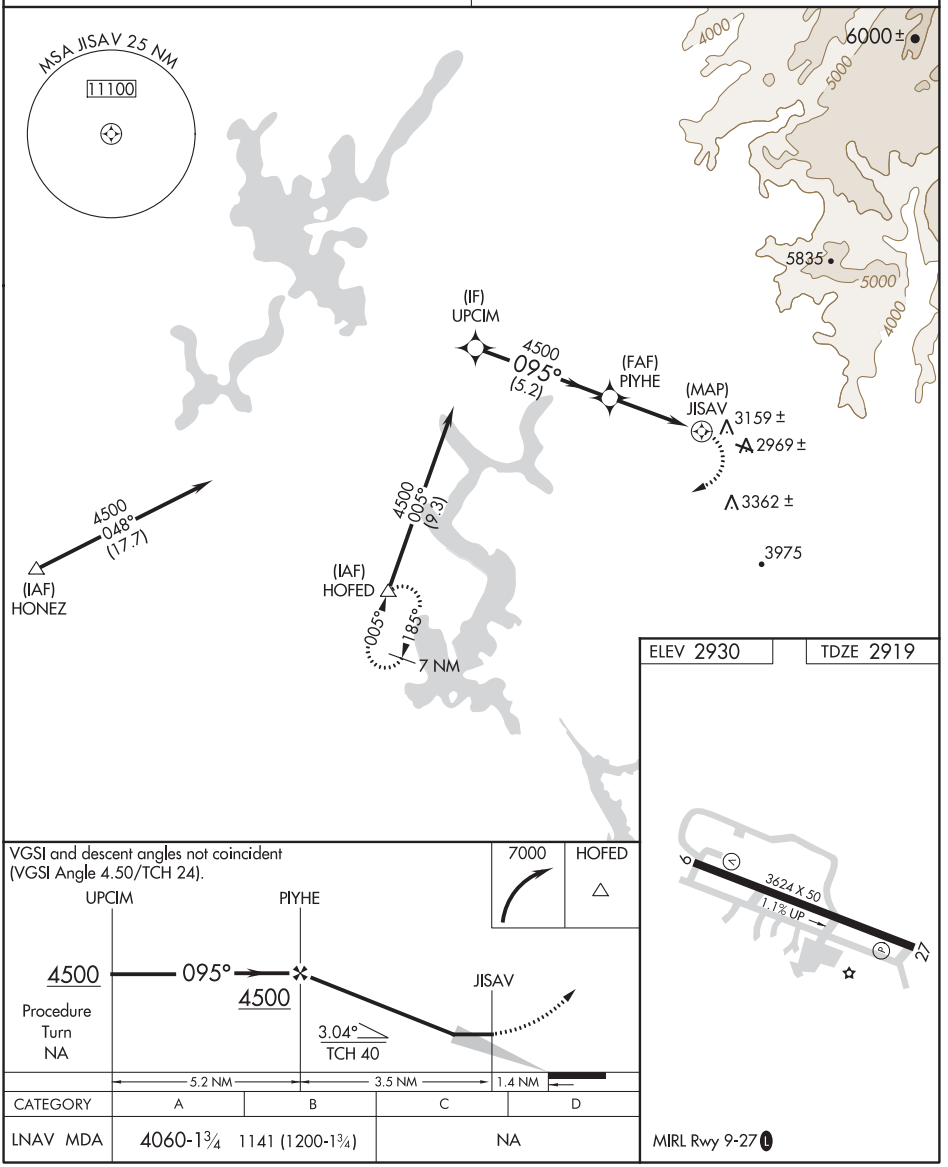

CATEGORY	A	B	C	D
LNAV MDA	4060-1¾	1141 (1200-1¾)	NA	

MIRL Rwy 9-27 L

GROVELAND, CALIFORNIA

Orig-C 15AUG19

37°52′N-120°11′W

PINE MOUNTAIN LAKE (E45)

RNAV (GPS) RWY 9

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	3624
291°	TDZE	2930
	Apt Elev	2930

GPS RWY 27
PINE MOUNTAIN LAKE (E45)

NA — Obtain local altimeter setting on CTAF; when not received, use Columbia altimeter setting.

MISSED APPROACH: Climb to 4500 on 275° course to UPCIM and hold.

OAKLAND CENTER	CTAF
121.25 327.0	122.9 L

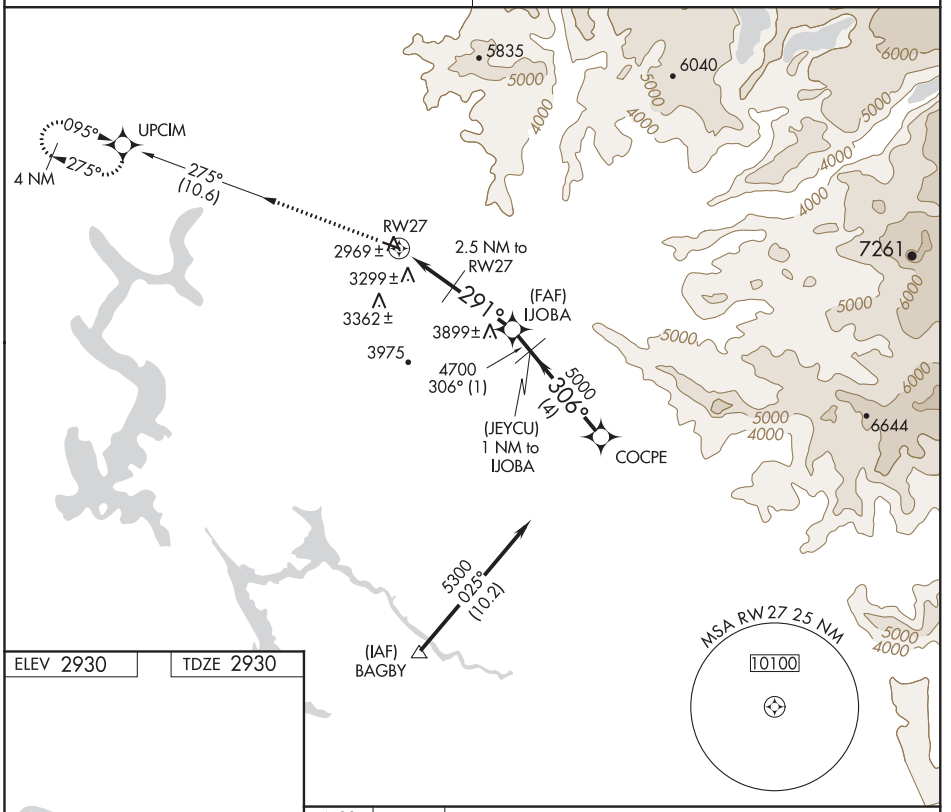

ELEV 2930 | TDZE 2930



MIRL Rwy 9-27 L

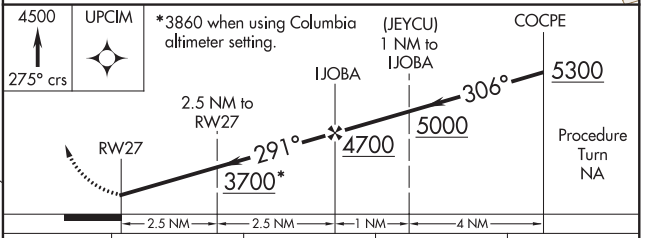

CATEGORY	A	B	C	D
S-27	3560-1 630 (700-1)		NA	
COLUMBIA ALTIMETER SETTING MINIMUMS				
S-27	3700-1 770 (800-1)	3700-1¼ 770 (800-1¼)	NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

HALF MOON BAY, CALIFORNIA AL-6675 (FAA) 19199

RNAV (GPS) RWY 12

HALF MOON BAY (HAF)

WAAS	APP CRS	Rwy Idg	4248
CH 99742	122°	TDZE	59
W12A		Apt Elev	66

RNP APCH.

Rwy 12 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C.

MISSED APPROACH: Climb to 700 then climbing right turn to 4000 direct SEEMS and hold, continue climb-in-hold to 4000.

AWOS	NORCAL APP CON	UNICOM
127.275	135.1 307.2	122.8 (CTAF) L

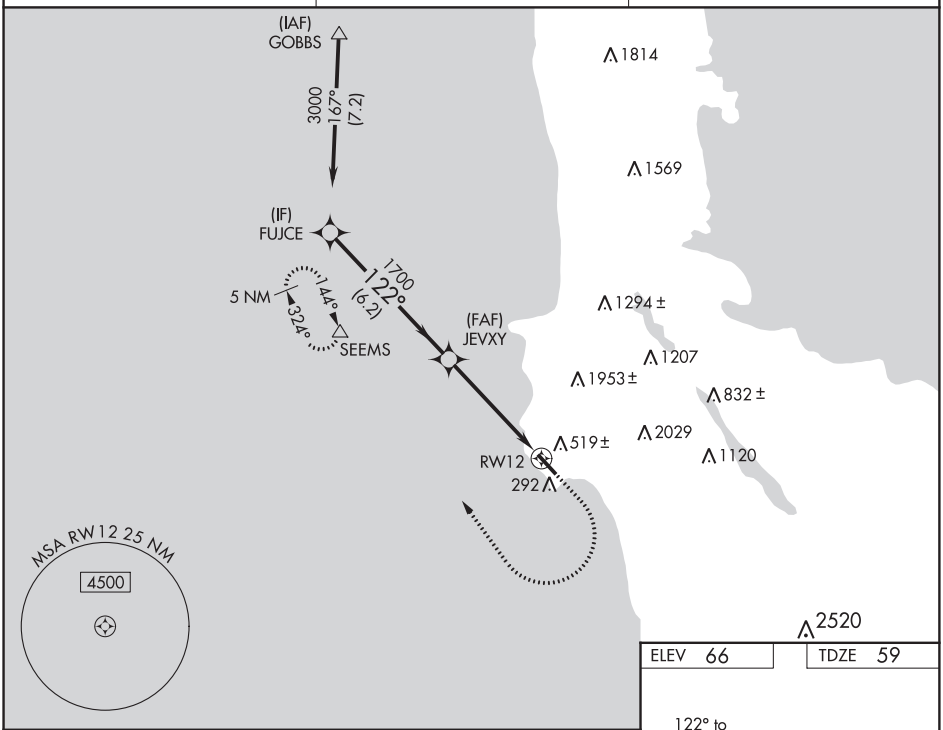

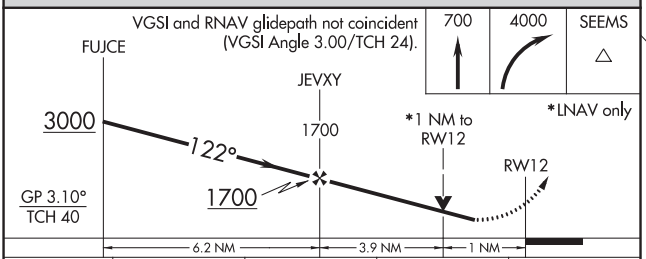

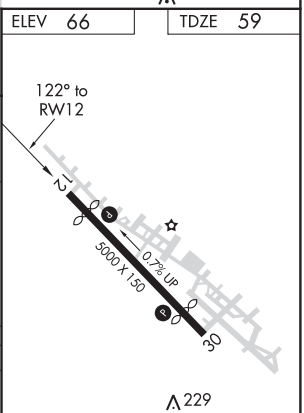

CATEGORY	A	B	C	D
LPV DA	360-⅞ 301 (300-⅞)			
LNAV/VNAV DA	652-1¾ 593 (600-1¾)			
LNAV MDA	660-1 601 (600-1)		660-1¾ 601 (600-1¾)	

REIL Rwy 30 L
MIRL Rwy 12-30 L

HALF MOON BAY, CALIFORNIA
Amdt 1A 18JUL19

37°31′N-122°30′W

HALF MOON BAY (HAF)

RNAV (GPS) RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 30

HALF MOON BAY (HAF)

WAAS	APP CRS	Rwy Idg	4238
CH 50302	302°	TDZE	54
W30A		Apt Elev	66

RNP APCH.

MISSED APPROACH: Climb to 4000 direct LAYKI and on track 267° to SEEMS and hold, continue climb-in-hold to 4000.

AWOS-3	NORCAL APP CON	UNICOM
127.275	135.1 307.2	122.8 (CTAF) L

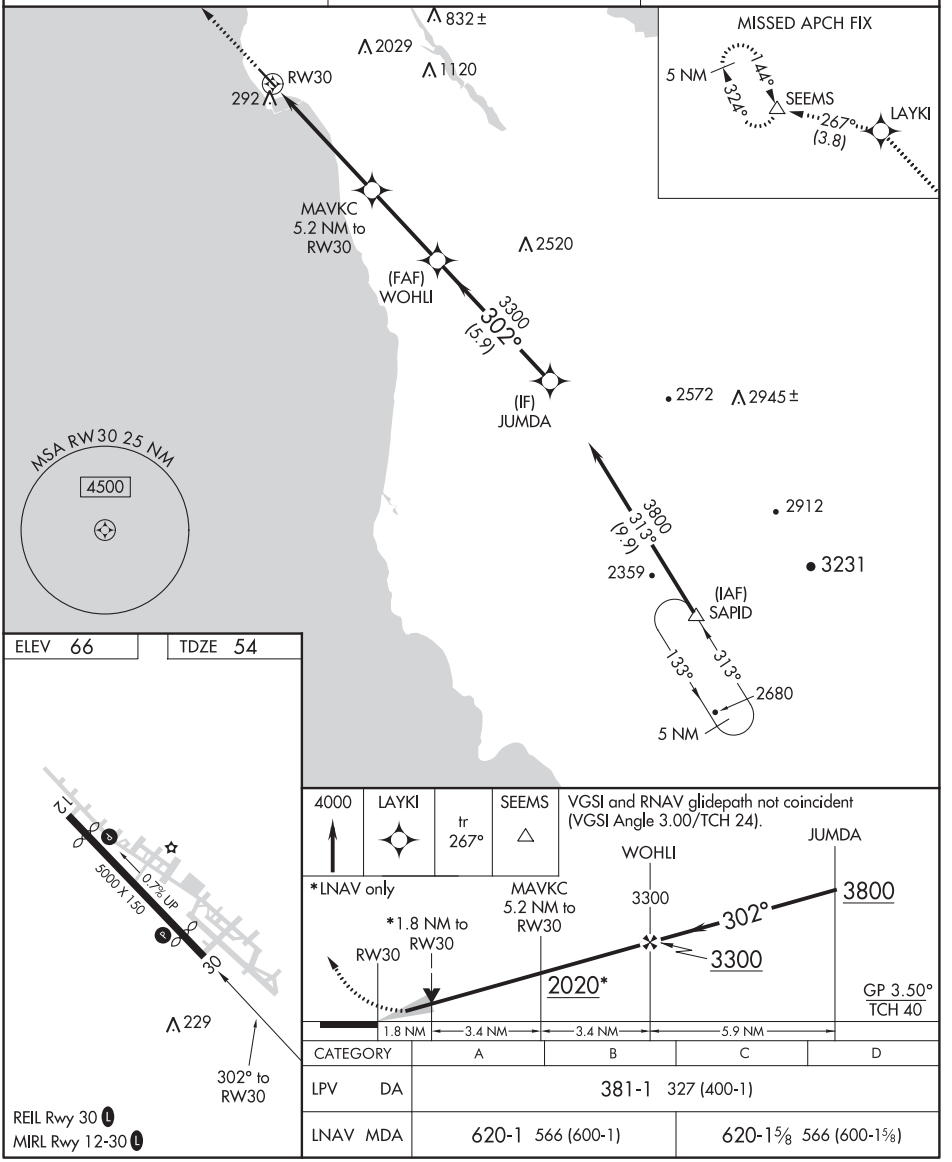

CATEGORY	A	B	C	D
LPV DA	381-1 327 (400-1)			
LNAV MDA	620-1 566 (600-1)		620-1⅝ 566 (600-1⅝)	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

HANFORD, CALIFORNIA AL-5736 (FAA) 19311

RNAV (GPS) RWY 32

HANFORD MUNI (HJO)

WAAS CH 70344 W32A	APP CRS 318°	Rwy Idg 5179 TDZE 238 Apt Elev 240

RNP APCH.

T Rwy 32 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.

MISSED APPROACH: Climb to 700 then climbing right turn to 2000 direct OYUGO and hold, continue climb-in-hold to 2000.

ASOS	FRESNO APP CON	CLNC DEL	UNICOM
134.75	123.9	123.9	122.8 (CTAF) L

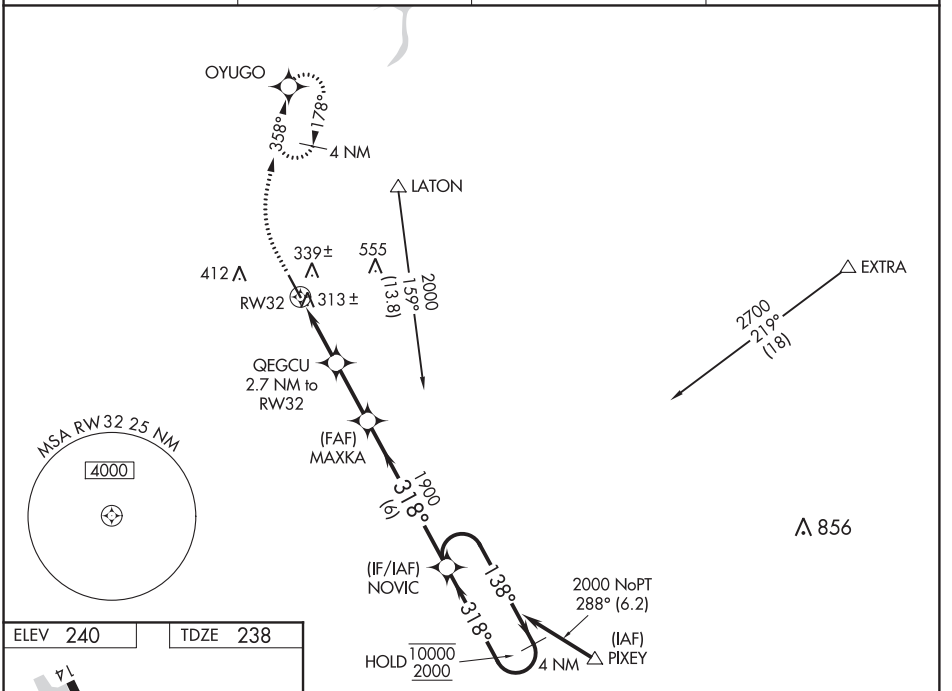

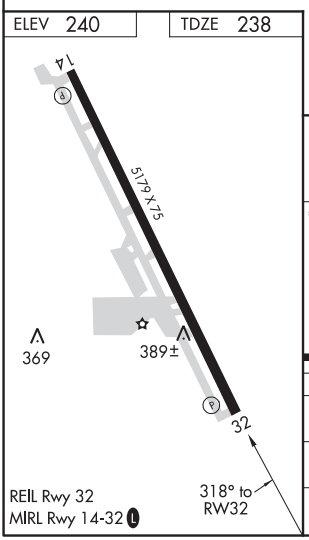

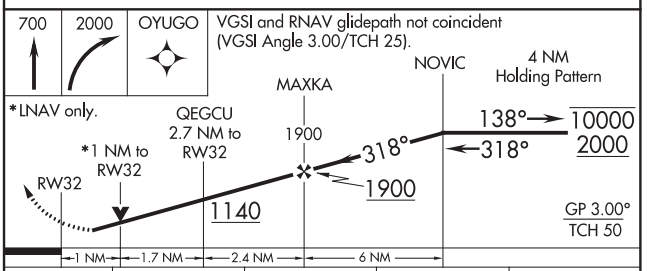

CATEGORY	A	B	C	D
LPV DA	488-¾ 250 (300-¾)			NA
LNAV/VNAV DA	488-¾ 250 (300-¾)			NA
LNAV MDA	580-1 342 (400-1)		580-1½ 342 (400-1½)	NA

HANFORD, CALIFORNIA
Amdt 2A 07NOV19

36°19′N-119°38′W

HANFORD MUNI (HJO)

RNAV (GPS) RWY 32

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS)-B

HANFORD MUNI (HJO)

APP CRS	Rwy Idg	N/A
137°	TDZE	N/A
	Apt Elev	240

RNP APCH.

Circling Rwy 14 NA at night.

MISSED APPROACH: Climb to 3100 direct MAXKA and on track 122° to PIXEY and hold.

ASOS	FRESNO APP CON	CLNC DEL	UNICOM
134.75	123.9	123.9	122.8 (CTAF)

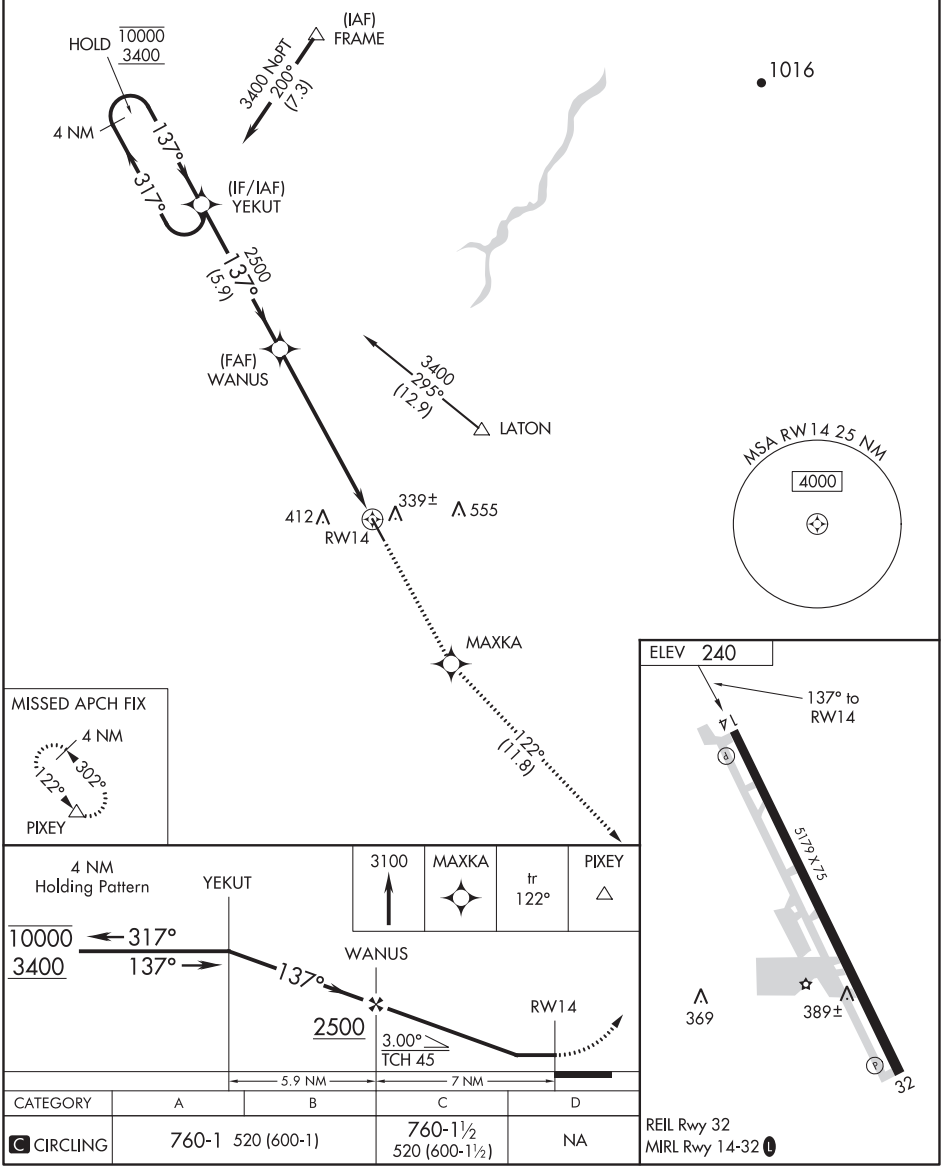

CATEGORY	A	B	C	D
C CIRCLING	760-1 520 (600-1)		760-1½ 520 (600-1½)	NA

REIL Rwy 32
MIRL Rwy 14-32

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

HANFORD, CALIFORNIA

AL-5736 (FAA)

19227

VOR-A

HANFORD MUNI (HJO)

VOR/DME VIS	APP CRS	Rwy Idg	N/A
109.4	230°	TDZE	N/A
Chan 31		Apt Elev	240

Circling Rwy 14 NA at night.

MISSED APPROACH: Climb to 1300 then climbing left turn to 2000 direct VIS VOR/DME and hold.

ASOS	FRESNO APP CON	CLNC DEL	UNICOM
134.75	123.9	123.9	122.8 (CTAF)

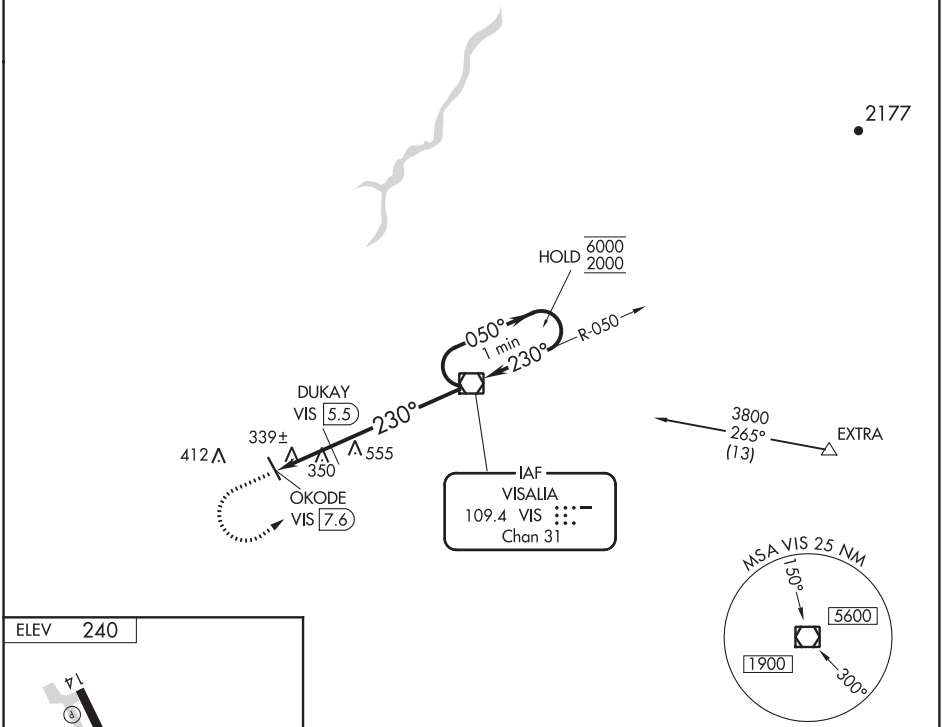

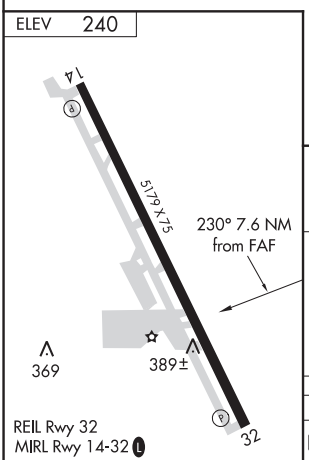

FAF to MAP 7.6 NM					
Knots	60	90	120	150	180
Min:Sec	7:36	5:04	3:48	3:02	2:32

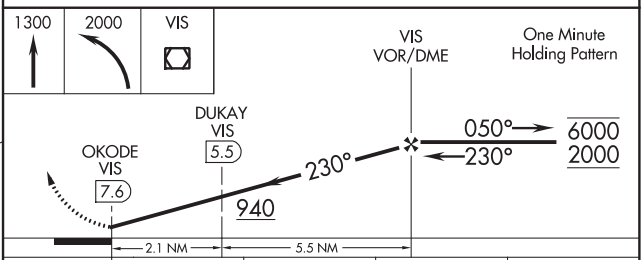

CATEGORY	A	B	C	D
C CIRCLING	940-1 700 (700-1)		940-2 700 (700-2)	NA

DUKAY FIX MINIMUMS				
C CIRCLING	680-1 440 (500-1)	720-1 480 (500-1)	720-1½ 480 (500-1½)	NA

HANFORD, CALIFORNIA

Amdt 10 15AUG19

36°19′N-119°38′W

HANFORD MUNI (HJO)

VOR-A

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	5018
CH 40330	285°	TDZE	50
W28A		Apt Elev	52

RNAV (GPS) RWY 28L

HAYWARD EXECUTIVE (HWD)

RNP APCH.

Baro-VNAV NA. When local altimeter setting not received, use Oakland altimeter setting and increase all DA and MDA 20 feet, and increase all LNAV/VNAV and LNAV Cats C and D visibility ⅛ mile. Circling NA north of Rwy 10L-28R. Rwy 28L: Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 2100 direct OAK VOR/DME and hold.

ATIS	NORCAL APP CON	HAYWARD TOWER ★	GND CON	CLNC DEL	UNICOM
126.7	124.4 351.8	120.2 (CTAF) L 257.8	121.4	128.05	122.95

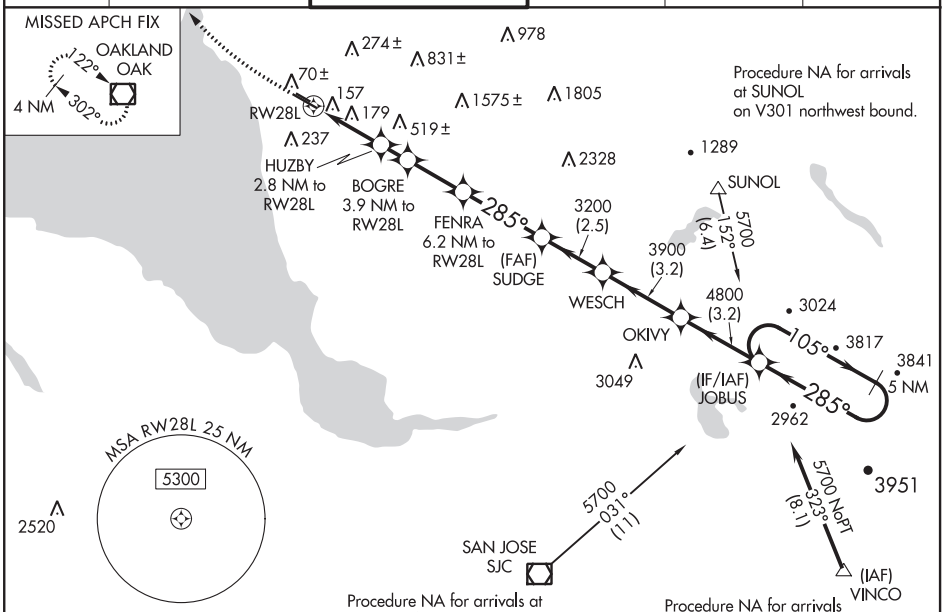

ELEV	52	TDZE	50



MIRL Rwy 10R-28L L
MIRL Rwy 10L-28R
REIL Rwys 10R and 28L

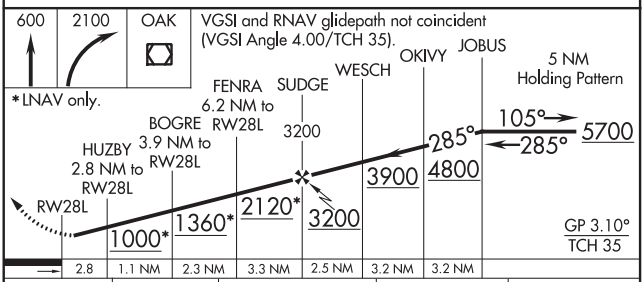

CATEGORY	A	B	C	D
LPV DA	348-1 298 (300-1)			
LNAV/VNAV DA	400-1⅛ 350 (400-1⅛)			
LNAV MDA	460-1 410 (500-1)		460-1⅛ 410 (500-1⅛)	
CIRCLING	540-1 488 (500-1)		540-1½ 488 (500-1½)	620-2 568 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-HWD	APP CRS	Rwy Idg	5018
111.5	288°	TDZE	50
Chan 52		Apt Elev	52

LOC/DME RWY 28L

HAYWARD EXECUTIVE (HWD)

Circling NA north of Rwy 10L-28R. When local altimeter setting not received, use Oakland altimeter setting and increase all MDA 20 feet. Rwy 28L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2100 direct OAK VOR/DME and hold.

ATIS	NORCAL APP CON	HAYWARD TOWER ★	GND CON	CLNC DEL	UNICOM
126.7	124.4 351.8	120.2 (CTAF) L 257.8	121.4	128.05	122.95

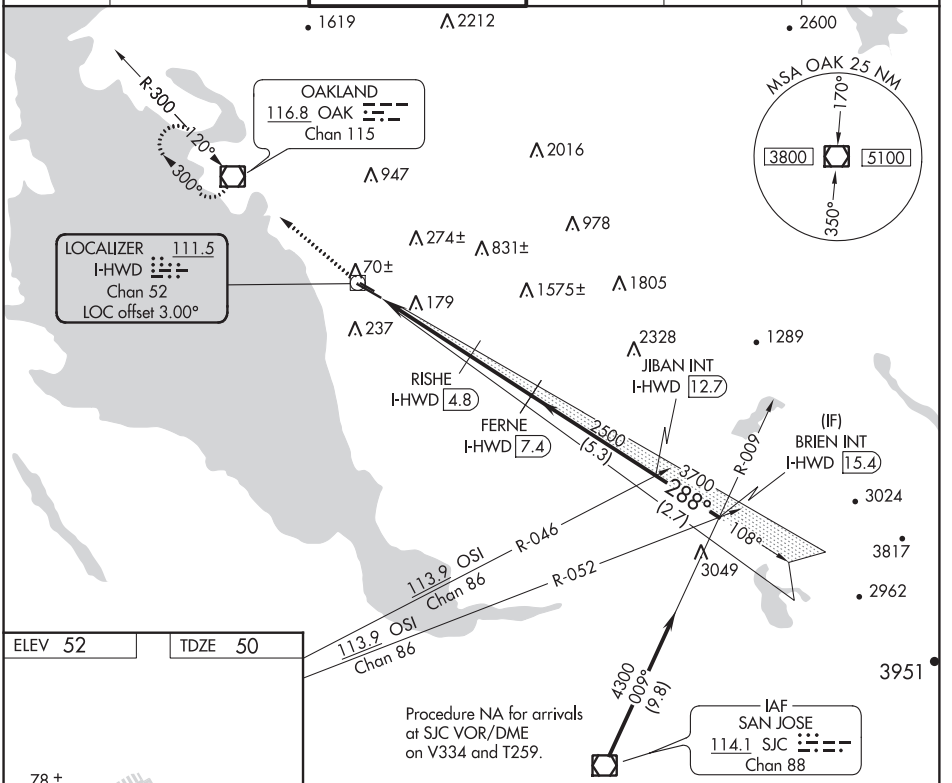

ELEV 52 TDZE 50



MIRL Rwy 10R-28L L
MIRL Rwy 10L-28R
REIL Rwys 10R and 28L

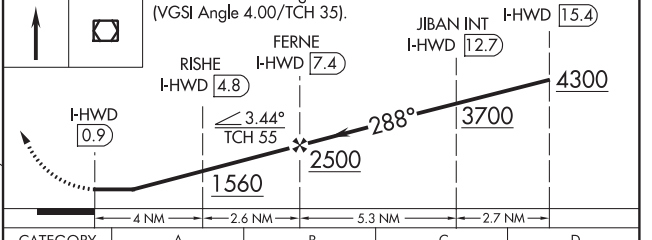

CATEGORY	A	B	C	D
S-28L	500-1 450 (500-1)		500-1⅜ 450 (500-1⅜)	
CIRCLING	540-1 488 (500-1)		540-1½ 488 (500-1½)	620-2 568 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME OAK	APP CRS	Rwy Idg	N/A
116.8	293°	TDZE	N/A
Chan 115		Apt Elev	52

VOR/DME-A

HAYWARD EXECUTIVE (HWD)

T A When local altimeter setting not received, use Oakland altimeter setting and increase all MDA 20 feet. Circling NA north of Rwy 10L-28R.

MISSED APPROACH: Climb to 2100 direct OAK VOR/DME and hold.

ATIS	NORCAL APP CON	HAYWARD TOWER ★	GND CON	CLNC DEL	UNICOM
126.7	124.4 351.8	120.2 (CTAF) L 257.8	121.4	128.05	122.95

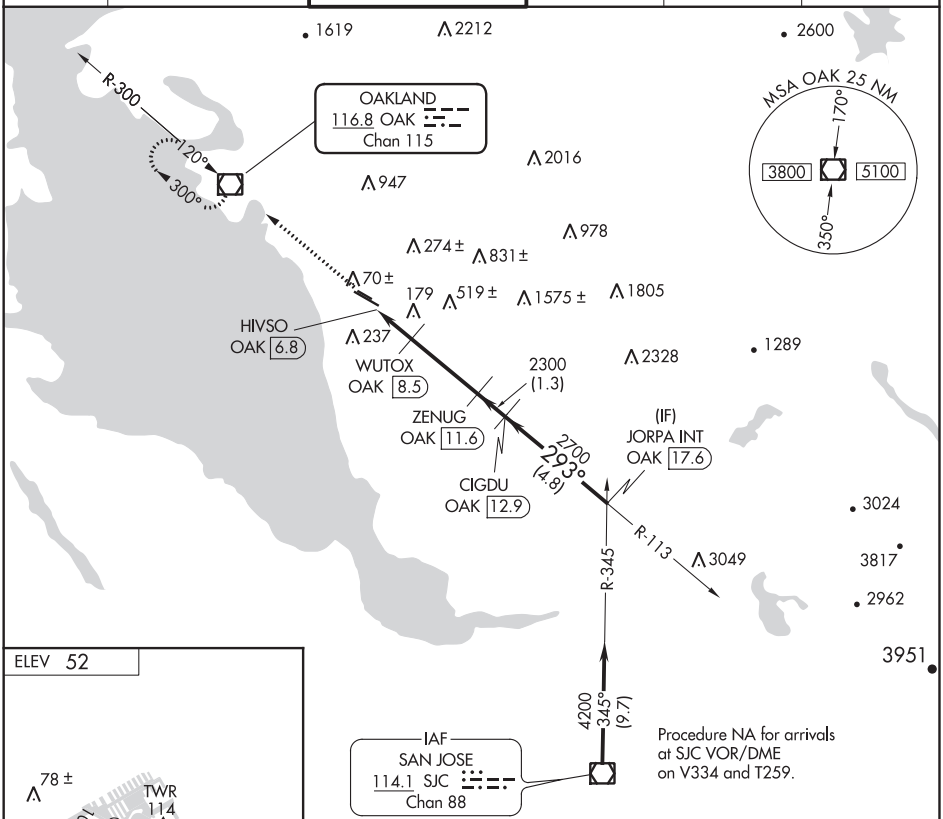

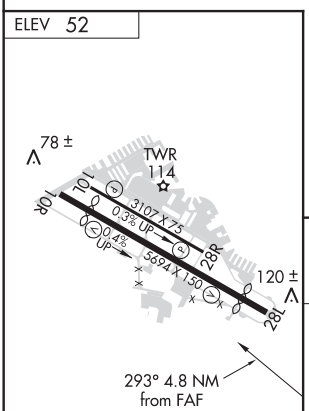

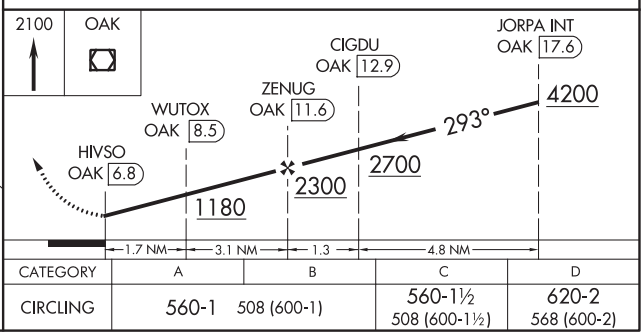

CATEGORY	A	B	C	D
CIRCLING	560-1	508 (600-1)	560-1½ 508 (600-1½)	620-2 568 (600-2)

MIRL Rwy 10R-28L L
MIRL Rwy 10L-28R
REIL Rwys 10R and 28L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

20030
AIRPORT DIAGRAM
AL-5015 (FAA)
HAYWARD EXECUTIVE (HWD)
HAYWARD, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
20030
HAYWARD, CALIFORNIA
HAYWARD EXECUTIVE (HWD)

RNAV (GPS) RWY 31

HOLLISTER MUNI (CVH)

WAAS	APP CRS	Rwy Idg	6350
CH 93806	307°	TDZE	230
W31A		Apt Elev	230

T DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

A Baro-VNAV NA when using Norman Y Mineta (KSJC) San Jose Intl altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).
When local altimeter setting not received, use Norman Y Mineta (KSJC) San Jose Intl altimeter setting, and increase all DAs/MDAs 120 feet and all visibilities ½ mile.
VDP NA when using Norman Y Mineta (KSJC) San Jose Intl altimeter setting.

MISSED APPROACH: Climb to 7000 direct ZEDOX and via 260° track to SANTY and hold, continue climb-in-hold to 7000.

AWOS-3	NORCAL APP CON	UNICOM
120.425	124.525 348.675	123.0 (CTAF) L

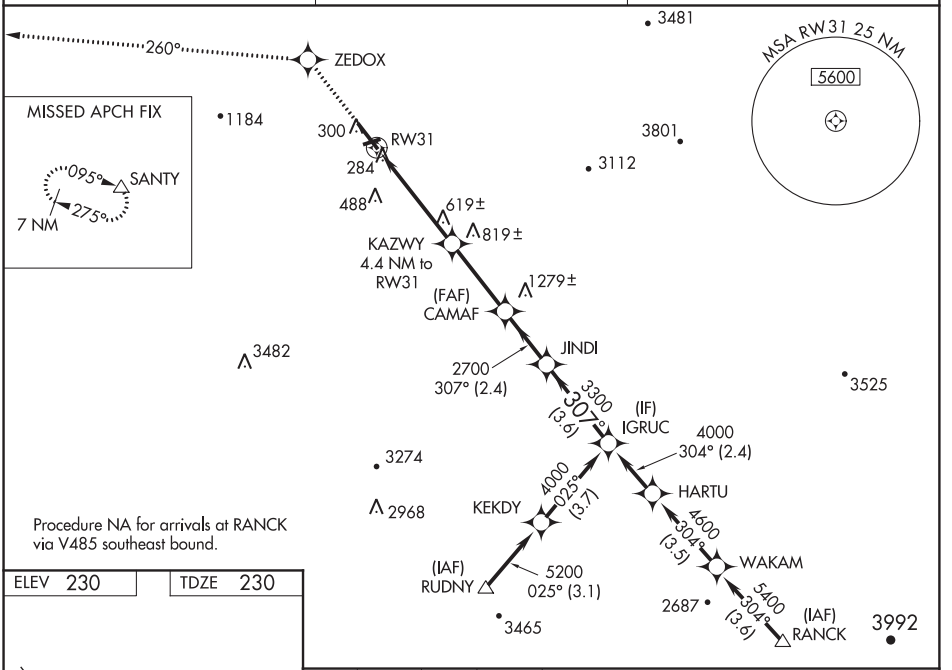

ELEV 230 | TDZE 230

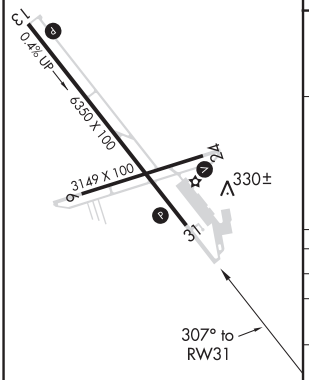

MIRL Rwys 6-24 and 13-31 L
REIL Rwys 13, 24 and 31 L

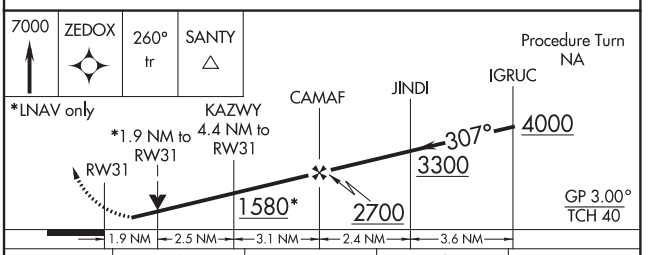

CATEGORY	A	B	C	D
LPV DA	553-1¼ 323 (400-1¼)			NA
LNAV/VNAV DA	801-2 571 (600-2)			NA
LNAV MDA	880-1 650 (700-1)		880-1¾ 650 (700-1¾)	NA
CIRCLING	880-1 650 (700-1)		880-1¾ 650 (700-1¾)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	3401
006°	TDZE	1690
	Apt Elev	1694

GPS RWY 1

WESTOVER FIELD AMADOR COUNTY (JAQ)

T NA — When local altimeter setting not received, use Sacramento Executive altimeter setting.

MISSED APPROACH: Climb to 4500 on 006° course to VOHBO and hold.

AWOS-3	NORCAL APP CON	UNICOM
121.125	125.1 363.2	123.075 (CTAF) L

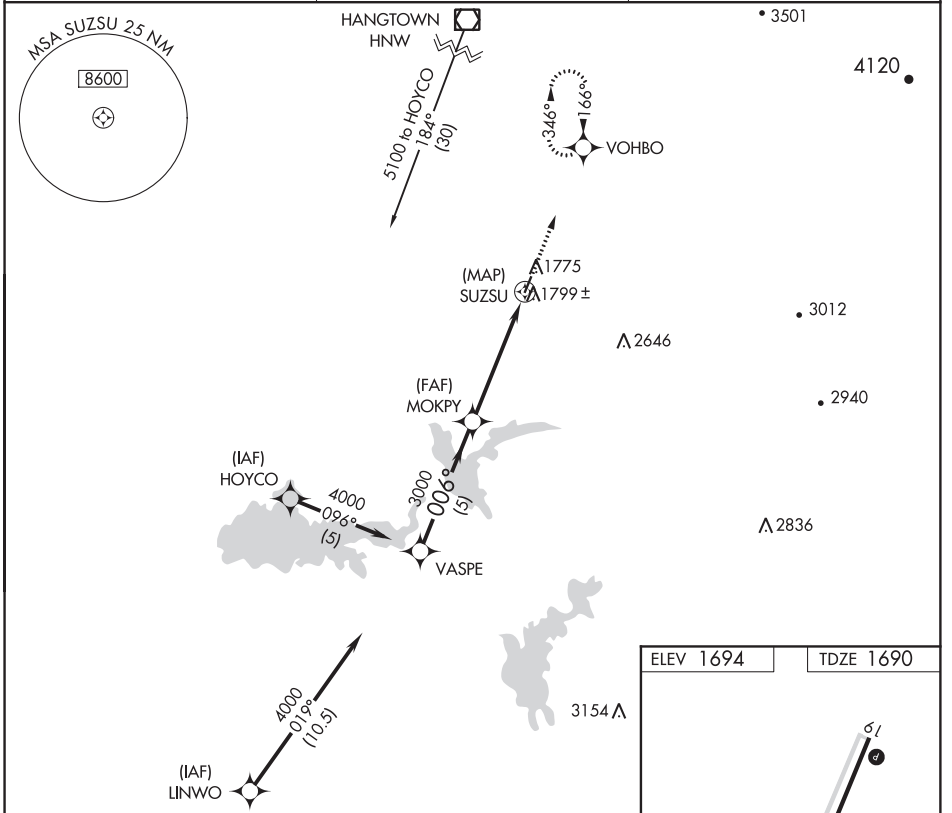

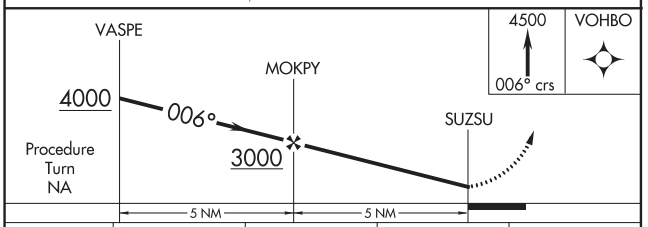

CATEGORY	A	B	C	D
S-1	2060-1	370 (400-1)	NA	
SACRAMENTO EXECUTIVE ALTIMETER SETTING MINIMUMS				
S-1	2380-1	690 (700-1)	NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME LIN	APP CRS	Rwy Idg	3401
114.8	012°	TDZE	1690
Chan 95		Apt Elev	1694

VOR/DME RWY 1

WESTOVER FIELD AMADOR COUNTY (JAQ)

T NA If local altimeter not received, use Sacramento Executive altimeter setting.

MISSED APPROACH: Climbing left turn to 3000 via LIN R-012 to LIN VOR/DME.

AWOS-3	NORCAL APP CON	UNICOM
121.125	125.1 363.2	123.075 (CTAF) L

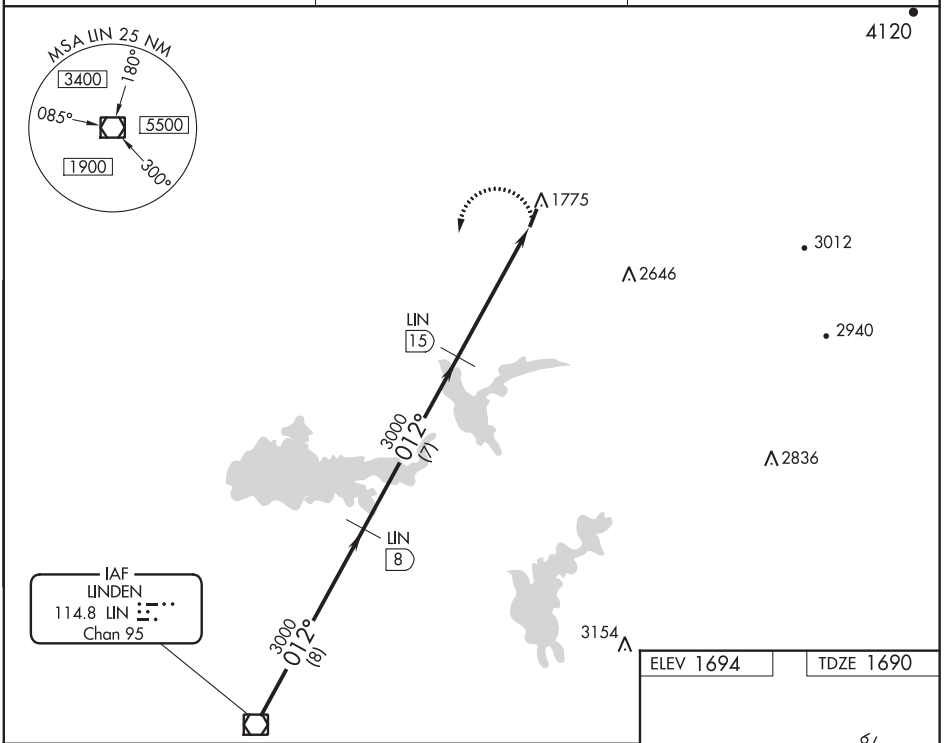

ELEV 1694 TDZE 1690

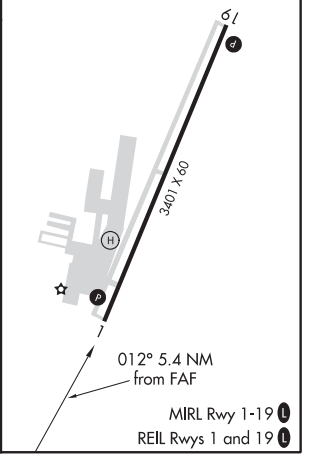

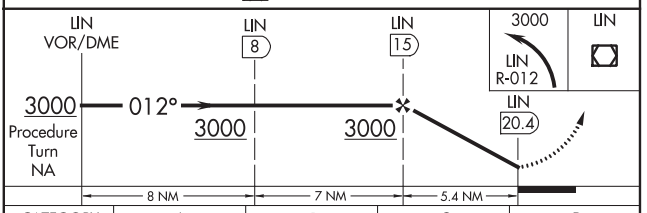

CATEGORY	A	B	C	D
S-1	2080-1 390 (400-1)	2080-1¼ 390 (400-1¼)	NA	
CIRCLING	2200-1 506 (600-1)	2200-1¼ 506 (600-1¼)	NA	
SACRAMENTO EXECUTIVE ALTIMETER SETTING MINIMUMS				
S-1	2380-1 690 (700-1)	2380-1¼ 690 (700-1¼)	NA	
CIRCLING	2520-1 826 (900-1)	2520-1¼ 826 (900-1¼)	NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

LAKEPORT, CALIFORNIA | AL-6939 (FAA) | 18032

APP CRS	Rwy Idg	N/A
164°	TDZE	N/A
	Apt Elev	1380

RNAV (GPS)-A
LAMPSON FIELD (102)

T
NA

Circling NA south of Rwy 10-28. DME/DME RNP-0.3 NA. Procedure NA at night. When local altimeter setting not received, use Ukiah altimeter setting and increase all MDA 560 feet.

MISSED APPROACH: Climbing left turn to 8000 direct WEPLO and hold.

AWOS-3	OAKLAND CENTER	UNICOM
118.35	127.8 353.5	122.8 (CTAF) L

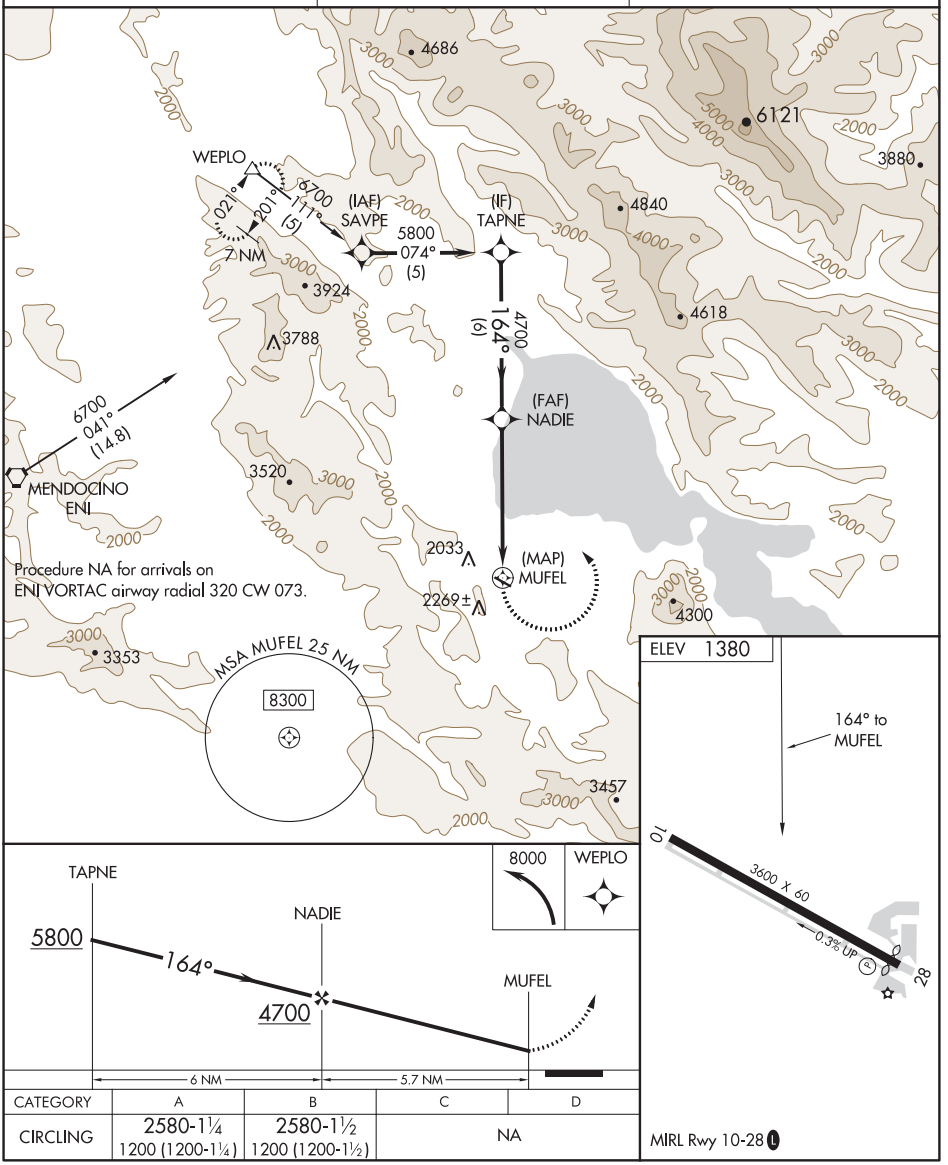

CATEGORY	A	B	C	D
CIRCLING	2580-1¼ 1200 (1200-1¼)	2580-1½ 1200 (1200-1½)	NA	

MIRL Rwy 10-28 L

SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND CENTER
127.8 353.5

TOP ALTITUDE: 6000

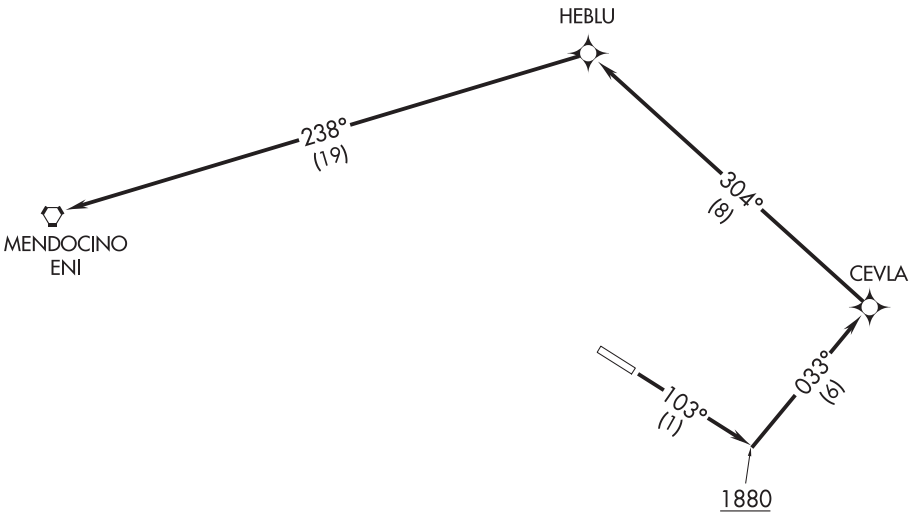

NOTE: GPS required.

NOTE: RNAV 1.

NOTE: Takeoff Rwy 10: Do not exceed 175K until passing HEBLU.

TAKEOFF MINIMUMS
Rwy 10: Standard with minimum climb of 496′ per NM to 4500.
Rwy 28: NA- Rapidly rising terrain.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 10: Climb heading 103° to 1880, then climb on 033° course to CEVLA, then via 304° track to HEBLU, then via 238° track to ENI VORTAC, thence . . . .

. . . . via assigned route, expect clearance to filed altitude 10 minutes after departure.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19283

LEMOORE, CALIFORNIA

RNAV (GPS) RWY 14L

WAAS	APCH CRS	Rwy Idg 13,502
Chan 70209	142°	TDZE 220
W14A		Arpt Elev 229

AL-5067 [USN] LEMOORE NAS (REEVES FIELD) (KNLC)

DME/DME RNP-0.3 NA

MISSED APPROACH: Climb to 1200, then climb left turn to 2000 direct STRAT and hold.

ATIS ★	LEMOORE APP CON	LEMOORE TOWER ★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	N124.1 S118.15 269.025	128.3 340.2	121.65 305.2	124.1 371.9	

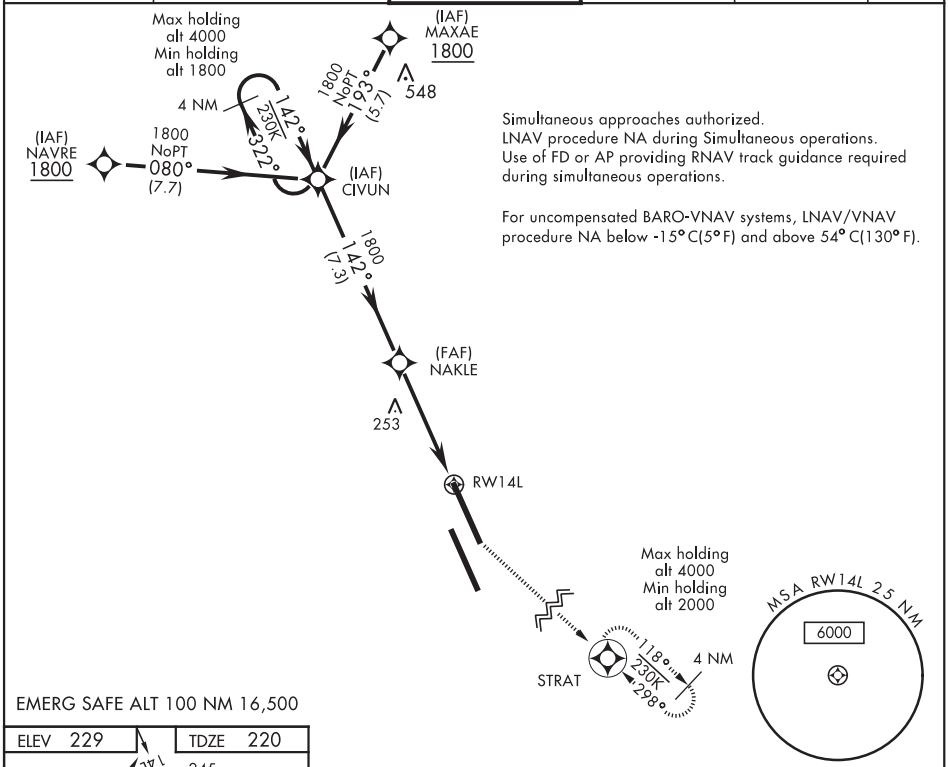

EMERG SAFE ALT 100 NM 16,500

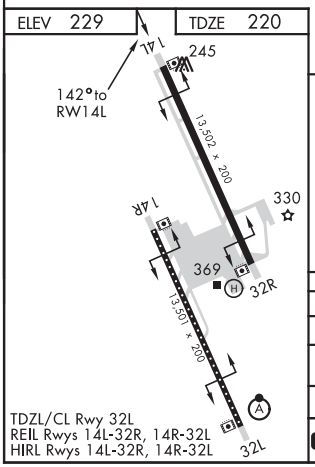

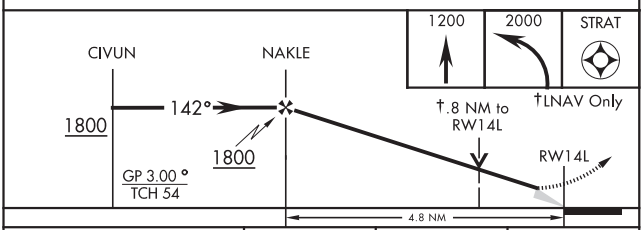

CATEGORY	A	B	C	D
LPV DA	420/40	200	(200-¾)	
LNAV/VNAV DA	470/40	250	(300-¾)	
LNAV MDA	520/55 300	(300-1)	520/45 300	(300-⅞)
C CIRCLING	680-1 451	(500-1)	680-1½ 451	(500-1½) 780-2 551 (600-2)

LEMOORE, CALIFORNIA 36°20'N-119°57'W LEMOORE NAS (REEVES FIELD) (KNLC)

Amdt 4 24MAY18

RNAV (GPS) RWY 14L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LEMOORE, CALIFORNIA

RNAV (GPS) RWY 14R

WAAS	APCH CRS	Rwy ldg 13,501
Chan 80286	142°	TDZE 229
W14B		Arpt Elev 229

AL-5067 [USN]

LEMOORE NAS (REEVES FIELD) (KNLC)

DME/DME RNP-0.3 NA

MISSED APPROACH: Climb to 2000 direct PHROG and hold.

ATIS ★	LEMOORE APP CON	LEMOORE TOWER ★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	N124.1 S118.15 269.025	128.3 360.2	121.65 305.2	124.1 371.9	

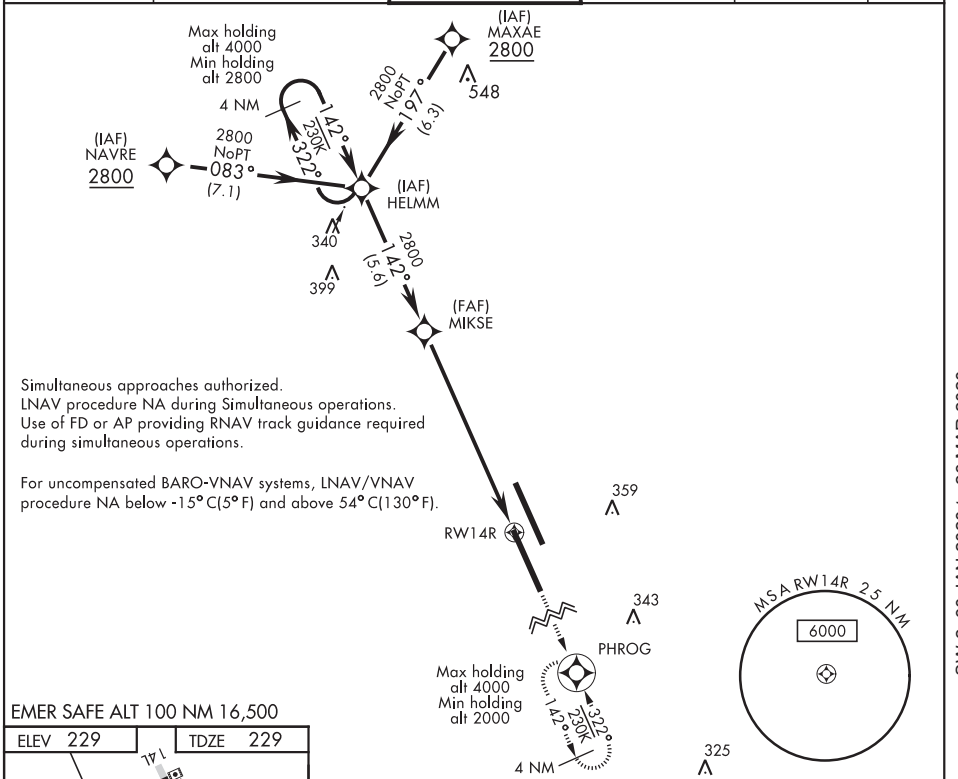

CATEGORY	A	B	C	D
LPV DA	429/40 200 (200-¾)			
LNAV/VNAV DA	479/40 250 (300-¾)			
LNAV MDA	660/55 431 (500-1)		660-1¼ 431 (500-1¼)	
C CIRCLING	680-1 451 (500-1)		680-1½ 451 (500-1½)	780-2 551 (600-2)

LEMOORE, CALIFORNIA

36°20'N-119°57'W

LEMOORE NAS (REEVES FIELD) (KNLC)

Amdt 5 24MAY18

RNAV (GPS) RWY 14R

SW-2, 30 JAN 2020 to 26 MAR 2020

LEMOORE, CALIFORNIA

RNAV (GPS) RWY 32L

WAAS	APCH CRS	Rwy ldg 13,501
Chan 50085	322°	TDZE 228
W32A		Arpt Elev 229

AL-5067 [USN]

LEMOORE NAS (REEVES FIELD) (KNLC)

* When ALS inop, increase CAT ABCD RVR to 40 and vis to ¾ mile.
** When ALS inop, increase RVR to 55 and vis to 1 mile.
DME/DME RNP-0.3 NA

ALSF-2

MISSED APPROACH: Climb to 1000, then climbing left turn to 3100 direct CREEZ and hold.

ATIS ★	LEMOORE APP CON	LEMOORE TOWER ★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	N124.1 S118.15 269.025	128.3 340.2	121.65 305.2	124.1 371.9	

Simultaneous approaches authorized.
LNAV procedure NA during Simultaneous operations.
Use of FD or AP providing RNAV track guidance required during simultaneous operations.

CREEZ
102°
230K
282°
4 NM
Max holding alt 4000
Min holding alt 3100

359
RW32L
253
274
343
327
322°
367
506
For uncompensated BARO-VNAV systems, LNAV/VNAV procedure NA below -15°C(5°F) and above 54°C(130°F).
(FAF)
LERNE
288
325
269
1800
323°
(8)
289
M.S.A RW32L 2.5 NM
5600
(IAF)
PHROG
1800
NoPT
267°
(7.9)
(IAF)
LEGDE
1800
230K
142°
322°
1800
NoPT
042°
(9.2)
(IAF)
MOOTH
1800
4 NM
Max holding alt 4000
Min holding alt 1800

EMER SAFE ALT 100 NM 16,500

ELEV 229 | TDZE 228

1 AL
245
13,502 × 200
1 AR
330
TWR
368
32R
13,501 × 200
322° to RW32L
265
32L
264

TDZL/CL Rwy 32L
REIL Rwys 14L-32R, 14R-32L
HIRL Rwys 14L-32R, 14R-32L

1000 | 3100 | CREEZ

†LNAV Only

†1 NM from RW32L

LERNE
PHROG
323°
1800
322°
1800
RW32L
GP 3.00°
TCH 48
4.8 NM

CATEGORY	A	B	C	D
LPV DA *	428/18 200 (200-½)			
LNAV/VNAV DA *	478/18 250 (300-½)			479/18 251 (300-½)
LNAV MDA**	600/24 372 (400-½)		600/35 372 (400-⅝)	
C CIRCLING	680-1 451 (500-1)		680-1½ 451 (500-1½)	780-2 551 (600-2)

LEMOORE, CALIFORNIA
Amdt 4 24MAY18

36°20'N-119°57'W

LEMOORE NAS (REEVES FIELD) (KNLC)

RNAV (GPS) RWY 32L

SW-2, 30 JAN 2020 to 26 MAR 2020

LEMOORE, CALIFORNIA

RNAV (GPS) RWY 32R

WAAS	APCH CRS	Rwy ldg 13,502
Chan 60335	322°	TDZE 222
W32B		Arpt Elev 229

AL-5067 [USN] LEMOORE NAS (REEVES FIELD) (KNLC)

DME/DME RNP-0.3 NA

MISSED APPROACH: Climb to 1200, then climbing right turn to 2000 direct HAYEN and hold.

ATIS ★	LEMOORE APP CON	LEMOORE TOWER ★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	N124.1 S118.15 269.025	128.3 360.2	121.65 305.2	124.1 371.9	

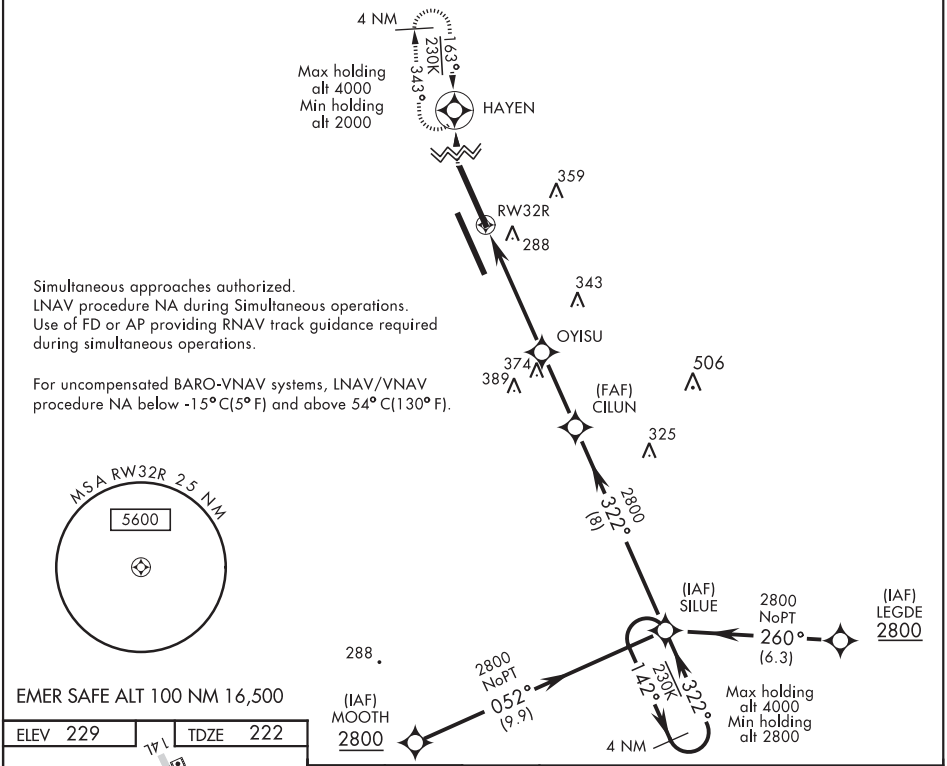

ELEV 229	TDZE 222

TDZL/CL Rwy 32L
REIL Rwys 14L-32R, 14R-32L
HIRL Rwys 14L-32R, 14R-32L

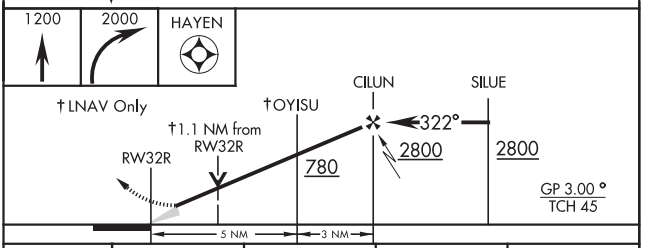

CATEGORY	A	B	C	D
LPV DA	422/40 200 (200-¾)			
LNAV/VNAV DA	500/45 278 (300-⅞)	511/50 289 (300-1)	519/50 297 (300-1)	530/55 308 (400-1)
LNAV MDA	620/55 398 (400-1)		620/60 398 (400-1⅛)	
C CIRCLING	680-1 451 (500-1)		680-1½ 451 (500-1½)	780-2 551 (600-2)

LEMOORE, CALIFORNIA 36° 20'N-119° 57'W LEMOORE NAS (REEVES FIELD) (KNLC)

Amdt 4 24MAY18

RNAV (GPS) RWY 32R

SW-2, 30 JAN 2020 to 26 MAR 2020

18144

LEMOORE, CALIFORNIA

TACAN RWY 14L

TACAN	APCH CRS	Rwy Idg	TDZE	Arpt Elev
NLC Chan 80	164°	13,502	220	229

AL-5067 [USN]

LEMOORE NAS (REEVES FIELD) (KNLC)

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 via heading 142°, intercept NLC TACAN R-118 to STRAT and hold.

ATIS ★	LEMOORE APP CON	LEMOORE TOWER ★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	N124.1 S118.15 269.025	128.3 340.2	121.65 305.2	124.1 371.9	

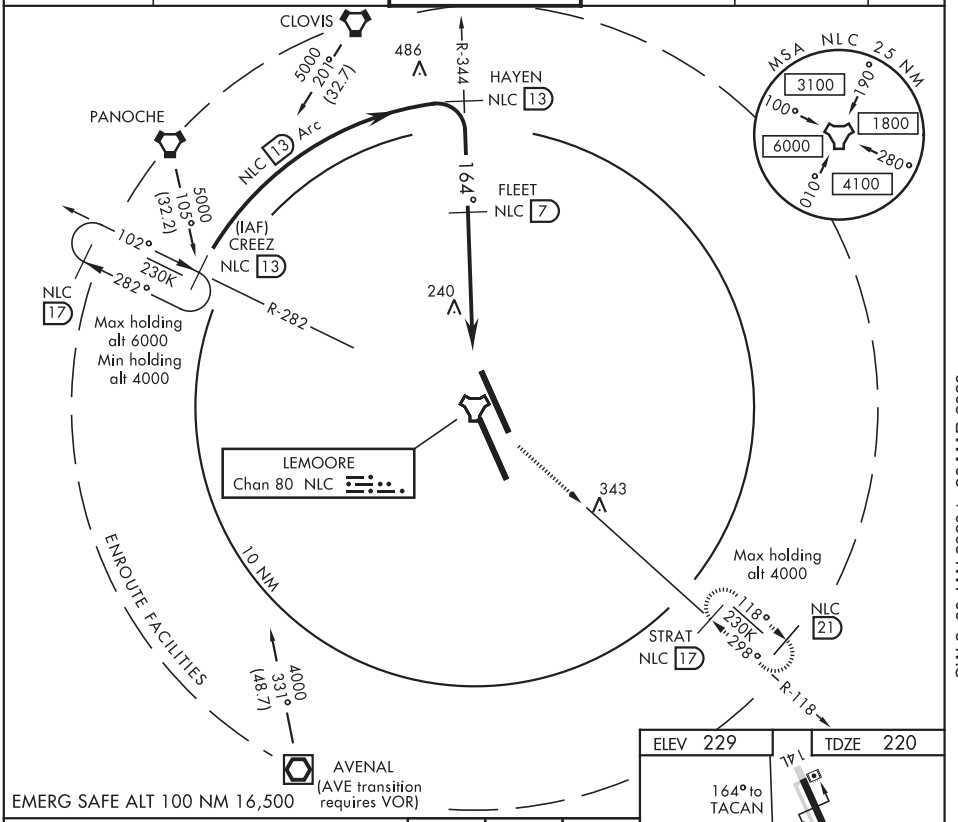

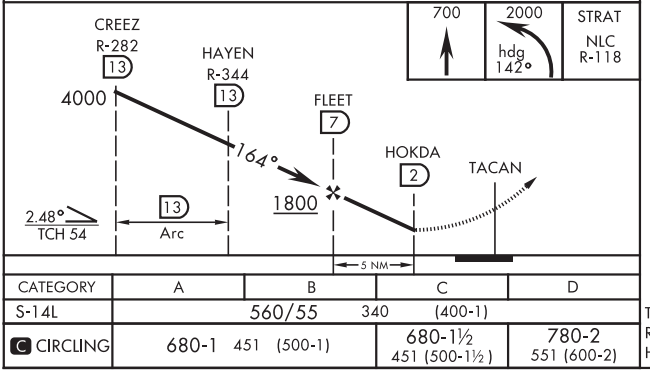

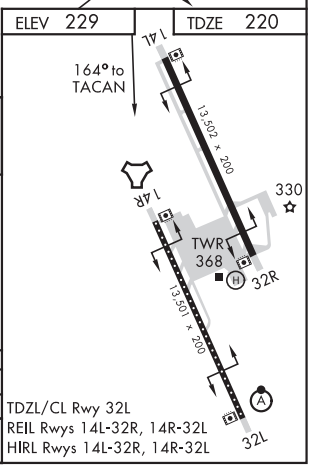

CATEGORY	A	B	C	D
S-14L	560/55	340	(400-1)	
C CIRCLING	680-1 451 (500-1)		680-1½ 451 (500-1½)	780-2 551 (600-2)

TDZL/CL Rwy 32L
REIL Rwys 14L-32R, 14R-32L
HIRL Rwys 14L-32R, 14R-32L

LEMOORE, CALIFORNIA

Amdt 4 24MAY18

36°20'N-119°57'W

LEMOORE NAS (REEVES FIELD) (KNLC)

TACAN RWY 14L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LEMOORE, CALIFORNIA

TACAN RWY 14R

TACAN	APCH CRS	Rwy Idg	TDZE	Arpt Elev
NLC Chan 80	142°	13,501	229	229

AL-5067 [USN]

LEMOORE NAS (REEVES FIELD) (KNLC)

MISSED APPROACH: Climb to 3000 via R-142 to HORNN, then arc SW of NLC TACAN via the 13 DME Arc to CREEZ and hold.

ATIS ★	LEMOORE APP CON	LEMOORE TOWER ★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	N124.1 S118.15 269.025	128.3 360.2	121.65 305.2	124.1 371.9	

Simultaneous approaches authorized.

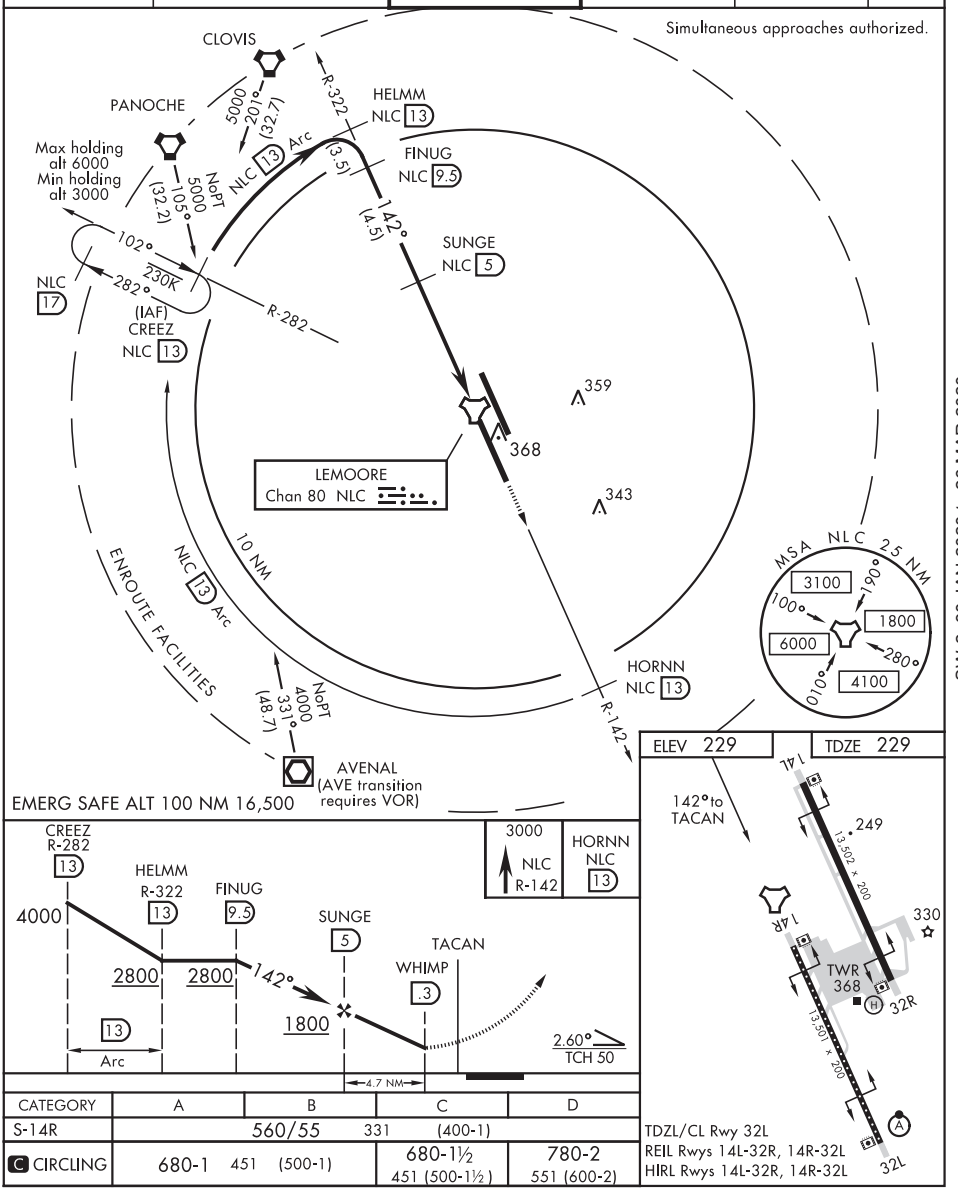

EMERG SAFE ALT 100 NM 16,500

CATEGORY	A	B	C	D
S-14R	560/55	331	(400-1)	
C CIRCLING	680-1	451 (500-1)	680-1½ 451 (500-1½)	780-2 551 (600-2)

TDZL/CL Rwy 32L
REIL Rwys 14L-32R, 14R-32L
HIRL Rwys 14L-32R, 14R-32L

LEMOORE, CALIFORNIA

Amdt 4 24MAY18

36°20'N-119°57'W

LEMOORE NAS (REEVES FIELD) (KNLC)

TACAN RWY 14R

SW-2, 30 JAN 2020 to 26 MAR 2020

18144

LEMOORE, CALIFORNIA

TACAN RWY 32L

TACAN	APCH CRS	Rwy ldg	TDZE	Arpt Elev
NLC Chan 80	322°	13,501	228	229

AL-5067 [USN]

LEMOORE NAS (REEVES FIELD) (KNLC)

* When ALS inop, increase CAT ABCD RVR to 55 and vis to 1 mile.

ALSF-2

MISSED APPROACH: Climb to 3000 via R-142 to NLC TACAN, then via R-282 to CREEZ and hold.

ATIS★	LEMOORE APP CON	LEMOORE TOWER★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	N124.1 S118.15 269.025	128.3 340.2	121.65 305.2	124.1 371.9	

Simultaneous approaches authorized.

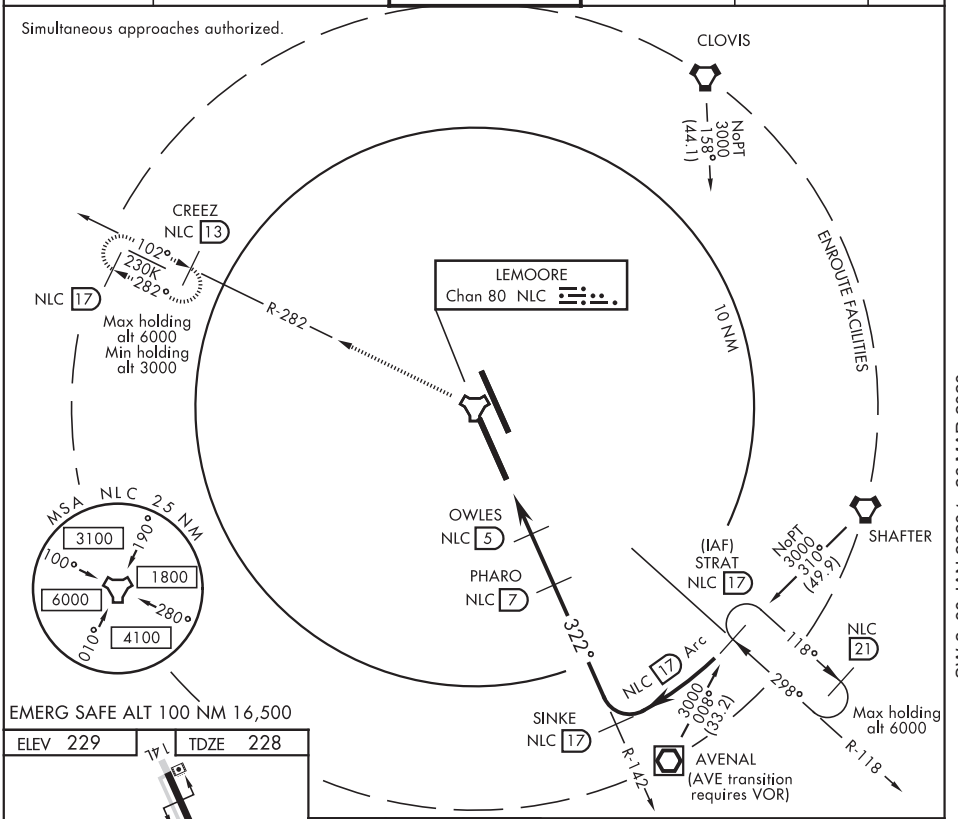

ELEV 229 | TDZE 228

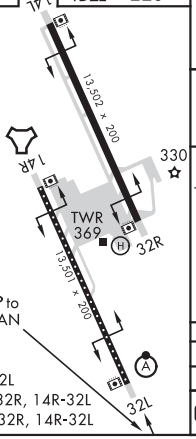

TDZL/CL Rwy 32L
REIL Rwys 14L-32R, 14R-32L
HIRL Rwys 14L-32R, 14R-32L

3000 NLC R-142 | NLC | NLC R-282

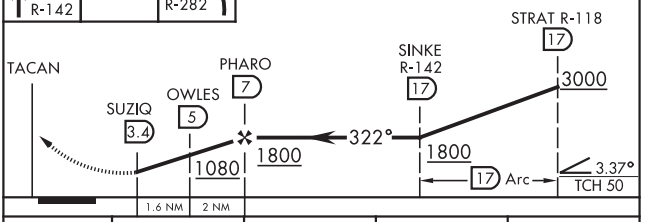

CATEGORY	A	B	C	D
S-32L *	540/24 313 (400-½)			
C CIRCLING	680-1 451 (500-1)		680-1½ 451 (500-1½)	780-2 551 (600-2)

LEMOORE, CALIFORNIA
Amdt 6 24MAY18

36°20'N-119°57'W

LEMOORE NAS (REEVES FIELD) (KNLC)

TACAN RWY 32L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

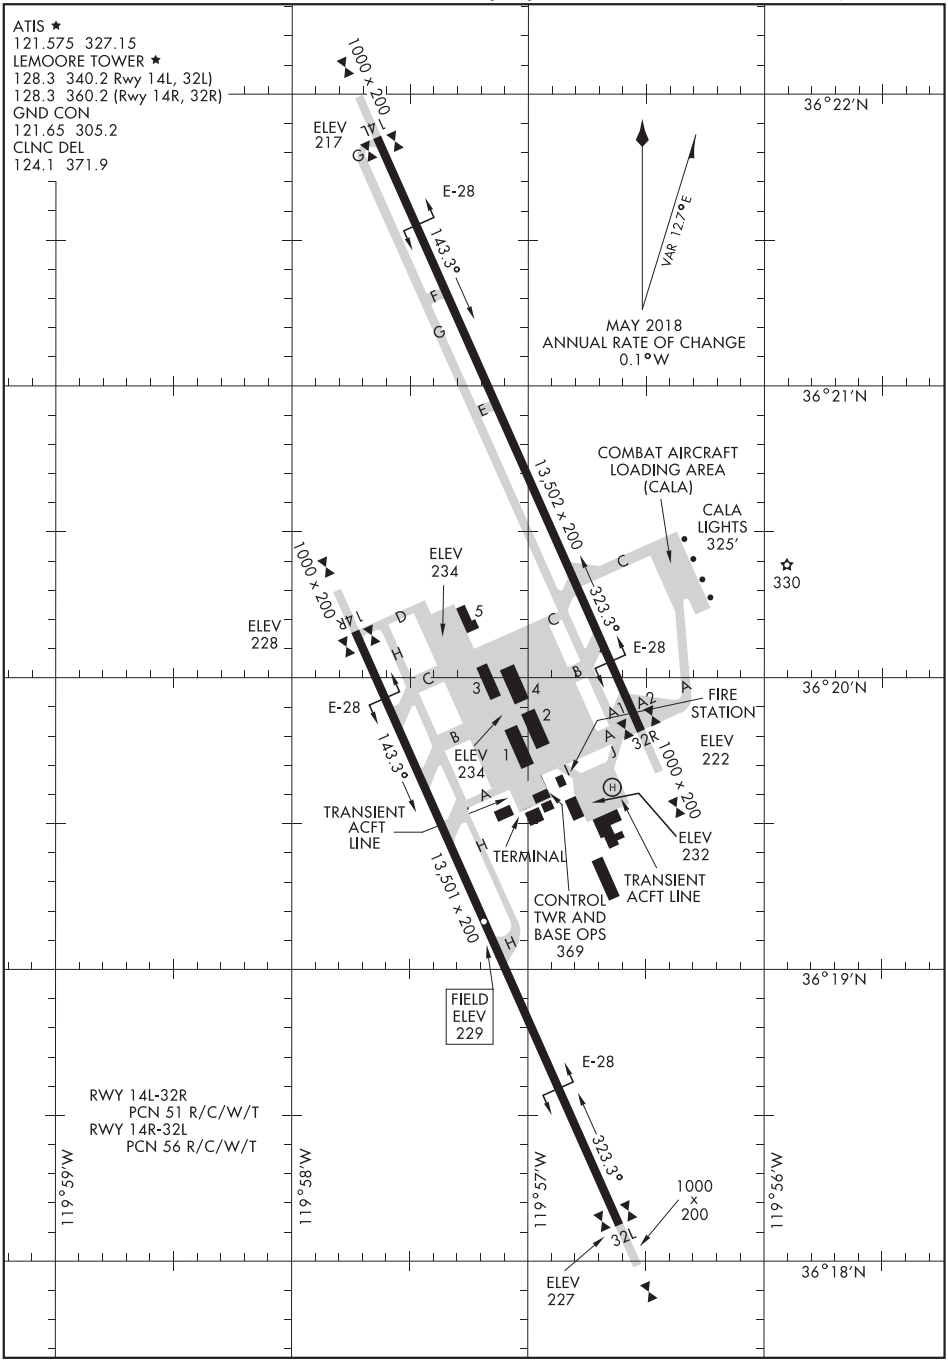

SW-2, 30 JAN 2020 to 26 MAR 2020

LEMOORE-NINE DEPARTURE (NLC9•NLC)

SHL-5067 [USN] LEMOORE, CALIFORNIA

ATIS ★ 121.575 327.15
CLNC DEL
124.1 371.9
GND CON
121.65 305.2
LEMOORE TOWER ★
128.3 340.2
(Rwy 14L, 32L)
128.3 360.2
(Rwy 14R, 32R)
LEMOORE DEP CON
124.1 318.8 (N)
118.15 318.8 (S)

Rwy	Knots	60	120	180	240	300	360
†32L/R	V/V(fpm)	318	636	954	1272	1590	1908
††32L/R	V/V(fpm)	397	794	1191	1588	1985	2382

† ATC climb rate, CETTA transition to 15,000
†† ATC climb rate, WADDE transition to 11,000

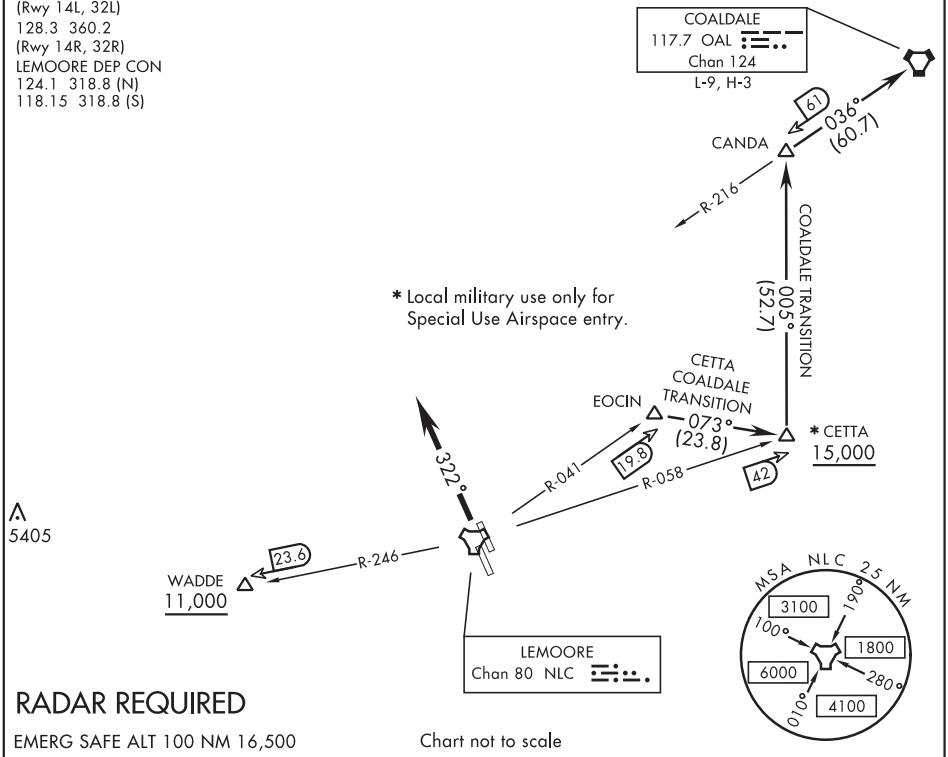

RADAR REQUIRED

EMERG SAFE ALT 100 NM 16,500 Chart not to scale

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAYS 32L/32R: Climb to 2000 via heading 322° then radar vectors to join assigned transition or route.

CETTA TRANSITION (NLC9•CETTA): From over EOCIN direct CETTA thence as filed. Cross CETTA at or above 15,000.

COALDALE TRANSITION (NLC9•OAL): From over EOCIN direct CETTA, direct CANDA, direct COALDALE VORTAC. Cross CETTA at or above 15,000.

WADDE TRANSITION (NLC9•WADDE): From over WADDE thence as filed. Cross WADDE at or above 11,000.

LOST COMMUNICATIONS: If no transmissions are received within 8 DME of NLC TACAN, fly departure heading to intercept NLC 10 DME arc, arc to respective departure radial then via departure radial to assigned departure fix . Then via assigned route. Once established on departure radial climb to filed altitude.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

REEVES-THREE DEPARTURE (REVES3•NLC) SHL-5067 [USN]

LEMOORE, CALIFORNIA

ATIS ★ 121.575 327.15
CLNC DEL
124.1 371.9
GND CON
121.65 305.2
LEMOORE TOWER ★
128.3 340.2
(Rwy 14L, 32L)
128.3 360.2
(Rwy 14R, 32R)
LEMOORE DEP CON
124.1 318.8 (N)
118.15 318.8 (S)

Rwy	Knots	60	120	180	240	300	360
†14L/R	V/V(fpm)	320	640	960	1280	1600	1920
††14L/R	V/V(fpm)	364	728	1092	1456	1820	2184

† ATC Climb Rate to 15,000 OMEGA
†† ATC Climb Rate to 11,000 CARRL

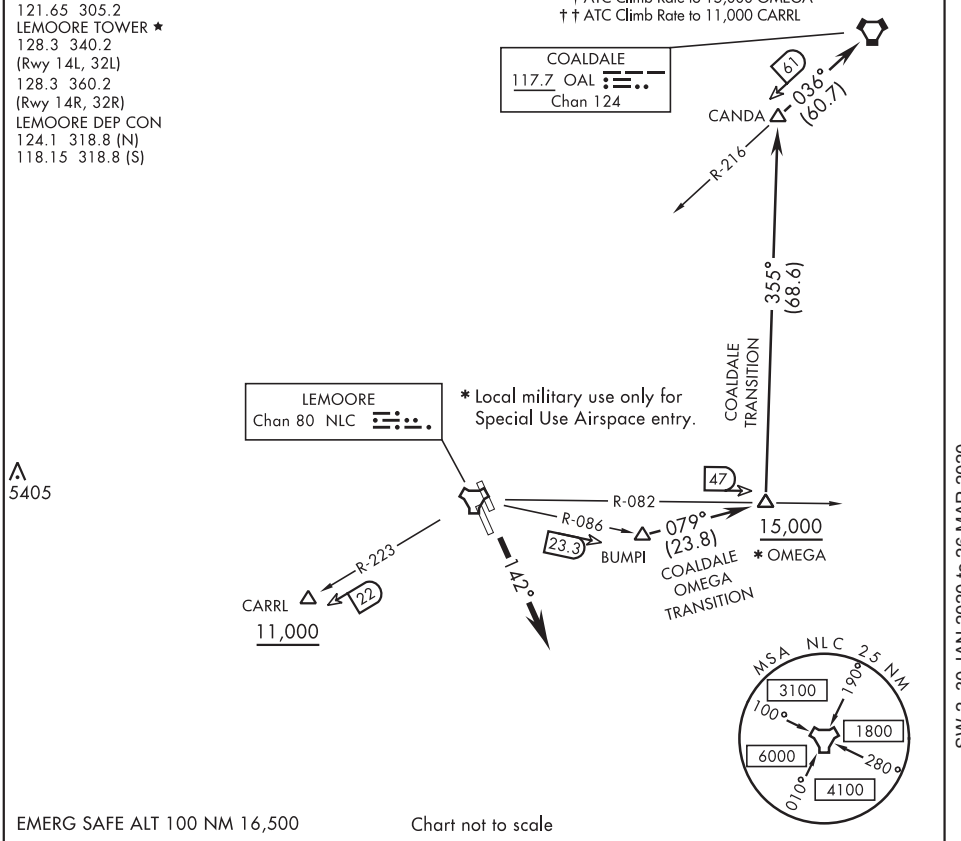

EMERG SAFE ALT 100 NM 16,500

Chart not to scale

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 14L/14R: Climb to 2000 via heading 142° then radar vectors to join assigned transition or route.

CARRL TRANSITION (REVES3.CARRL): From over CARRL thence as filed. Cross CARRL at or above 11,000.

COALDALE TRANSITION (REVES3.OAL): From over BUMPI direct OMEGA, direct CANDA, direct COALDALE VORTAC. Cross OMEGA at or above 15,000.

OMEGA TRANSITION (REVES3.OMEGA): From over BUMPI direct OMEGA thence as filed.

LOST COMMUNICATIONS: If no transmissions are received within 8 DME of NLC TACAN, fly departure heading to intercept NLC 10 DME arc, arc to respective departure radial then via departure radial to assigned departure fix. Then via assigned route. Once estalished on departure radial climb to filed altitude.

SW-2, 30 JAN 2020 to 26 MAR 2020

LINCOLN, CALIFORNIA | AL-5850 (FAA) | 19171

ILS or LOC RWY 15

LINCOLN RGNL/KARL HARDER FIELD (LHM)

LOC/DME I-LHM	APP CRS	Rwy Idg	6001
108.75	151°	TDZE	121
Chan 24 (Y)		Apt Elev	121

T NA — When local altimeter setting not received, use Beale AFB altimeter setting and increase all DA/MDA 40 feet, and increase S-LOC 15 Cat C/D visibility ¼ mile. VDP NA with Beale AFB altimeter setting. WIDBO fix minimums: for inop ALS, increase S-LOC 15 Cat D visibility to 1 mile.

MALSR (A5)

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct MYV VOR/DME and hold.

AWOS-3	NORCAL APP CON	UNICOM
124.25	125.4 259.1	123.0 (CTAF) L

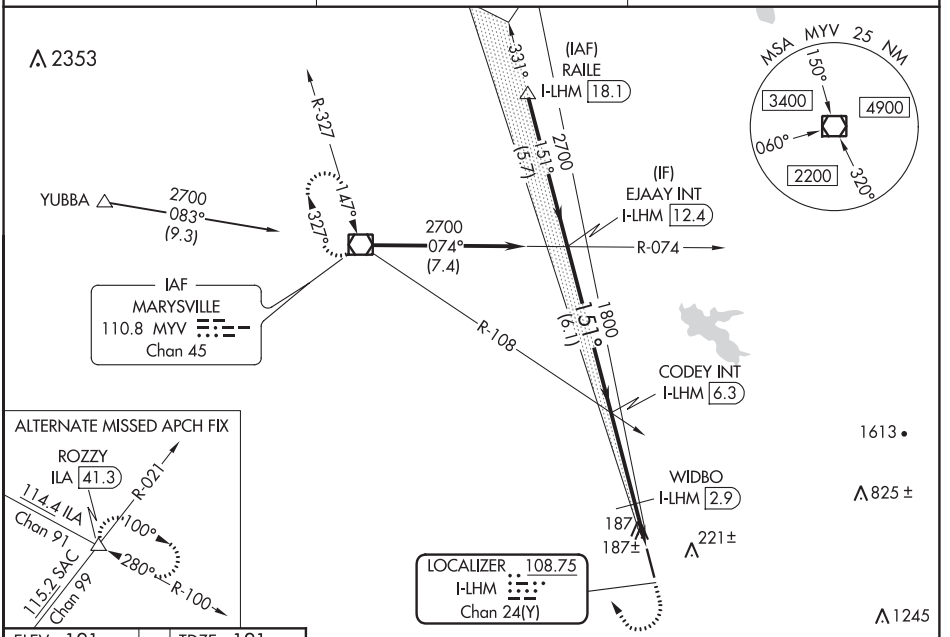

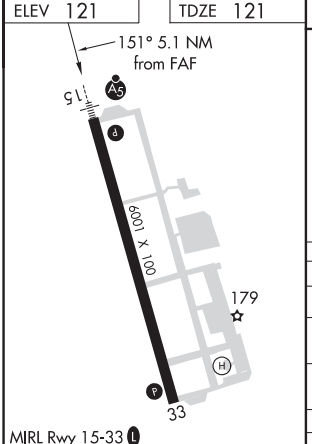

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

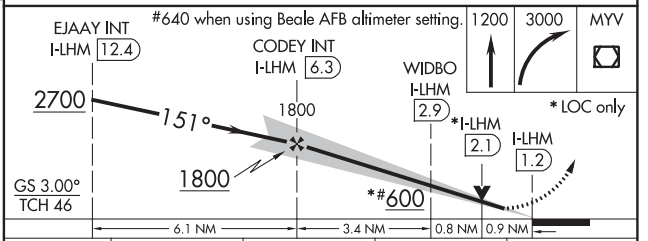

CATEGORY	A	B	C	D
S-ILS 15	321-½ 200 (200-½)			
S-LOC 15	600-½ 479 (500-½)		600-¾ 479 (500-¾)	600-1 479 (500-1)
CIRCLING	600-1 479 (500-1)		600-1½ 479 (500-1½)	680-2 559 (600-2)
WIDBO FIX MINIMUMS				
S-LOC 15	460-½ 339 (400-½)			460-¾ 339 (400-¾)
CIRCLING	520-1 399 (400-1)	580-1 459 (500-1)	580-1½ 459 (500-1½)	680-2 559 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 15

LINCOLN RGNL/KARL HARDER FIELD (LHM)

WAAS CH 82618 W15A	APP CRS 151°	Rwy Idg 6001 TDZE 121 Apt Elev 121

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. VDP and Baro-VNAV NA when using Beale AFB altimeter setting. When local altimeter setting not received, use Beale AFB altimeter setting and increase all DA/MDA 40 feet. For inop ALS when using Beale AFB altimeter setting, increase LNAV Cat D visibility to 1¼.

MALSR

MISSED APPROACH: Climb to 2500 direct MUCGU and on track 131° to ROZZY and hold.

AWOS-3	NORCAL APP CON	UNICOM
124.25	125.4 259.1	123.0 (CTAF)

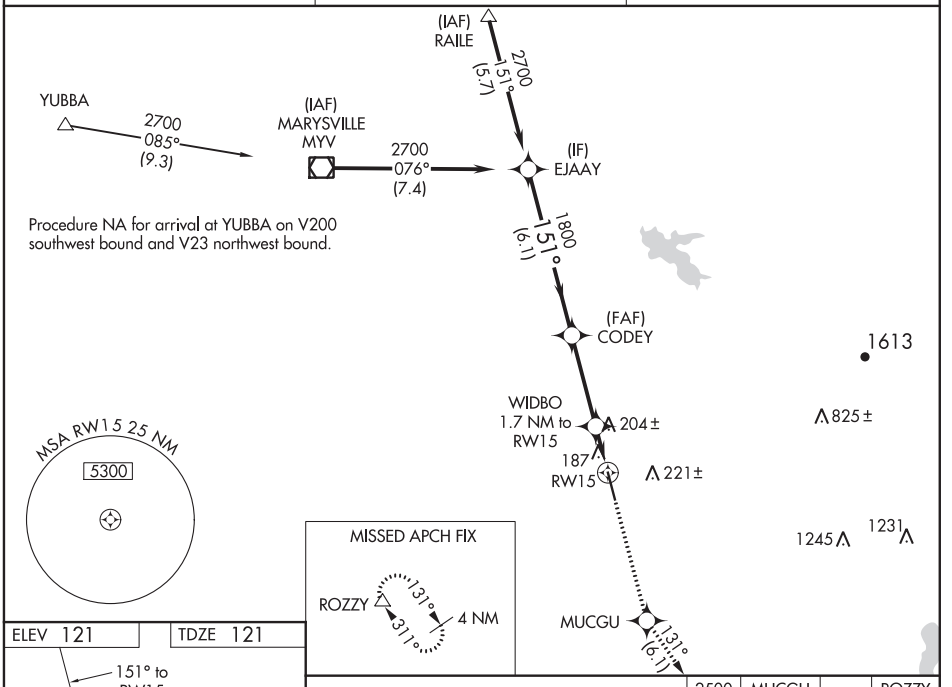

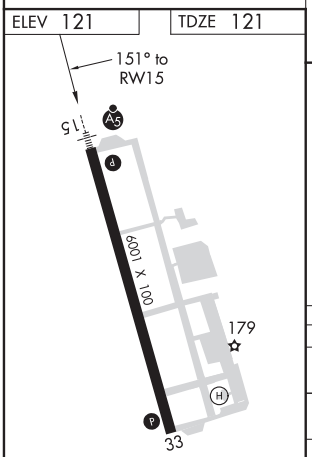

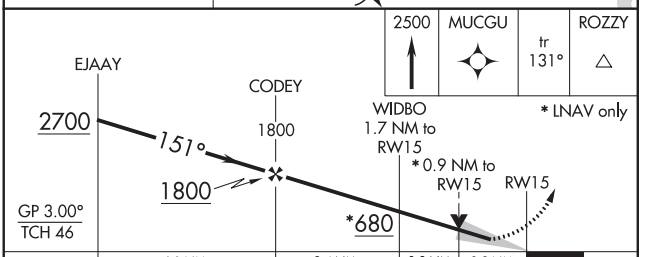

CATEGORY	A	B	C	D
LPV DA	321-½ 200 (200-½)			
LNAV/VNAV DA	452-¾ 331 (400-¾)			
LNAV MDA	460-½ 339 (400-½)			460-1 339 (400-1)
CIRCLING	520-1 399 (400-1)	580-1 459 (500-1)	580-1½ 459 (500-1½)	680-2 559 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	6001
331°	TDZE	121
	Apt Elev	121

RNAV (GPS) RWY 33

LINCOLN RGNL/KARL HARDER FIELD (LHM)

RNP APCH.

T A Rwy 33 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Beale AFB altimeter setting and increase all MDA 40 feet, and increase LNAV Cat C/D visibility ⅛ mile. VDP NA with Beale AFB altimeter setting.

MISSED APPROACH: Climb to 2000 direct WILLD and on track 300° to MYV VOR/DME and hold.

AWOS-3	NORCAL APP CON	UNICOM
124.25	125.4 259.1	123.0 (CTAF) L

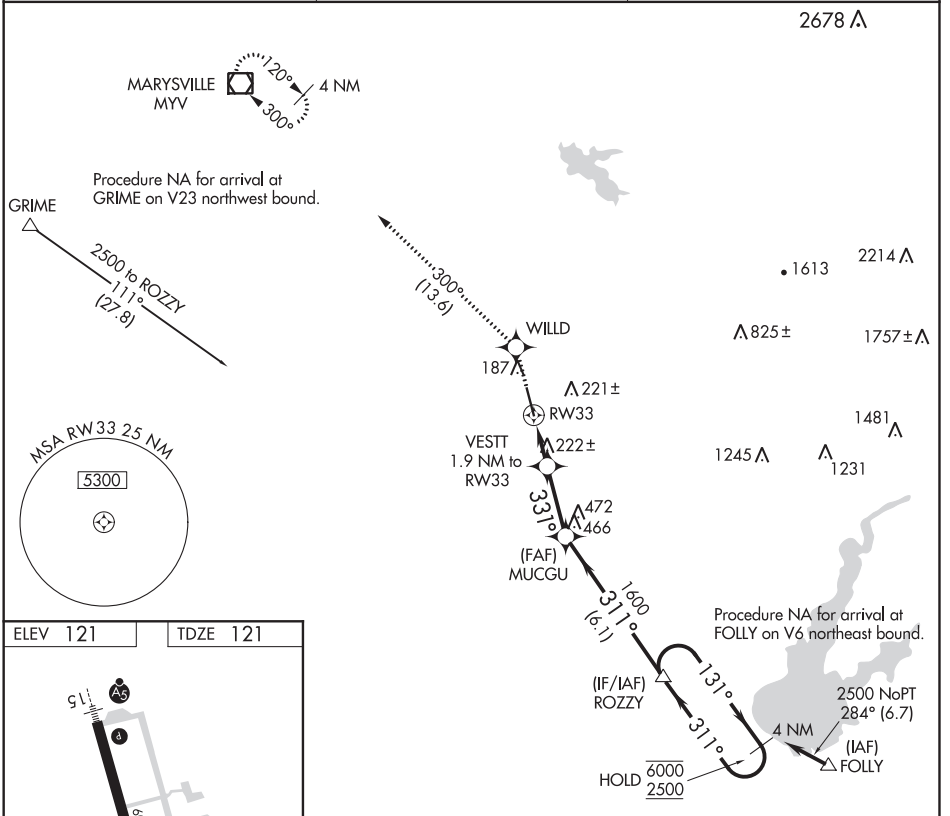

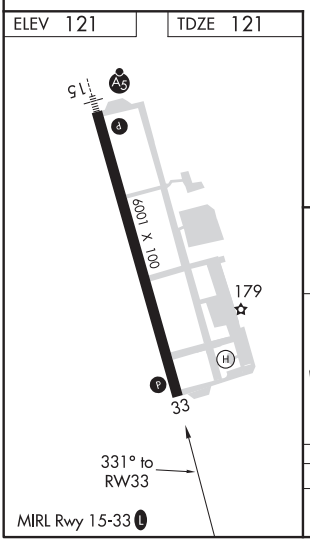

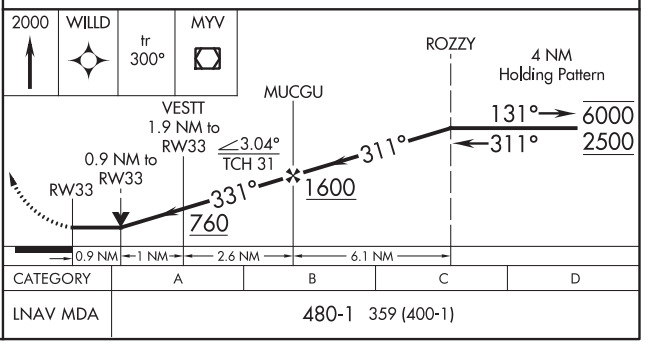

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	5249
CH 77829	293°	TDZE	574
W29A		Apt Elev	574

RNAV (GPS) RWY 29
LITTLE RIVER (LLR)

RNP APCH.

Circling NA northeast of Rwy 11-29.
Procedure NA at night.
Rwy 29 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing left turn to 6000 direct AMAKR and hold, continue climb-in-hold to 6000.

AWOS-AV	OAKLAND CENTER	AUNICOM
121.125	132.2 350.3	122.7 (CTAF) L

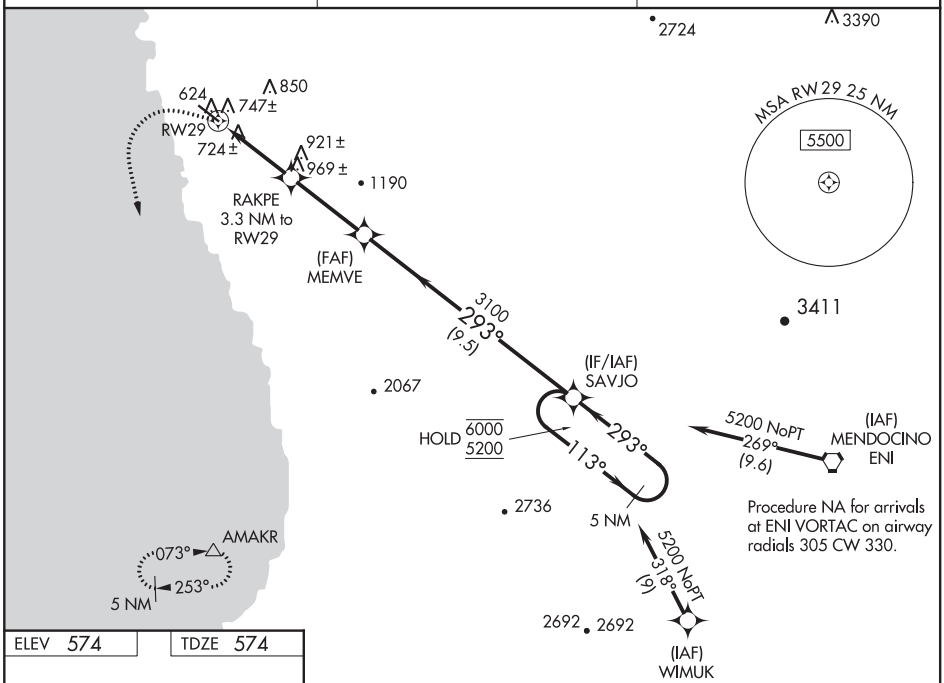

ELEV 574 TDZE 574



MIRL Rwy 11-29 L

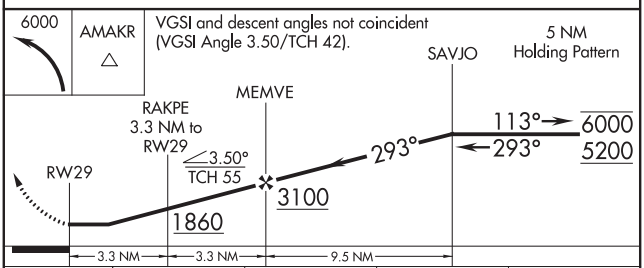

CATEGORY	A	B	C	D
LP MDA	980-1 406 (500-1)		980-1⅛ 406 (500-1⅛)	
LNAV MDA	1000-1 426 (500-1)		1000-1¼ 426 (500-1¼)	
C CIRCLING	1040-1 466 (500-1)		1080-1½ 506 (600-1½)	1400-2¾ 826 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020

(LTLRV1.LTLRV) 16091

SL-10390 (FAA)

LITTLE RIVER ONE DEPARTURE (OBSTACLE) (RNAV)

LITTLE RIVER (LLR)
LITTLE RIVER, CALIFORNIA

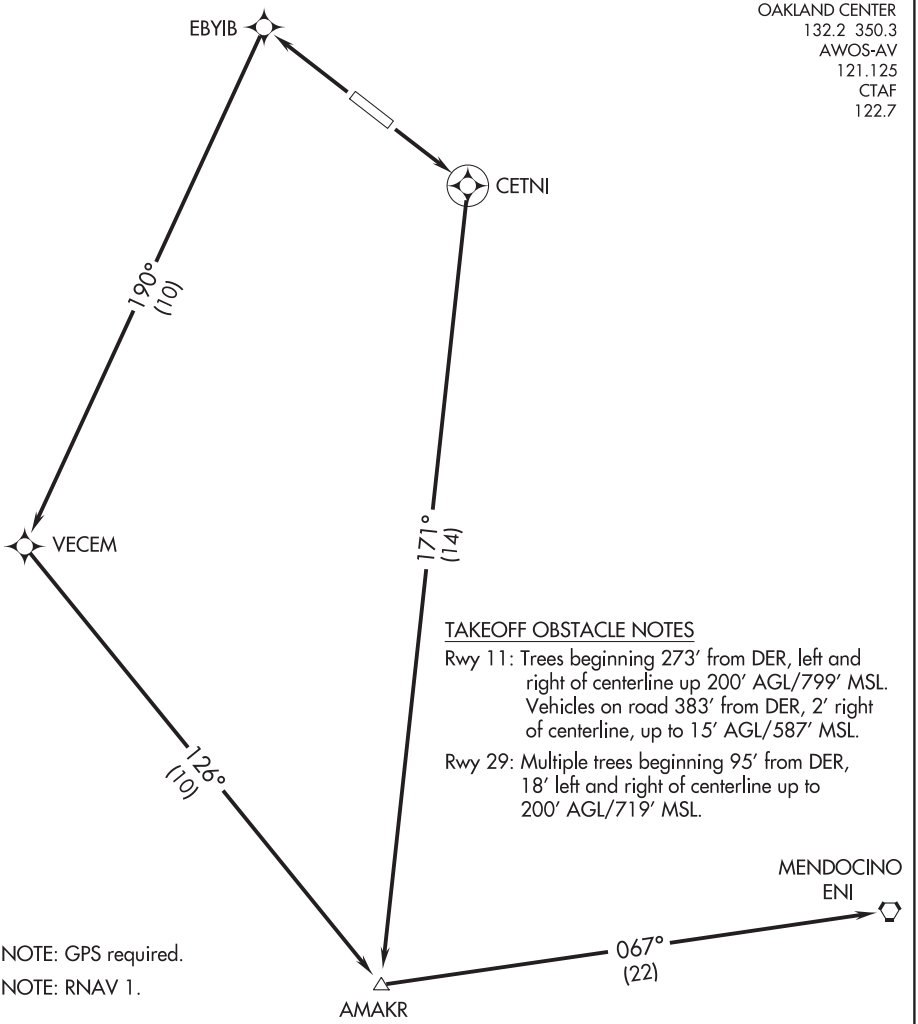

TAKEOFF OBSTACLE NOTES

Rwy 11: Trees beginning 273′ from DER, left and right of centerline up 200′ AGL/799′ MSL. Vehicles on road 383′ from DER, 2′ right of centerline, up to 15′ AGL/587′ MSL.

Rwy 29: Multiple trees beginning 95′ from DER, 18′ left and right of centerline up to 200′ AGL/719′ MSL.

NOTE: GPS required.

NOTE: RNAV 1.

TAKEOFF MINIMUMS

Rwy 11: 300-1 with minimum climb of 330′ per NM climb to 2100′.

Rwy 29: 300-1.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 11: Climb to 6000 direct CETNI and via track 171° to AMAKR and left turn via track 067° to ENI VORTAC, thence . . . .

TAKEOFF RUNWAY 29: Climb to 6000 direct EBYIB and left turn via track 190° to VECEM and via track 126° to AMAKR and via track 067° to ENI VORTAC, thence . . . .

. . . . via assigned route.

ILS RWY 25R

LIVERMORE MUNI (LVK)

LOC/DME I-LVK	APP CRS	Rwy Idg	5253
110.5	255°	TDZE	400
Chan 42		Apt Elev	400

Autopilot coupled approach NA below 1700. DME required.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 5000 on heading 020° and OAK VOR/DME R-060 to ALTAM/OAK VOR/DME 23.3 DME and hold, continue climb-in-hold to 5000.
*Missed approach requires a minimum climb of 358 feet per NM to 3600, if unable to meet climb gradient, see LOC RWY 25R.

ATIS	NORCAL APP CON	LIVERMORE TOWER *	GND CON	UNICOM
119.65	123.85 278.3	118.1 (CTAF) L 239.25	121.6	122.95

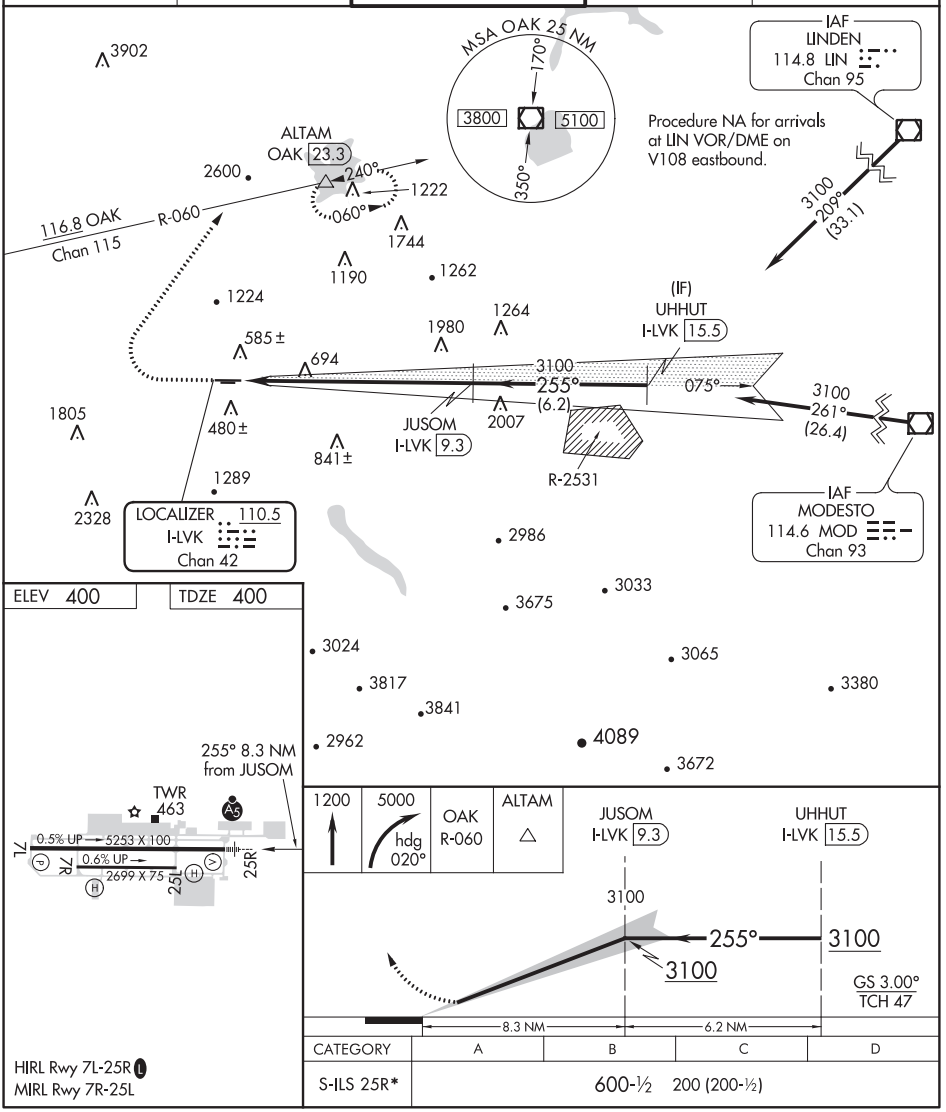

CATEGORY	A	B	C	D
S-ILS 25R*	600-½ 200 (200-½)			

HIRL Rwy 7L-25R L
MIRL Rwy 7R-25L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 25R

LIVERMORE MUNI (LVK)

WAAS	APP CRS	Rwy Idg	5253
CH 50214	255°	TDZE	400
W25A		Apt Elev	400

Circling to Rwy 25L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). Circling NA north of Rwy 7L-25R. RADAR Required. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cat C/D to 1⅝ SM.

MALSR

MISSED APPROACH: Climb to 4000 direct DRNAY and on track 317° to WHYEE.

ATIS	NORCAL APP CON	LIVERMORE TOWER ★	GND CON	UNICOM
119.65	123.85 278.3	118.1 (CTAF) L 239.25	121.6	122.95

MISSED APCH FIX

WHYEE

MSA RW25R 25 NM

5600

Procedure NA for arrivals at EVETT on T298, T331 northeast bound.

(IAF) EVETT

3700 NoPT 207° (26.2)

Procedure NA for arrivals at OOWEN on T259 northeast bound.

4 NM 075° 255°

3700 NoPT 249° (11)

(IAF) OOWEN

317° (15.3)

DRNAY

RW25R

585 ± 730 ± 480 ± 841 ±

3200 255° (5.9)

(FAF) GAYNS

(IF/IAF) UHHUT

3700 307° (6)

ZORIR

4900 NoPT 307° (5.6)

(IAF) SMONE

Procedure NA for arrivals at SMONE on T261-263 southeast bound.

TORCS 2.3 NM to RW25R

OYAHI 5.9 NM to RW25R

2600 1222 1744 1190 1262 1224 1980 1264 2007 1805 2328 1289 2986 3033 3675 3065 3380 3817

ELEV 400 TDZE 400

TWR 463

0.5% UP 5253 X 100

0.6% UP 2699 X 75

7L 7R 25L 25R

255° to RW25R

4000	DRNAY	tr 317°	WHYEE

*LNAV only

TORCS 2.3 NM to RW25R

OYAHI 5.9 NM to RW25R

GAYNS 3200

UHHUT 4 NM Holding Pattern 075° 255° 3700

*1.7 NM to RW25R

RW25R 1180* 2320* 3200

GP 3.00° TCH 47

1.7 NM 0.6 NM 3.6 NM 2.7 NM 5.9 NM

CATEGORY	A	B	C	D
LPV DA	600-½ 200 (200-½)			
LNAV/VNAV DA	843-⅞ 443 (500-⅞)			
LNAV MDA	980-½ 580 (600-½)		980-1¼ 580 (600-1¼)	
C CIRCLING	980-1 580 (600-1)		1140-2 740 (800-2)	1780-3 1380 (1400-3)

MIRL Rwy 7R-25L

HIRL Rwy 7L-25R L

37°42'N-121°49'W

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-LVK	APP CRS	Rwy Idg	5253
110.5	255°	TDZE	400
Chan 42		Apt Elev	400

LOC RWY 25R
LIVERMORE MUNI (LVK)

Circling to Rwy 25L NA at night.
Inop table does not apply to S-25R Cats C/D.
Circling NA north of Rwy 7L-25R.
DME required.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 5000 on heading 020° and OAK VOR/DME R-060 to ALTAM/OAK VOR/DME 23.3 DME and hold, continue climb-in-hold to 5000.
*Missed approach requires minimum climb of 235 feet per NM to 3600.

ATIS	NORCAL APP CON	LIVERMORE TOWER *	GND CON	UNICOM
119.65	123.85 278.3	118.1 (CTAF) L 239.25	121.6	122.95

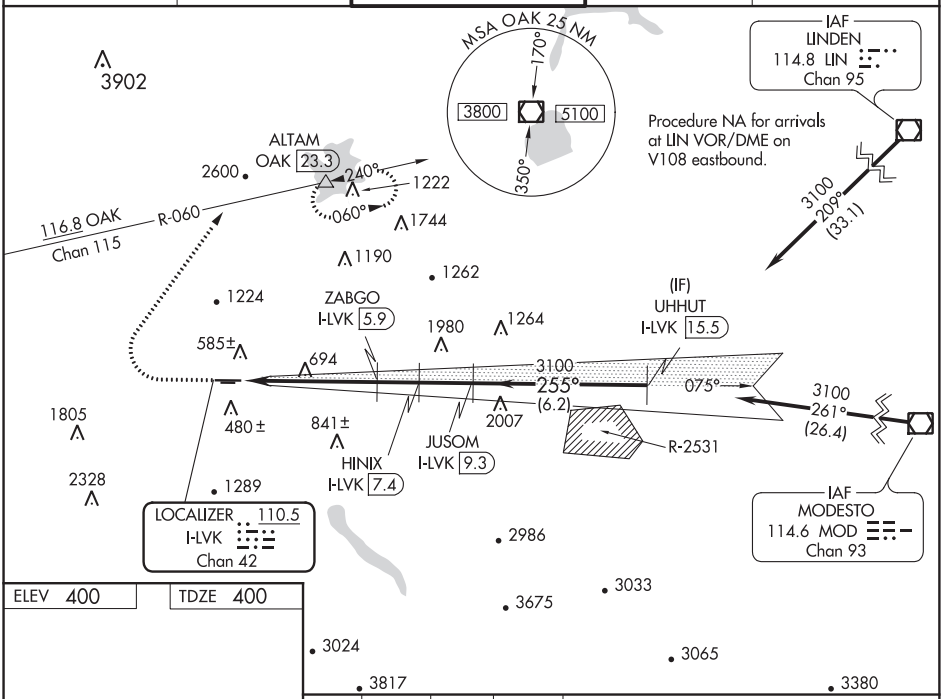

ELEV 400 | TDZE 400

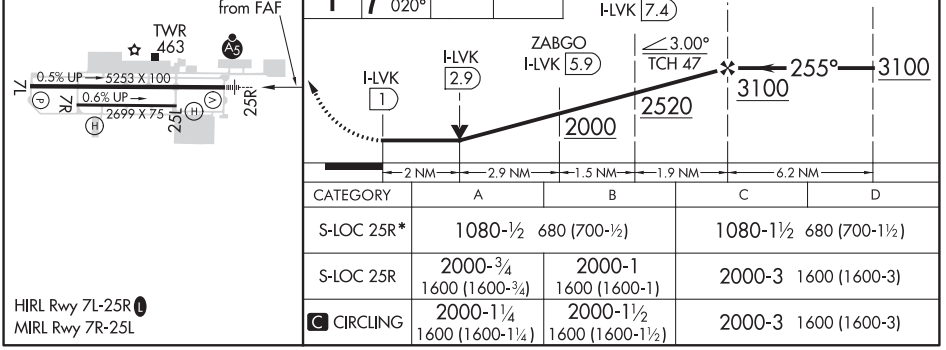

CATEGORY	A	B	C	D
S-LOC 25R*	1080-½ 680 (700-½)		1080-1½ 680 (700-1½)	
S-LOC 25R	2000-¾ 1600 (1600-¾)	2000-1 1600 (1600-1)	2000-3 1600 (1600-3)	
C CIRCLING	2000-1¼ 1600 (1600-1¼)	2000-1½ 1600 (1600-1½)	2000-3 1600 (1600-3)	

HIRL Rwy 7L-25R L
MIRL Rwy 7R-25L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19227

AIRPORT DIAGRAM

AL-6075 (FAA)

LIVERMORE MUNI (LVK)
LIVERMORE, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM

LIVERMORE, CALIFORNIA
LIVERMORE MUNI (LVK)

19227

LIVERMORE THREE DEPARTURE (OBSTACLE)

(LVK3.ALTAM) 07DEC17

LIVERMORE, CALIFORNIA
LIVERMORE MUNI (LVK)

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 7L/R: Climb heading 075° to 1000, then climbing left turn heading 340° and on SAC VORTAC R-177 to ALTAM, thence . . . .

TAKEOFF RUNWAYS 25L/R: Climb heading 255° to 1200, then climbing right turn heading 020° and on OAK VOR/DME R-060 to ALTAM, thence . . . .

VCOA ALL RUNWAYS: Obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Livermore Airport at or above 3100, thence . . . .

. . . . continue climb on course to the MEA/MCA for route of flight.

TAKEOFF MINIMUMS

Rwys 7L/R: Standard with minimum climb of 375′ per NM to 3500 or 2900-3 for VCOA.
Rwys 25L/R: Standard with minimum climb of 295′ per NM to 3400 or 2900-3 for VCOA.

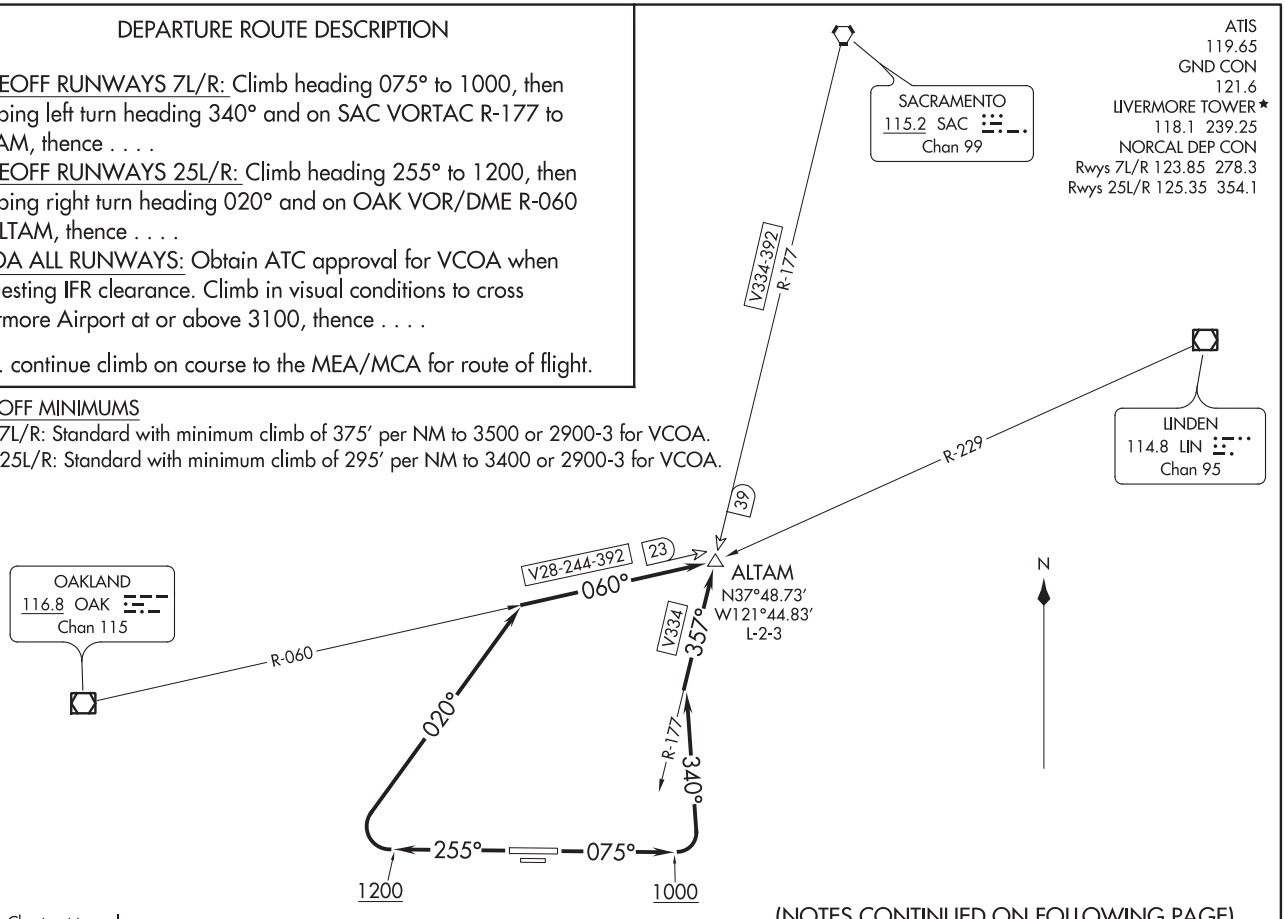

(NOTES CONTINUED ON FOLLOWING PAGE)

(LVK3.ALTAM) 17341

LIVERMORE THREE DEPARTURE (OBSTACLE)

AL-6075 (FAA)

LIVERMORE MUNI (LVK)
LIVERMORE, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

TAKEOFF OBSTACLE NOTES

Rwy 7L: Sign 20′ from DER, 475′ right of centerline, up to 3′ AGL/403′ MSL.
Bush 48′ from DER, 501′ left of centerline, 403′ MSL.
Poles, buildings, electrical system, antenna on building, tree, and tanks beginning 447′ from DER, 567′ right of centerline, up to 42′ AGL/445′ MSL.
Hangar and building beginning 459′ from DER, 558′ left of centerline, up to 414′ MSL.
Tree 708′ from DER, 603′ left of centerline, 421′ MSL.
Trees beginning 711′ from DER, 567′ left of centerline, up to 439′ MSL.
Trees beginning 1623′ from DER, 690′ left of centerline, up to 450′ MSL.
Tree 1626′ from DER, 796′ left of centerline, 455′ MSL.
Trees beginning 1732′ from DER, 528′ right of centerline, up to 461′ MSL.
Tree 1767′ from DER, 816′ left of centerline, 463′ MSL.
Tree 2217′ from DER, 1040′ right of centerline, 465′ MSL.
Tree 2368′ from DER, 1027′ right of centerline, 466′ MSL.
Tree 3922′ from DER, 1480′ left of centerline, 528′ MSL.

Rwy 7R: Building 3′ from DER, 287′ right of centerline, 411′ MSL.
Terrain 3′ from DER, 9′ left of centerline, 396′ MSL.
Buildings beginning 29′ from DER, 287′ right of centerline, up to 412′ MSL.
Buildings and hangar beginning 137′ from DER, 287′ right of centerline, up to 413′ MSL.
Tower and navaid beginning 308′ from DER, 249′ left of centerline, up to 39′ AGL/432′ MSL.
Building 435′ from DER, 287′ right of centerline, 414′ MSL.
Buildings beginning 463′ from DER, 287′ right of centerline, up to 416′ MSL.
Building 668′ from DER, 287′ right of centerline, 417′ MSL.
Building 701′ from DER, 403′ right of centerline, 418′ MSL.
Buildings beginning 799′ from DER, 287′ right of centerline, up to 436′ MSL.
Tree 1146′ from DER, 399′ right of centerline, 438′ MSL.
Buildings and trees beginning 1169′ from DER, 344′ right of centerline, up to 445′ MSL.
Hangar and pole beginning 1402′ from DER, 66′ right of centerline, up to 446′ MSL.
Trees beginning 2349′ from DER, 672′ right of centerline, up to 467′ MSL.
Tree 3980′ from DER, 1563′ right of centerline, 497′ MSL.

Rwy 25L: Tree 388′ from DER, 532′ left of centerline, 442 MSL.

Rwy 25R: Sign 34′ from DER, 203′ right of centerline, 5′ AGL/376′ MSL.
Terrain beginning 43′ from DER, 486′ right of centerline, up to 378′ MSL.
Fences beginning 169′ from DER, 413′ right of centerline, up to 379′ MSL.
Tree 305′ from DER, 298′ right of centerline, 385′ MSL.
Tree 349′ from DER, 580′ right of centerline, 411′ MSL.
Tree 464′ from DER, 509′ right of centerline, 417′ MSL.
Trees beginning 477′ from DER, 426′ right of centerline, up to 424′ MSL.
Pole 662′ from DER, 411′ left of centerline, 33′ AGL/400′ MSL.
Trees beginning 805′ from DER, 248′ right of centerline, up to 427′ MSL.
Trees beginning 1405′ from DER, 747′ right of centerline, up to 432′ MSL.
Tree 1426′ from DER, 186′ left of centerline, 411′ MSL.
Tree 1596′ from DER, 244′ left of centerline, 413′ MSL.
Tree 1719′ from DER, 127′ left of centerline, 421′ MSL.
Trees beginning 1946′ from DER, 50′ right of centerline, up to 436′ MSL.

APP CRS	Rwy Idg	N/A
285°	TDZE	N/A
	Apt Elev	60

RNAV (GPS)-B
LODI (103)

DME/DME RNP-0.3 NA.
Use Stockton altimeter setting, when not received, use Sacramento Intl altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climbing left turn to 2000 direct LIN VOR/DME and hold.

SCK ASOS	NORCAL APP CON	CTAF
118.25	125.1 363.2	122.9

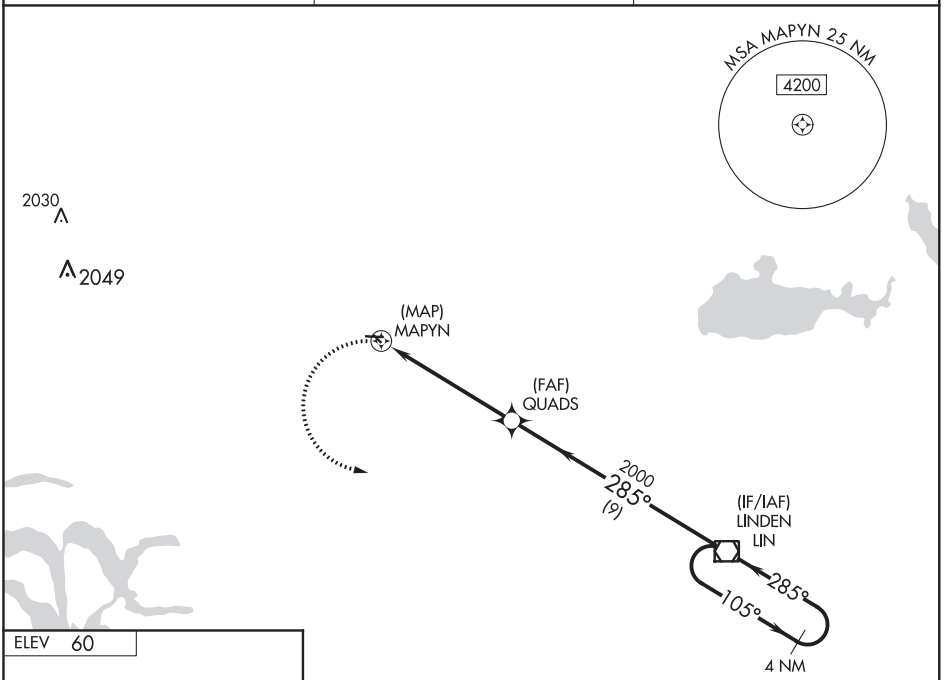

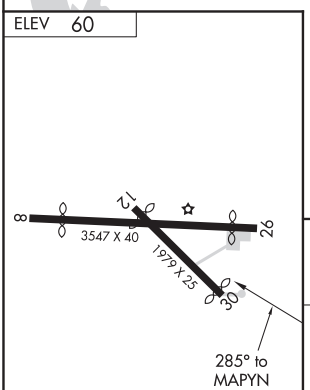

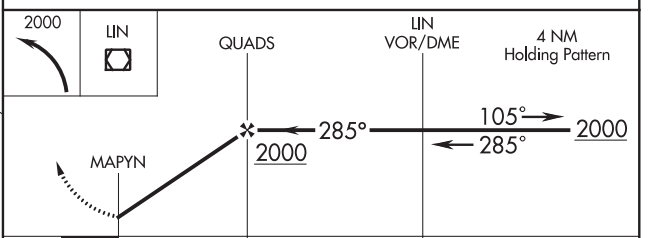

CATEGORY	A	B	C	D
CIRCLING	640-1 580 (600-1)		NA	

LIRL Rwy 8-26

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME LIN	APP CRS	Rwy Idg	N/A
114.8	284°	TDZE	N/A
Chan 95		Apt Elev	60

VOR-A
LODI (103)

DME required. Use Stockton altimeter setting, when not received, use Sacramento Intl altimeter setting and increase all MDA 40 feet. Procedure NA at night. Rwy 8, 12, 26, 30 Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing left turn to 2000 direct LIN VOR/DME and hold.

SCK ASOS	NORCAL APP CON	CTAF
118.25	125.1 363.2	122.9

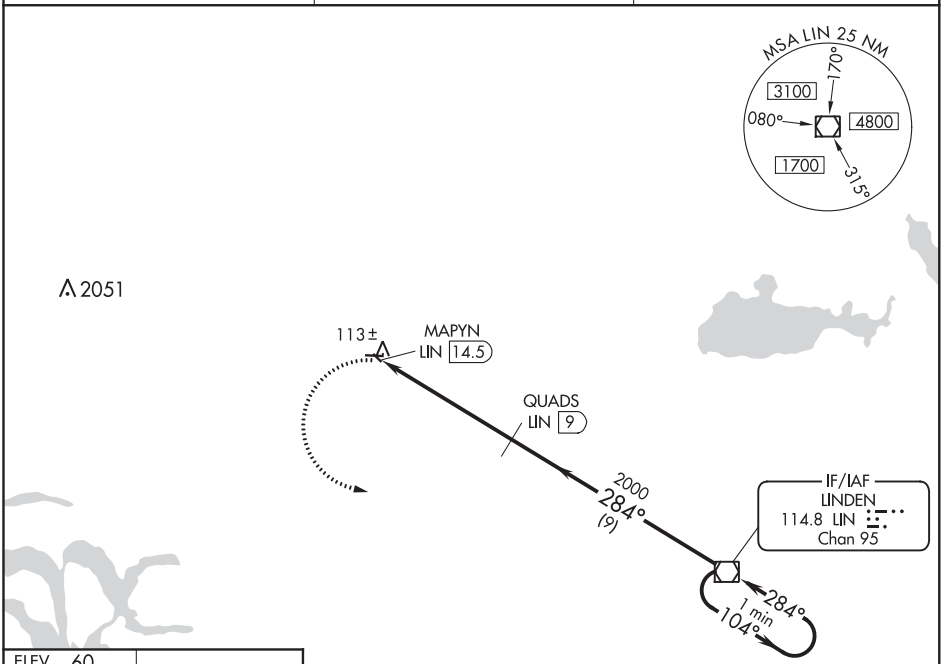

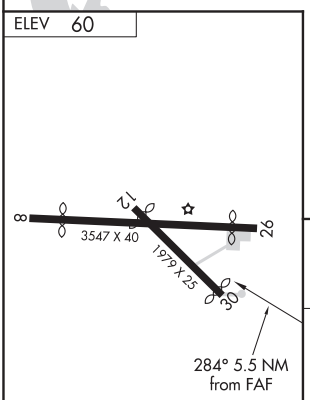

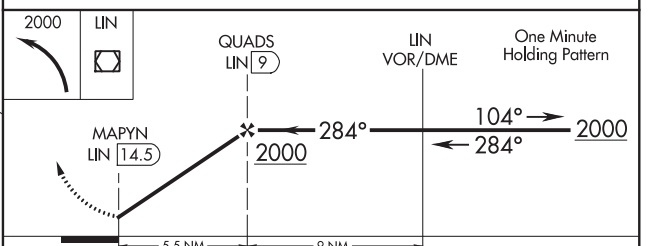

CATEGORY	A	B	C	D
C CIRCLING	620-1	560 (600-1)	NA	

LIRL Rwy 8-26

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	3801
CH 53715	137°	TDZE	121
W14A		Apt Elev	121

RNAV (GPS) RWY 14
LOS BANOS MUNI (LSN)

RNP APCH.

T A NA Rwy 14 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Merced Rgnl/Macready Field altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Merced Rgnl/Macready Field altimeter setting and increase all DA/MDA 60 feet, and all visibility ¼ SM.

MISSED APPROACH: Climb to 6500 direct GEZJO and on track 154° to PXN VORTAC and hold, continue climb-in-hold to 6500.

AWOS-3	NORCAL APP CON	UNICOM
118.675	120.95 269.45	122.8 (CTAF) L

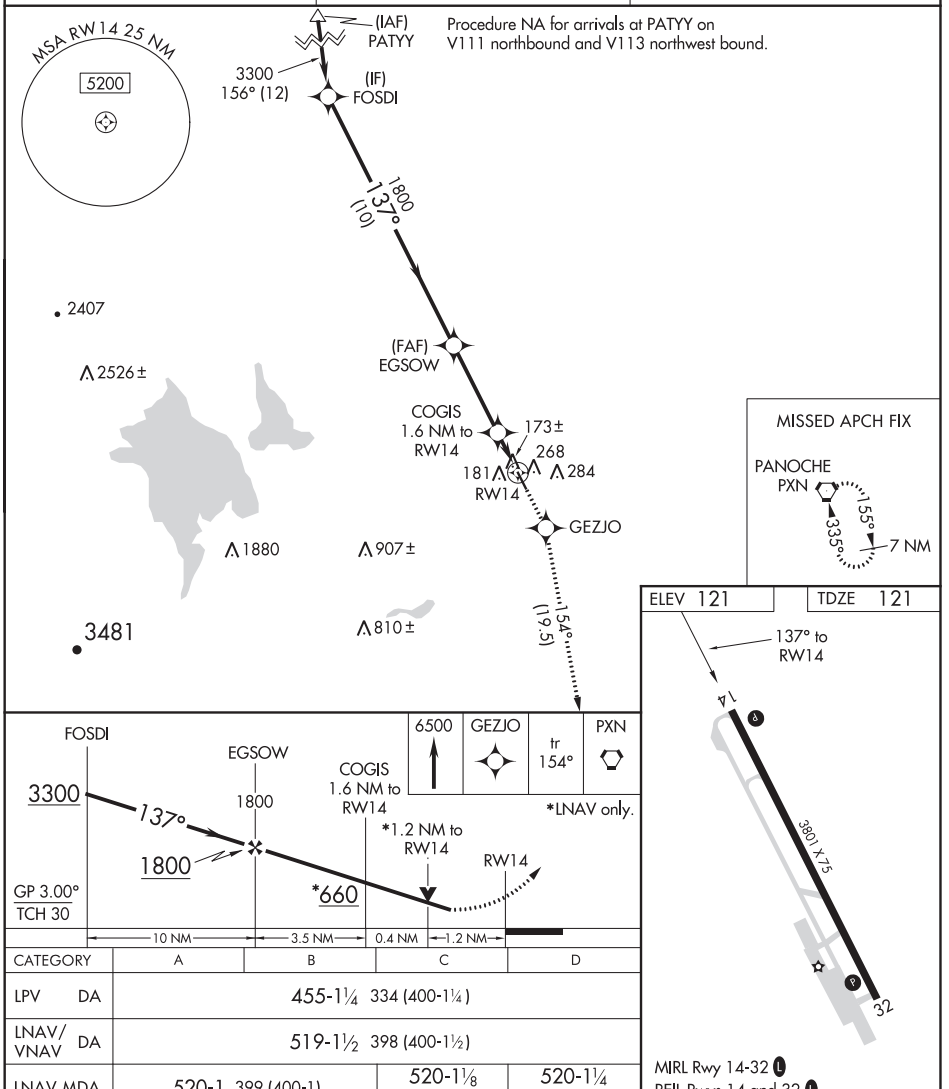

CATEGORY	A	B	C	D
LPV DA	455-1¼ 334 (400-1¼)			
LNAV/VNAV DA	519-1½ 398 (400-1½)			
LNAV MDA	520-1 399 (400-1)		520-1⅛ 399 (400-1⅛)	520-1¼ 399 (400-1¼)

MIRL Rwy 14-32 L
REIL Rwys 14 and 32 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

LOS BANOS, CALIFORNIA | AL-5819 (FAA) | 19199

APP CRS	Rwy Idg	3801
317°	TDZE	121
	Apt Elev	121

RNAV (GPS) RWY 32
LOS BANOS MUNI (LSN)

RNP APCH.

Rwy 32 helicopter visibility reduction below ¾ SM NA. VDP NA when using Merced Rgnl/Macready Field altimeter setting. When local altimeter setting not received, use Merced Rgnl/Macready Field altimeter setting and increase all MDA 60 feet, and all visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct COGIS and on track 323° to VOLTA and hold.

AWOS-3	NORCAL APP CON	UNICOM
118.675	120.95 269.45	122.8 (CTAF) L

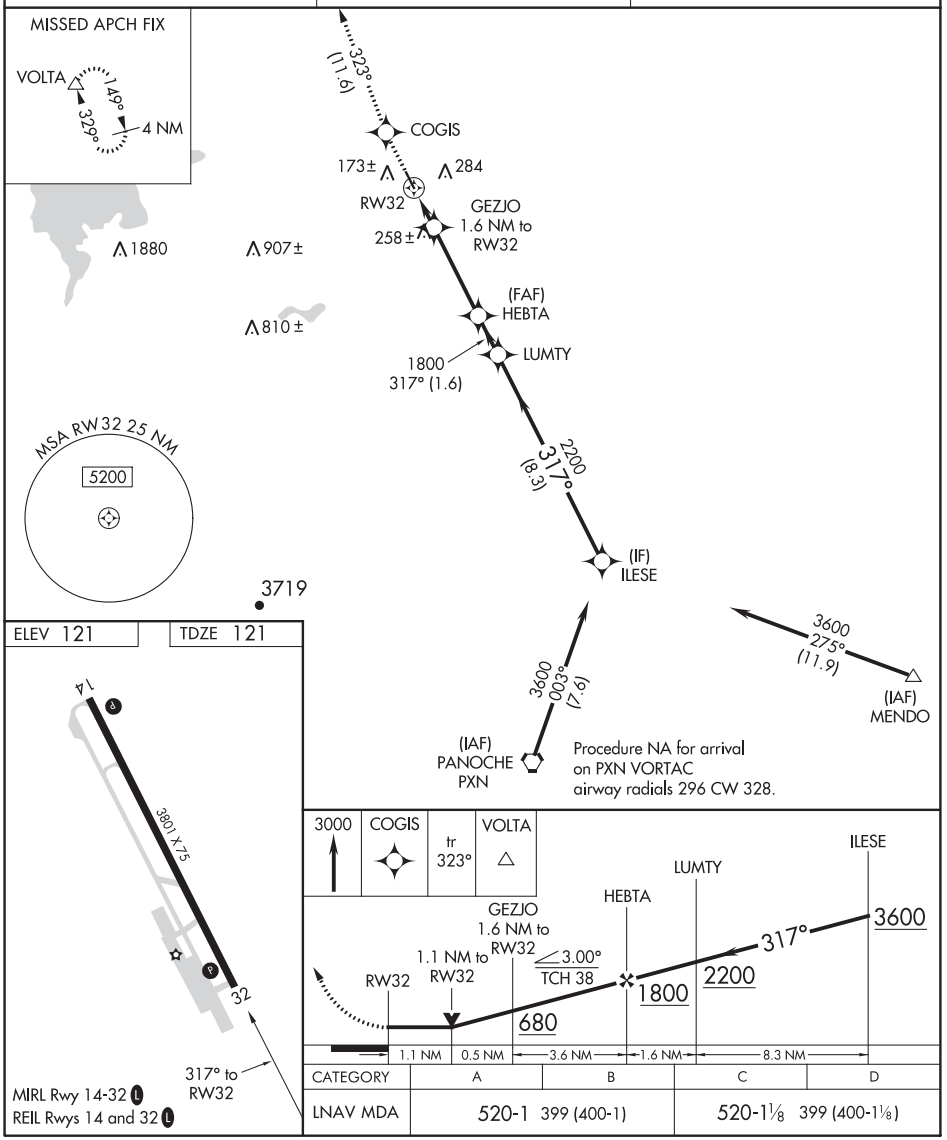

CATEGORY	A	B	C	D
LNAV MDA	520-1 399 (400-1)		520-1⅛ 399 (400-1⅛)	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC PXN	APP CRS	Rwy Idg	3801
112.6	332°	TDZE	121
Chan 73		Apt Elev	121

VOR RWY 32
LOS BANOS MUNI (LSN)

DME required.

Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Merced Rgnl/Macready Field altimeter setting and increase all MDA 60 feet, increase Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climbing left turn to 5000 on heading 295° and PXN VORTAC R-328 to VOLTA INT/PXN 34.8 DME and hold. Continue climb-in-hold to 5000.

AWOS-3	NORCAL APP CON	UNICOM
118.675	120.95 269.45	122.8 (CTAF) L

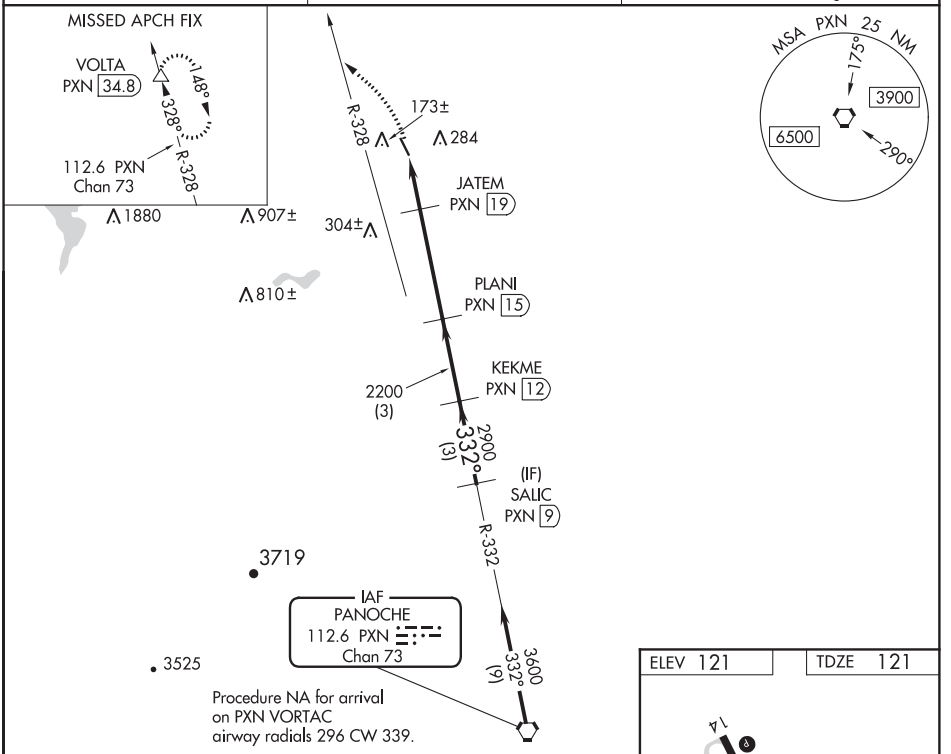

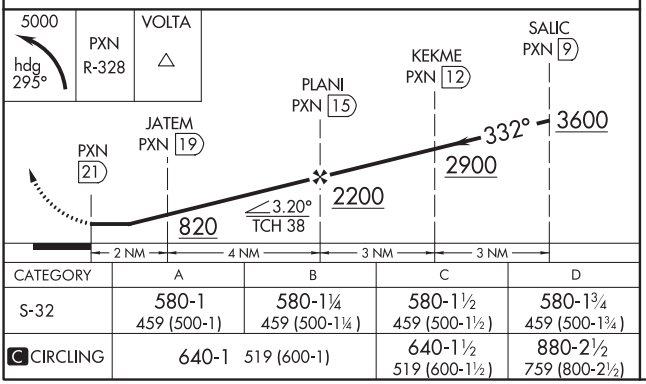

CATEGORY	A	B	C	D
S-32	580-1 459 (500-1)	580-1¼ 459 (500-1¼)	580-1½ 459 (500-1½)	580-1¾ 459 (500-1¾)
C CIRCLING	640-1 519 (600-1)		640-1½ 519 (600-1½)	880-2½ 759 (800-2½)

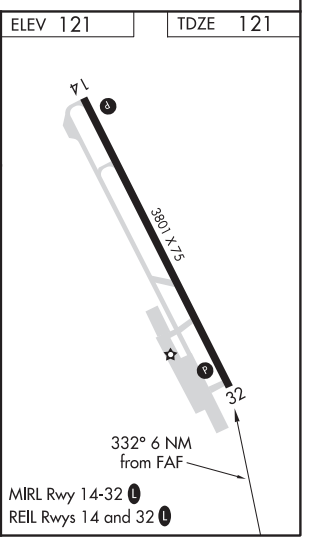

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MADERA, CALIFORNIA | AL-6399 (FAA) | 19283

RNAV (GPS) RWY 12

MADERA MUNI (MAE)

WAAS	APP CRS	Rwy Idg	5545
CH 62909	122°	TDZE	253
W12A		Apt Elev	255

RNP APCH.

Circling NA to Rwys 8 and 26.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct KITBY and hold.

ASOS	FRESNO APP CON	CLNC DEL	UNICOM
134.725	119.45	119.45	122.8 (CTAF)

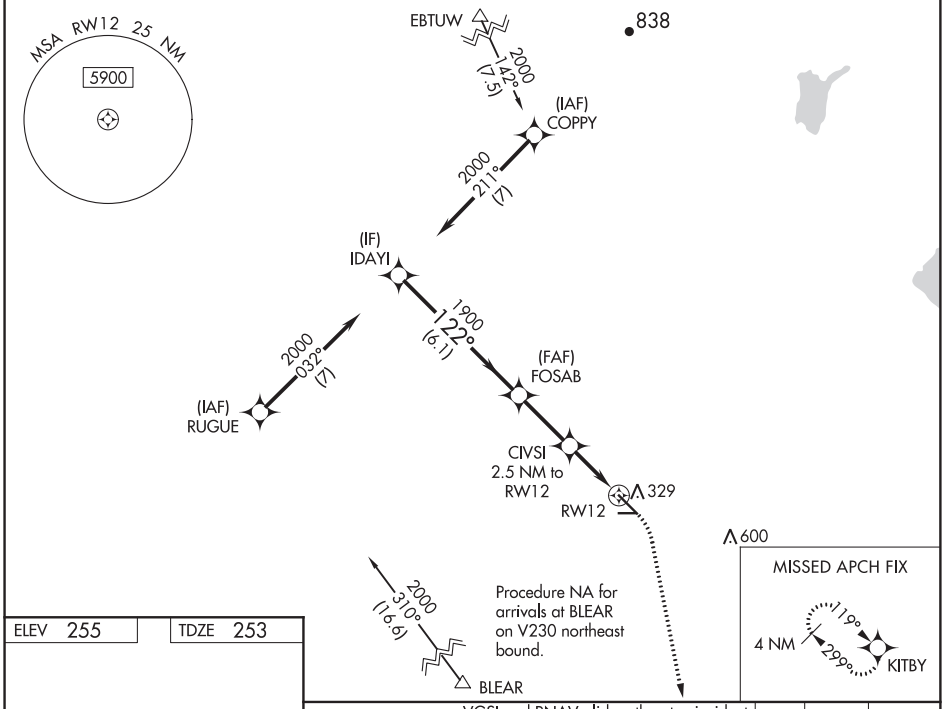

ELEV 255 | TDZE 253

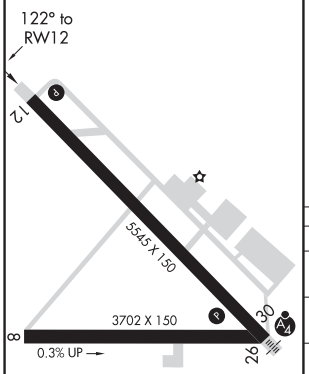

REIL Rwy 12 (L)
MIRL Rwy 12-30 (L)

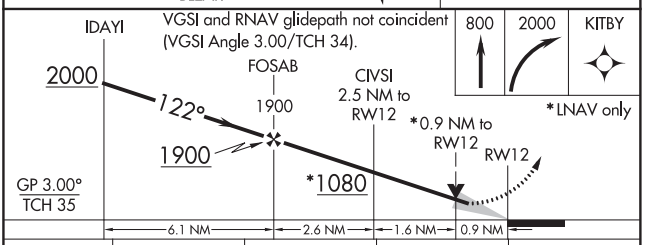

CATEGORY	A	B	C	D
LPV DA	503-¾ 250 (300-¾)			NA
LNAV/VNAV DA	503-¾ 250 (300-¾)			NA
LNAV MDA	580-1 327 (400-1)			NA
C CIRCLING	680-1 425 (500-1)	720-1 465 (500-1)	740-1½ 485 (500-1½)	NA

MADERA, CALIFORNIA
Amdt 2 10OCT19

36°59'N-120°07'W

MADERA MUNI (MAE)

RNAV (GPS) RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 30

MADERA MUNI (MAE)

WAAS	APP CRS	Rwy Idg	5545
CH 90209	302°	TDZE	255
W30A		Apt Elev	255

RNP APCH.

Circling NA to Rwys 8 and 26. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. Inop table does not apply to LPV and LNAV/VNAV Cat A/B/C.

MALSF

MISSED APPROACH: Climb to 800 then climbing left turn to 2000 to KITBY and hold.

ASOS	FRESNO APP CON	CLNC DEL	UNICOM
134.725	119.45	119.45	122.8 (CTAF) L

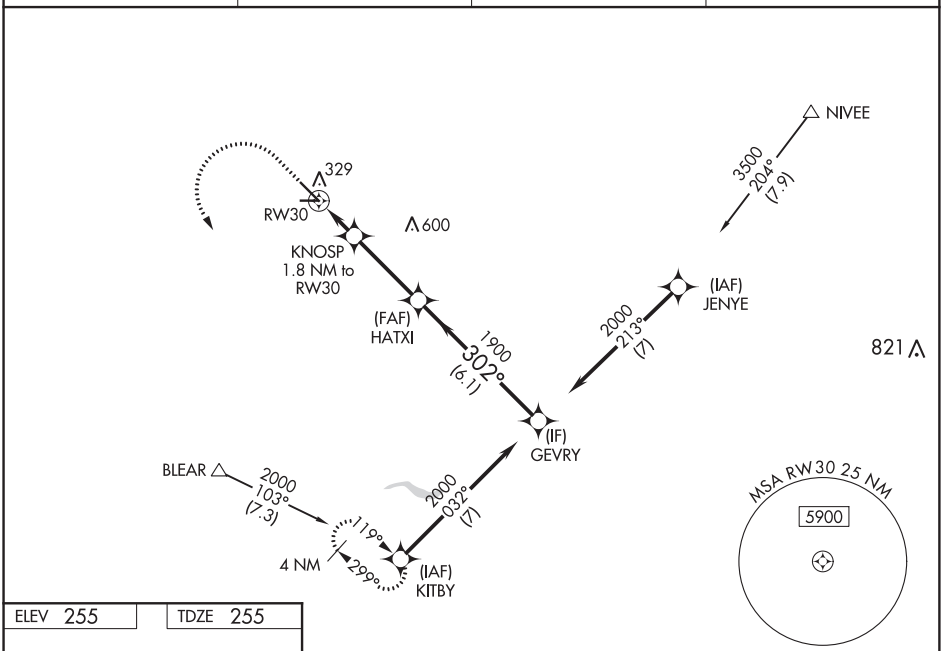

ELEV 255 TDZE 255

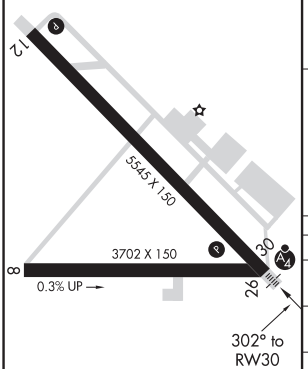

REIL Rwy 12 L

MIRL Rwy 12-30 L

800 2000 KITBY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).

*LNAV only

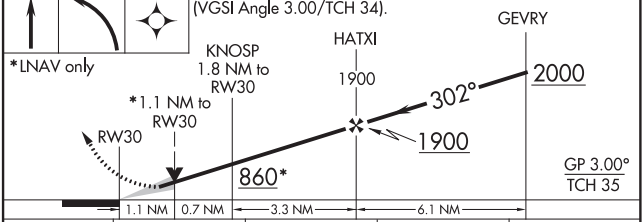

CATEGORY	A	B	C	D
LPV DA	505-¾ 250 (300-¾)			NA
LNAV/VNAV DA	505-¾ 250 (300-¾)			NA
LNAV MDA	640-¾ 385 (400-¾)		640-⅞ 385 (400-⅞)	NA
C CIRCLING	680-1 425 (500-1)	720-1 465 (500-1)	740-1½ 485 (500-1½)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MAMMOTH LAKES, CALIFORNIA | AL-6841 (FAA) | 19227

RNAV (GPS) RWY 27

MAMMOTH YOSEMITE (MMH)

APP CRS	Rwy Idg	TDZE	Apt Elev
259°	7000	7097	7135

Circling NA at night. Circling NA south of Rwy 9-27. DME/DME RNP-0.3 NA. When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climbing right turn to 13000 direct TEPRE and via track 044° to EVERR and via track 322° to NIKOL and hold.

AWOS-3	OAKLAND CENTER	UNICOM
118.05	125.75 284.65	122.8 (CTAF) L

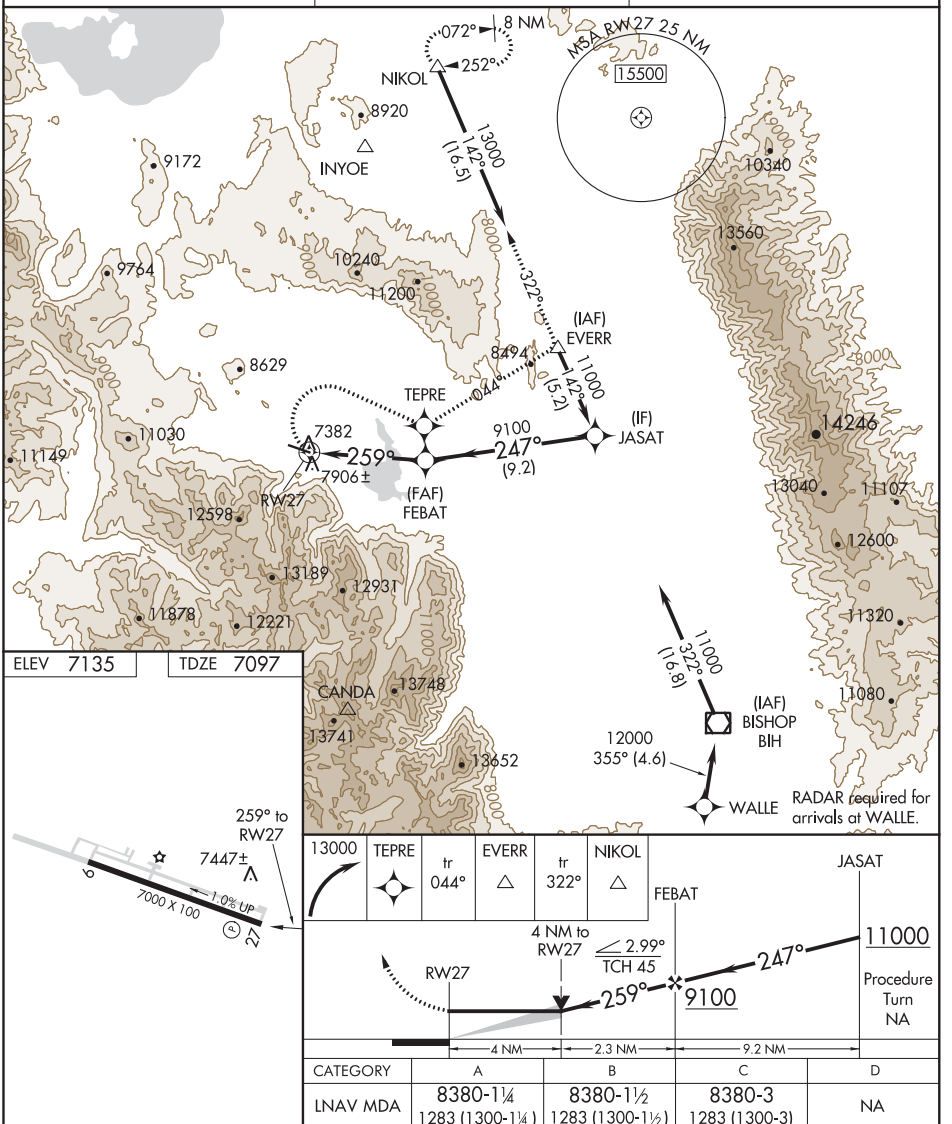

CATEGORY	A	B	C	D
LNAV MDA	8380-1¼ 1283 (1300-1¼)	8380-1½ 1283 (1300-1½)	8380-3 1283 (1300-3)	NA
CIRCLING	8380-1¼ 1245 (1300-1¼)	8380-1½ 1245 (1300-1½)	8380-3 1245 (1300-3)	NA

REIL Rwy 27 L
MIRL Rwy 9-27 L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND CENTER
125.75 284.65
UNICOM
122.8 (CTAF)
AWOS-3
118.05

TAKEOFF MINIMUMS
Rwy 9: Standard with minimum climb of 370' per NM to 10500.
Rwy 27: Standard with minimum climb of 500' per NM to 12700.

NOTE: Do not exceed 250K until established on 054° heading.
NOTE: Rwy 27 NA at night.

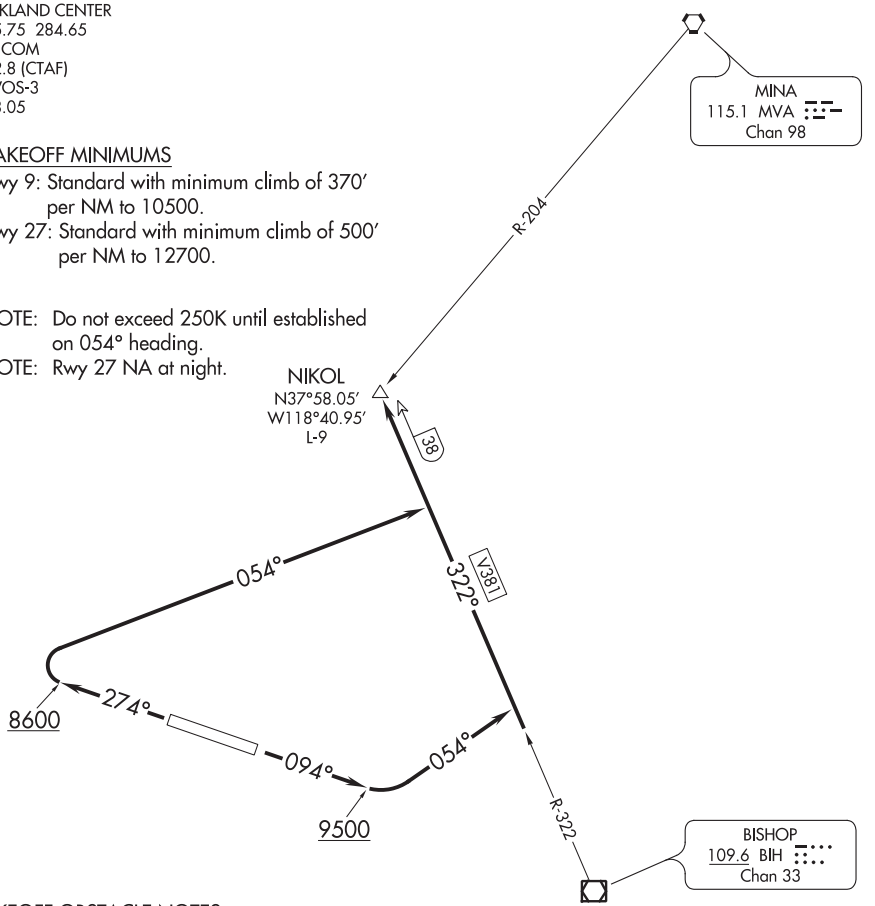

TAKEOFF OBSTACLE NOTES
Rwy 9: Vehicles on roadway beginning 11' from DER, 460' right of centerline, up to 17' AGL/7078' MSL. Trees beginning 1956' from DER, 554' left of centerline, up to 100' AGL/7186' MSL. Trees beginning 3994' from DER, 963' right of centerline, up to 100' AGL/7252' MSL.
Rwy 27: Vehicles on roadway and bushes beginning 178' from DER, 269' left of centerline, up to 17' AGL/7160' MSL. Building 386' from DER, 434' right of centerline, 21' AGL/7155' MSL. Terrain and trees beginning 1.9 NM from DER, 334' right of centerline, up to 68' AGL/7970' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9: Climb heading 094° to 9500, then climbing left turn heading 054° to intercept BIH R-322 to NIKOL INT.

TAKEOFF RUNWAY 27: Climb heading 274° to 8600, then climbing right turn heading 054° to intercept BIH R-322 to NIKOL INT.

SW-2, 30 JAN 2020 to 26 MAR 2020

(CROLI1.CROLI) 18312

CROLI ONE DEPARTURE (RNAV)

AL-6841 (FAA)

MAMMOTH YOSEMITE (MMH)
MAMMOTH LAKES, CALIFORNIA

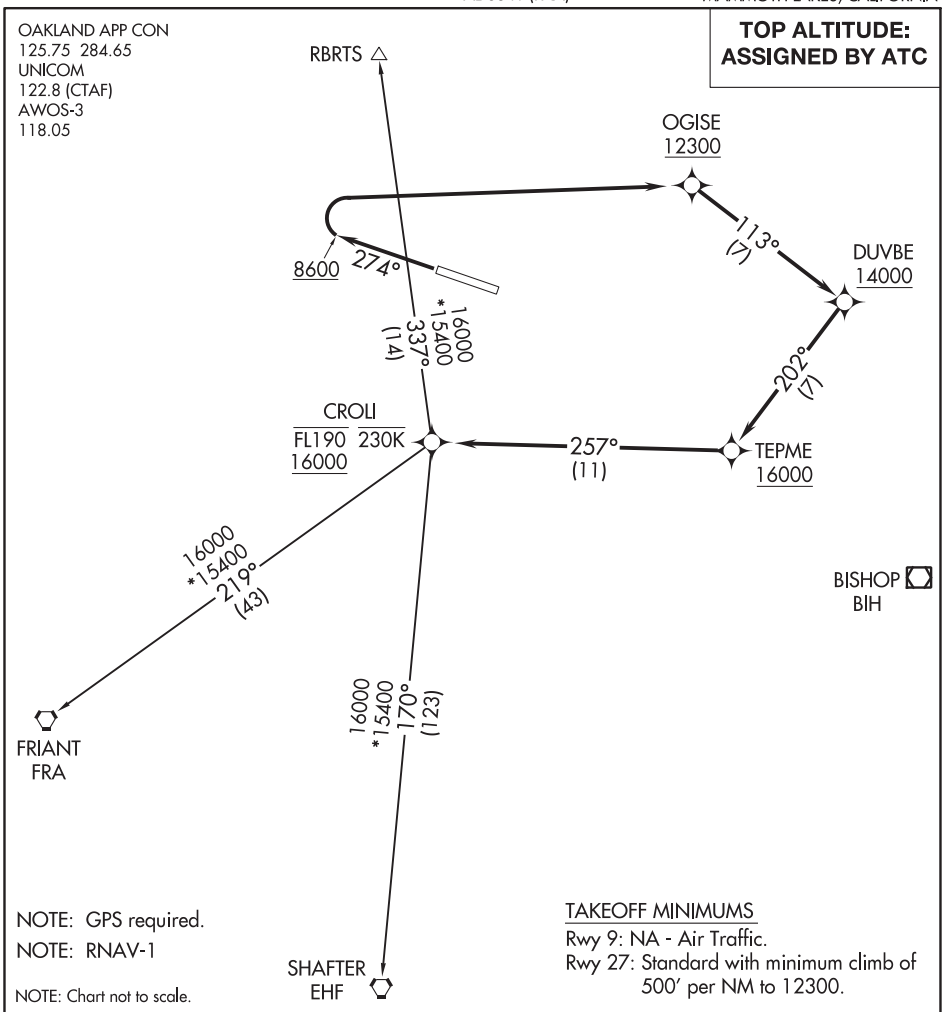

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 27: Climb heading 274° to 8600, then right turn direct to cross OGISE at or above 12300, then on track 113° to cross DUVBE at or above 14000, then on track 202° to cross TEPME at or above 16000, then on track 257° to cross CROLI at or above 16000 and at or below FL190, thence. . . .

. . . .on (transition) maintain 16000, expect filed altitude 10 minutes after departure.

SHAFTER TRANSITION (CROLI1.EHF)

FRIANT TRANSITION (CROLI1.FRA)

RBRTS TRANSITION (CROLI1.RBRTS)

OENNS ONE DEPARTURE (RNAV)

AL-6841 (FAA)

MAMMOTH YOSEMITE (MMH)
MAMMOTH LAKES, CALIFORNIA

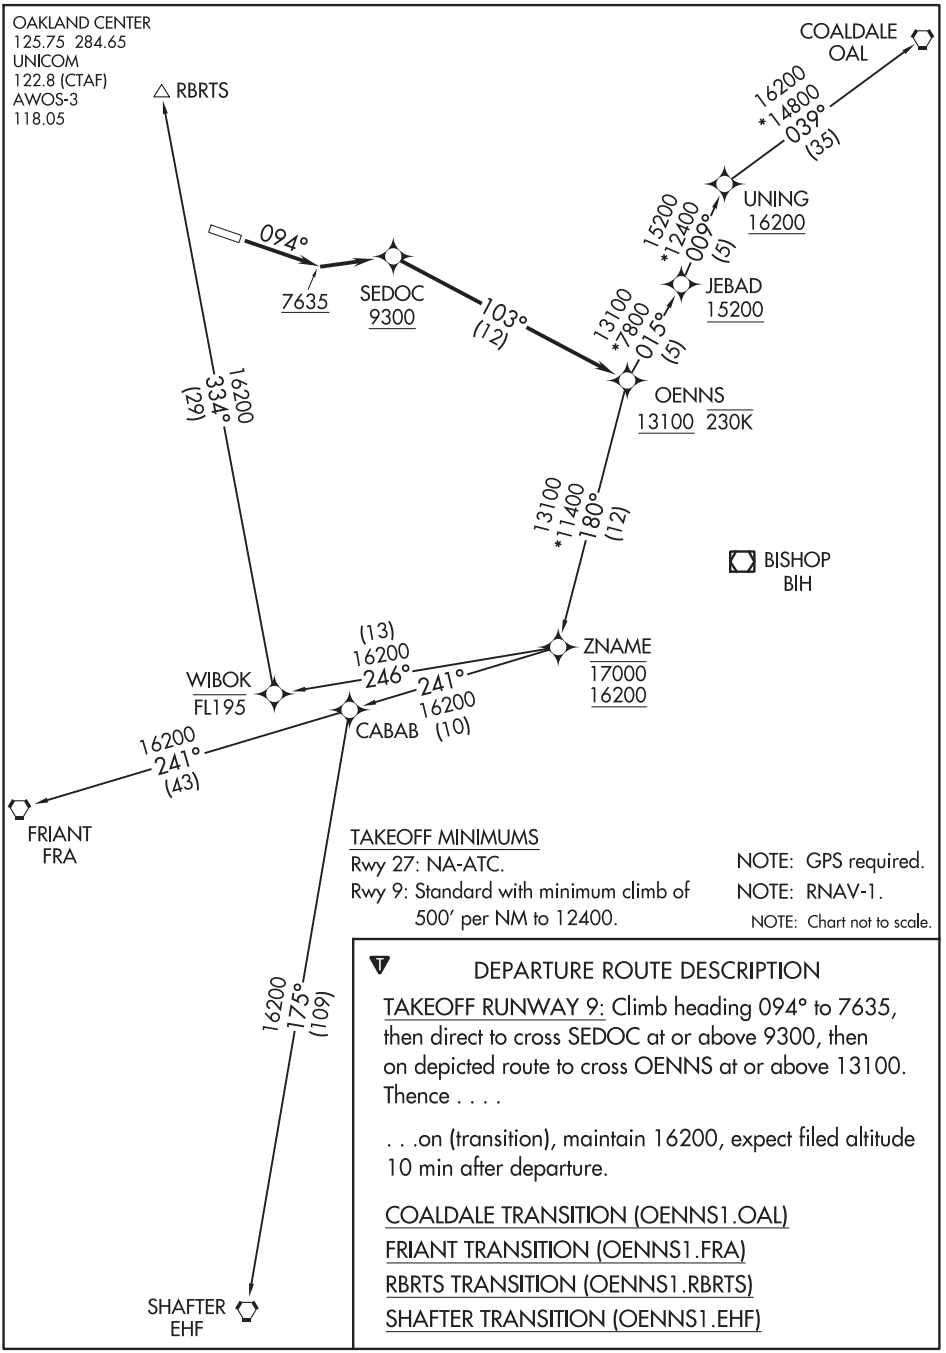

TAKEOFF MINIMUMS

Rwy 27: NA-ATC.

Rwy 9: Standard with minimum climb of 500′ per NM to 12400.

NOTE: GPS required.

NOTE: RNAV-1.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9: Climb heading 094° to 7635, then direct to cross SEDOC at or above 9300, then on depicted route to cross OENNS at or above 13100. Thence . . . .

. . .on (transition), maintain 16200, expect filed altitude 10 min after departure.

COALDALE TRANSITION (OENNS1.OAL)

FRIANT TRANSITION (OENNS1.FRA)

RBRTS TRANSITION (OENNS1.RBRTS)

SHAFTER TRANSITION (OENNS1.EHF)

SW-2, 30 JAN 2020 to 26 MAR 2020

MARINA, CALIFORNIA | AL-5271 (FAA) | 19115

RNAV (GPS) RWY 11

MARINA MUNI (OAR)

APP CRS	Rwy Idg	3483
108°	TDZE	137
	Apt Elev	137

DME/DME RNP- 0.3 NA. Visibility reduction by helicopters NA. Use Monterey altimeter setting; when not received, use Salinas altimeter setting and increase all MDA 220 feet and all Cat B visibilities ¼ mile.

MISSED APPROACH: Climbing left turn to 2700 direct FOMET and hold.

AWOS-3PT	NORCAL APP CON	UNICOM
134.025	133.0 251.15	122.7 (CTAF) L

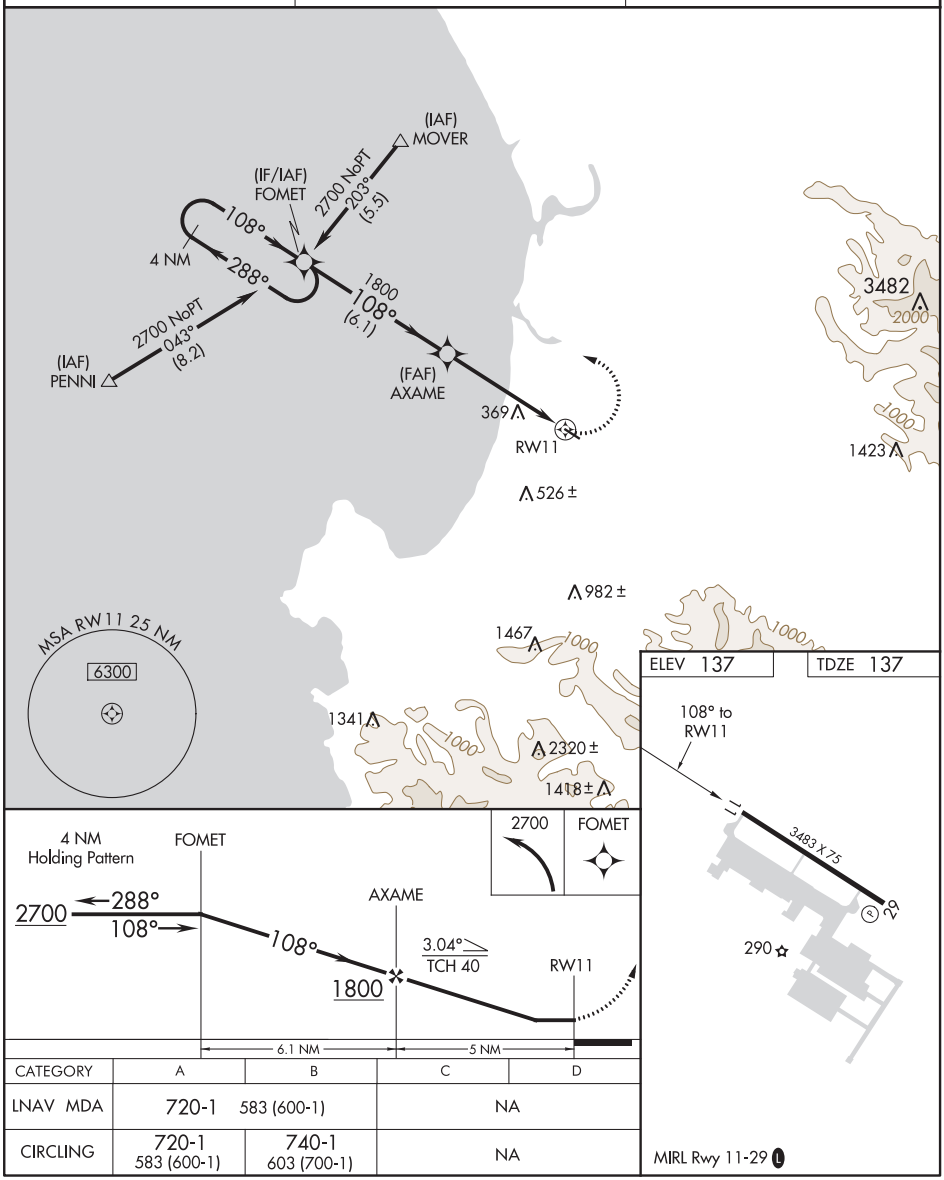

CATEGORY	A	B	C	D
LNAV MDA	720-1	583 (600-1)	NA	
CIRCLING	720-1 583 (600-1)	740-1 603 (700-1)	NA	

MIRL Rwy 11-29 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 29

MARINA MUNI (OAR)

APP CRS	Rwy Idg	3483
288°	TDZE	137
	Apt Elev	137

Inoperative table does not apply.
DME/DME RNP 0.3 NA.
Use Monterey altimeter setting; when not received, procedure NA.

MISSED APPROACH: Climb to 2700 direct FOMET and hold.

AWOS-3PT	NORCAL APP CON	UNICOM
134.025	133.0 251.15	122.7 (CTAF) L

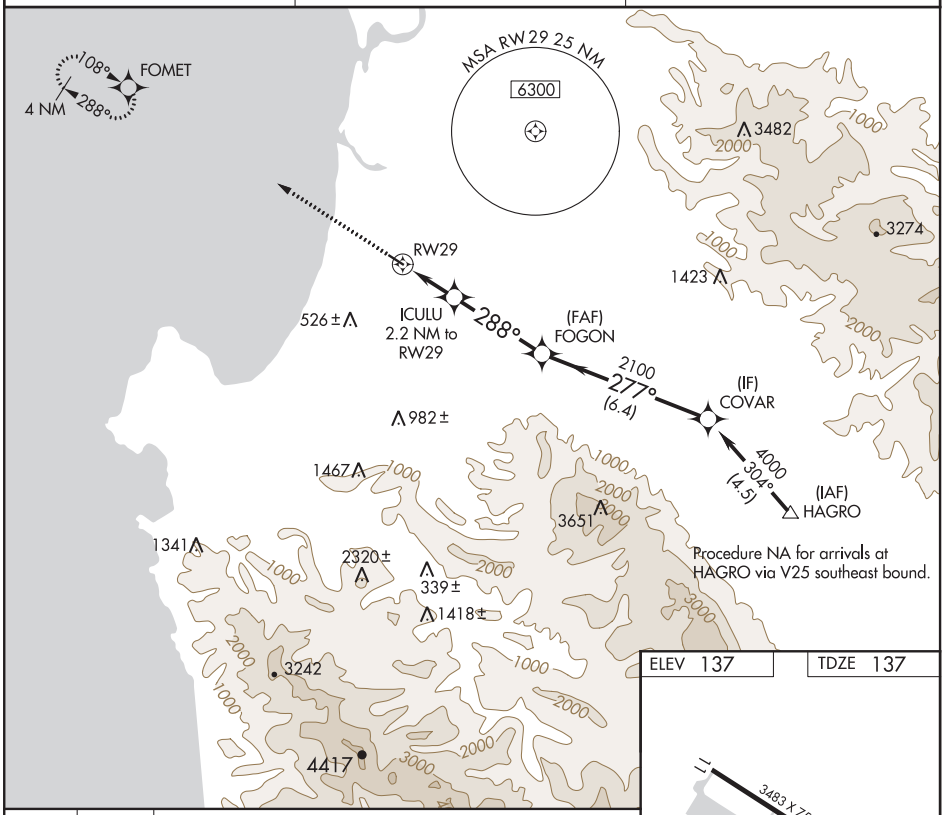

ELEV 137	TDZE 137

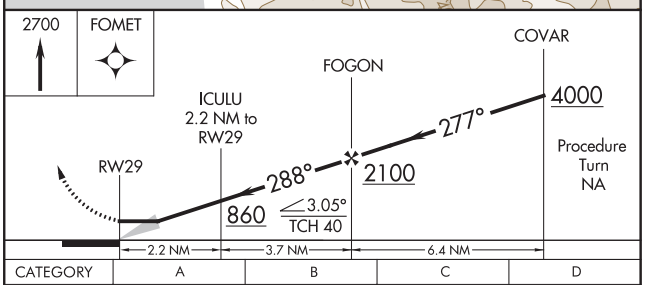



CATEGORY	A	B	C	D
LNAV MDA	640-1	503 (600-1)	NA	
CIRCLING	680-1 543 (600-1)	740-1 603 (700-1)	NA	

MIRL Rwy 11-29 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MARINA, CALIFORNIA | AL-5271 (FAA) | 19115

VOR/DME RWY 29

MARINA MUNI (OAR)

VORTAC SNS 117.3 Chan 120	APP CRS 260°	Rwy Idg 3483 TDZE 137 Apt Elev 137

Helicopter visibility reduction below ¾ SM NA. VDP NA with Monterey altimeter setting. When local altimeter setting not received, use Monterey altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climbing right turn to 3000 on heading 332° and on SNS VORTAC R-293 to MOVER INT/SNS 18 DME and hold.

AWOS-3PT	NORCAL APP CON	UNICOM
134.025	133.0 251.15	122.7 (CTAF) L

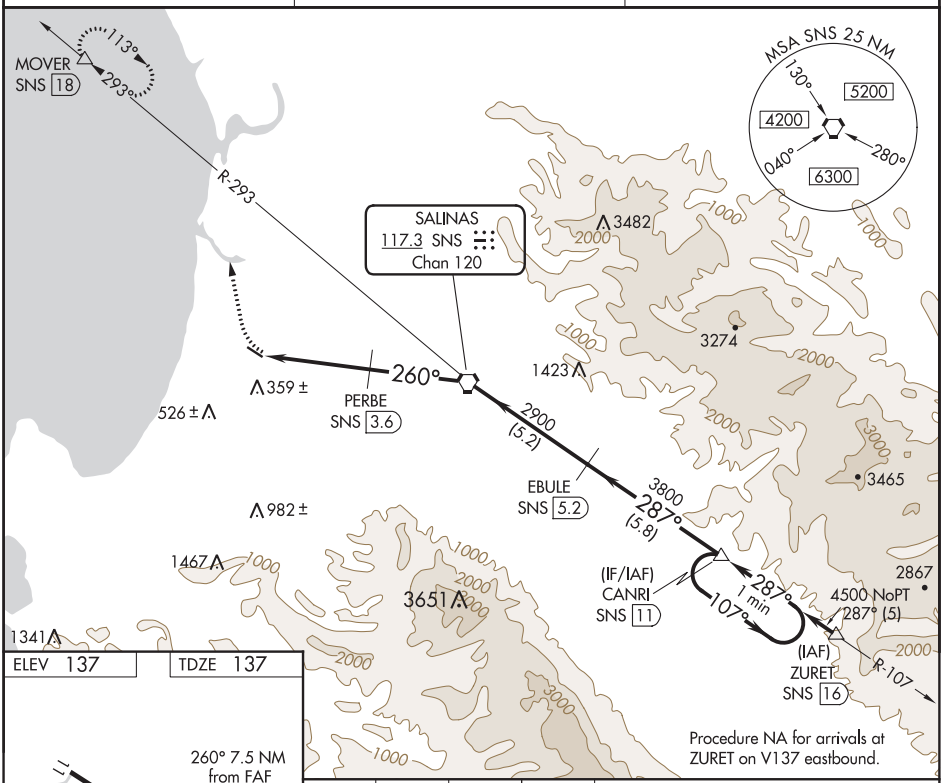

ELEV 137 | TDZE 137



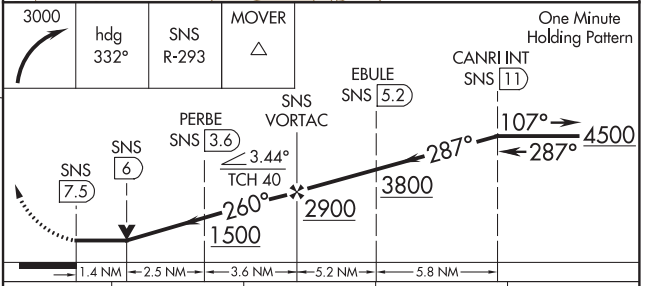

CATEGORY	A	B	C	D
S-29	700-1 563 (600-1)		NA	
CIRCLING	700-1 563 (600-1)		NA	

MIRL Rwy 11-29 L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC SNS	APP CRS	Rwy Idg	3483
117.3	082°	TDZE	137
Chan 120		Apt Elev	137

VOR RWY 11

MARINA MUNI (OAR)

T NA ADF or DME required. Helicopter visibility reduction below ¾ SM NA. VDP NA with Monterey altimeter setting. When local altimeter setting not received, use Monterey altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climb to 1200, then climbing left turn to 3300 on heading 230° and on SNS VORTAC R-262 to RIGDE INT/SNS 18 DME and hold.

AWOS-3PT	NORCAL APP CON	UNICOM
134.025	133.0 251.15	122.7 (CTAF) L

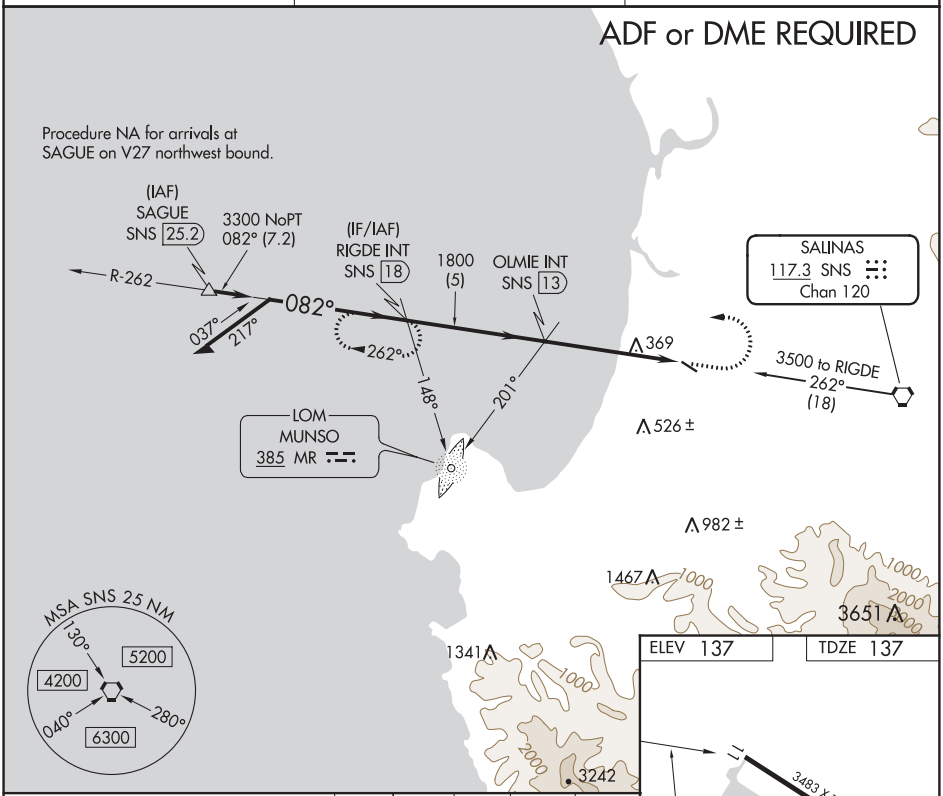

CATEGORY	A	B	C	D
S-11	680-1	543 (600-1)	NA	
CIRCLING	680-1 543 (600-1)	700-1 563 (600-1)	NA	

MIRL Rwy 11-29 L

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MARIPOSA, CALIFORNIA | AL-9969 (FAA) | 18144

APP CRS	Rwy Idg	N/A
290°	TDZE	N/A
	Apt Elev	2254

RNAV (GPS)-A
MARIPOSA-YOSEMITE (MPI)

DME/DME RNP-0.3 NA.
NA
Circling NA north of Rwy 8-26. Procedure NA at night. When local altimeter setting not received, use Atwater altimeter setting and increase all MDA 360 feet.

MISSED APPROACH: Climbing left turn to 7000 direct COGOL and hold.

AWOS-3	OAKLAND CENTER	UNICOM
135.6	121.25 327.0	122.7 (CTAF) L

Procedure NA for arrival at COGOL via V459 southeast bound.

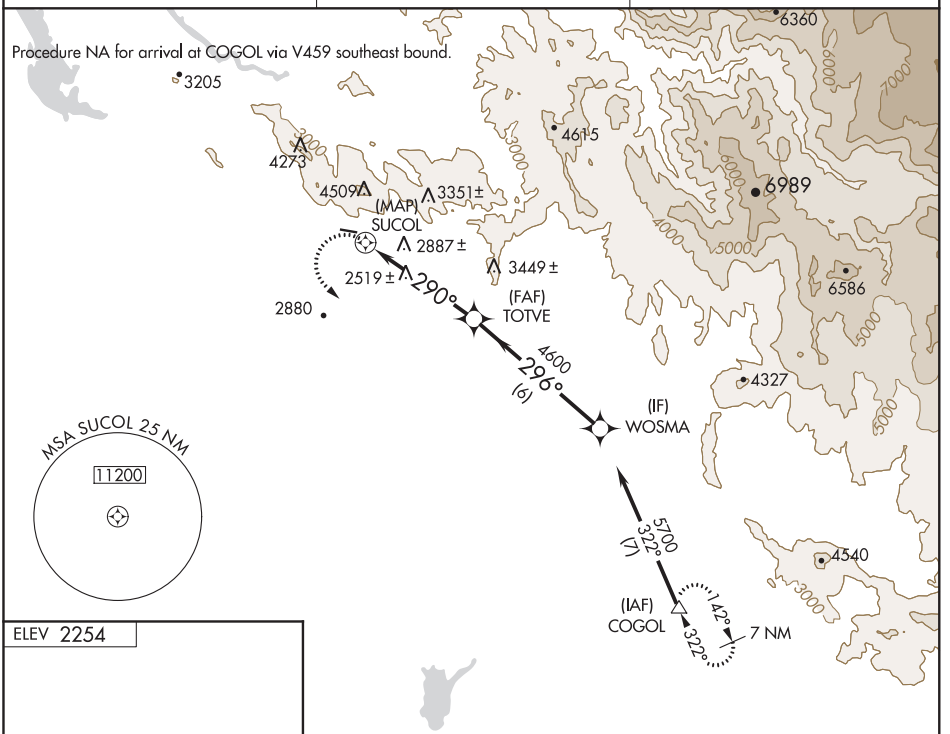

ELEV 2254

MIRL Rwy 8-26 L

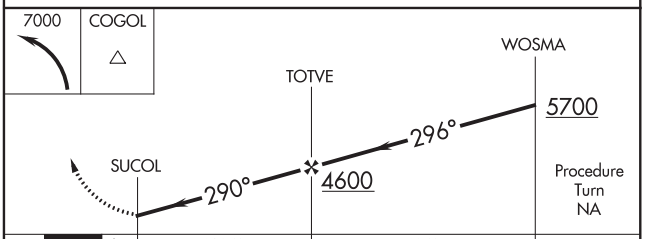

CATEGORY	A	B	C	D
CIRCLING	3900-1¼ 1646 (1700-1¼)	3900-1½ 1646 (1700-1½)	NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	N/A
098°	TDZE	N/A
	Apt Elev	2254

RNAV (GPS)-B
MARIPOSA-YOSEMITE (MPI)

NA

DME/DME RNP-0.3 NA.
Circling NA north of Rwy 8-26. Procedure NA at night.
When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 7000 direct TOTOY and via 127° track to COGOL and hold.

AWOS-3	OAKLAND CENTER	UNICOM
135.6	121.25 327.0	122.7 (CTAF) L

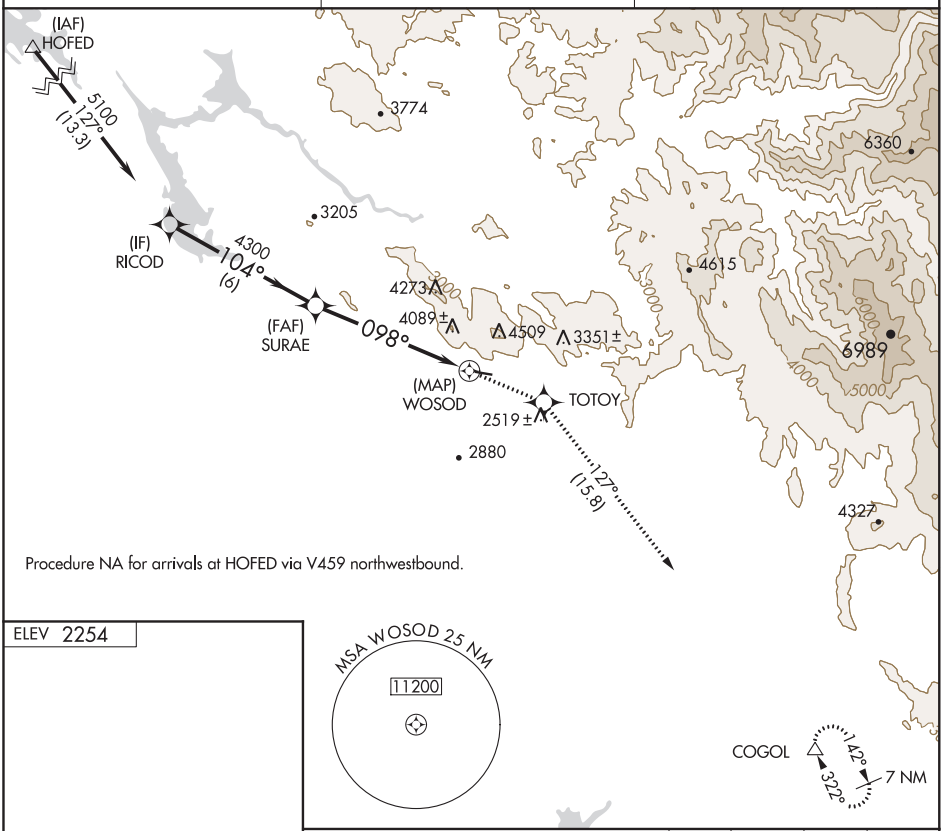

ELEV 2254



MIRL Rwy 8-26 L

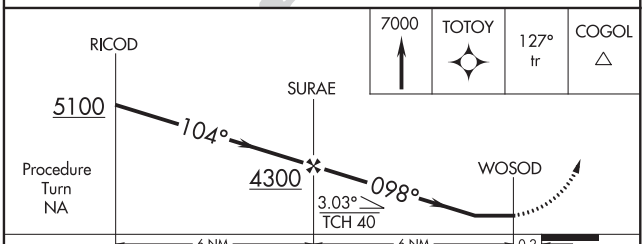

CATEGORY	A	B	C	D
CIRCLING	4180-1¼ 1926 (2000-1¼)	4180-1½ 1926 (2000-1½)	NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MARYSVILLE, CALIFORNIA | AL-664 (FAA) | 18144

ILS or LOC RWY 14

YUBA COUNTY (MYV)

LOC I-MYV	APP CRS	Rwy Idg / TDZE / Apt Elev
110.5	141°	6007 / 64 / 64

T NA — Circling to Rwy 23 NA at night. Autopilot coupled approach NA below 576.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 4000 on MYV VOR/DME R-263 to YUBBA INT/ MYV 9.3 DME and hold, continue climb in hold to 4000.

ASOS	NORCAL APP CON	UNICOM
118.475	125.4 259.1	123.05 (CTAF) L

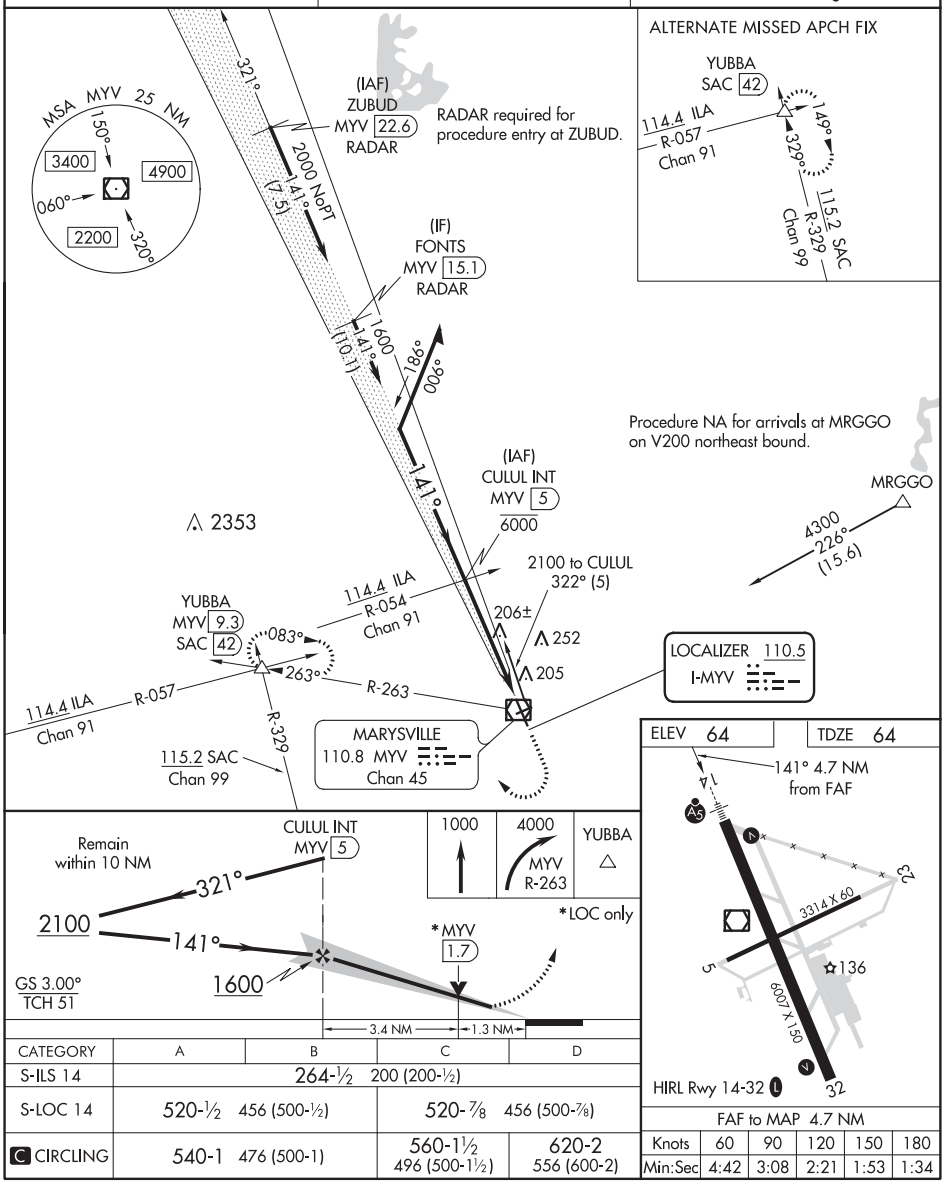

CATEGORY	A	B	C	D
S-ILS 14	264-½ 200 (200-½)			
S-LOC 14	520-½ 456 (500-½)		520-⅞ 456 (500-⅞)	
C CIRCLING	540-1 476 (500-1)		560-1½ 496 (500-1½)	620-2 556 (600-2)

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

MARYSVILLE, CALIFORNIA
Amdt 6 22JUN17

39°06′N-121°34′W

YUBA COUNTY (MYV)
ILS or LOC RWY 14

RNAV (GPS) RWY 14

YUBA COUNTY (MYV)

WAAS CH 42814 W14A	APP CRS 141°	Rwy Idg 6007 TDZE 64 Apt Elev 64

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Lincoln altimeter setting. When local altimeter setting not received, use Lincoln altimeter setting and increase LPV DA to 308 feet, LNAV/VNAV DA to 514 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ⅛ mile, LNAV Cats C/D visibility ⅛ mile. Inop table does not apply to LPV all Cats. For inop MALSR increase LNAV Cats A/B visibility ¼ mile. Night landing: Rwy 5, 23 NA.

MALSR

MISSED APPROACH: Climb to 4000 direct TUXUY and via track 251° to RADNE and via track 318° to YUBBA and hold.

ASOS	NORCAL APP CON	UNICOM
118.475	125.4 259.1	123.05 (CTAF) L

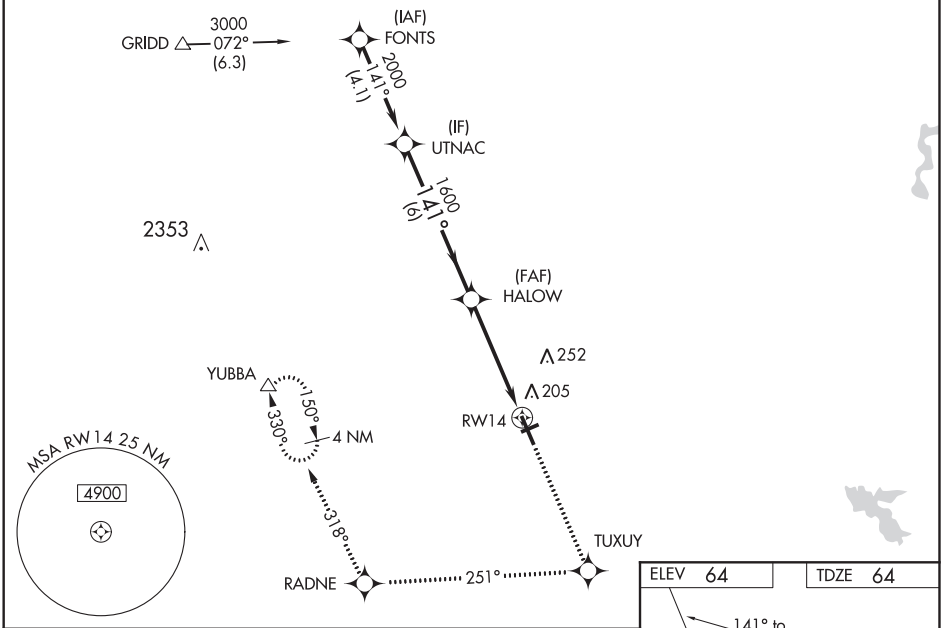

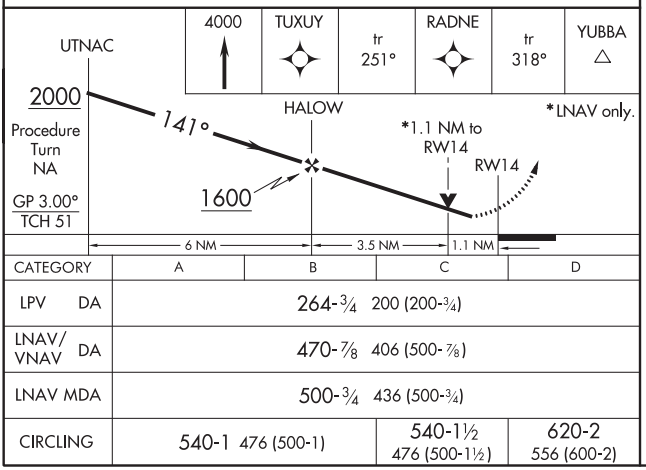

CATEGORY	A	B	C	D
LPV DA	264-¾ 200 (200-¾)			
LNAV/VNAV DA	470-⅞ 406 (500-⅞)			
LNAV MDA	500-¾ 436 (500-¾)			
CIRCLING	540-1 476 (500-1)		540-1½ 476 (500-1½)	620-2 556 (600-2)

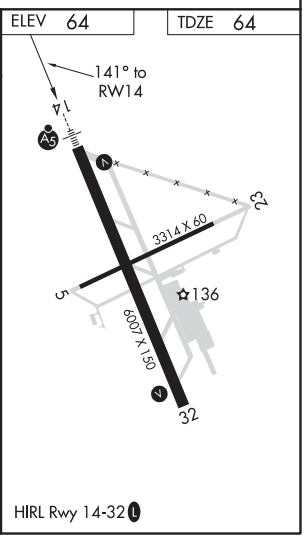

HIRL Rwy 14-32 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 32

YUBA COUNTY (MYV)

WAAS	APP CRS	Rwy Idg	6007
CH 87014	321°	TDZE	63
W32A		Apt Elev	64

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lincoln altimeter setting and increase LPV DA to 357 feet, LNAV/VNAV DA to 418 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility ⅛ mile, LNAV Cats C/D visibility ¼ mile. Night landing: Rwy 5, 23 NA. Baro-VNAV and VDP NA when using Lincoln altimeter setting.

MISSED APPROACH: Climb to 4000 direct HALOW and via track 295° to GRIDD and hold.

ASOS	NORCAL APP CON	UNICOM
118.475	125.4 259.1	123.05 (CTAF) L

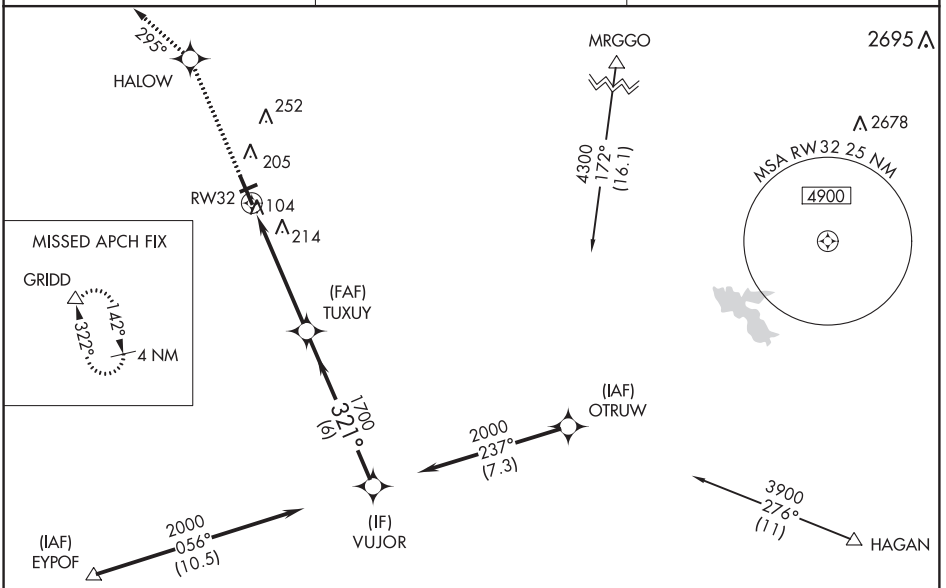

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 64 TDZE 63

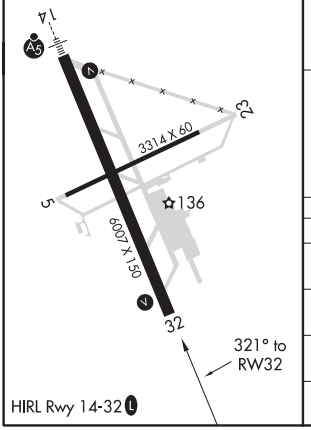

4000	HALOW	tr 295°	GRIDD	*LNAV only	VUJOR	Procedure Turn NA

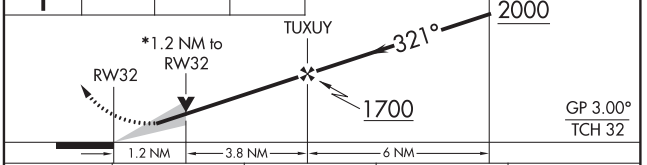

CATEGORY	A	B	C	D
LPV DA	313-⅞ 250 (300-⅞)			
LNAV/VNAV DA	374-1⅛ 311 (400-1⅛)			
LNAV MDA	480-1 417 (500-1)		480-1⅛ 417 (500-1⅛)	
CIRCLING	540-1 476 (500-1)		540-1½ 476 (500-1½)	620-2 556 (600-2)

VOR/DME MYV	APP CRS	Rwy Idg 6007
110.8	316°	TDZE 63
Chan 45		Apt Elev 64

VOR RWY 32
YUBA COUNTY (MYV)

Night landing: Rwy 5, 23 NA. When local altimeter setting not received, use Lincoln altimeter setting and increase all MDA 60 feet.

MISSED APPROACH: Climb to 2300 via MYV R-316, then climbing left turn to 4000 via heading 230° and SAC R-329 to YUBBA Int/SAC 42 DME and hold.

ASOS	NORCAL APP CON	UNICOM
118.475	125.4 259.1	123.05 (CTAF) L

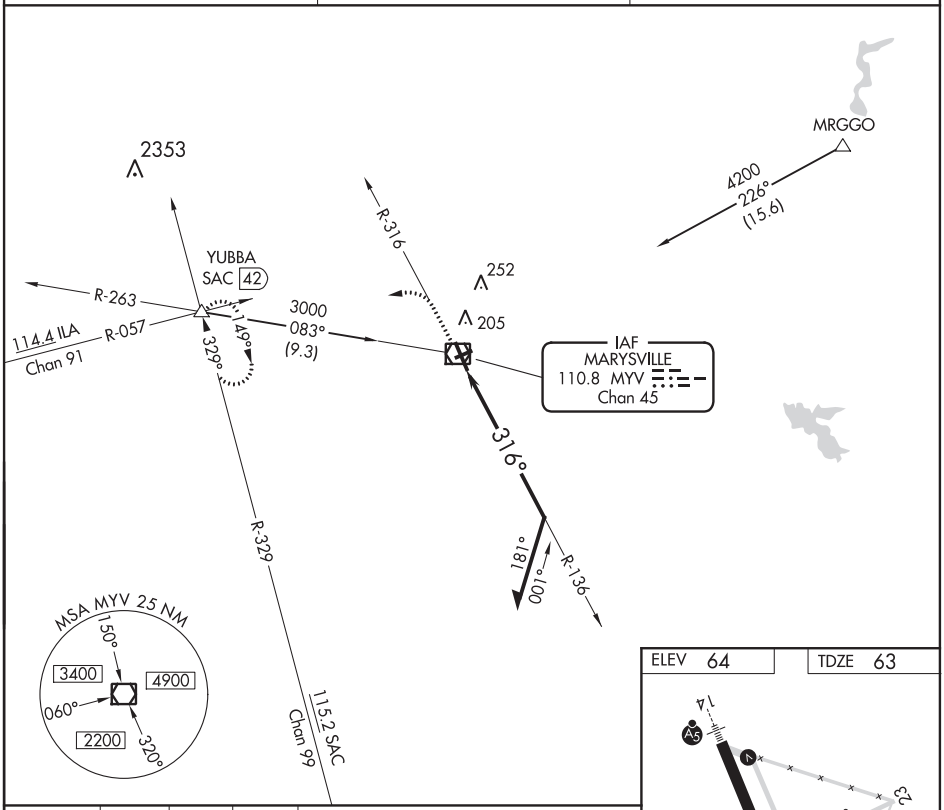

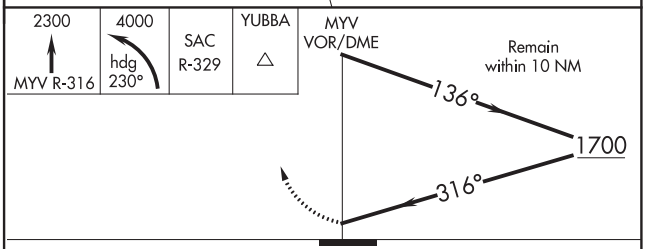

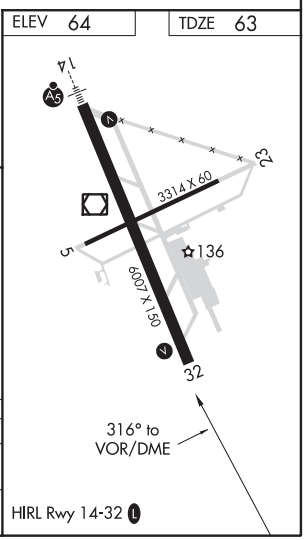

CATEGORY	A	B	C	D
S-32	880-1 817 (900-1)	880-1¼ 817 (900-1¼)	880-2½ 817 (900-2½)	
CIRCLING	880-1¼ 816 (900-1¼)		880-2½ 816 (900-2½)	880-2¾ 816 (900-2¾)

17061

AIRPORT DIAGRAM

AL-664 (FAA)

YUBA COUNTY(MYV)
MARYSVILLE, CALIFORNIA

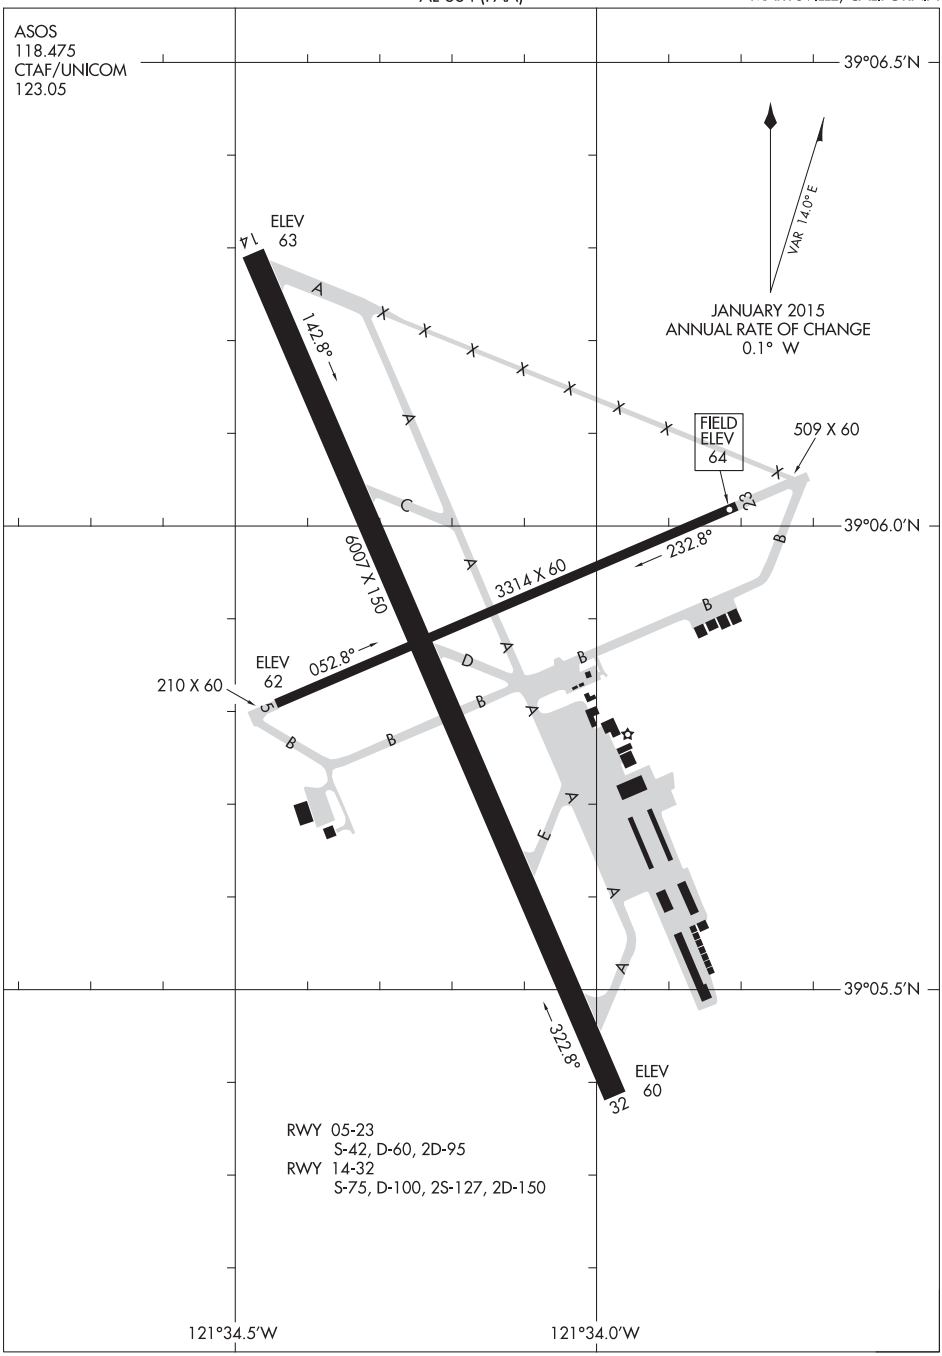

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
17061

MARYSVILLE, CALIFORNIA
YUBA COUNTY(MYV)

LOC/DME I-MCE	APP CRS	Rwy Idg	5914
109.3	304°	TDZE	155
Chan 30		Apt Elev	155

ILS or LOC RWY 30

MERCED RGNL/MACREADY FIELD (MCE)

T
A NA — For inop ALS, increase S-LOC visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct HYP VOR/DME and hold.

ASOS	NORCAL APP CON	UNICOM
132.175	120.95 269.45	122.7 (CTAF) L

LOCALIZER 109.3 I-MCE Chan 30

TURLO

Procedure NA for arrivals at TURLO on V23 northwest bound.

2900 175° (12.8)

ALTERNATE MISSED APCH FIX

109.3 I-MCE Chan 30 — R-255 — 124° 115.6 FRA Chan 103 — 304° — 124° — 112.6 PXN Chan 73 — R-025 — CHOWA INT

△335± △247± △244± △478 △705

EL NIDO 114.2 HYP Chan 89

2000 229° (1.6)

RIPME I-MCE 3.9

R-229 — 110° — 290° — R-110 — R-100 — 304°

(IAF) COOPE INT I-MCE 6.7

2000 304° (6.9)

Procedure NA for arrival on FRA VORTAC airway radials 202 CW 302.

MSA HYP 25 NM: 170° — 3000 — 5600 — 080° — 260° — 2200 — 3300 — 350°

169° — 349° — R-025 — R-172

2000 NoPT 255° (10) — R-255 — 4900 255° (25.5)

(IAF) ELFIE INT FRA 25.5

FRIANT 115.6 FRA Chan 103

Procedure NA for arrival on PXN VORTAC airway radials 328 CW 061.

(IAF) TEENY INT PXN 25.4

2000 NoPT 025° (7)

(IF) CHOWA INT I-MCE 13.7

124°

PANOCHE 112.6 PXN Chan 73

4300 025° (25.4)

ELEV 155 — TDZE 155

1000 — 2000 — HYP

COOPE INT I-MCE 6.7

Remain within 10 NM

*LOC only — * I-MCE — RIPME I-MCE 3.9 — I-MCE 2 — I-MCE 1.1

2000 — 124° — 304° — 2000 — 2000 — 640*

GS 3.00° TCH 53

0.9 — 1.9 NM — 2.8 NM



REIL Rwy 12 L
HIRL Rwy 12-30 L

304° 5.6 NM from FAF

CATEGORY	A	B	C	D
S-ILS 30	355-½ 200 (200-½)			
S-LOC 30	640-¾ 485 (500-¾)		640-1 485 (500-1)	
RIPME FIX MINIMUMS				
S-LOC 30	500-¾ 345 (400-¾)			

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MERCED, CALIFORNIA AL-665 (FAA) 19227

WAAS	APP CRS	Rwy Idg	5914
CH 93923	123°	TDZE	155
W12A		Apt Elev	155

RNAV (GPS) RWY 12

MERCED RGNL/MACREADY FIELD (MCE)

RNP APCH.

T Rwy 12 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.

MISSED APPROACH: Climb to 3600 direct CHOWA and hold.

ASOS	NORCAL APP CON	UNICOM
132.175	120.95 269.45	122.7 (CTAF) L

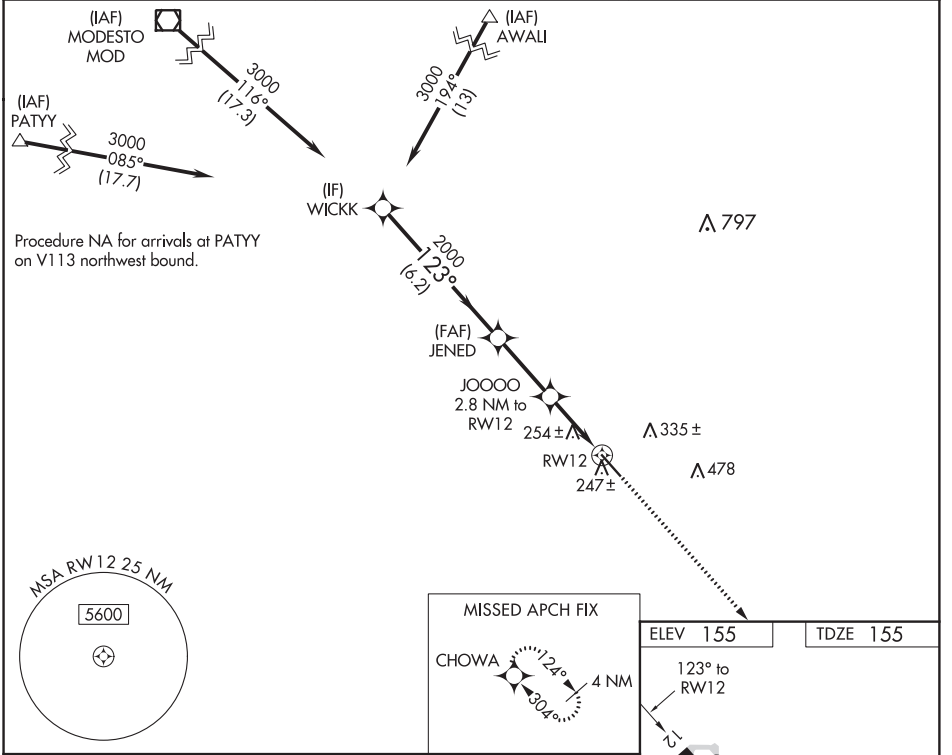

CATEGORY	A	B	C	D
LPV DA	405-¾	250 (300-¾)		
LNAV/VNAV DA	434-⅞	279 (300-⅞)		
LNAV MDA	520-1	365 (400-1)		

REIL Rwy 12 L
HIRL Rwy 12-30 L

MERCED, CALIFORNIA
Amdt 1 15AUG19

37°17'N-120°31'W

MERCED RGNL/MACREADY FIELD (MCE)

RNAV (GPS) RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 30

MERCED RGNL/MACREADY FIELD (MCE)

WAAS	APP CRS	Rwy Idg	5914
CH 93709	304°	TDZE	155
W30A		Apt Elev	155

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inoperative ALS, increase LNAV Cats C/D visibility to 1⅜ SM. Circling NA northeast of Rwy 12-30.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct VOLTA and hold.

ASOS	NORCAL APP CON	UNICOM
132.175	120.95 269.45	122.7 (CTAF) L

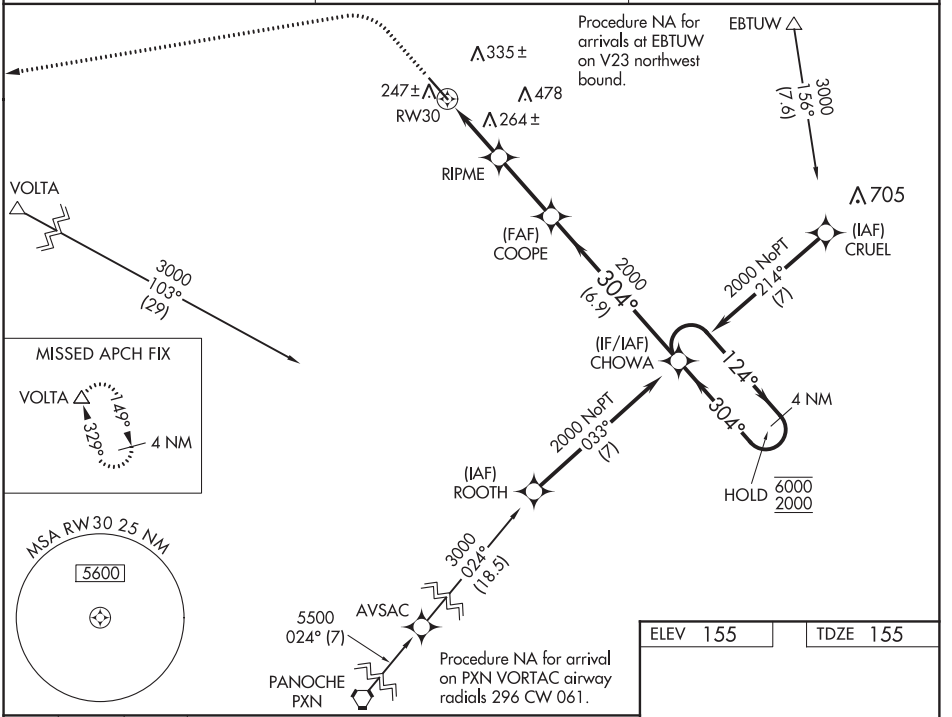

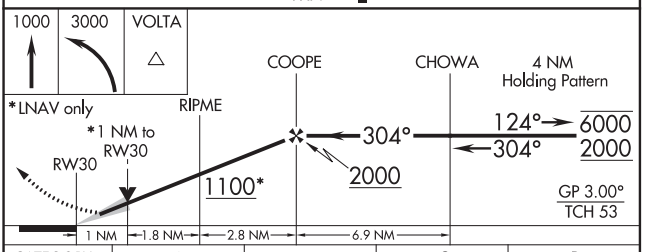

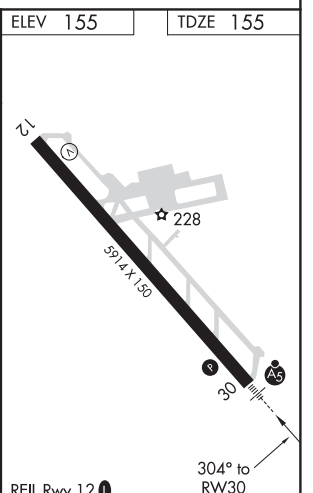

CATEGORY	A	B	C	D
LPV DA	355-½ 200 (200-½)			
LNAV/VNAV DA	544-⅝ 389 (400-⅝)			
LNAV MDA	520-½ 365 (400-½)		520-⅝ 365 (400-⅝)	
C CIRCLING	560-1 405 (500-1)	620-1 465 (500-1)	620-1½ 465 (500-1½)	720-2 565 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MERCED, CALIFORNIA AL-665 (FAA) 20030

LOC/DME I-MCE	APP CRS	Rwy Idg	5914
109.3	123°	TDZE	155
Chan 30		Apt Elev	155

LOC BC RWY 12

MERCED RGNL/MACREADY FIELD (MCE)

DME or RADAR required.

T NA Rwy 12 helicopter visibility reduction below ¾ SM NA. Circling NA northeast of Rwy 12-30.

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct MOD VOR/DME and hold.

ASOS	NORCAL APP CON	UNICOM
132.175	120.95 269.45	122.7 (CTAF) L

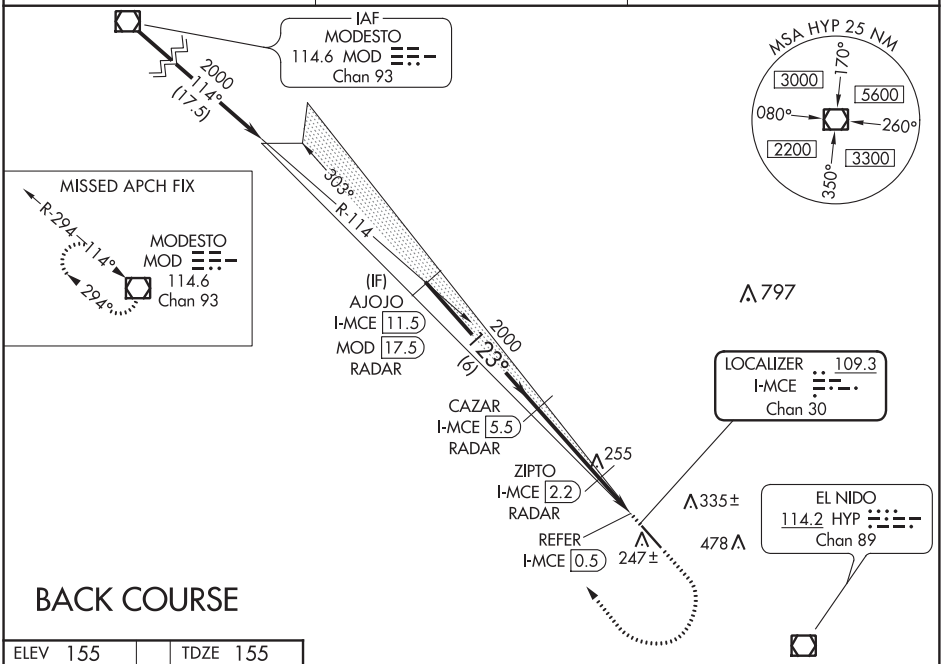

ELEV 155	TDZE 155

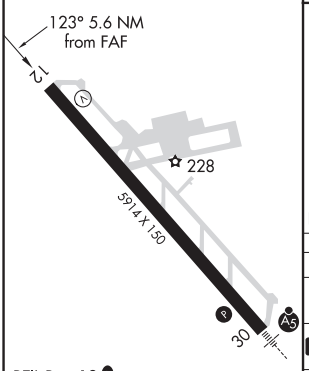

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

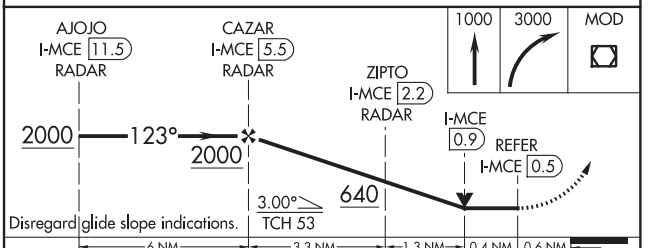

CATEGORY	A	B	C	D
S-12	640-1 485 (500-1)		640-1⅜ 485 (500-1⅜)	
C CIRCLING	640-1 485 (500-1)		640-1½ 485 (500-1½)	720-2 565 (600-2)
ZIPTO FIX MINIMUMS				
S-12	520-1 365 (400-1)	NA		
C CIRCLING	560-1 405 (500-1)	620-1 465 (500-1)	620-1½ 465 (500-1½)	720-2 565 (600-2)

MERCED, CALIFORNIA
Amdt 11 15AUG19

37°17′N-120°31′W

MERCED RGNL/MACREADY FIELD (MCE)

LOC BC RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME HYP	APP CRS	Rwy Idg	5914
114.2	290°	TDZE	155
Chan 89		Apt Elev	155

VOR RWY 30

MERCED RGNL/MACREADY FIELD (MCE)

Rwy 30 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-30 all Cats visibility to 1 SM. Circling NA northeast of Rwy 12-30.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2200 direct HYP VOR/DME and hold.

ASOS	NORCAL APP CON	UNICOM
132.175	120.95 269.45	122.7 (CTAF) L

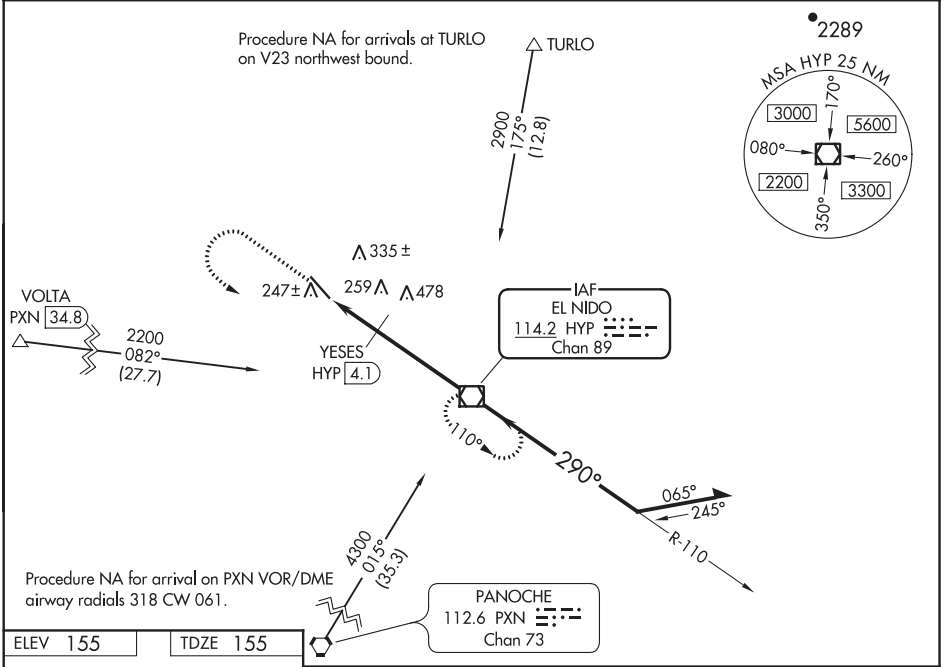

ELEV 155 TDZ 155



FAF to MAP 6.2 NM					
Knots	60	90	120	150	180
Min:Sec	6:12	4:08	3:06	2:29	2:04

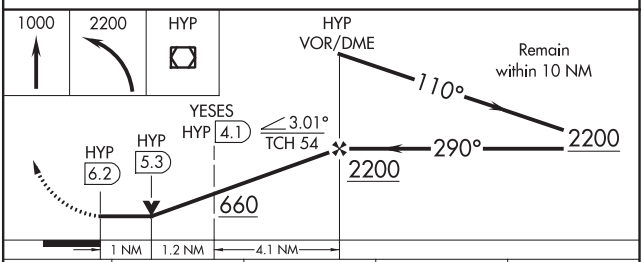

CATEGORY	A	B	C	D
S-30	660-¾ 505 (600-¾)		660-1 505 (600-1)	
C CIRCLING	660-1 505 (600-1)		660-1½ 505 (600-1½)	720-2 565 (600-2)
YESES FIX MINIMUMS				
S-30	520-¾ 365 (400-¾)			
C CIRCLING	560-1 405 (500-1)	620-1 465 (500-1)	620-1½ 465 (500-1½)	720-2 565 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

ILS or LOC RWY 28R

MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)

LOC I-MOD	APP CRS	Rwy Idg	5904
111.9	288°	TDZE	91
		Apt Elev	99

DME required for LOC only.

Autopilot coupled approach NA below 1080. DME from MOD VOR/DME. Simultaneous reception of I-MOD and MOD DME required. For inop ALS, increase S-LOC 28R Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct MOD VOR/DME and hold.

ATIS	NORCAL APP CON	MODESTO TOWER ★	GND CON	UNICOM
127.7	120.95 269.45	125.3 (CTAF) L 257.8	121.7	122.95

ALTERNATE MISSED APCH FIX

LINDEN LIN 114.8 Chan 95

R-180 360° 180°

LOCALIZER 111.9 I-MOD

WRAPS

3000 194° (16.1)

357±

446

2000 to ZELAT 107° (6)

499 299 228 214 162± 206 542 458

105° 285°

(IAF) ZELAT MOD 6

MODESTO 114.6 MOD Chan 93

2000 011° (9.3)

PATYY

MOD R-105

1 min 108° 288°

HOLD 4500 1800

1800 288° (11.6)

(IF) DLRAY INT MOD 17.6

MOD R-107

MOD LR-109

108°

R-306

1482

MSA MOD 25 NM

170° 2900 3500 080° 260° 5100 2300 350°

3000 NoPT 306° (18.9)

CLOVIS 112.9 CZQ Chan 76

IAF EL NIDO 114.2 HYP Chan 89

PANOCHE 112.6 PXN Chan 73

4300 015° (35.3)

3000 291° (34.5)

ELEV 99 D TDZE 91

156 TWR 191

10R 10L 28L 28R

3464 X 100 0.4% UP

5904 X 150 0.3% UP

136±

288° 5.2 NM from FAF

1500	2000	MOD

ZELAT MOD 6

One Minute Holding Pattern

*LOC only

*MOD MOD 1.8 MOD 0.8

1800

108° 288°

4500 1800

1800

GS 3.00° TCH 53

1 NM 4.2 NM

CATEGORY	A	B	C	D
S-ILS 28R	291-½		200 (200-½)	
S-LOC 28R	460-½	369 (400-½)	460-⅝ 369 (400-⅝)	460-⅝ 369 (400-⅝)
CIRCLING	540-1 441 (500-1)	560-1 461 (500-1)	600-1½ 501 (600-1½)	660-2 561 (600-2)

REIL Rwy 10L L

MIRL Rwy 10R-28L

HIRL Rwy 10L-28R L

37°38'N-120°57'W

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 28R

MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)

WAAS	APP CRS	Rwy Idg	5904
CH 70609	288°	TDZE	88
W28A		Apt Elev	97

T For inoperative MALSR, increase LPV visibility to 1 mile all Cats and LNAV Cat D to 1¼ mile.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.
When local altimeter setting not received, use Atwater/Castle altimeter setting and increase all DA/MDA 80 feet; increase LPV, LNAV/VNAV visibilities ¼ mile all Cats and LNAV Cat C visibility ¼ mile.
Baro-VNAV and VDP NA when using Atwater/Castle altimeter setting.
For inoperative MALSR, when using Atwater/Castle altimeter setting, increase LPV visibility to 1¼ mile all Cats.

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct COMKI and left turn via 226° track to SHELI and hold, continue climb-in-hold to 3000.

ATIS	NORCAL APP CON	MODESTO TOWER ★	GND CON	UNICOM
127.7	120.95 269.45	125.3 (CTAF) L 257.8	121.7	122.95

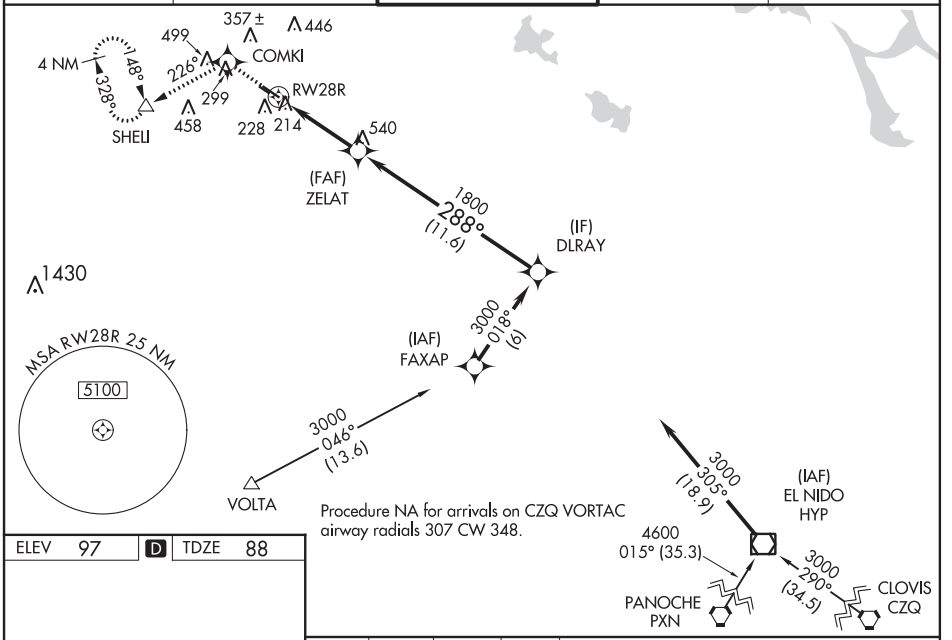

ELEV 97 D TDZE 88



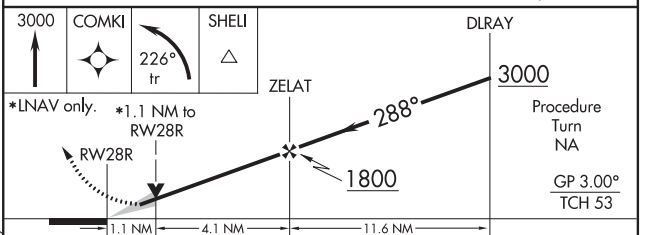

CATEGORY	A	B	C	D
LPV DA	385-½ 297 (300-½)			
LNAV/VNAV DA	495-1 407 (400-1)			
LNAV MDA	480-½ 392 (400-½)			480-1 392 (400-1)
CIRCLING	540-1 443 (500-1)	560-1 463 (500-1)	560-1½ 463 (500-1½)	660-2 563 (600-2)

REIL Rwy 10L L
MIRL Rwy 10R-28L
HIRL Rwy 10L-28R L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VOR RWY 28R

MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)

VOR/DME MOD	APP CRS	Rwy Idg	5904
114.6	287°	TDZE	91
Chan 93		Apt Elev	99

DME required.

For inop ALS increase S-28R Cat C/D visibility to 1⅛ SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing right turn to 2000 direct MOD VOR/DME and hold.

ATIS	NORCAL APP CON	MODESTO TOWER ★	GND CON	UNICOM
127.7	120.95 269.45	125.3 (CTAF) L 257.8	121.7	122.95

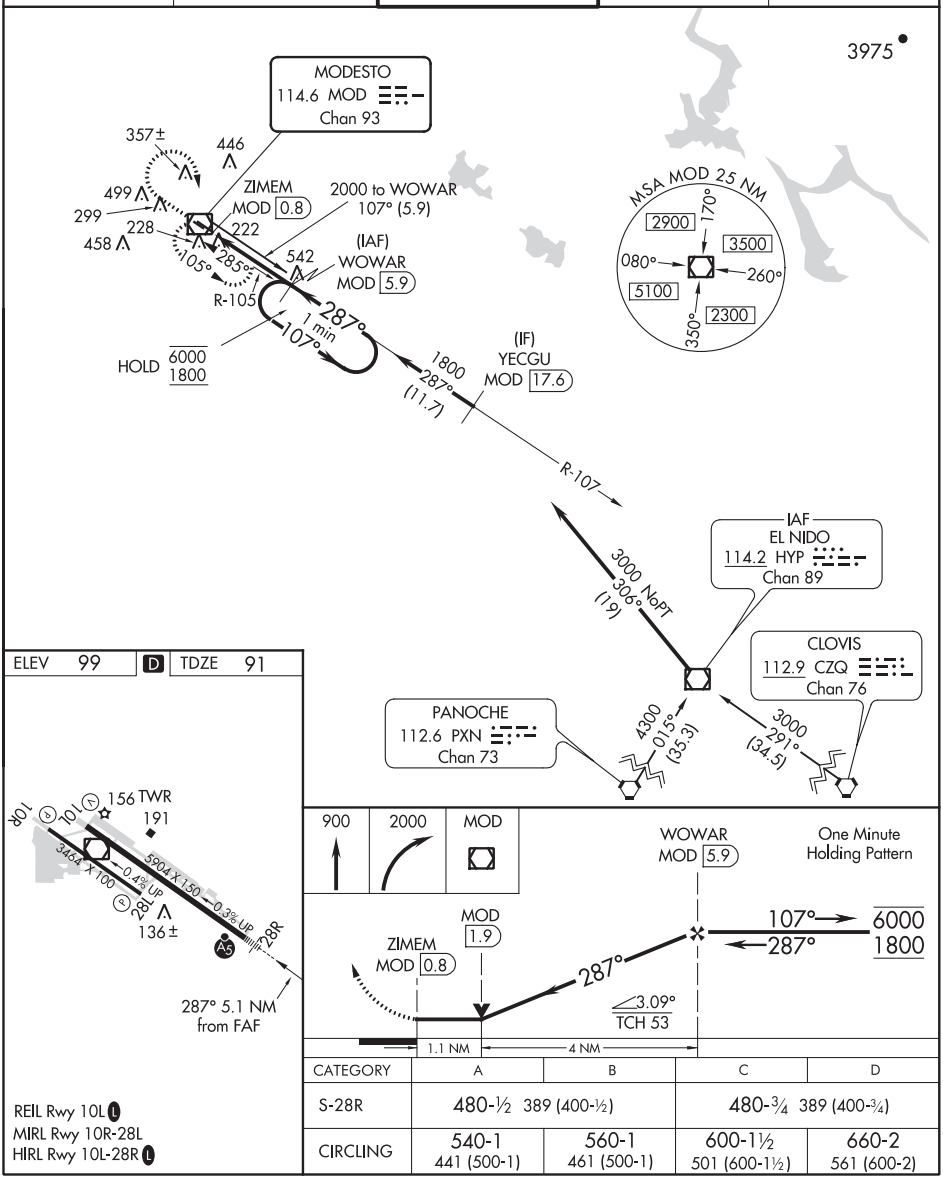

CATEGORY	A	B	C	D
S-28R	480-½ 389 (400-½)		480-¾ 389 (400-¾)	
CIRCLING	540-1 441 (500-1)	560-1 461 (500-1)	600-1½ 501 (600-1½)	660-2 561 (600-2)

REIL Rwy 10L L
MIRL Rwy 10R-28L
HIRL Rwy 10L-28R L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM

MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)

AL-643 (FAA)

MODESTO, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
18032

MODESTO, CALIFORNIA
MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)

MONTAGUE, CALIFORNIA | AL-882 (FAA) | 19115

NDB MOG 404	APP CRS 356°	Rwy Idg N/A TDZE N/A Apt Elev 2648

NDB or GPS-A
SISKIYOU COUNTY (SIY)

Use Siskiyou County altimeter setting; when not available, use Montague-Yreka Rohrer Field altimeter setting; when neither received, procedure not authorized.

MISSED APPROACH: Climbing right turn to 6800 direct MOG NDB and hold.

ASOS	SEATTLE CENTER	UNICOM
121.125	124.85 306.3	123.0 (CTAF)

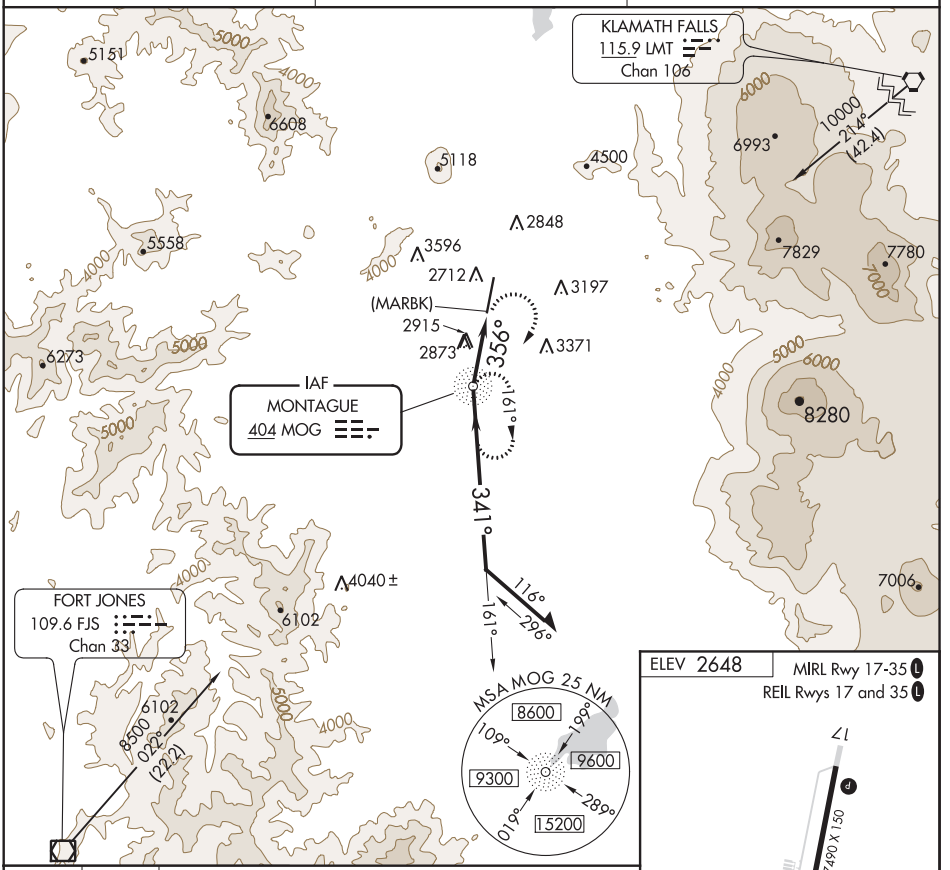

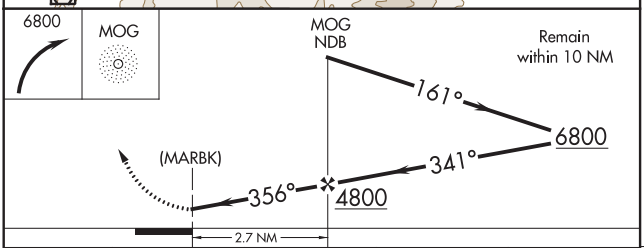

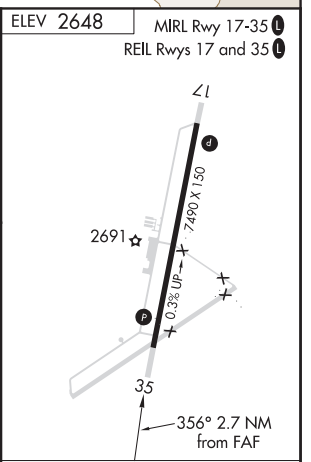

CATEGORY	A	B	C	D
CIRCLING	3760-1¼ 1112 (1200-1¼)	3760-1½ 1112 (1200-1½)	3760-3 1112 (1200-3)	

FAF to MAP 2.7 NM					
Knots	60	90	120	150	180
Min:Sec	2:42	1:48	1:21	1:05	0:54

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ILS or LOC RWY 10R

MONTEREY RGNL (MRY)

LOC/DME I-MRY	APP CRS	Rwy ldg	7000
110.7	098°	TDZE	198
Chan 44		Apt Elev	257

DME required for procedure entry.

Circling NA south of Rwy 10R-28L.
For inop ALS, increase S-ILS 10R all Cats visibility to RVR 6000, and increase S-LOC 10R visibility Cat C/D to 2.

MALSR

MISSED APPROACH: Climb to 600 then climbing left turn to 5000 on heading 030° and on SNS VORTAC R-243 to SNS VORTAC and hold, continue climb-in-hold to 5000.
Missed approach requires minimum climb of 265 feet per NM to 1360.

ATIS	NORCAL APP CON	MONTEREY TOWER ★	GND CON	CLNC DEL	UNICOM
119.25	133.0 251.15 (360°-150°) 127.15 307.125 (151°-359°)	118.4 (CTAF) L 257.8	120.875 348.6	135.45	122.95

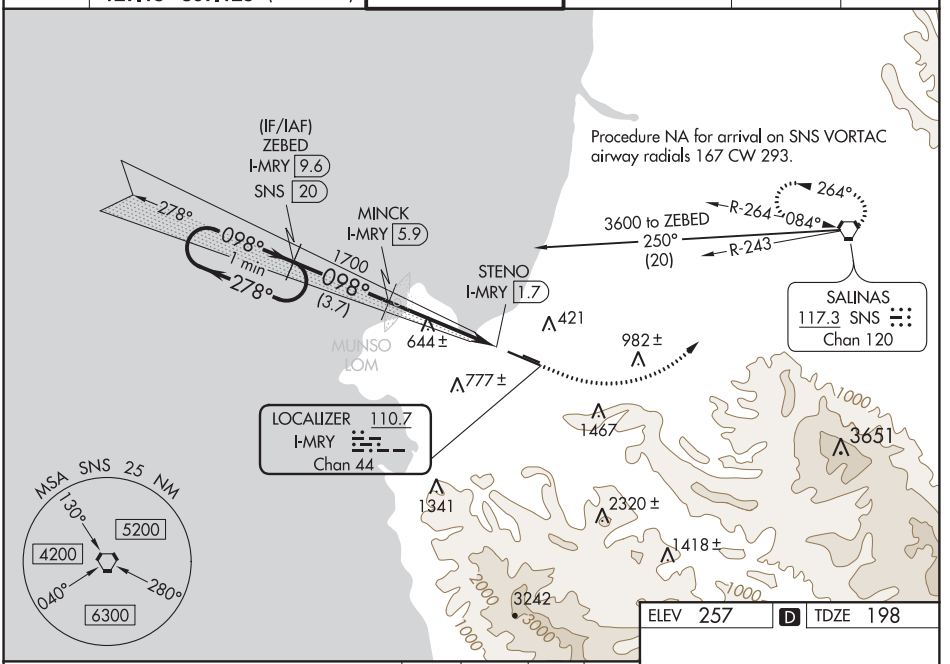

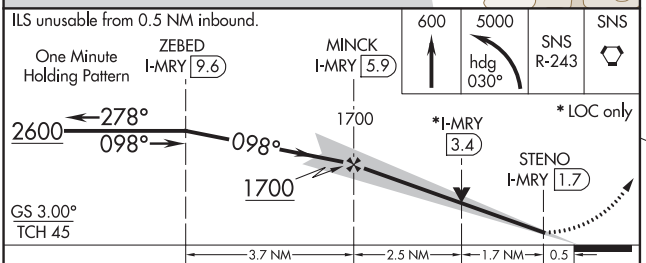



CATEGORY	A	B	C	D
S-ILS 10R#	398/24 200 (200-½)			
S-ILS 10R	583/35 385 (400-⅝)			
S-LOC 10R	920/24 722 (700-½)		920-1⅝ 722 (700-1⅝)	
C CIRCLING	920-1 663 (700-1)		1280-3 1023 (1100-3)	1820-3 1563 (1600-3)

MIRL Rwy 10L-28R
HIRL Rwy 10R-28L L
REIL Rwy 28L L
REIL Rwys 10L and 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

MONTEREY, CALIFORNIA | AL-271 (FAA) | 19227

APP CRS	Rwy Idg	7000
278°	TDZE	257
	Apt Elev	257

RNAV (RNP) Z RWY 28L

MONTEREY RGNL (MRY)

For uncompensated Baro-VNAV systems, procedure NA below 0°C (32°F) or above 48°C (120°F). RF required. GPS required.

MISSED APPROACH: Climb to 5500 on track 278° to URUYU, right turn to CUGVU, and on track 101° to SNS VORTAC and hold.

ATIS	NORCAL APP CON	MONTEREY TOWER*	GND CON	CLNC DEL	UNICOM
119.25	133.0 251.15 (360°-150°) 127.15 307.125 (151°-359°)	118.4 (CTAF) L 257.8	120.875 348.6	135.45	122.95

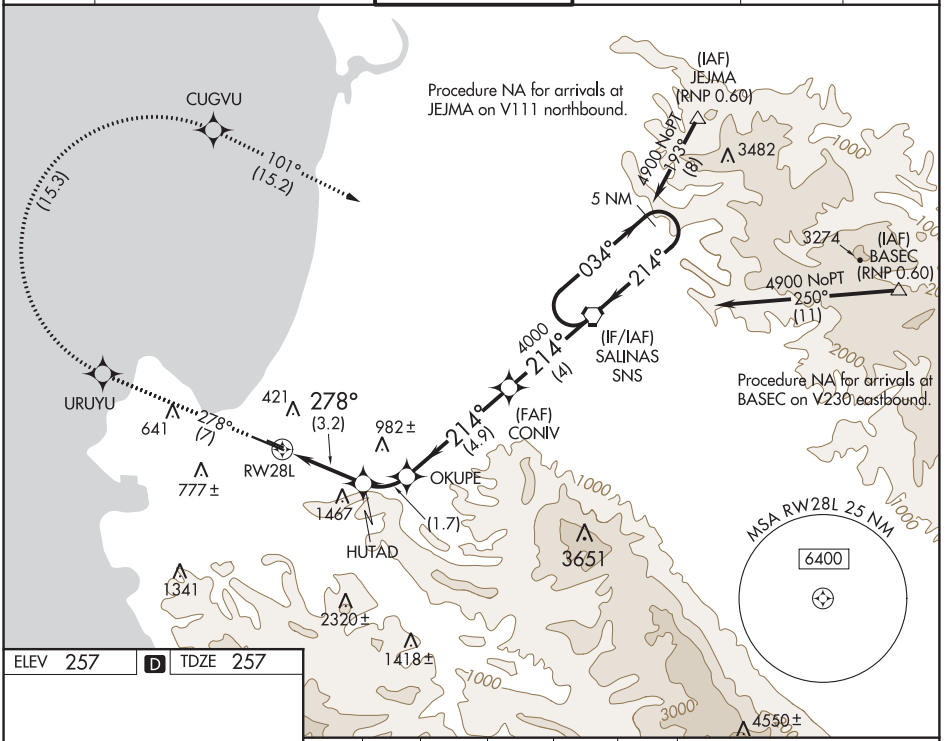

ELEV 257 | D | TDZE 257



MIRL Rwy 10L-28R
HIRL Rwy 10R-28L L
REIL Rwy 28L L
REIL Rwys 10L and 28R

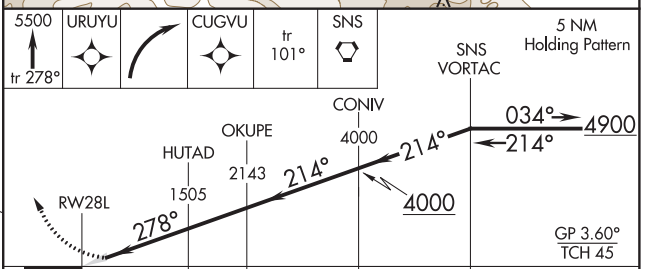

CATEGORY	A	B	C	D
RNP 0.10 DA	527/45	270 (300-⅞)		NA
RNP 0.15 DA	767- 1½	510 (600-1½)		NA
RNP 0.20 DA	1236-3	979 (1000-3)		NA

AUTHORIZATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 10R

MONTEREY RGNL (MRY)

WAAS	APP CRS	Rwy Idg	7000
CH 69602	098°	TDZE	198
W10A		Apt Elev	257

T A DME/DME RNP-0.3 NA. Circling NA south of Rwy 10R-28L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). For inop MALSR, increase LPV visibility all Cats to 1⅞ mile, LNAV/VNAV visibility all Cats to 2½ miles, and LNAV Cat C/D visibility to 2½ miles.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 5000 direct SNS VORTAC and hold, continue climb-in-hold to 5000.

ATIS	NORCAL APP CON	MONTEREY TOWER ★	GND CON	CLNC DEL	UNICOM
119.25	133.0 251.15 (360°-150°) 127.15 307.125 (151°-359°)	118.4 (CTAF) L 257.8	120.875 348.6	135.45	122.95

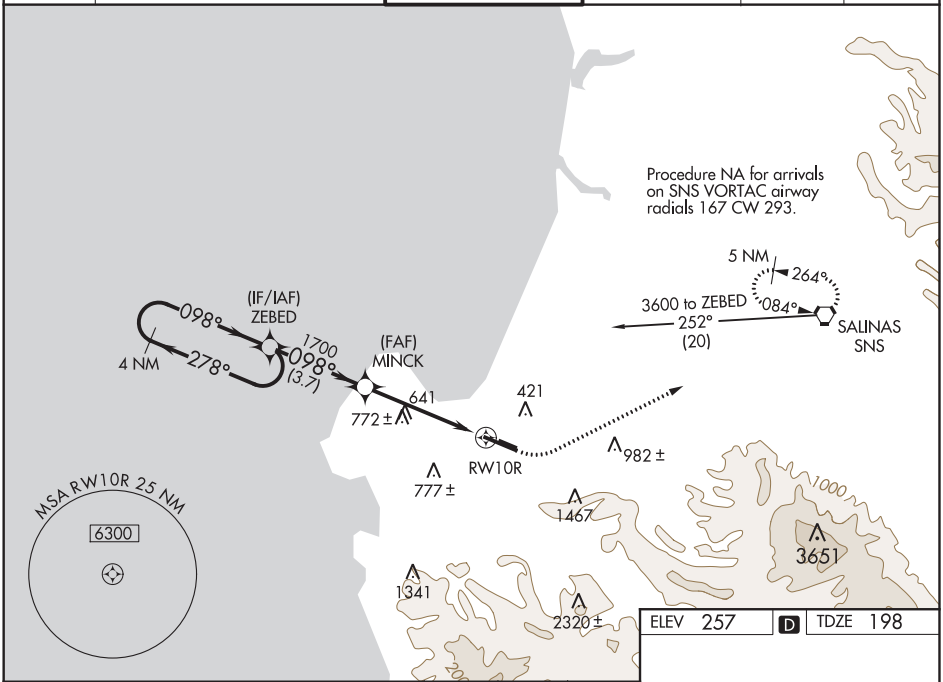

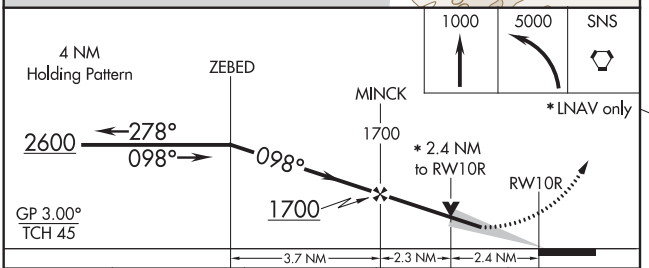



CATEGORY	A	B	C	D
LPV DA	718-1½	520 (500-1½)		
LNAV/VNAV DA	789-1¾	591 (600-1¾)		
LNAV MDA	980/24 782 (800-½)	980/40 782 (800-¾)	980-1¾ 782 (800-1¾)	
C CIRCLING	980-1 723 (800-1)	980-1¼ 723 (800-1¼)	1280-3 1023 (1100-3)	1820-3 1563 (1600-3)

MIRL Rwy 10L-28R
HIRL Rwy 10R-28L L
REIL Rwy 28L L
REIL Rwys 10L and 28R

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Y RWY 28L

MONTEREY RGNL (MRY)

WAAS CH 61237 W28A	APP CRS 261°	Rwy Idg 7000 TDZE 257 Apt Elev 257

Circling NA South of Rwy 28L-10R. DME/DME RNP-0.3 NA.
Helicopter visibility reduction below RVR 4000 NA.

MISSED APPROACH: Climbing right turn to 6000 direct SNS VORTAC and hold, continue climb-in-hold to 6000.

ATIS	NORCAL APP CON	MONTEREY TOWER ★	GND CON	CLNC DEL	UNICOM
119.25	133.0 251.15 (360°-150°) 127.15 307.125 (151°-359°)	118.4 (CTAF) L 257.8	120.875 348.6	135.45	122.95

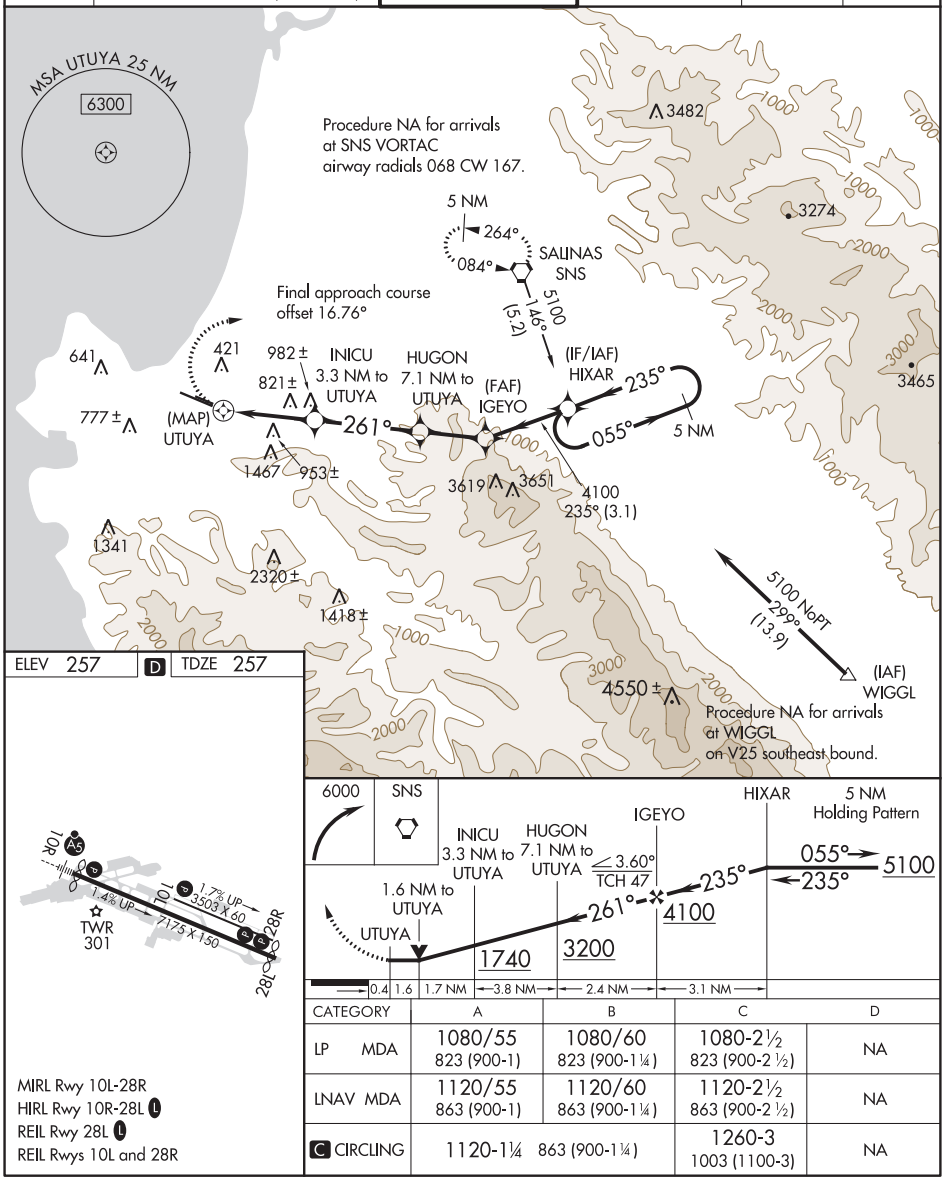

ELEV 257 D TDZE 257

CATEGORY	A	B	C	D
LP MDA	1080/55 823 (900-1)	1080/60 823 (900-1¼)	1080-2½ 823 (900-2 ½)	NA
LNAV MDA	1120/55 863 (900-1)	1120/60 863 (900-1¼)	1120-2½ 863 (900-2 ½)	NA
C CIRCLING	1120-1¼ 863 (900-1¼)		1260-3 1003 (1100-3)	NA

MIRL Rwy 10L-28R
HIRL Rwy 10R-28L L
REIL Rwy 28L L
REIL Rwys 10L and 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-MTB	APP CRS	Rwy ldg	7000
110.7	278°	TDZE	257
Chan 44		Apt Elev	257

LOC RWY 28L
MONTEREY RGNL (MRY)

DME required. DME or RADAR required for procedure entry.

T A Circling NA south of Rwy 10R-28L. Rwy 28L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 then climbing right turn to 5000 on heading 360° and SNS VORTAC R-264 to SNS VORTAC and hold.

ATIS	NORCAL APP CON	MONTEREY TOWER★	GND CON	CLNC DEL	UNICOM
119.25	133.0 251.15 (360°-150°) 127.15 307.125 (151°-359°)	118.4 (CTAF) L 257.8	120.875 348.6	135.45	122.95

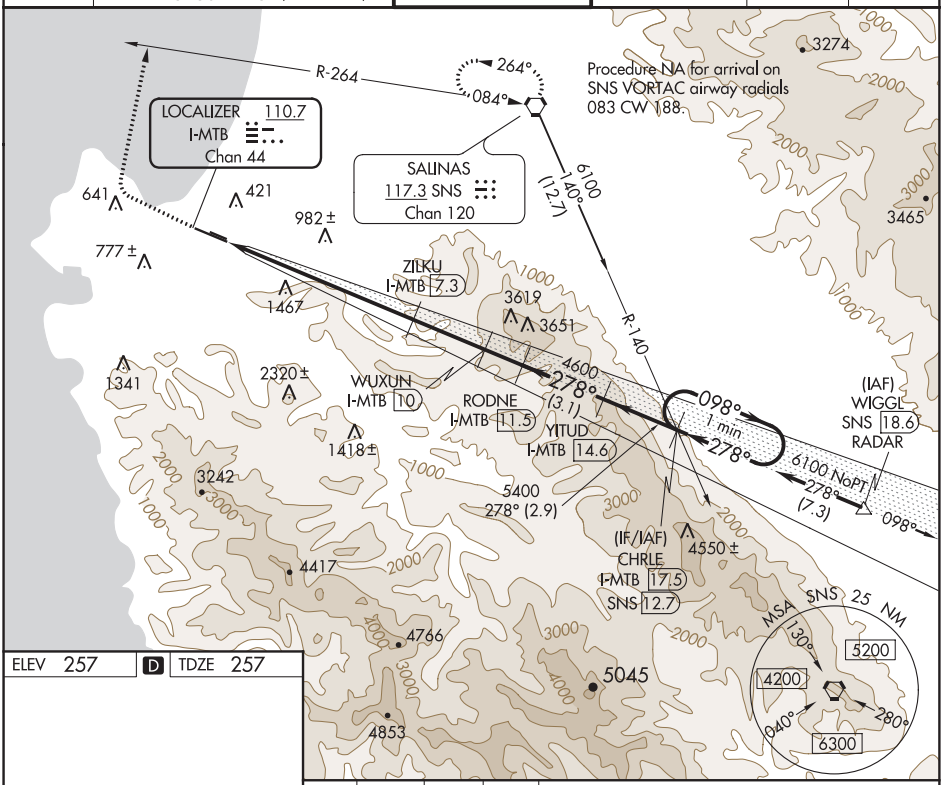

ELEV 257 D TDZ 257



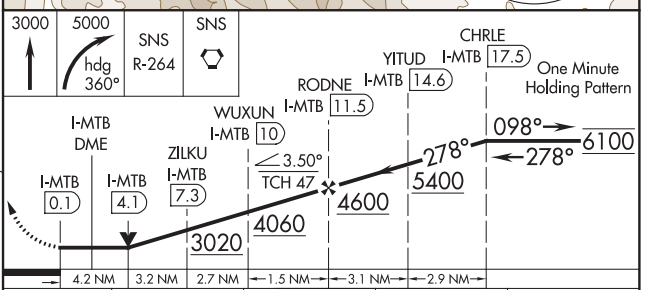

CATEGORY	A	B	C	D
S-LOC 28L	1860-1¼ 1603 (1700-1¼)	1860-1½ 1603 (1700-1½)	1860-3	1603 (1700-3)
C CIRCLING	1860-1¼ 1603 (1700-1¼)	1860-1½ 1603 (1700-1½)	1860-3	1603 (1700-3)

MIRL Rwy 10L-28R
HIRL Rwy 10R-28L L
REIL Rwy 28L L
REIL Rwys 10L and 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

19339

RACEWAY VISUAL RWY 28L

AL-271 (FAA)

MONTEREY RGNL (MRY)
MONTEREY, CALIFORNIA

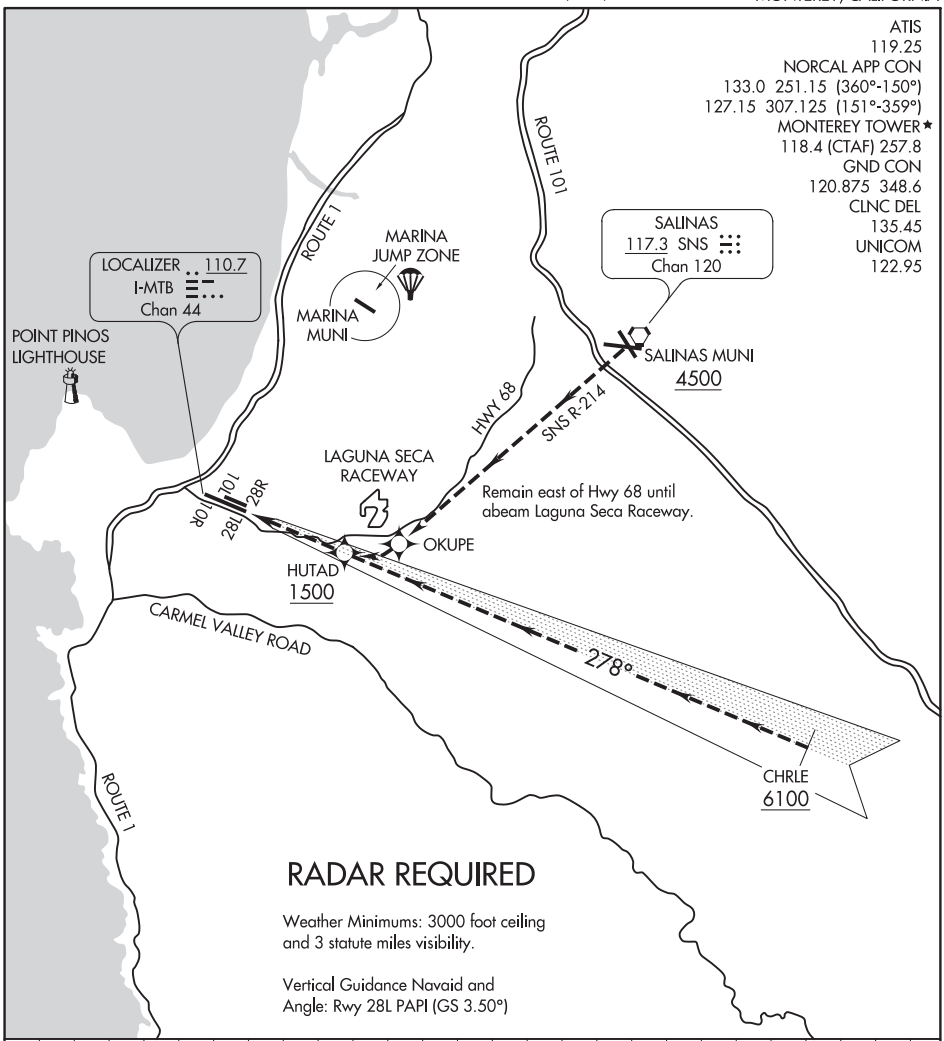

RACEWAY VISUAL APPROACH RWY 28L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VAR 13.4°E
JANUARY 2015
ANNUAL RATE OF CHANGE
0.1° W
ATIS
119.25
MONTEREY TOWER★
118.4 257.8
GND CON
120.875 348.6
CLNC DEL
135.45
D
36°35.5'N
36°35.0'N
121°51.5'W
121°51.0'W
121°50.5'W
121°50.0'W
GENERAL AVIATION TERMINAL
HANGAR
HANGARS
ILS CRITICAL AREA
EMAS
10R
ELEV 158
1.4% UP
099.4°
3303 X 60
ELEV 198
101
MILITARY RAMP
HANGARS
HANGARS
NAVY FLYING CLUB
HANGARS
NORTHEAST TIE DOWN
ELEV 256
28R
1.7% UP
279.4°
7175 X 150
099.4°
347
HANGARS
FIRE STATION
HANGARS
TWR
301
GENERAL AVIATION TERMINAL
TERMINAL
EMAS
28L
FIELD ELEV 257
ATC NON-VISIBILITY AREA
CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.
RWY 10L-28R
S-12.5
RWY 10R-28L
PCN 43 F/A/X/U
S-100, D-160, 2S-175, 2D-300

(MRY5.MRY) 19003

MONTEREY FIVE DEPARTURE

AL-271 (FAA)

MONTEREY RGNL (MRY)
MONTEREY, CALIFORNIA

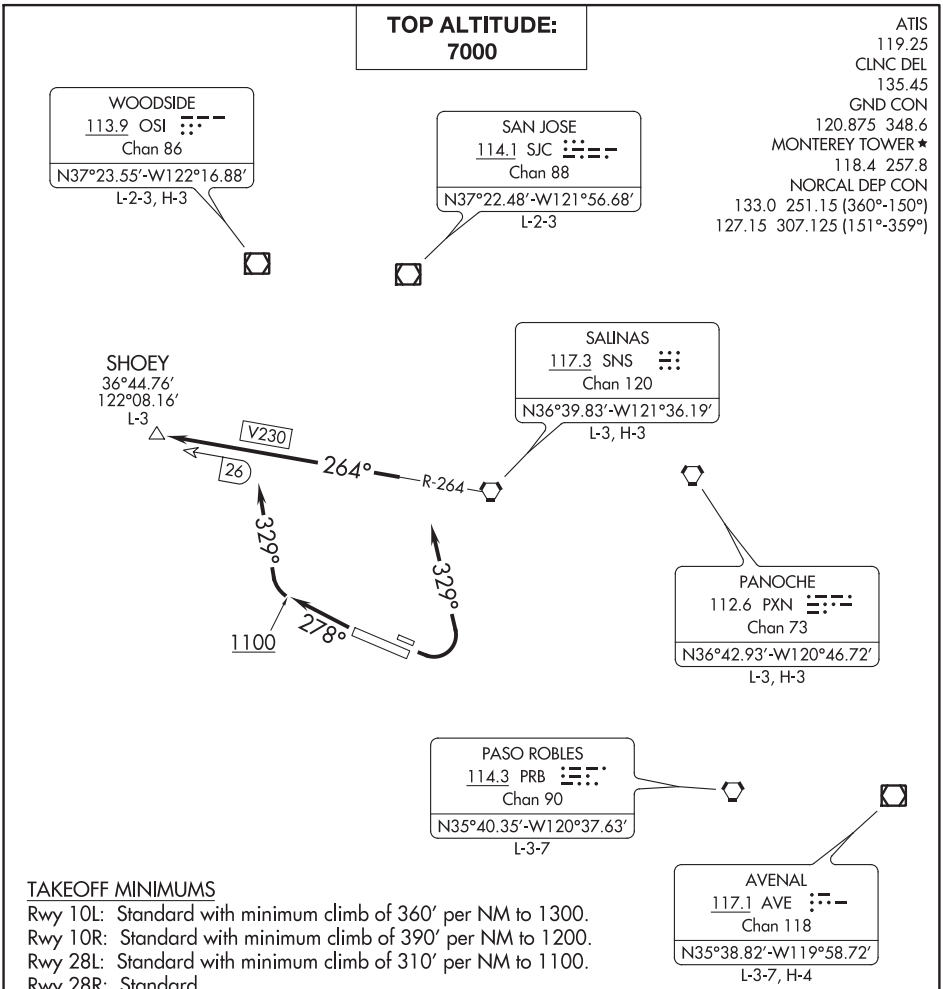

TAKEOFF MINIMUMS
Rwy 10L: Standard with minimum climb of 360′ per NM to 1300.
Rwy 10R: Standard with minimum climb of 390′ per NM to 1200.
Rwy 28L: Standard with minimum climb of 310′ per NM to 1100.
Rwy 28R: Standard.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 10L/R: Climbing left turn heading 329°. Thence. . . .

TAKEOFF RUNWAYS 28L/R: Climb heading 278° until leaving 1100 or as directed by Monterey Tower. Then climbing right turn heading 329°. Thence. . . .

. . . .intercept SNS R-264 westbound to SHOEY intersection. Maintain 7000 or assigned altitude. Expect clearance to filed altitude five minutes after departure.

TOP ALTITUDE: 7000

ATIS 119.25
GND CON 120.875 348.6
MONTEREY TOWER ★ 118.4 257.8
NORCAL DEP CON 133.0 251.15 (360°-150°) 127.15 307.125 (151°-359°)

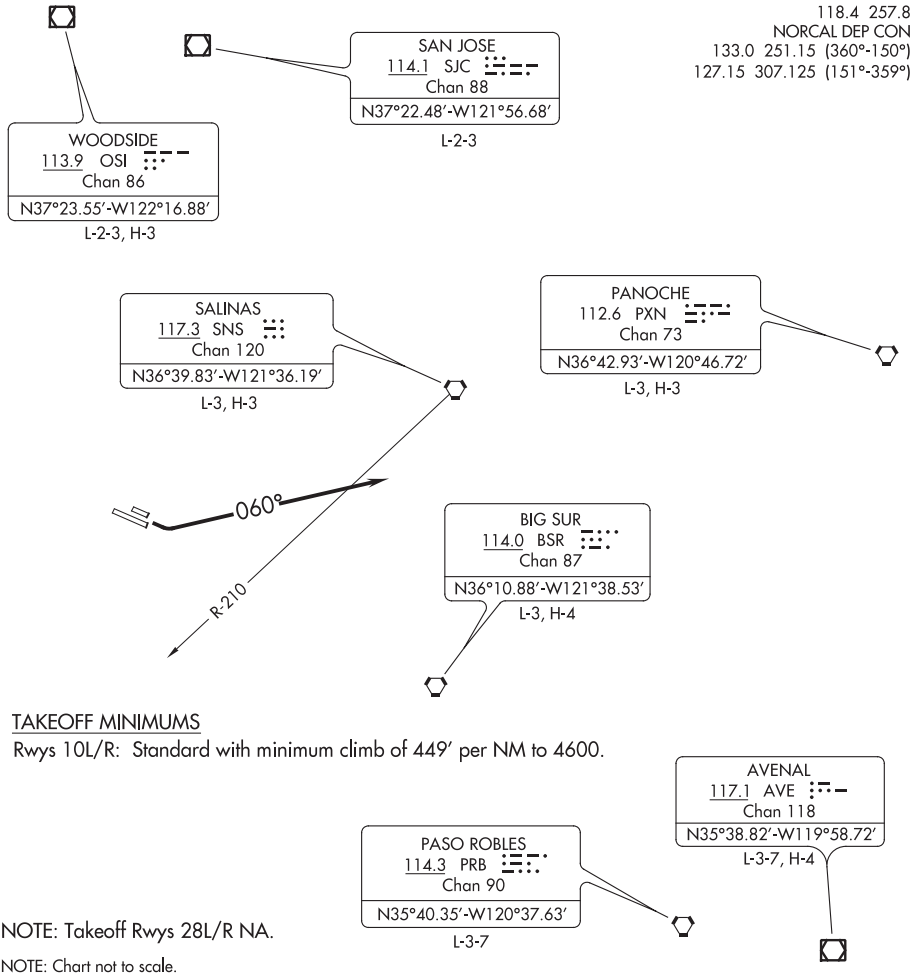

TAKEOFF MINIMUMS

Rwys 10L/R: Standard with minimum climb of 449′ per NM to 4600.

NOTE: Takeoff Rwys 28L/R NA.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 10L/R: Climbing left turn heading 060°. Expect vectors to filed route after passing SNS R-210. Maintain 7000 or assigned altitude. Expect clearance to filed altitude five minutes after departure.

LOST COMMUNICATIONS: If no transmissions are received within one minute after departure, climb direct SNS VORTAC, then via assigned fix/route. Maintain 7000.

SW-2, 30 JAN 2020 to 26 MAR 2020

ILS or LOC RWY 32R

MOFFETT FEDERAL AFLD (NUQ)

LOC/DME I-NUQ	APP CRS	Rwy Idg 9006
110.35	322°	TDZE 31
Chan 40 (Y)		Apt Elev 37

DME required. RADAR required for procedure entry.

T A For inop ALS, increase S-ILS 32R Cat E visibility to ¾ SM and S-LOC 32R Cat C/D/E to 1⅜ SM.

MALSR A5

MISSED APPROACH: Climb to 600 then climbing left turn to 4000 on heading 310° and on OAK VOR/DME R-139 to OAK VOR/DME and hold.

ATIS	NORCAL APP CON	MOFFETT TOWER ★	GND CON	CLNC DEL
124.175 283.0	120.1 290.25	119.55 L (CTAF) 259.65	121.85 278.95	296.75

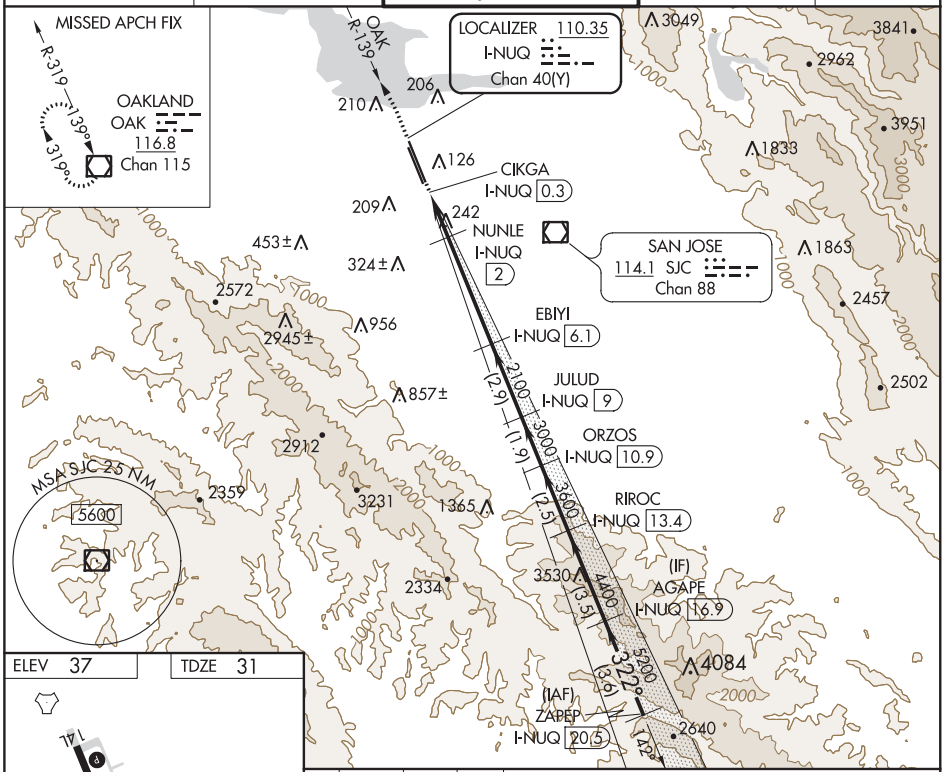

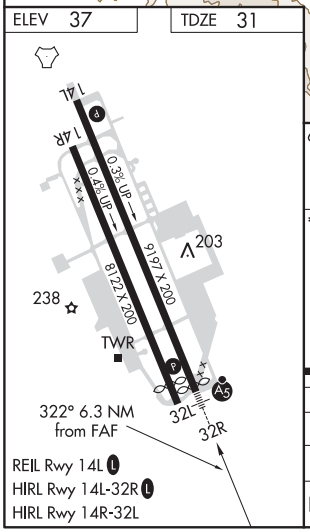

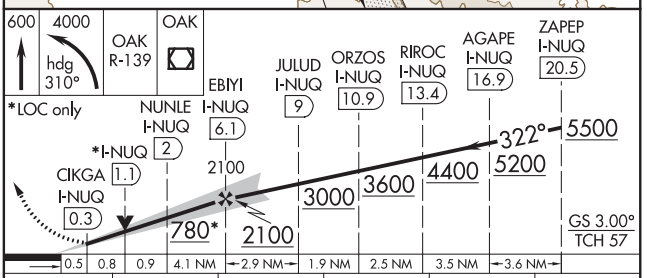

CATEGORY	A	B	C	D	E
S-ILS 32R	231-½ 200 (200-½)				
S-LOC 32R	500-½ 469 (500-½)		500-1 469 (500-1)		
C CIRCLING	540-1 503 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2½ 743 (800-2½)	940-3 903 (1000-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	9197
CH 70442	142°	TDZE	6
W14A		Apt Elev	37

RNAV (GPS) RWY 14L

MOFFETT FEDERAL AFLD (NUQ)

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C .

MISSED APPROACH: Climb to 500 then climbing left turn to 3200 direct PEYIC and hold.

ATIS	NORCAL APP CON	MOFFETT TOWER ★	GND CON	CLNC DEL
124.175 283.0	120.1 290.25	119.55 L (CTAF) 259.65	121.85 278.95	296.75

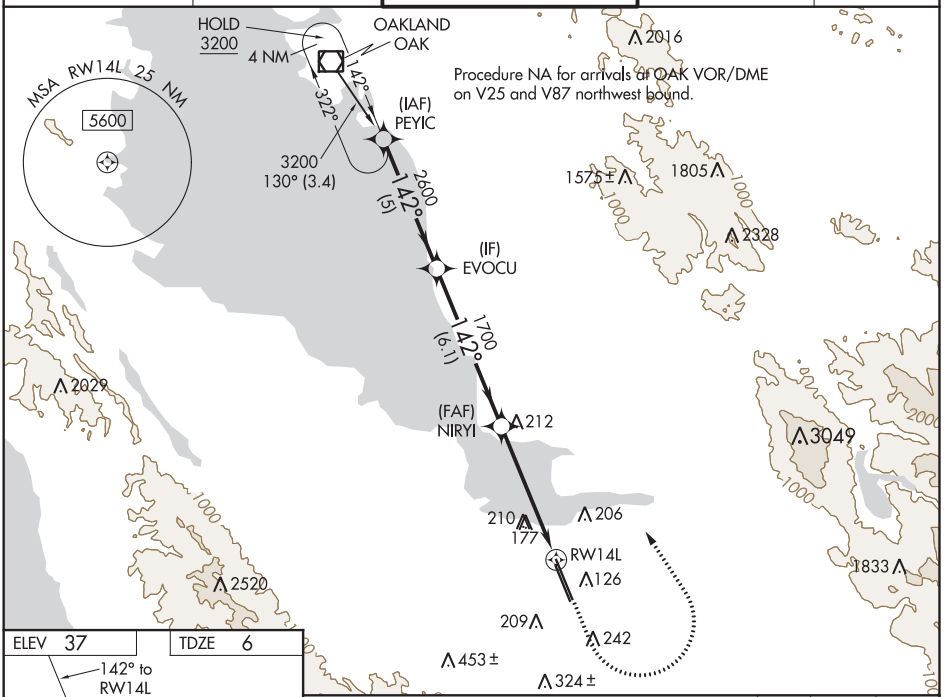

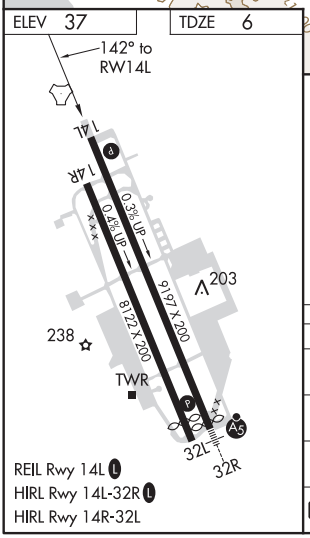

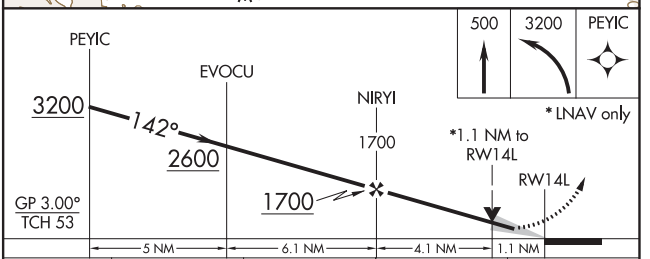

CATEGORY	A	B	C	D
LPV DA	256-¾ 250 (300-¾)			
LNAV/VNAV DA	326-⅞ 320 (300-⅞)			
LNAV MDA	440-1 434 (500-1)		440-1¼ 434 (500-1¼)	
C CIRCLING	540-1 503 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2¼ 743 (800-2¼)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MOUNTAIN VIEW, CALIFORNIA | AL-410 (FAA) | 20030

RNAV (GPS) RWY 14R

MOFFETT FEDERAL AFLD (NUQ)

WAAS	APP CRS	Rwy Idg	8122
CH 81942	142°	TDZE	14
W14B		Apt Elev	37

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C.

MISSED APPROACH: Climb to 540 then climbing left turn to 3200 direct PEYIC and hold.

ATIS	NORCAL APP CON	MOFFETT TOWER ★	GND CON	CLNC DEL
124.175 283.0	120.1 290.25	119.55 L (CTAF) 259.65	121.85 278.95	296.75

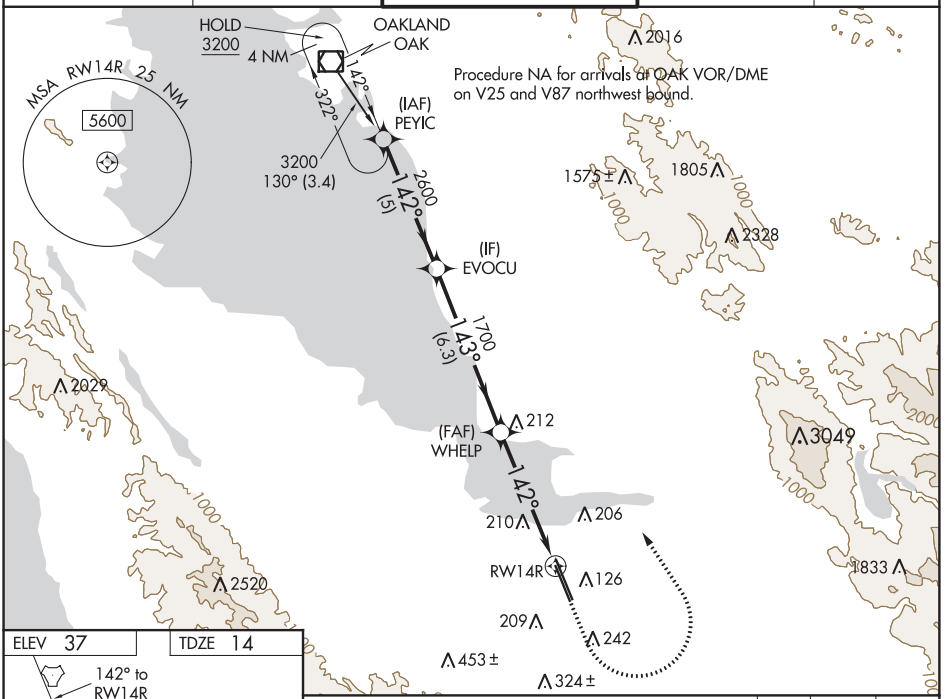

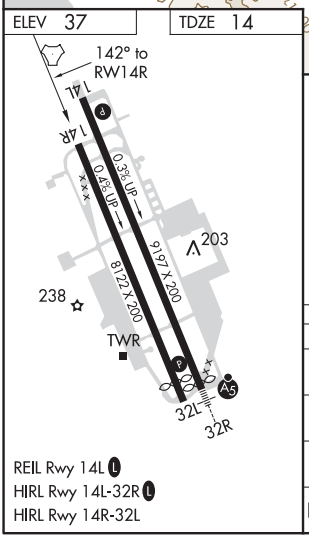

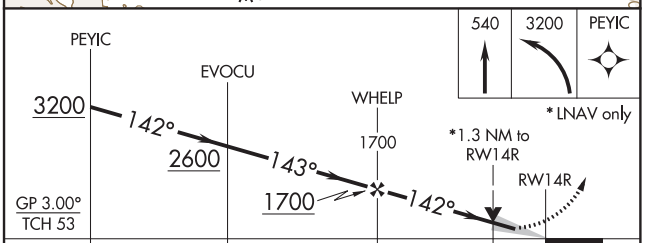

CATEGORY	A	B	C	D
LPV DA	264-¾ 250 (300-¾)			
LNAV/VNAV DA	364-1 350 (400-1)			
LNAV MDA	460-1 446 (500-1)		460-1⅜ 446 (500-1⅜)	
C CIRCLING	540-1 503 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2¼ 743 (800-2¼)

REIL Rwy 14L L
HIRL Rwy 14L-32R L
HIRL Rwy 14R-32L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 32L

MOFFETT FEDERAL AFLD (NUQ)

WAAS CH 50242 W32A	APP CRS 322°	Rwy Idg 7520 TDZE 36 Apt Elev 37

RNP APCH.

Rwy 32L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 47°C .

MISSED APPROACH: Climb to 3200 direct PEYIC and hold.

ATIS	NORCAL APP CON	MOFFETT TOWER ★	GND CON	CLNC DEL
124.175 283.0	120.1 290.25	119.55 (L) (CTAF) 259.65	121.85 278.95	296.75

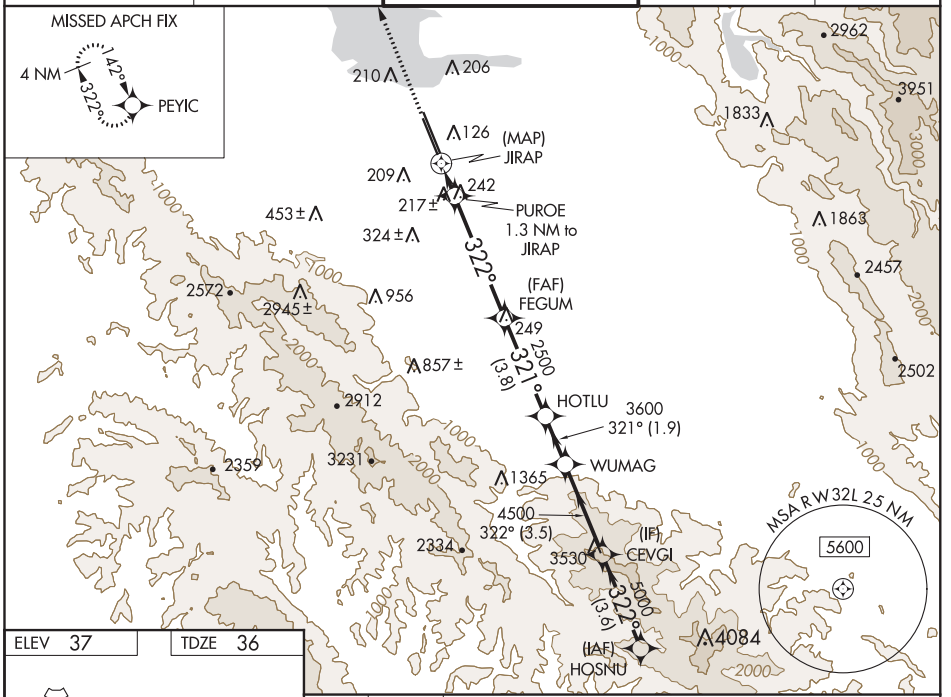

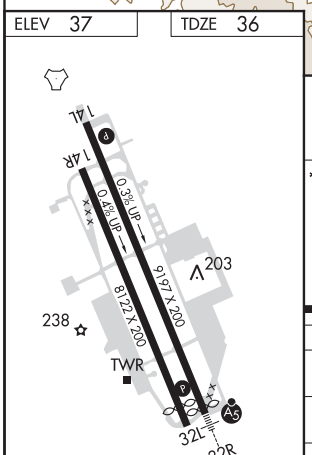

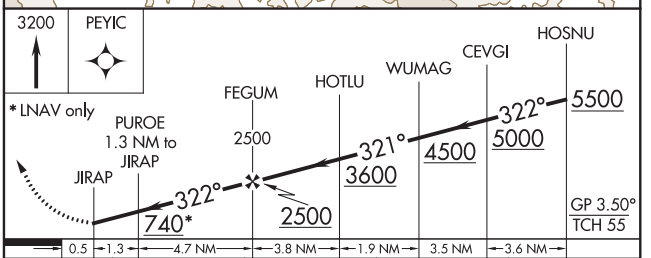

CATEGORY	A	B	C	D
LPV DA	337-⅞ 301 (300-⅞)			
LNAV/VNAV DA	421-1⅛ 385 (400-1⅛)			
LNAV MDA	480-1 444 (500-1)		480-1⅜ 444 (500-1⅜)	
C CIRCLING	540-1 503 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2¼ 743 (800-2¼)

SW-2, 30 JAN 2020 to 26 MAR 2020

MOUNTAIN VIEW, CALIFORNIA | AL-410 (FAA) | 20030

RNAV (GPS) RWY 32R

MOFFETT FEDERAL AFLD (NUQ)

WAAS	APP CRS	Rwy Idg	9006
CH 53343	322°	TDZE	31
W32B		Apt Elev	37

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C . For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅛ SM and LNAV Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3200 direct PEYIC and hold.

ATIS	NORCAL APP CON	MOFFETT TOWER ★	GND CON	CLNC DEL
124.175 283.0	120.1 290.25	119.55 (L) (CTAF) 259.65	121.85 278.95	296.75

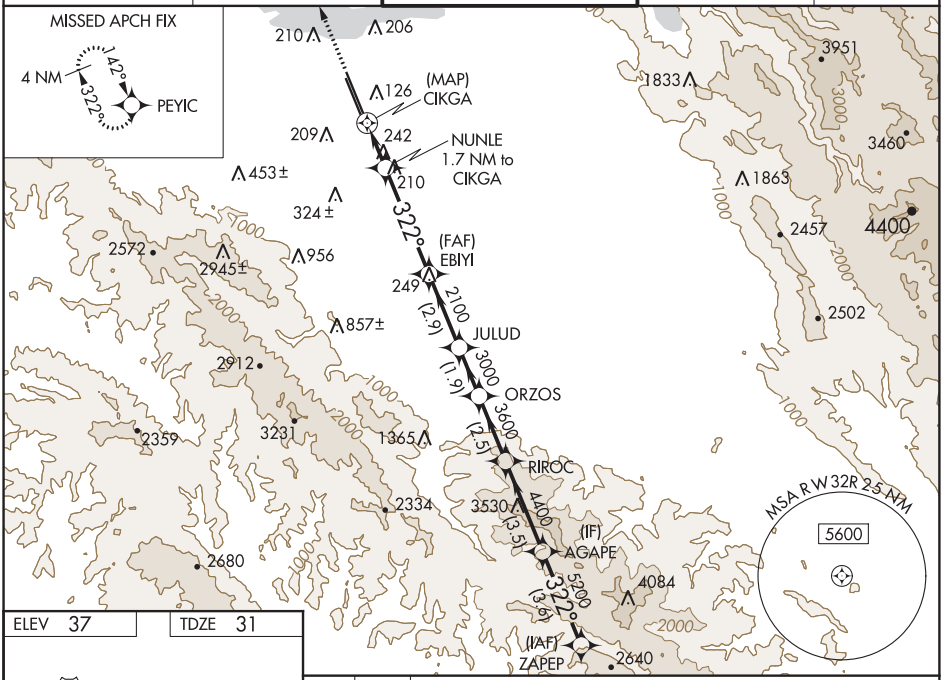

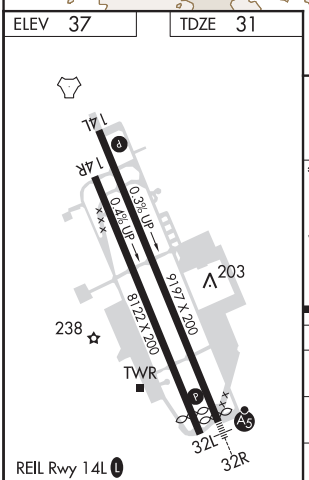

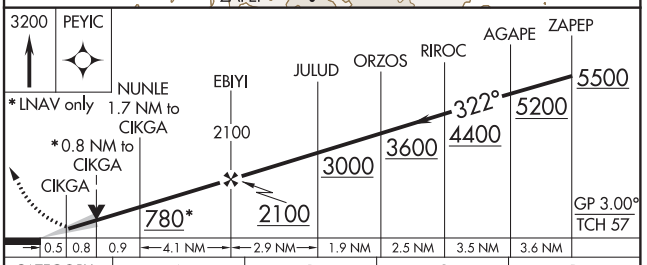

CATEGORY	A	B	C	D
LPV DA	231-½ 200 (200-½)			
LNAV/VNAV DA	442-¾ 411 (500-¾)			
LNAV MDA	500-½ 469 (500-½)		500-1 469 (500-1)	
C CIRCLING	540-1 503 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2½ 743 (800-2½)

MOUNTAIN VIEW, CALIFORNIA
Orig-A 05DEC19

37°25'N-122°03'W

MOFFETT FEDERAL AFLD (NUQ)

RNAV (GPS) RWY 32R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC RWY 14L

MOFFETT FEDERAL AFLD (NUQ)

LOC/DME I-MNQ	APP CRS	Rwy Idg	9197
110.35	142°	TDZE	6
Chan 40 (Y)		Apt Elev	37

DME required. RADAR required for procedure entry. TACAN required.

MISSED APPROACH: Climb to 500 then climbing left turn to 3200 on heading 285° and on NUQ TACAN R-321 to PEYIC/NUQ TACAN 16 DME and hold.

ATIS	NORCAL APP CON	MOFFETT TOWER ★	GND CON	CLNC DEL
124.175 283.0	120.1 290.25	119.55 L (CTAF) 259.65	121.85 278.95	296.75

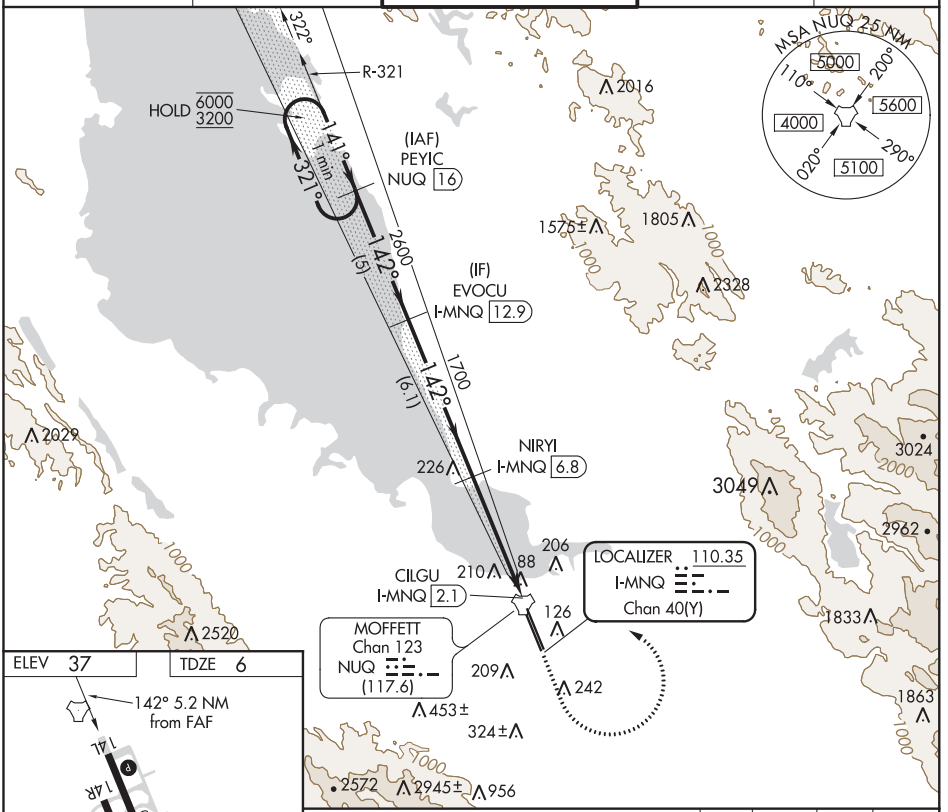

CATEGORY	A	B	C	D
S-LOC 14L	340-1 334 (400-1)			
C CIRCLING	540-1 503 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2½ 743 (800-2½)

REIL Rwy 14L L
HIRL Rwy 14L-32R L
HIRL Rwy 14R-32L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

MOUNTAIN VIEW, CALIFORNIA | AL-410 (FAA) | 20030

TACAN RWY 32L

MOFFETT FEDERAL AFLD (NUQ)

TACAN NUQ Chan 123 (117.6)	APP CRS 321°	Rwy Idg 7520 / TDZE 36 / Apt Elev 37

RADAR required for procedure entry.

Rwy 32L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3200 on NUQ TACAN R-321 to PEYIC/16 DME and hold.

ATIS	NORCAL APP CON	MOFFETT TOWER ★	GND CON	CLNC DEL
124.175 283.0	120.1 290.25	119.55 L (CTAF) 259.65	121.85 278.95	296.75

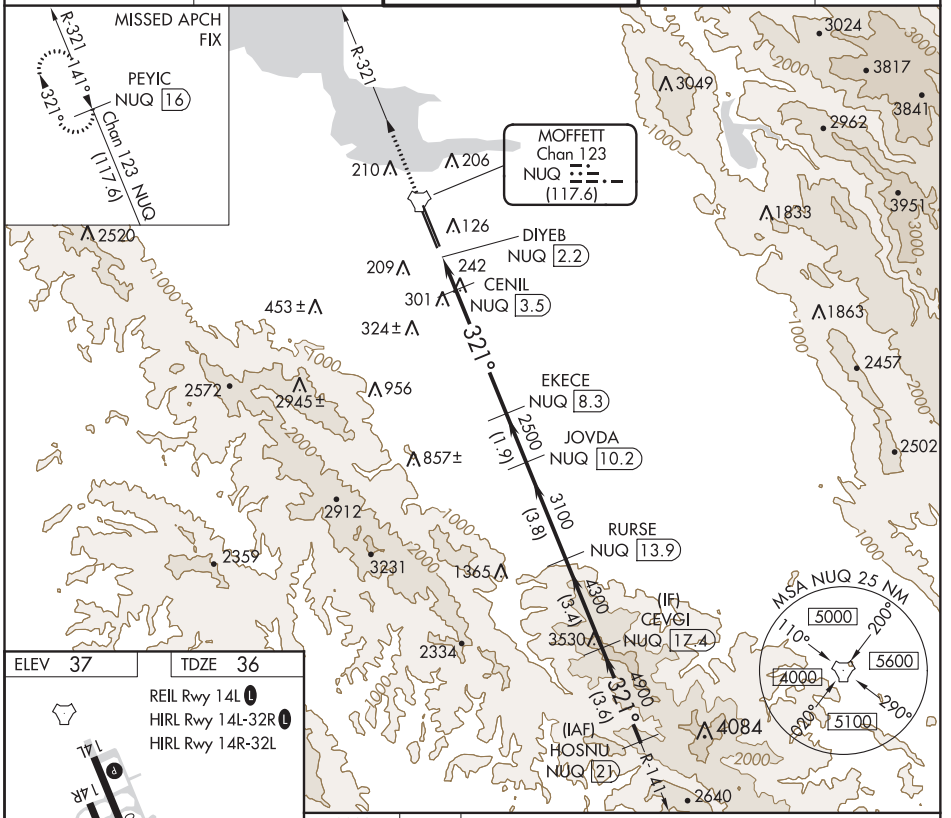

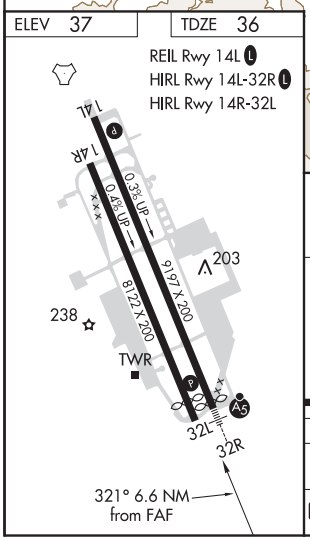

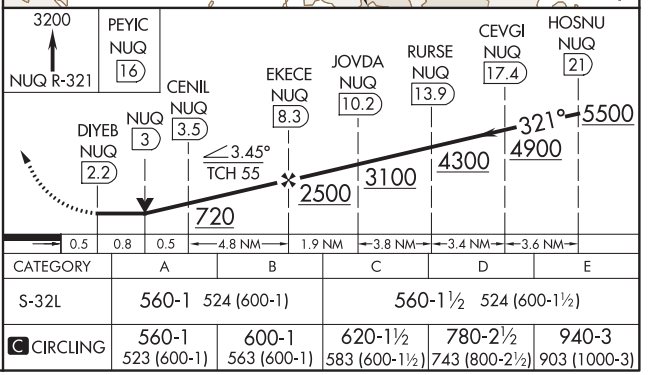

CATEGORY	A	B	C	D	E
S-32L	560-1 524 (600-1)		560-1½ 524 (600-1½)		
C CIRCLING	560-1 523 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2½ 743 (800-2½)	940-3 903 (1000-3)

SW-2, 30 JAN 2020 to 26 MAR 2020

TACAN	APP CRS	Rwy Idg	9006
NUQ Chan 123 (117.6)	321°	TDZE	31
		Apt Elev	37

TACAN RWY 32R

MOFFETT FEDERAL AFLD (NUQ)

RADAR required for procedure entry.

For inop ALS, increase Cat E visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3200 on NUQ TACAN R-321 to PEYIC/16 DME and hold.

ATIS	NORCAL APP CON	MOFFETT TOWER ★	GND CON	CLNC DEL
124.175 283.0	120.1 290.25	119.55 L (CTAF) 259.65	121.85 278.95	296.75

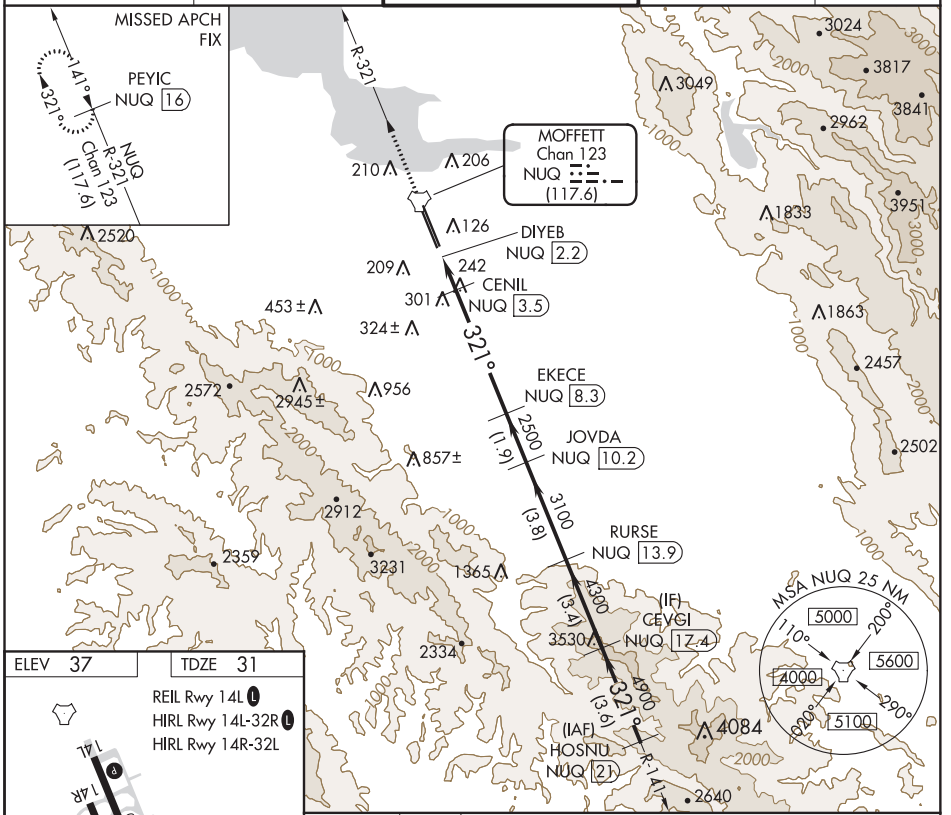

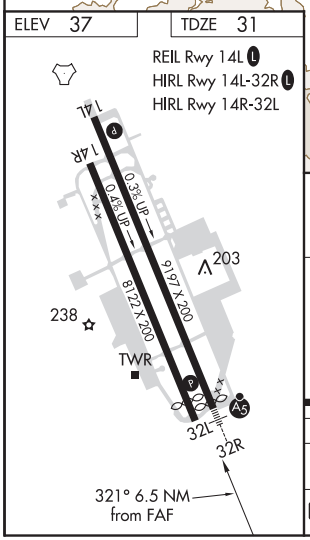

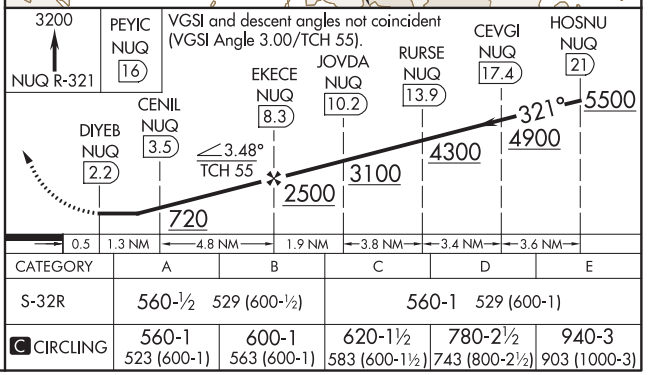

CATEGORY	A	B	C	D	E
S-32R	560-½ 529 (600-½)		560-1 529 (600-1)		
C CIRCLING	560-1 523 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2½ 743 (800-2½)	940-3 903 (1000-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

18200

AIRPORT DIAGRAM

MOFFETT FEDERAL AIRFIELD (NUQ)
MOUNTAIN VIEW, CALIFORNIA

AL-410 (FAA)

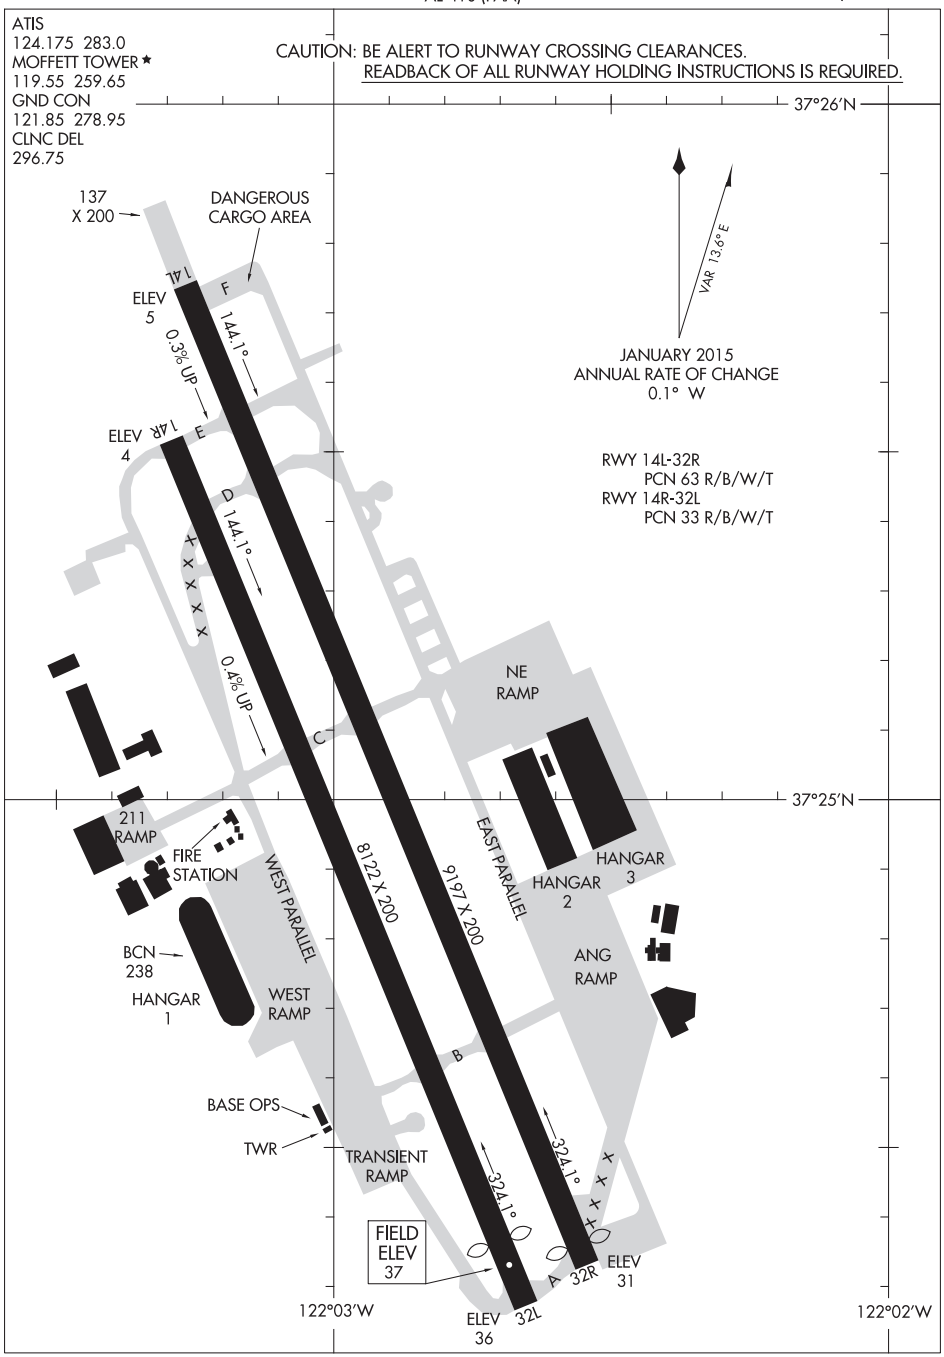

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
18200

MOUNTAIN VIEW, CALIFORNIA
MOFFETT FEDERAL AIRFIELD (NUQ)

HOOKS TWO DEPARTURE AL-410 (FAA)

SW-2, 30 JAN 2020 to 26 MAR 2020

ATIS
124.175 283.0
CLNC DEL
296.75
GND CON
121.85 278.95
MOFFETT TOWER*
119.55 (CTAF) 259.65
NORCAL DEP CON
120.1 290.25

TOP ALTITUDE: ASSIGNED BY ATC

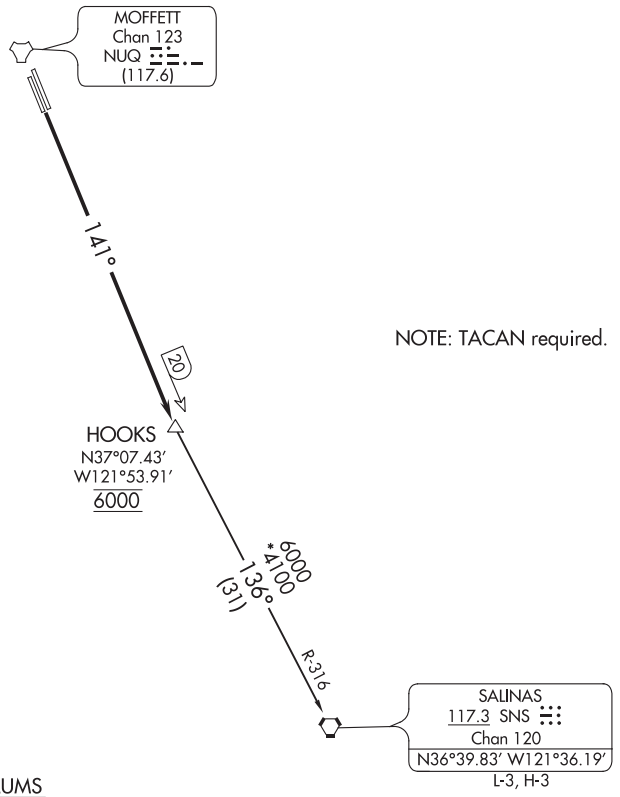

NOTE: TACAN required.

TAKEOFF MINIMUMS

Rwy 14R/L: Standard with the following minimum climb gradients:
Rwy 14R: Obstacle climb of 314' per NM to 4900, ATC climb of 332' per NM to 6000.
Rwy 14L: Obstacle climb of 314' per NM to 4900, ATC climb of 328' per NM to 6000.
Rwy 32R/L: NA, ATC.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 14L/R: Climb via NUQ R-141 to cross HOOKS/NUQ 20 DME at 6000, thence . . . .

. . . . via (transition).

VALLEY TRANSITION (HOOKS2.SNS): From over HOOKS DME on SNS R-316 to SNS VORTAC.

(SOLN3.MOONY) 19171

SOUTHLAND THREE DEPARTURE

AL-410 (FAA)

MOFFETT FEDERAL AFLD (NUQ)
MOUNTAIN VIEW, CALIFORNIA

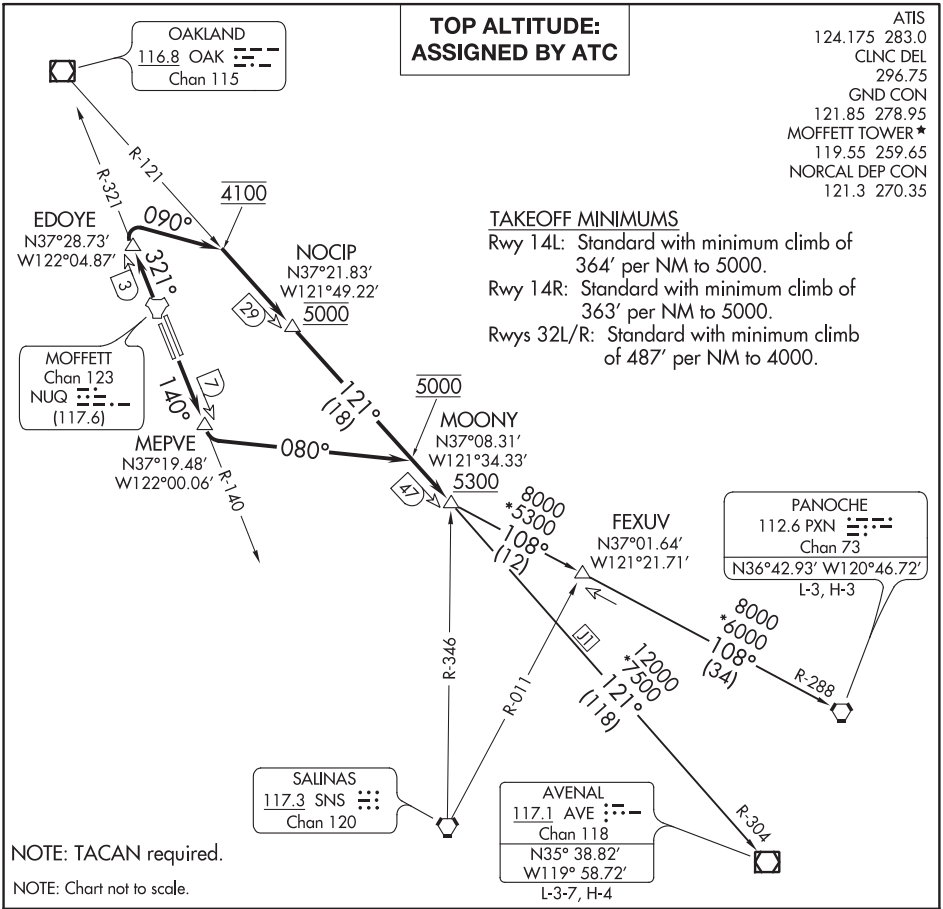

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 14L/R: Climb on NUQ R-140 to MEPVE/NUQ 7 DME, then climbing left turn on heading 080° to intercept OAK R-121 at 5000, then on OAK R-121 to cross MOONY INT at or above 5300, thence . . . .

TAKEOFF RUNWAYS 32L/R: Climb on NUQ R-321 to EDOYE/NUQ 3 DME, then climbing right turn on heading 090° to intercept OAK R-121 at 4100, then on OAK R-121 to cross NOCIP/OAK 29 DME at 5000, then on OAK R-121 to cross MOONY INT at or above 5300, thence . . . .

. . . . on (transition), maintain ATC assigned altitude.

AVENAL TRANSITION (SOLN3.AVE): From over MOONY INT on OAK R-121 and AVE R-304 to AVE VOR/DME.

PANOCHE TRANSITION (SOLN3.PXN): From over MOONY INT on PXN R-288 to PXN VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020

WOODSIDE TWO DEPARTURE

ATIS
124.175 283.0
CLNC DEL
296.75
GND CON
121.85 278.95
MOFFETT TOWER ★
119.55 (CTAF) 259.65
NORCAL DEP CON
121.3 270.35

TOP ALTITUDE: ASSIGNED BY ATC

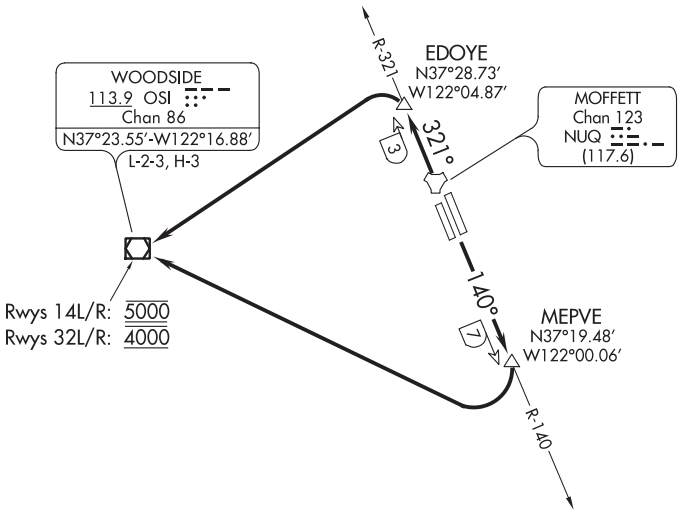

NOTE: TACAN required.

TAKEOFF MINIMUMS

Rwys 14L/R: Standard with minimum climb of 402′ per NM to 5000.
Rwy 32R: Standard with minimum climb of 250′ per NM to 4000.
Rwy 32L: Standard with minimum climb of 246′ per NM to 4000.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 14L/R: Climb via NUQ R-140 to MEPVE/NUQ 7 DME, then right turn direct to cross OSI VOR/DME at 5000, thence . . . .

TAKEOFF RUNWAYS 32L/R: Climb via NUQ R-321 to EDOYE/NUQ 3 DME, then turn left direct to cross OSI VOR/DME at 4000, thence . . . .

. . . . via RADAR vectors or assigned route.

NAPA, CALIFORNIA | AL-281 (FAA) | 19283

LOC/DME I-APC	APP CRS	Rwy Idg	5930
111.3	006°	TDZE	17
Chan 50		Apt Elev	36

ILS or LOC Z RWY 1L
NAPA COUNTY (APC)

T A Autopilot coupled approach NA below 530. Inop table does not apply to S-ILS 1L. Circling Cats A/B/C NA northeast of Rwys 19R and 24. Circling Cat D NA east of Rwy 19L-1R. Circling Rwy 6 NA at night.

MALS (A)

MISSED APPROACH: Climb to 500 then climbing left turn to 3200 direct SGD VORTAC and on SGD VORTAC R-230 to BURDE INT/SGD 11.3 DME and hold, continue climb-in-hold to 3200.

ATIS	OAKLAND CENTER	NAPA TOWER ★	GND CON	CLNC DEL	UNICOM
124.05	127.8 353.5	118.7 (CTAF) L 257.8	121.7	127.85	122.95

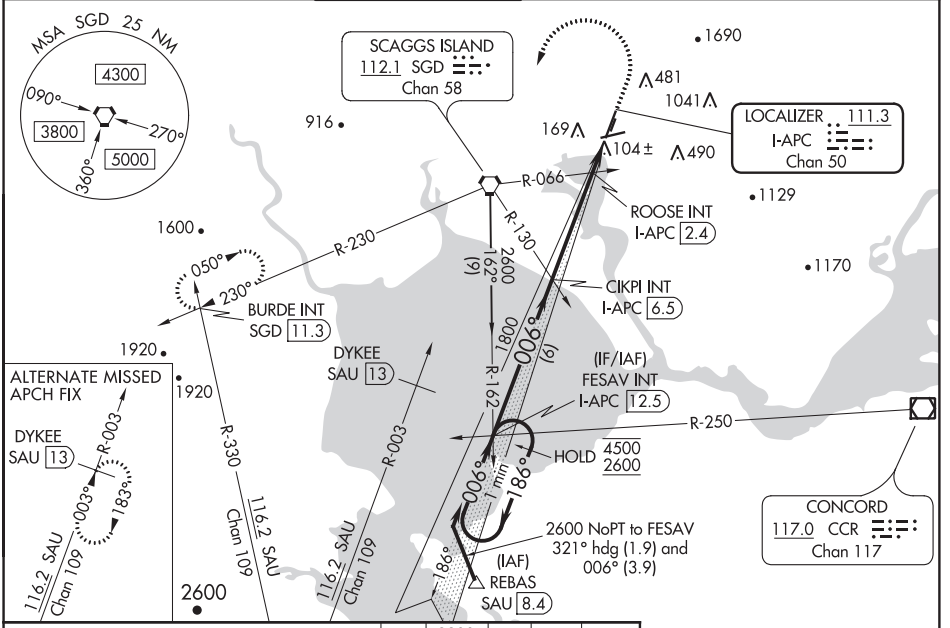

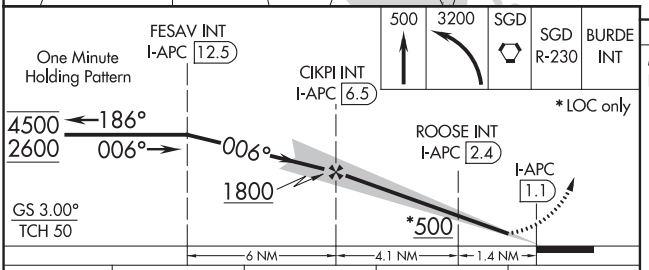

CATEGORY	A	B	C	D
S-ILS 1L	217-¾ 200 (200-¾)			
S-LOC 1L	500-¾ 483 (500-¾)		500-1⅛ 483 (500-1⅛)	
C CIRCLING	600-1 564 (600-1)	680-1 644 (700-1)	1280-3 1244 (1300-3)	1300-3 1264 (1300-3)
ROOSE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 1L	360-¾ 343 (400-¾)			
C CIRCLING	600-1 564 (600-1)	680-1 644 (700-1)	1280-3 1244 (1300-3)	1300-3 1264 (1300-3)

ELEV 36 | TDZE 17

MIRL Rwys 6-24 and 1L-19R L
REIL Rwy 6 L

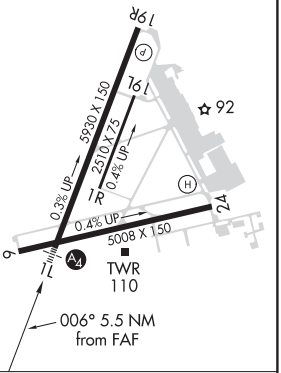

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

NAPA, CALIFORNIA
Amdt 1 10OCT19

38°13′N-122°17′W

NAPA COUNTY (APC)
ILS or LOC Z RWY 1L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 6

NAPA COUNTY (APC)

APP CRS	Rwy Idg	5008
062°	TDZE	21
	Apt Elev	36

RNP APCH.

Rwy 6 helicopter visibility reduction below 1 SM NA.
Circling Cats A/B/C NA northeast of Rwys 19R and 24.
Circling Cat D NA east of Rwy 19L-1R.
Straight-in Rwy 6 NA at night, Circling Rwy 6 NA at night.

MISSED APPROACH: Climbing left turn to 4100 direct HABAP and hold, continue climb-in-hold to 4100.
*Missed approach requires minimum climb of 355 feet per NM to 2300.

ATIS	OAKLAND CENTER	NAPA TOWER *	GND CON	CLNC DEL	UNICOM
124.05	127.8 353.5	118.7 (CTAF) L 257.8	121.7	127.85	122.95

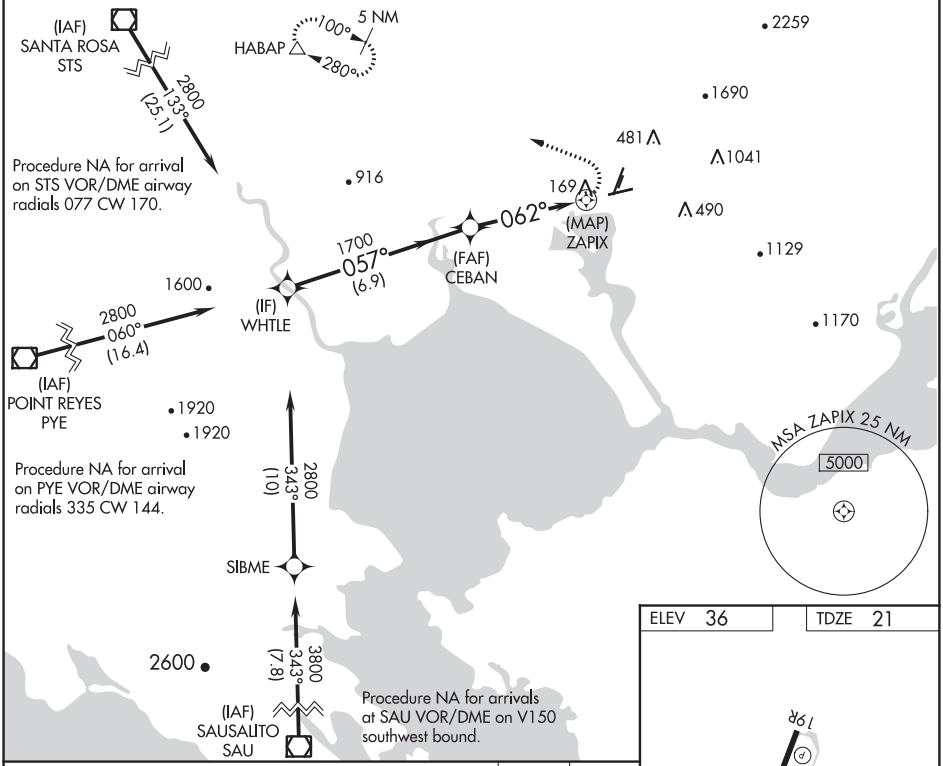

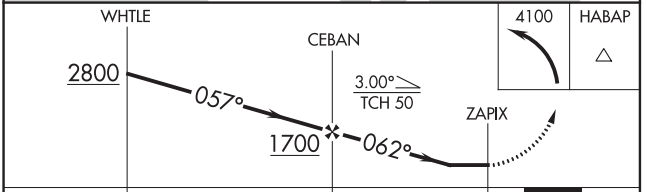

CATEGORY	A	B	C	D
LNAV MDA*	480-1 459 (500-1)		480-1⅜ 459 (500-1⅜)	
LNAV MDA	940-1¼ 919 (1000-1¼)		940-2½ 919 (1000-2½)	
C CIRCLING	940-1¼ 904 (1000-1¼)		1280-3 1244 (1300-3)	1300-3 1264 (1300-3)

ELEV 36 TDZE 21



REIL Rwy 6 L
MIRL Rwys 6-24 and 1L-19R L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

NAPA, CALIFORNIA | AL-281 (FAA) | 19283

RNAV (GPS) Y RWY 1L

NAPA COUNTY (APC)

WAAS CH 56613 W01A	APP CRS 006°	Rwy Idg 5930 / TDZE 17 / Apt Elev 36

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Circling Cats A/B/C NA northeast or Rwys 19R and 24. Circling Cat D NA east of Rwy 19L-1R. Inop table does not apply to LPV, LNAV/VNAV all Cats, and LNAV Cats C/D. Circling Rwy 6 NA at night.

MALS

MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold, continue climb-in-hold to 5000.

ATIS	OAKLAND CENTER	NAPA TOWER ★	GND CON	CLNC DEL	UNICOM
124.05	127.8 353.5	118.7 (CTAF) L 257.8	121.7	127.85	122.95

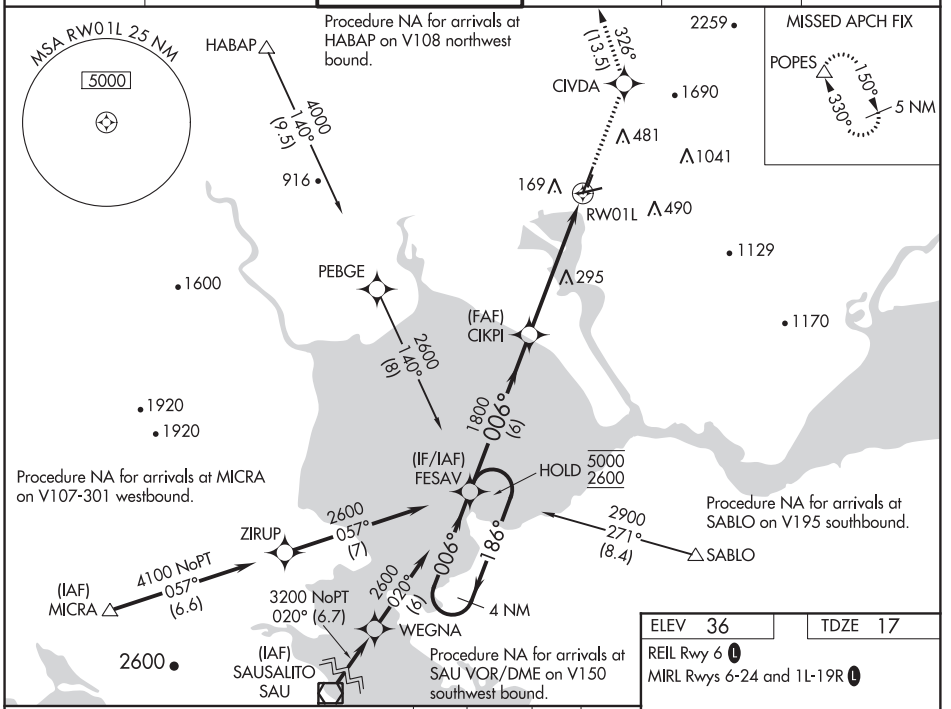

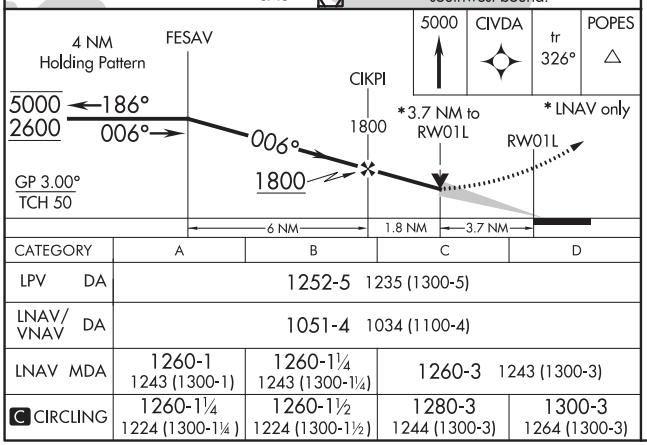

CATEGORY	A	B	C	D
LPV DA	1252-5 1235 (1300-5)			
LNAV/VNAV DA	1051-4 1034 (1100-4)			
LNAV MDA	1260-1 1243 (1300-1)	1260-1¼ 1243 (1300-1¼)	1260-3 1243 (1300-3)	
C CIRCLING	1260-1¼ 1224 (1300-1¼)	1260-1½ 1224 (1300-1½)	1280-3 1244 (1300-3)	1300-3 1264 (1300-3)

ELEV 36 | TDZE 17

REIL Rwy 6 L

MIRL Rwys 6-24 and 1L-19R L

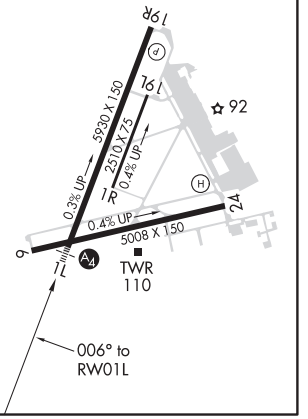

NAPA, CALIFORNIA

Amdt 3 10OCT19

38°13'N-122°17'W

NAPA COUNTY (APC)

RNAV (GPS) Y RWY 1L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	5930
CH 40313	006°	TDZE	17
W01B		Apt Elev	36

RNAV (GPS) Z RWY 1L

NAPA COUNTY (APC)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Inop table does not apply to LPV minimums. For inop ALS, increase visibility LNAV/VNAV to ⅞ SM. Missed approach requires minimum climb of 420 feet per NM to 2200. If unable to meet climb gradient see RNAV (GPS) Y RWY 1L.

MALS

MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold, continue climb-in-hold to 5000.

ATIS	OAKLAND CENTER	NAPA TOWER ★	GND CON	CLNC DEL	UNICOM
124.05	127.8 353.5	118.7 (CTAF) L 257.8	121.7	127.85	122.95

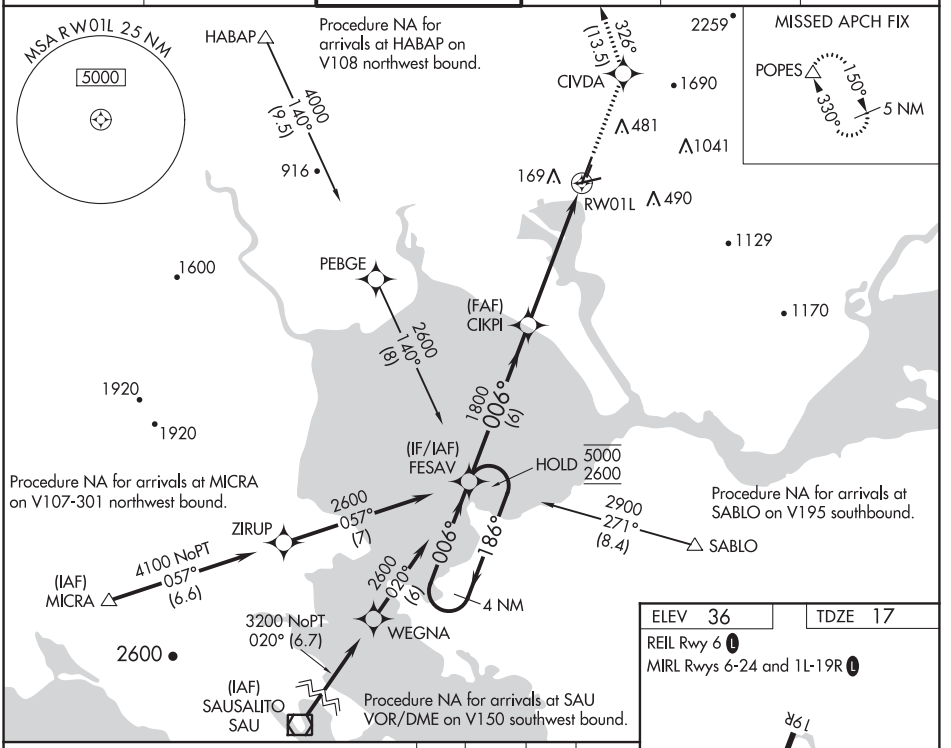

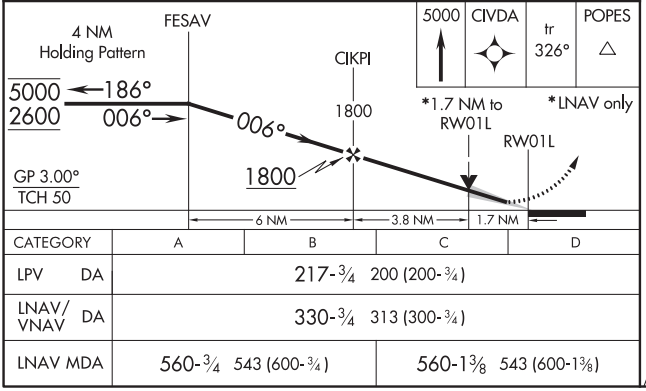

CATEGORY	A	B	C	D
LPV DA	217-¾ 200 (200-¾)			
LNAV/VNAV DA	330-¾ 313 (300-¾)			
LNAV MDA	560-¾ 543 (600-¾)		560-1⅜ 543 (600-1⅜)	

ELEV 36	TDZE 17
REIL Rwy 6 L	
MIRL Rwys 6-24 and 1L-19R L	

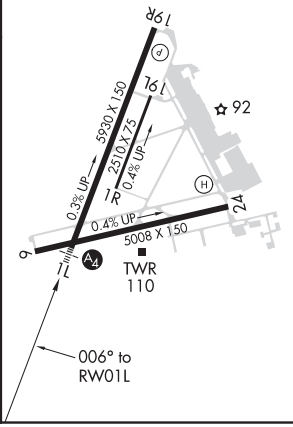

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

NAPA, CALIFORNIA | AL-281 (FAA) | 19283

VORTAC SGD 112.1 Chan 58	APP CRS 050°	Rwy Idg 5008 / TDZE 21 / Apt Elev 36

VOR RWY 6
NAPA COUNTY (APC)

Rwy 6 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 6 NA at night, Circling Rwy 6 NA at night. Circling Cats A/B/C NA northeast of Rwys 19R and 24. Circling Cat D NA east of Rwy 19L-1R.

MISSED APPROACH: Climbing left turn to 3200 on heading 193° and SGD VORTAC R-230 to BURDE INT/SGD 11.3 DME and hold, continue climb-in-hold to 3200.

ATIS	OAKLAND CENTER	NAPA TOWER *	GND CON	CLNC DEL	UNICOM
124.05	127.8 353.5	118.7 (CTAF) L 257.8	121.7	127.85	122.95

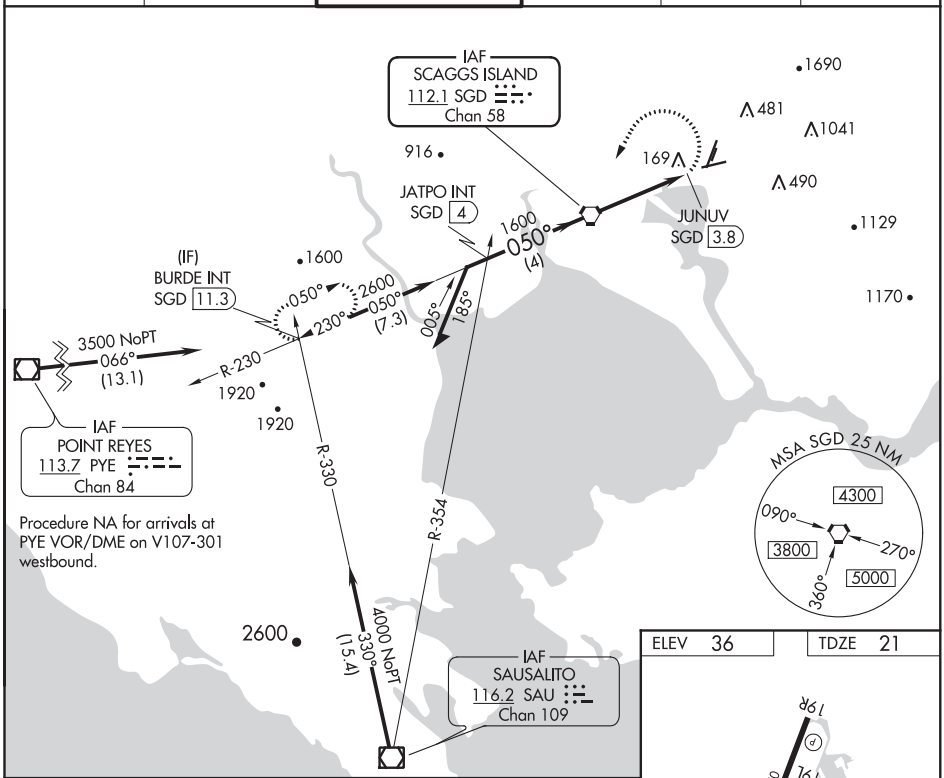

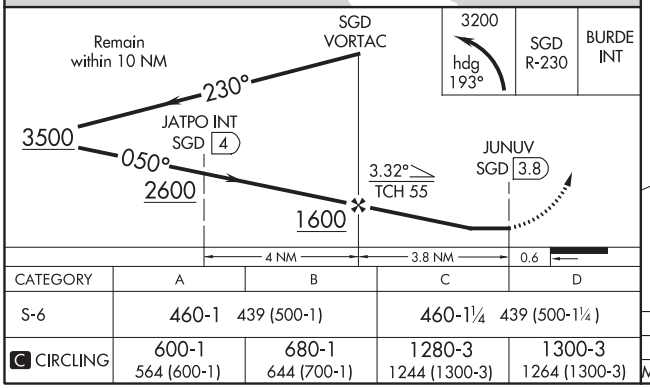

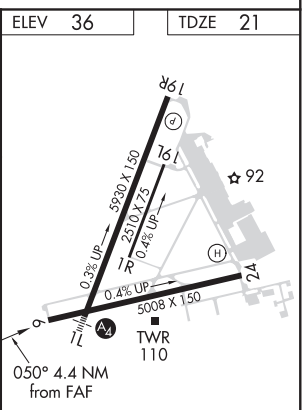

CATEGORY	A	B	C	D
S-6	460-1 439 (500-1)		460-1¼ 439 (500-1¼)	
C CIRCLING	600-1 564 (600-1)	680-1 644 (700-1)	1280-3 1244 (1300-3)	1300-3 1264 (1300-3)

REIL Rwy 6 L
MIRL Rwys 6-24 and 1L-19R L

FAF to MAP 3.8 NM

Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

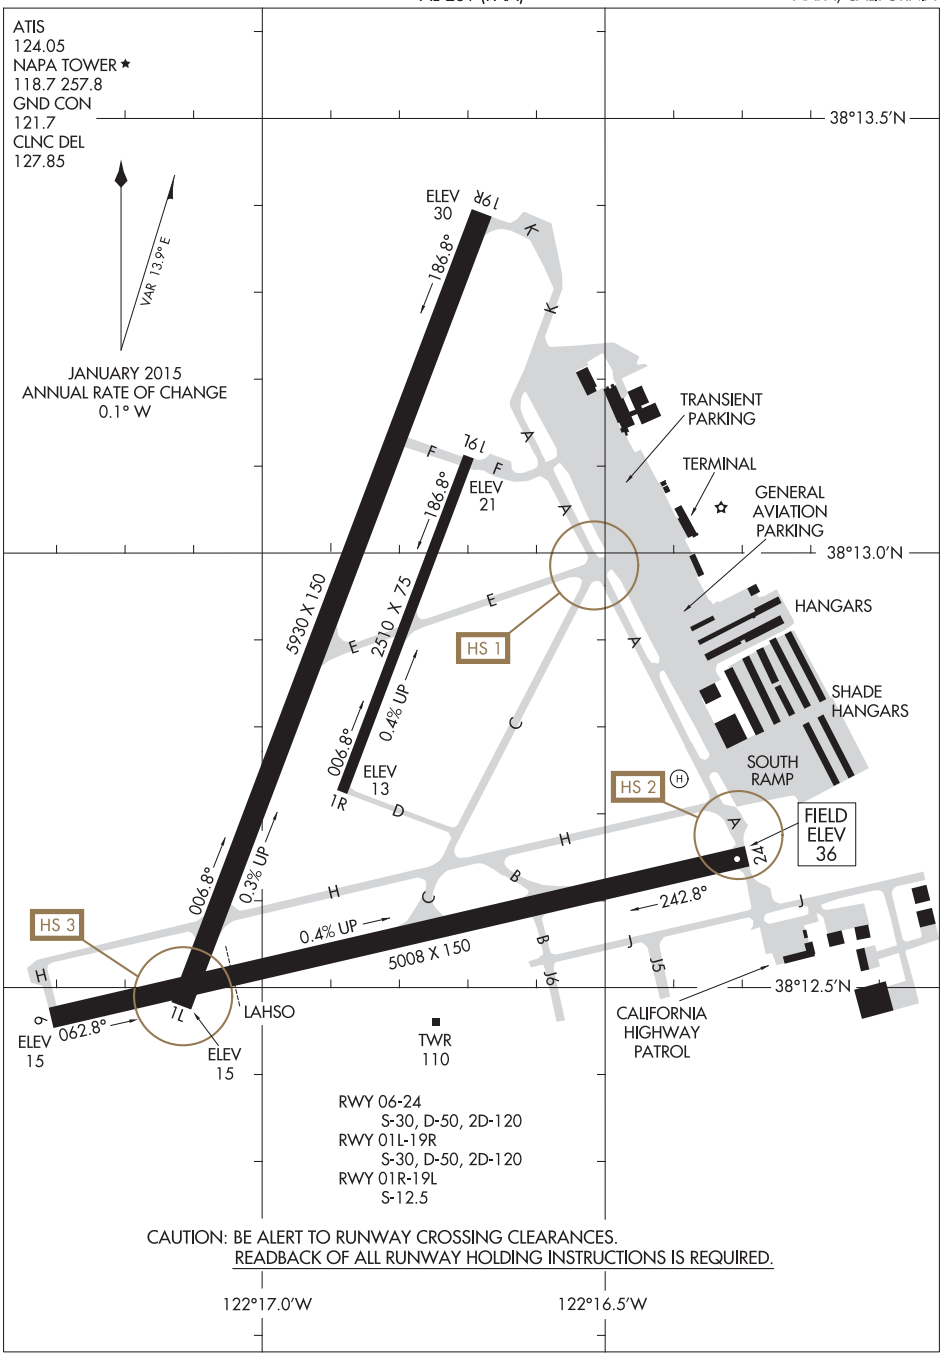

SW-2, 30 JAN 2020 to 26 MAR 2020

(NAPAA4.NAPAA) 19283

NAPAA FOUR DEPARTURE (OBSTACLE)

AL-281 (FAA)

NAPA COUNTY (APC)
NAPA, CALIFORNIA

TAKEOFF MINIMUMS
Rwys 19L/R: Standard.
Rwy 1L: Standard with minimum climb of 310′ per NM to 900 or 2400-3 for VCOA.
Rwy 1R: Standard with minimum climb of 360′ per NM to 700 or 2400-3 for VCOA.
Rwy 6: Standard with minimum climb of 440′ per NM to 1700 or 2400-3 for VCOA.
Rwy 24: 300-1⅛ or standard with minimum climb of 255′ per NM to 300, or alternatively, with standard takeoff minimums and a normal 200′ per NM climb gradient, takeoff must occur no later than 2100′ prior to DER.

ATIS 124.05
GND CON 121.7
CLNC DEL 127.85
NAPA TOWER★ 118.7 (CTAF) 257.8
OAKLAND CENTER 127.8 353.5

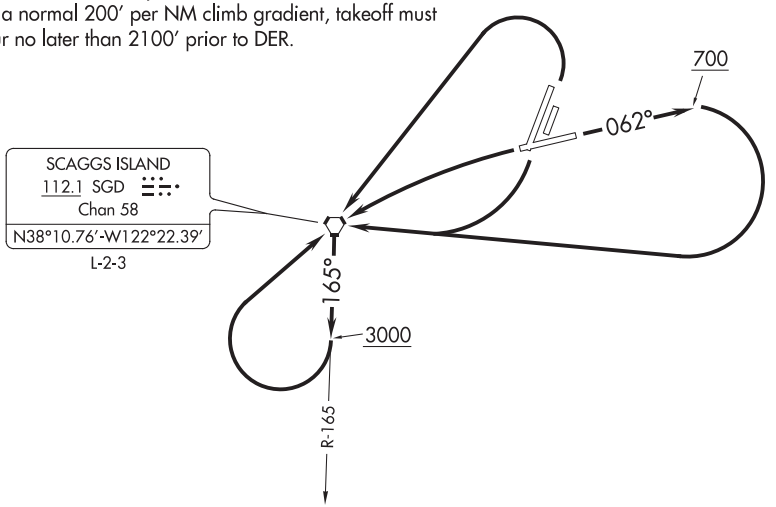

(NOTES CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6: Climb on heading 062° to 700, then turn right direct SGD VORTAC, thence. . . .

TAKEOFF RUNWAYS 1L/R, 24: Turn left direct SGD VORTAC, thence. . . .

TAKEOFF RUNWAYS 19L/R: Turn right direct SGD VORTAC, thence. . . .

VCOA RUNWAYS 1L/R, 6: Obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Napa County Airport at or above 2300, then direct SGD VORTAC, thence. . . .

. . . .aircraft departing SGD VORTAC on R-165 climb on course. All other aircraft continue climb on SGD VORTAC R-165 to 3000, then turn right direct SGD VORTAC before proceeding on course.

TAKEOFF OBSTACLE NOTES

Rwy 1L: Terrain beginning 7′ from DER, 340′ left of centerline up to 37′ MSL.
Lighting 10′ from DER, 51′ right of centerline, 1′ AGL/30′ MSL.
Vehicles on road beginning 105′ from DER, 317′ right of centerline, up to 41′ MSL.
Vehicles on road and terrain, beginning 105′ from DER, 298′ left of centerline, up to 43′ MSL.
Vehicles on road 203′ from DER, 300′ left of centerline, 44′ MSL.
Vehicles on road beginning 363′ from DER, 302′ left of centerline, up to 45′ MSL.
Vehicles on road 559′ from DER, 544′ right of centerline, 44′ MSL.
Trees beginning 3205′ from DER, 790′ right of centerline, up to 124′ MSL.
Trees beginning 4610′ from DER, 306′ right of centerline, up to 168′ MSL.
Tree 1.1 NM from DER, 2025′ right of centerline, 226′ MSL.
Trees beginning 1.1 NM from DER, 1674′ right of centerline, up to 249′ MSL.
Tree 1.1 NM from DER, 1839′ right of centerline, 253′ MSL.
Trees and terrain beginning 1.1 NM from DER, 1648′ right of centerline, up to 282′ MSL.
Trees, terrain and fence beginning 1.1 NM from DER, 1634′ right of centerline, up to 298′ MSL.
Tree and fence beginning 1.7 NM from DER, 3269′ right of centerline, up to 345′ MSL.
Electrical system, terrrain, fence and tree beginning 1.8 NM from DER, 606′ right of centerline, up to 129′ AGL/446′ MSL.
Trees and terrain beginning 2 NM from DER, 542′ right of centerline, up to 526′ MSL.
Terrrain, fence and tree beginning 2 NM from DER, 1089′ right of centerline, up to 528′ MSL
Fence, trees, terrrain and building beginning 2.1 NM from DER, 2007′ right of centerline, up to 5′ AGL/554′ MSL.
Terrrain and trees beginning 2.1 NM from DER, 2139′ right of centerline, up to 581′ MSL
Tree 2.2 NM from DER, 3913′ right of centerline, 585′ MSL.
Trees, terrrain and fence, beginning 2.2 NM from DER, 2013′ right of centerline, up to 587′ MSL.
Trees and terrain beginning 2.3 NM from DER, 2566′ right of centerline, up to 599′ MSL.

Rwy 1R: Lighting 43′ from DER, 493′ right of centerline, 1′ AGL/25′ MSL.
Sign 51′ from DER, 420′ left of centerline, 2′ AGL/23′ MSL.
Poles and vehicles on road beginning 262′ from DER, 63′ right of centerline, up to 36′ AGL/59′ MSL.
Vehicles on road 639′ from DER, 436′ left of centerline, 38′ MSL.
Vehicles on road beginning 640′ from DER, 95′ left of centerline, up to 39′ MSL.
Tree 812′ from DER, 673′ right of centerline, 70′ MSL.
Tree 1870′ from DER, 470′ right of centerline, 71′ MSL.
Tree 1.2 NM from DER, 2507′ right of centerline, 240′ MSL.
Tree 1.2 NM from DER, 2314′ right of centerline, 243′ MSL.
Trees beginning 1.2 NM from DER, 2143′ right of centerline, up to 286′ MSL.
Trees, fence and terrain beginning 1.3 NM from DER, 2073′ right of centerline, up to 309′ MSL.
Tree 1.3 NM from DER, 2552′ right of centerline, 322′ MSL.
Trees and terrain beginning 1.3 NM from DER, 1204′ right of centerline, up to 368′ MSL.
Trees, terrain and fence beginning 1.4 NM from DER, 1286′ right of centerline, up to 391′ MSL.
Trees beginning 1.4 NM from DER, 1312′ right of centerline, up to 400′ MSL.
Trees, terrrain, building and fence beginning 1.4 NM from DER, 2008′ right of centerline, up to 417′ MSL.
Electrical system, fence and terrrain beginning 2.1 NM from DER, 2329′ right of centerline, up to 129′ AGL/446′ MSL.
Transmission line 2.2 NM from DER, 3214′ right of centerline, 123′ AGL/542′ MSL.
Electrical system, fence, pole, terrrain and trees beginning 2.2 NM from DER, 1515′ right of centerline, up to 116′ AGL/544′ MSL.
Terrrain and fence beginning 2.3 NM from DER, 2076′ right of centerline, up to 551′ MSL.
Trees, fence, terrrain and building beginning 2.3 NM from DER, 1494′ right of centerline, up to 561′ MSL.
Terrrain and tree beginning 2.4 NM from DER, 1626′ right of centerline, up to 581′ MSL.
Terrrain and tree beginning 2.4 NM from DER, 2067′ right of centerline, up to 612′ MSL.
Terrain and trees beginning 2.4 NM from DER, 2564′ right of centerline, up to 643′ MSL.
Tree 2.4 NM from DER, 3917′ right of centerline, 671′ MSL.
Trees beginning 2.5 NM from DER, 1954′ right of centerline, up to 687′ MSL.

(CONTINUED ON FOLLOWING PAGE)

SW-2, 30 JAN 2020 to 26 MAR 2020

(NOTES CONTINUED)

TAKEOFF OBSTACLE NOTES

Rwy 6: Pole 1′ from DER, 59′ left of centerline, 3′ AGL/37′ MSL.
Pole 2′ from DER, 60′ right of centerline, 2′ AGL/36′ MSL.
Pole 98′ from DER, 480′ left of centerline, 34′ AGL/67′ MSL.
Pole 333′ from DER, 476′ left of centerline, 34′ AGL/68′ MSL.
Pole and vehicles on road beginning 573′ from DER, 0′ left of centerline, up to 33′ AGL/69′ MSL.
Building 773′ from DER, 660′ right of centerline, 29′ AGL/70′ MSL.
Buildings and pole beginning 1104′ from DER, 472′ right of centerline, up to 37′ AGL/80′ MSL.
Trees beginning 1288′ from DER, 516′ left of centerline, up to 98′ MSL.
Trees beginning 2082′ from DER, 98′ right of centerline, up to 113′ MSL.
Trees beginning 2306′ from DER, 53′ right of centerline, up to 130′ MSL.
Tree 4681′ from DER, 1103′ left of centerline, 180′ MSL.
Trees beginning 4859′ from DER, 1063′ left of centerline, up to 187′ MSL.
Terrain 5855′ from DER, 2050′ right of centerline, 195′ MSL.
Trees and fence beginning 5865′ from DER, 1761′ left of centerline, up to 211′ MSL.
Trees, terrrain and fence beginning 6068′ from DER, 1419′ right of centerline, up to 281′ MSL.
Tree 1 NM from DER, 2035′ left of centerline, 212′ MSL.
Trees beginning 1 NM from DER, 1796′ left of centerline, up to 224′ MSL.
Tree 2 NM from DER, 2933′ left of centerline, 340′ MSL.
Tree 2 NM from DER, 2803′ left of centerline, 359′ MSL.
Trees beginning 2.1 NM from DER, 3827′ right of centerline, up to 386′ MSL.
Terrain 2.2 NM from DER, 3202′ right of centerline, up to 405′ MSL.
Terrain beginning 2.3 NM from DER, 911′ right of centerline, up to 464′ MSL.
Fence and terrrain beginning 2.4 NM′ from DER, 3273′ left of centerline, up to 4′ AGL/452′ MSL.
Terrain 2.4 NM from DER, 3353′ left of centerline, 457′ MSL.
Terrain and trees beginning 2.4 NM from DER, 61′ left of centerline, up to 525′ MSL.
Fence beginning 2.5 NM from DER, 100′ right of centerline, up to 6′ AGL/519′ MSL.

Rwy 19L: Sign and terrain beginning 14′ from DER, 125′ left of centerline, up to 2′ AGL/14′ MSL.
Lighting 15′ from DER, 429′ right of centerline, 1′ AGL/14′ MSL.
Terrain 49′ from DER, 483′ left of centerline, 17′ MSL.
Navaid 1278′ from DER, 816′ left of centerline, 35′ AGL/52′ MSL.
Tree 3852′ from DER, 1304′ left of centerline, 111′ MSL.

Rwy 19R: Lighting 9′ from DER, 4′ left of centerline, 1′ AGL/15′ MSL.
Pole 10′ from DER, 44′ right of centerline, 1′ AGL/15′ MSL.
Lighting 10′ from DER, 96′ left of centerline, 3′ AGL/17′ MSL.
Vehicles on road beginning 350′ from DER, 584′ left of centerline, up to 34′ MSL.
Tree 3158′ from DER, 764′ left of centerline, 101′ MSL.
Tree 3503′ from DER, 1006′ left of centerline, 104′ MSL..

Rwy 24: Vehicles on road and general utility beginning 56′ from DER, 125′ right of centerline, up to 21′ MSL.
General utility 59′ from DER, 122′ left of centerline, 4′ AGL/17′ MSL.
Vehicles on road beginning 60′ from DER, 18′ left of centerline, up to 25′ MSL.
Vehicles on road beginning 167′ from DER, 9′ right of centerline, up to 22′ MSL.
Vehicles on road beginning 354′ from DER, 259′ right of centerline, up to 26′ MSL.
Trees beginning 1455′ from DER, 776′ left of centerline, up to 76′ MSL.
Trees beginning 2324′ from DER, 540′ left of centerline, up to 90′ MSL.
Tree 2650′ from DER, 527′ left of centerline, 93′ MSL.
Tree 4552′ from DER, 554′ left of centerline, 135′ MSL.
Vehicles on road and bridge beginning 4943′ from DER, 1631′ right of centerline, up to 165′ AGL/170′ MSL.

SW-2, 30 JAN 2020 to 26 MAR 2020

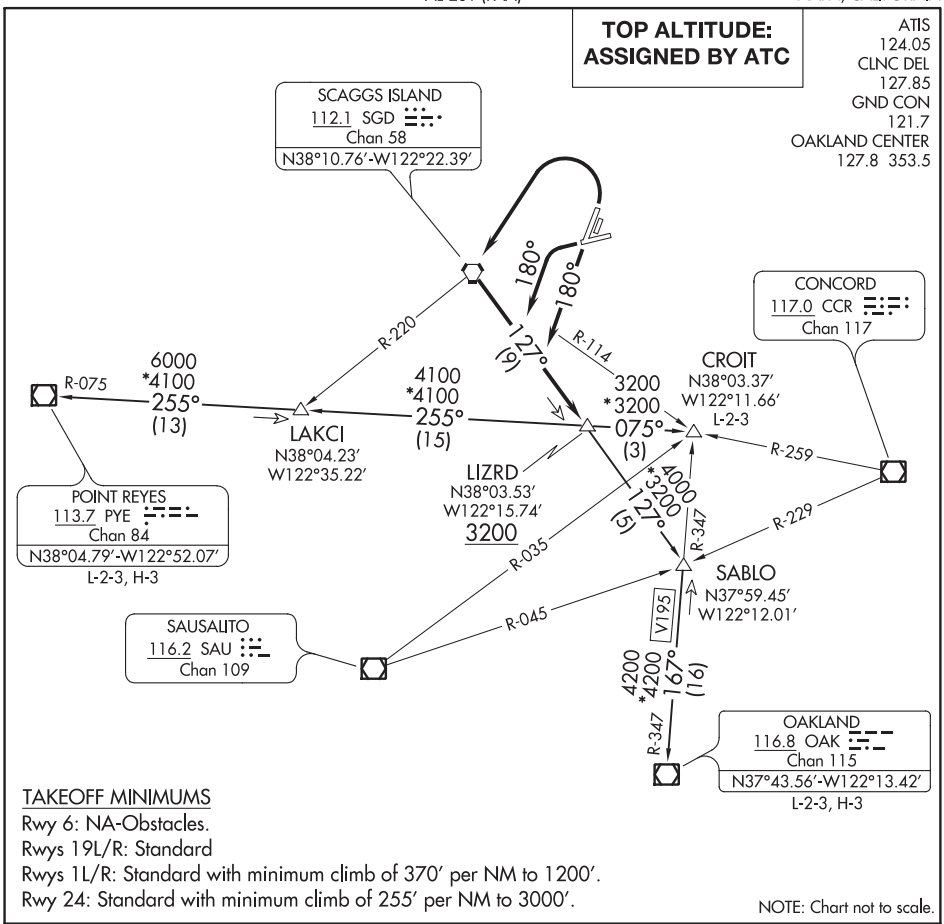

TAKEOFF MINIMUMS
Rwy 6: NA-Obstacles.
Rwys 19L/R: Standard
Rwys 1L/R: Standard with minimum climb of 370′ per NM to 1200′.
Rwy 24: Standard with minimum climb of 255′ per NM to 3000′.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climbing left turn direct SGD VORTAC, proceed outbound on the SGD R-127 to LIZRD INT. Cross LIZRD INT at or above 3200. Thence. . . .
TAKEOFF RUNWAYS 19L/R: Climb on heading 180° to intercept and proceed outbound on the SGD R-127 to LIZRD INT. Cross LIZRD INT at or above 3200. Thence. . . .
TAKEOFF RUNWAY 24: Climbing left turn on heading 180° to intercept and proceed outbound on the SGD R-127 to LIZRD INT. Cross LIZRD INT at or above 3200. Thence. . . .

. . . . on (transition) or (assigned route). Maintain ATC assigned altitude.

CROIT TRANSITION (LIZRD5.CROIT): From over LIZRD on PYE R-075 to CROIT.
OAKLAND TRANSITION (LIZRD5.OAK): From over LIZRD on SGD R-127 and OAK R-347 to OAK VOR/DME.
POINT REYES TRANSITION (LIZRD5.PYE): From over LIZRD on PYE R-075 to PYE VOR/DME.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(MER3.SGD) 19283

MERLOT THREE DEPARTURE

AL-281 (FAA)

NAPA COUNTY(APC)
NAPA, CALIFORNIA

ATIS
124.05
CLNC DEL
127.85
GND CON
121.7
NAPA TOWER★
118.7 (CTAF) 257.8
OAKLAND CENTER
127.8 353.5

TOP ALTITUDE: ASSIGNED BY ATC

TAKEOFF MINUMUMS

Rwy 1L: Standard with mimimum climb of 420′ per NM to 2900.
Rwy 1R: Standard with mimimum climb of 460′ per NM to 3000.
Rwy 6: Standard with minimum climb of 430′ per NM to 1600.
Rwy 19L: Standard with mimimum climb of 320′ per NM to 1500.
Rwy 19R: Standard with mimimum climb of 330′ per NM to 1600.
Rwy 24: Standard with mimimum climb of 255′ per NM to 1300.

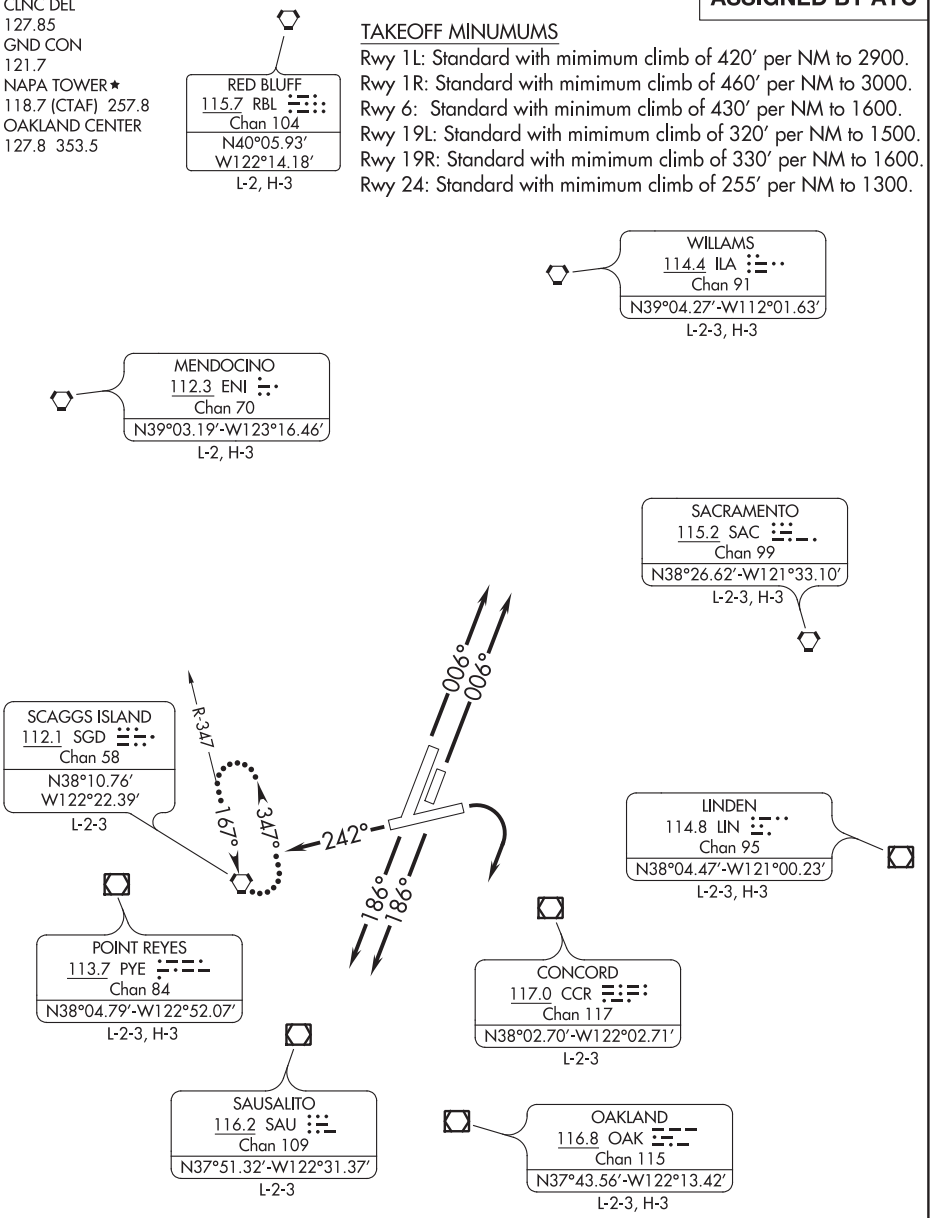

NOTE: RADAR required.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

MERLOT THREE DEPARTURE
(MER3.SGD) 10OCT19

NAPA, CALIFORNIA
NAPA COUNTY (APC)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb on heading 006° (or climbing left turn on ATC assigned heading 186° CW 006°); thence. . . .

TAKEOFF RUNWAY 6: Climbing right turn on assigned heading between 130° CW 242°; thence. . . .

TAKEOFF RUNWAYS 19L/R: Climb on heading 186° (or ATC assigned heading 130° CW 270°); thence. . . .

TAKEOFF RUNWAY 24: Climb on heading 242° (or ATC assigned heading 130° CW 270°); thence. . . .

. . . . expect vectors to join assigned route. Maintain ATC assigned altitude; expect filed altitude/flight level ten minutes after departure.

LOST COMMUNICATIONS

If not in contact with Oakland Center after reaching 4000, proceed to the SGD VORTAC and hold.

SW-2, 30 JAN 2020 to 26 MAR 2020

OZIEE FOUR DEPARTURE (RNAV)

(OZIEE4.OZIEE) 10OCT19

NAPA COUNTY (APC)

NAPA, CALIFORNIA

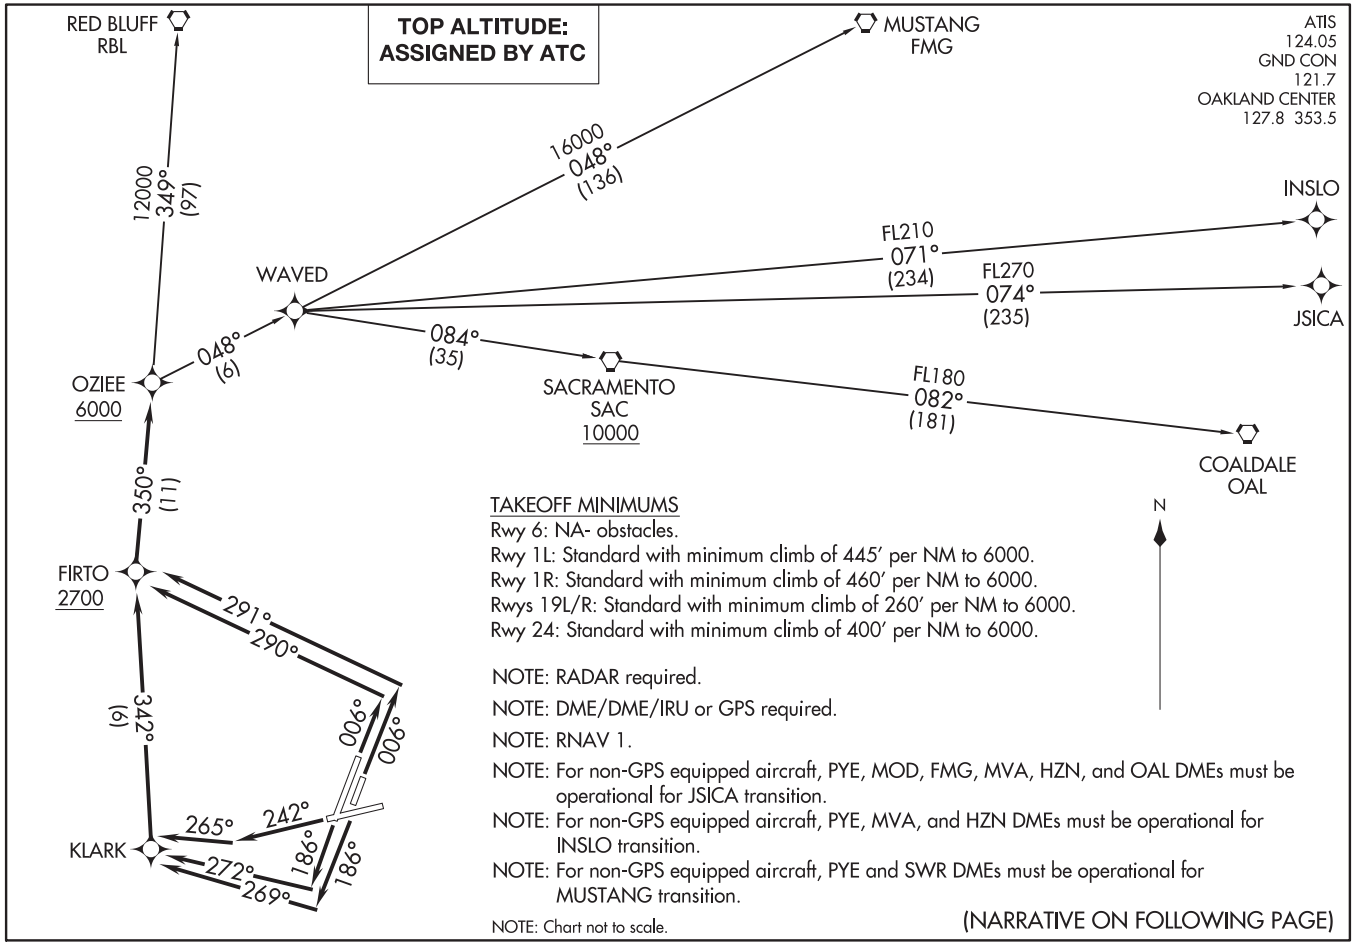

TAKEOFF MINIMUMS

Rwy 6: NA- obstacles.

Rwy 1L: Standard with minimum climb of 445′ per NM to 6000.

Rwy 1R: Standard with minimum climb of 460′ per NM to 6000.

Rwys 19L/R: Standard with minimum climb of 260′ per NM to 6000.

Rwy 24: Standard with minimum climb of 400′ per NM to 6000.

NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: For non-GPS equipped aircraft, PYE, MOD, FMG, MVA, HZN, and OAL DMEs must be operational for JSICA transition.

NOTE: For non-GPS equipped aircraft, PYE, MVA, and HZN DMEs must be operational for INSLO transition.

NOTE: For non-GPS equipped aircraft, PYE and SWR DMEs must be operational for MUSTANG transition.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

(OZIEE4.OZIEE) 19283

OZIEE FOUR DEPARTURE (RNAV)

AL-281 (FAA)

NAPA COUNTY (APC)

NAPA, CALIFORNIA

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 1L: Climb on heading 006° to intercept course 290° to FIRTO at or above 2700, then on track 350° to OZIEE at or above 6000, thence. . . .

TAKEOFF RUNWAY 1R: Climb on heading 006° to intercept course 291° to FIRTO at or above 2700, then on track 350° to OZIEE at or above 6000, thence. . . .

TAKEOFF RUNWAY 19L: Climb on heading 186° to intercept course 269° to KLARK, then on track 342° to FIRTO at or above 2700, then on track 350° to OZIEE at or above 6000, thence. . . .

TAKEOFF RUNWAY 19R: Climb on heading 186° to intercept course 272° to KLARK, then on track 342° to FIRTO at or above 2700, then on track 350° to OZIEE at or above 6000, thence. . . .

TAKEOFF RUNWAY 24: Climb on heading 242° to intercept course 265° to KLARK, then on track 342° to FIRTO at or above 2700, then on track 350° to OZIEE at or above 6000, thence. . . .

. . . .on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

COALDALE TRANSITION (OZIEE4.OAL)

INSLO TRANSITION (OZIEE4.INSLO)

JSICA TRANSITION (OZIEE4.JSICA)

MUSTANG TRANSITION (OZIEE4.FMG)

RED BLUFF TRANSITION (OZIEE4.RBL)

SW-2, 30 JAN 2020 to 26 MAR 2020

NOVATO, CALIFORNIA | AL-9238 (FAA) | 20030

APP CRS	Rwy Idg	3300
147°	TDZE	2
	Apt Elev	2

GPS RWY 13
GNOSS FIELD (DVO)

Circling NA west of Rwy 13-31. When local altimeter not received, use Napa altimeter setting and increase all MDAs 40 feet. If neither is received procedure is NA. Rwy 13 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing left turn to 3000 direct SGD VORTAC and hold.

AWOS-3P	OAKLAND CENTER	UNICOM
120.675	127.8 353.5	123.075 (CTAF)

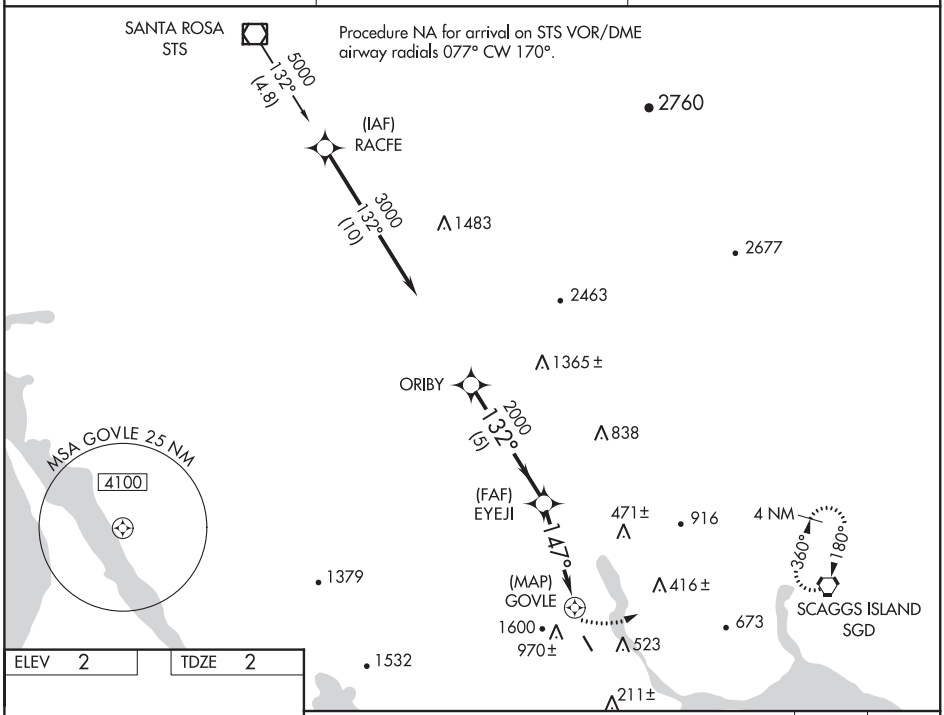

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 2 | TDZE 2

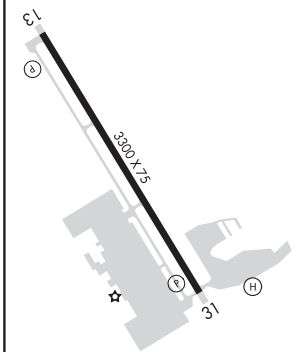

MIRL Rwy 13-31

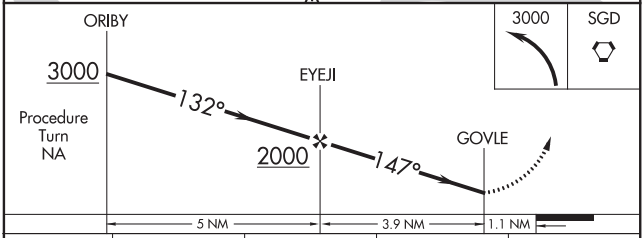

CATEGORY	A	B	C	D
S-13	1000-1¼ 998 (1000-1¼)	1000-1½ 998 (1000-1½)	NA	
CIRCLING	1000-1¼ 998 (1000-1¼)	1000-1½ 998 (1000-1½)	NA	
NAPA ALTIMETER SETTING MINIMUMS				
S-13	1040-1¼ 1038 (1100-1¼)	1040-1½ 1038 (1100-1½)	NA	
CIRCLING	1040-1¼ 1038 (1100-1¼)	1040-1½ 1038 (1100-1½)	NA	

NOVATO, CALIFORNIA
Orig-A 30JAN20

38°09'N-122°33'W

WAAS	APP CRS		
CH **42524**	**096°**	Rwy Idg	**3013**
W10A		TDZE	**237**
		Apt Elev	**237**

RNAV (GPS) RWY 10

OAKDALE (O27)

Baro-VNAV NA. DME/DME RNP-0.3 NA.
Use Modesto altimeter setting; when not received, use Stockton altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cat C visibility ⅛ SM.

NA

MISSED APPROACH: Climb to 4000 direct NOMAE and on track 114° to AWALI and hold, continue climb-in-hold to 4000.

MOD ASOS	NORCAL APP CON	UNICOM
127.7	**125.1 363.2**	**122.8** (CTAF) L

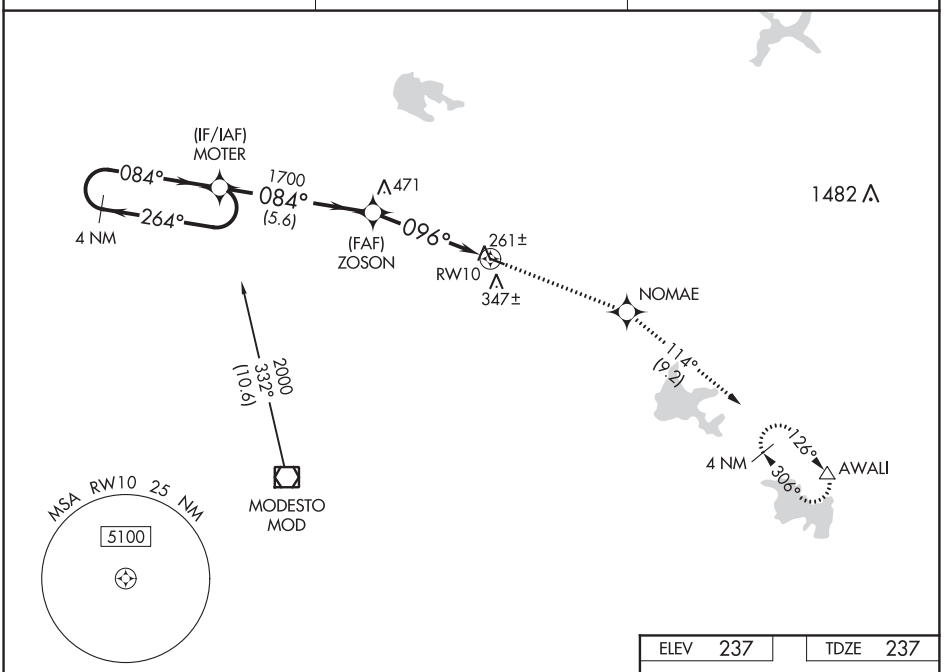

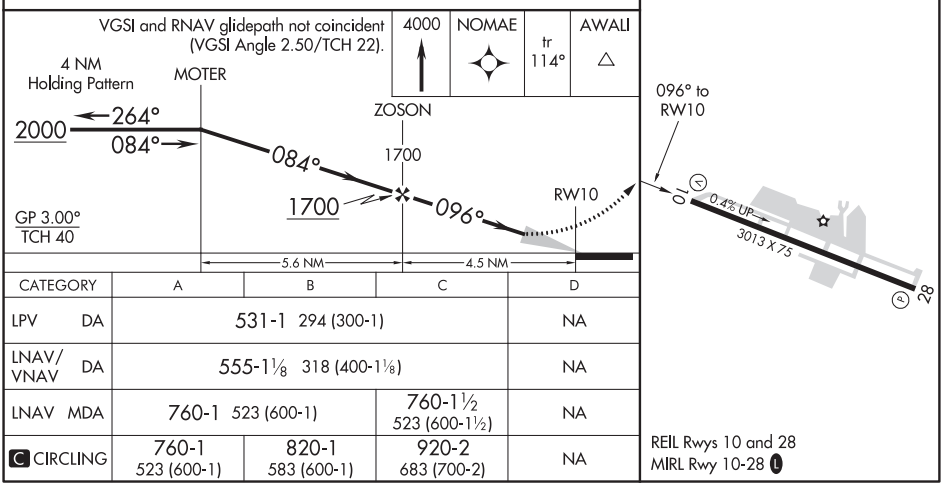

CATEGORY	A	B	C	D
LPV DA	531-1 294 (300-1)			NA
LNAV/VNAV DA	555-1⅛ 318 (400-1⅛)			NA
LNAV MDA	760-1 523 (600-1)		760-1½ 523 (600-1½)	NA
C CIRCLING	760-1 523 (600-1)	820-1 583 (600-1)	920-2 683 (700-2)	NA

REIL Rwys 10 and 28
MIRL Rwy 10-28 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

OAKDALE, CALIFORNIA | AL-6135 (FAA) | 19283

RNAV (GPS) RWY 28

OAKDALE (O27)

WAAS	APP CRS	Rwy Idg	3013
CH 70523	277°	TDZE	237
W28A		Apt Elev	237

NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Modesto altimeter setting; when not received, use Stockton altimeter setting and increase LPV DA to 567 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 570 feet and all visibilities ⅛ SM; increase all MDAs 40 feet.

MISSED APPROACH: Climb to 7000 direct ZOSON and on track 328° to LIN VOR/DME and hold, continue climb-in-hold to 7000.

MOD ASOS	NORCAL APP CON	UNICOM
127.7	125.1 363.2	122.8 (CTAF) L

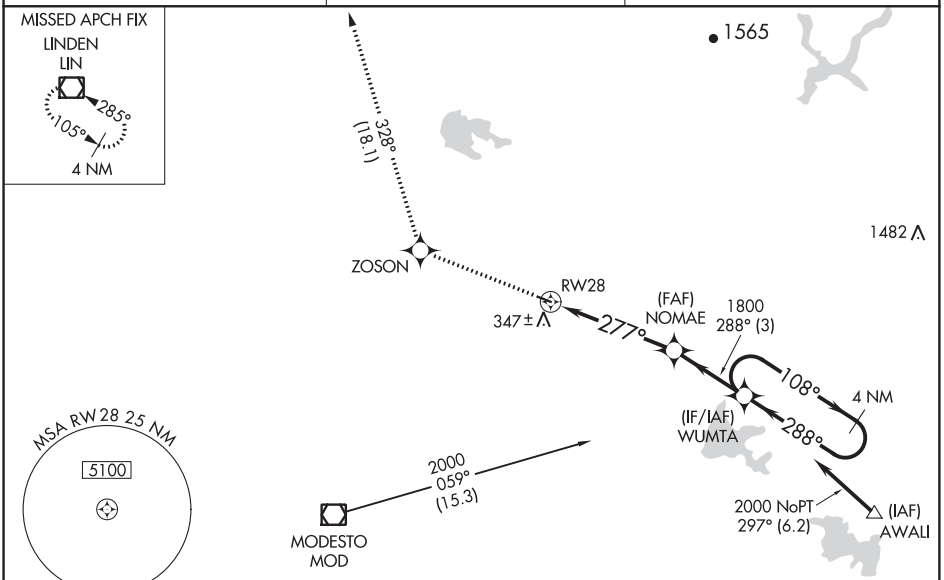

Procedure NA for arrivals at AWALI on V23 southeast bound.

ELEV 237 | TDZE 237



REIL Rwys 10 and 28
MIRL Rwy 10-28 L

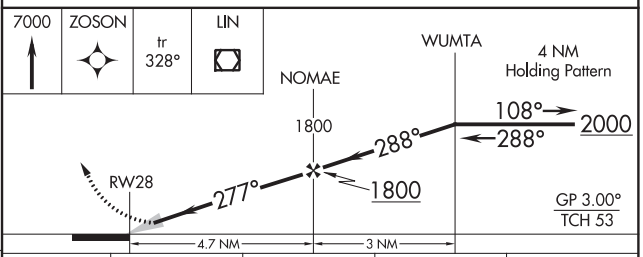

CATEGORY	A	B	C	D
LPV DA	531-⅞ 294 (300-⅞)			NA
LNAV/VNAV DA	534-1 297 (300-1)			NA
LNAV MDA	820-1 583 (600-1)		820-1¾ 583 (600-1¾)	NA
C CIRCLING	820-1 583 (600-1)		920-2 683 (700-2)	NA

OAKDALE, CALIFORNIA
Amdt 2 22JUN17

37°45′N-120°48′W

OAKDALE (O27)

RNAV (GPS) RWY 28

SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME MOD	APP CRS	Rwy Idg	N/A
114.6 Chan 93	027°	TDZE	N/A
		Apt Elev	237

VOR-A
OAKDALE (O27)

DME required.
NA Use Modesto altimeter setting, when not received, use Stockton altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climb to 3000 on heading 027° and LIN R-124 to WRAPS INT/LIN 16.7 DME and hold, continue climb-in-hold to 3000.

MOD ASOS	NORCAL APP CON	UNICOM
127.7	125.1 363.2	122.8 (CTAF) L

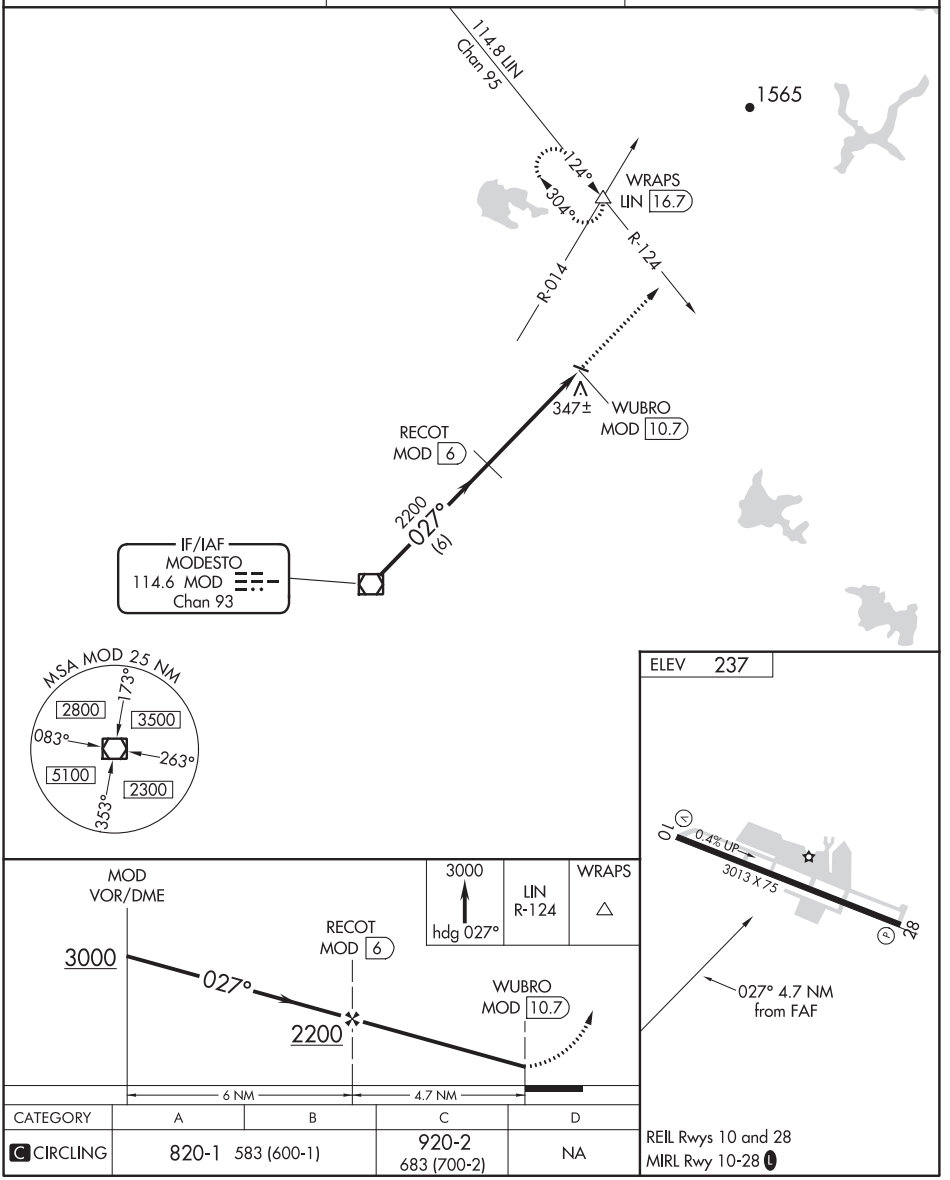

CATEGORY	A	B	C	D
C CIRCLING	820-1	583 (600-1)	920-2	NA
			683 (700-2)	

REIL Rwys 10 and 28
MIRL Rwy 10-28 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

ILS or LOC RWY 12

METROPOLITAN OAKLAND INTL (OAK)

LOC I-AAZ	APP CRS	Rwy Idg	10000
111.9	116°	TDZE	9
		Apt Elev	9

▼ DME required.
▲ * RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb on heading 116° and on OAK VOR/DME R-131 to cross HISIS/OAK 2.8 DME at or below 1600 then climb to 5100 on heading 090° and on OAK VOR/DME R-114 to DECOT INT/ OAK 11 DME/RADAR and hold, continue climb-in-hold to 5100.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

GPS REQUIRED

(IAF) RAIDR 5000

(IF) ALCAT INT OAK 12.5

PLAZA INT OAK 6.5 1800

OAK R-289

OAK R-286

OAK R-331

OAK R-353

OAK R-114

OAK R-131

OAK R-024

HISIS OAK 2.8 1600

DECOT OAK 11 RADAR

LOCALIZER 111.9 I-AAZ

OAKLAND 116.8 OAK Chan 115

SAN FRANCISCO 115.8 SFO Chan 105

113.9 OSI Chan 86

MSA OAK 25 NM
170°
3800 5100
350°

ALTERNATE MISSED APCH FIX
SAN JOSE SJC 114.1 Chan 88
286° R-106 106°

ELEV 9 D TDZE 9

116° 6 NM from FAF

TWR 257

REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

hdg 116°	OAK R-131	HISIS OAK 2.8 1600	5100 hdg 090°	OAK R-114	DECOT △

ALCAT INT OAK 12.5
PLAZA INT OAK 6.5
2900
116°
1800
1800
GS 2.75°
TCH 55
6.1 NM
6 NM

VGSI and ILS glidepath not coincident (VGSI Angle 2.75/TCH 70).

CATEGORY	A	B	C	D
S-ILS 12*	209/24		200 (200-½)	
S-LOC 12	460/24 451 (500-½)		460/45 451 (500-⅞)	
C CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1400-3 1391 (1400-3)

FAF to MAP 6 NM					
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-INB	APP CRS	Rwy Idg	10000
108.7	296°	TDZE	9
Chan 24		Apt Elev	9

ILS or LOC RWY 30

METROPOLITAN OAKLAND INTL (OAK)

T A DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 600 then climbing left turn to 4000 on heading 260° and on SAU VOR/DME R-110 to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

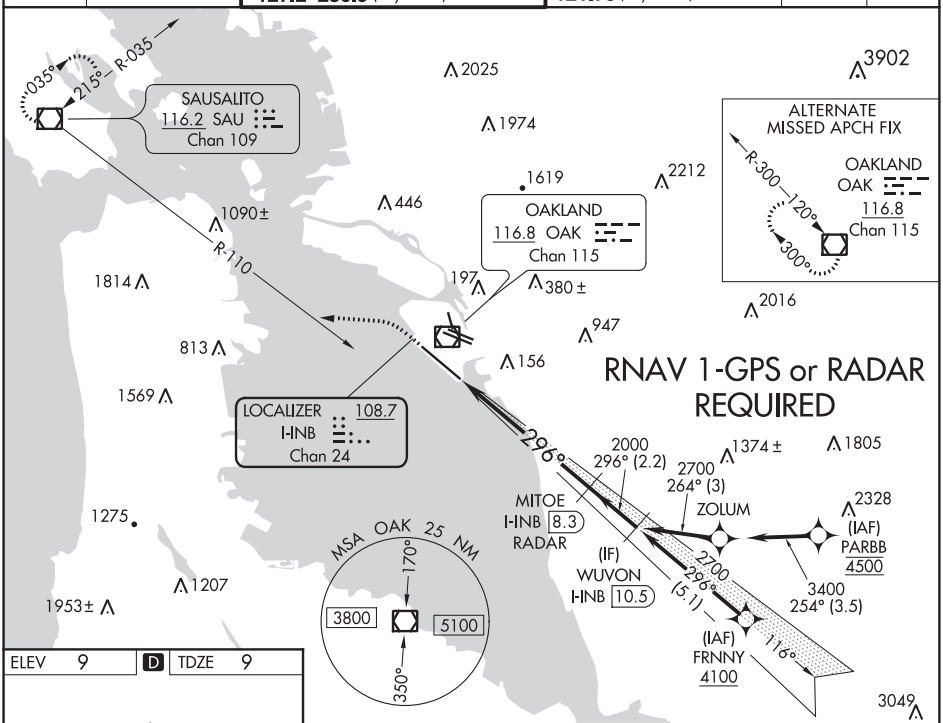

ELEV 9	D	TDZE 9



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwys 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

FAF to MAP 6.1 NM					
Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

600	4000 hdg 260°	SAU R-110	SAU

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

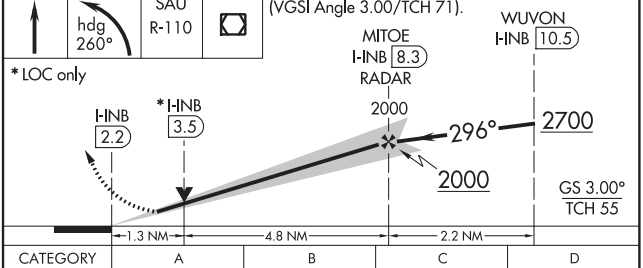

CATEGORY	A	B	C	D
S-ILS 30	209/18 200 (200-½)			
S-LOC 30	500/24 491 (500-½)		500/50 491 (500-1)	
C CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1400-3 1391 (1400-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND, CALIFORNIA

AL-294 (FAA)

18312

ILS or LOC/DME RWY 28R

METROPOLITAN OAKLAND INTL (OAK)

LOC I-OAK	APP CRS		28R	28L
109.9	278°	Rwy Idg	5458	6213
		TDZE	7	9
		Apt Elev	9	9

DME required. DME from OAK VOR/DME. Simultaneous reception of I-OAK and OAK DME required.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR Rwy 28R

MISSED APPROACH: Climb to 1900 then climbing right turn to 3000 on heading 340° and SGD VORTAC R-165 to REBAS/SGD 14.3 DME and hold.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

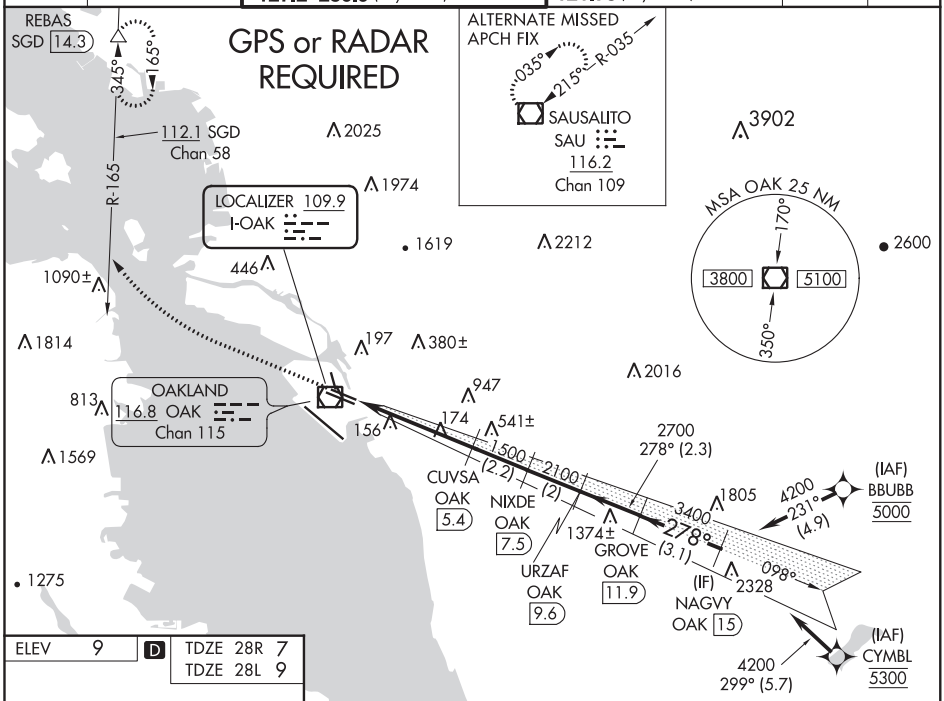

ELEV 9	D	TDZE 28R 7 TDZE 28L 9



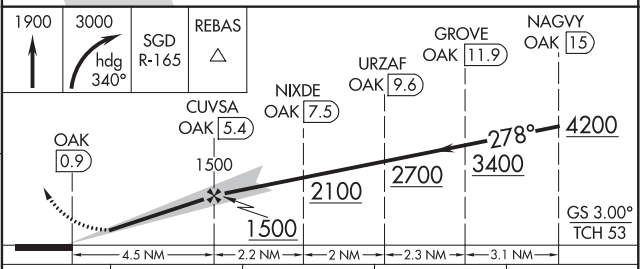

CATEGORY	A	B	C	D
*S-ILS 28R	207/24 200 (200-½)			
S-LOC 28R	440/24 433 (500-½)			
SIDESTEP 28L	440/55 431 (500-1)		440-1½ 431 (500-1½)	
C CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1400-3 1391 (1400-3)

REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

OAKLAND, CALIFORNIA
Amdt 37A 13OCT16

37°43'N-122°13'W

METROPOLITAN OAKLAND INTL (OAK)

ILS or LOC/DME RWY 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC I-AAZ	APP CRS	Rwy Idg	10000
111.9	116°	TDZE	9
		Apt Elev	9

ILS RWY 12 (SA CAT I)

METROPOLITAN OAKLAND INTL (OAK)

▼ DME required.
▲ Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DH.

MALSR

MISSED APPROACH: Climb on heading 116° and on OAK VOR/DME R-131 to cross HISIS/OAK 2.8 DME at or below 1600 then climb to 5100 on heading 090° and on OAK VOR/DME R-114 to DECOT INT/OAK 11 DME/RADAR and hold, continue climb-in-hold to 5100.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

GPS REQUIRED

(IAF) RAIDR 5000
2600
2900
(12.4)
138°
296°
(IF) ALCAT INT OAK 12.5
OAK R-289
1800
16.1
116°
PLAZA INT OAK 6.5
1800
1090±
OAK R-286
R-331
R-353
813
1814
208
446
2025
1974
1619
2212
197
380±
2016
947
156
1569
1374±
R-114
R-131
R-024
OAKLAND 116.8 OAK Chan 115
LOCALIZER 111.9 I-AAZ
HISIS OAK 2.8 1600
DECOT OAK 11 RADAR
294°
114°
113.9 OSI Chan 86
SAN FRANCISCO 115.8 SFO Chan 105
1275
1207
1953±
2029

MSA OAK 25 NM
170°
3800
5100
350°

ALTERNATE MISSED APCH FIX
SAN JOSE SJC 114.1 Chan 88
286°
106°
R-106

ELEV 9 D TDZE 9

	OAK R-131	HISIS OAK 2.8 1600	5100	OAK R-114	DECOT
hdg 116°			hdg 090°		

ALCAT INT OAK 12.5
PLAZA INT OAK 6.5
VGSI and ILS glidepath not coincident (VGSI Angle 2.75/TCH 70).
2900
116°
1800
1800
GS 2.75°
TCH 55
6.1 NM
6 NM
1145'

CATEGORY	A	B	C	D
S-ILS 12	RA 153/24 150 DA 159			

SA CATEGORY I ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND, CALIFORNIA | AL-294 (FAA) | 17341

LOC/DME I-INB	APP CRS	Rwy Idg	10000
108.7	296°	TDZE	9
Chan 24		Apt Elev	9

ILS RWY 30 (SA CAT I)

METROPOLITAN OAKLAND INTL (OAK)

DME or RADAR required. Requires specific OPSPEC, MSPEC or LOA approval and use of HUD to DH. Missed approach requires minimum climb of 240 feet per NM to 2700, if unable to meet climb gradient, see ILS or LOC RWY 30.

ALSF-2

MISSED APPROACH: Climb to 600 then climbing left turn to 4000 on heading 260° and on SAU VOR/DME R-110 to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

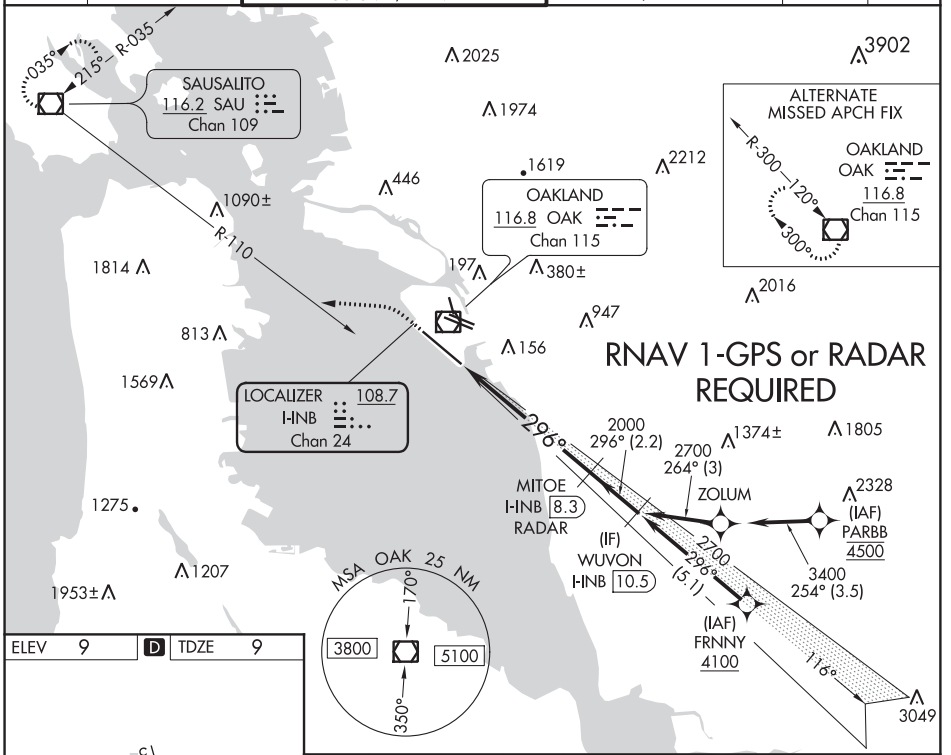

ELEV 9	D	TDZE 9



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

600	4000 hdg 260°	SAU R-110	SAU

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

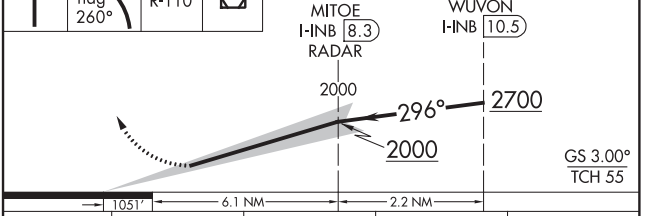

CATEGORY	A	B	C	D
S-ILS 30	RA 159/14 150 DA 159			

SA CATEGORY I ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

OAKLAND, CALIFORNIA
Amdt 31 07DEC17

37°43'N-122°13'W

METROPOLITAN OAKLAND INTL (OAK)
ILS RWY 30 (SA CAT I)

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-INB	APP CRS	Rwy Idg	10000
108.7	296°	TDZE	9
Chan 24		Apt Elev	9

ILS RWY 30 (CAT II & III)

METROPOLITAN OAKLAND INTL (OAK)

DME or RADAR required. CAT II: RVR 1000 authorized with specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown. Missed approach requires minimum climb of 240 feet per NM to 2700, if unable to meet climb gradient, see ILS or LOC RWY 30.

ALSF-2

MISSED APPROACH: Climb to 600 then climbing left turn to 4000 on heading 260° and on SAU VOR/DME R-110 to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

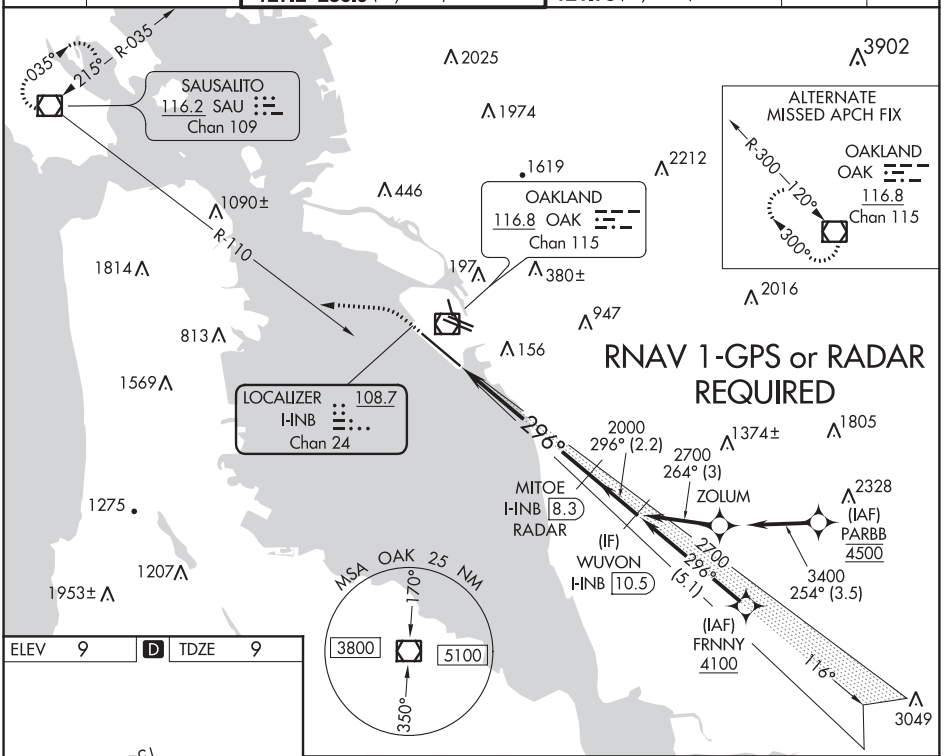

ELEV 9	D	TDZE 9



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

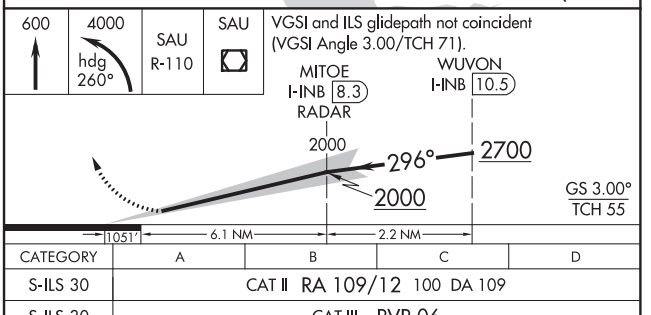

CATEGORY	A	B	C	D
S-ILS 30	CAT II RA 109/12 100 DA 109			
S-ILS 30	CAT III RVR 06			

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (RNP) Z RWY 12

METROPOLITAN OAKLAND INTL (OAK)

APP CRS	Rwy Idg	10000
116°	TDZE	9
	Apt Elev	9

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C. For inop ALS increase RNP 0.15 visibility all Cats to RVR 4500, RNP 0.30 visibility all Cats to RVR 5500.

MALSR

MISSED APPROACH: Climb direct HISIS to cross HISIS at or below 1600 then climb to 5400 on track 116° to YICPU and on track 103° to DECOT and hold, continue climb-in-hold to 5400.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

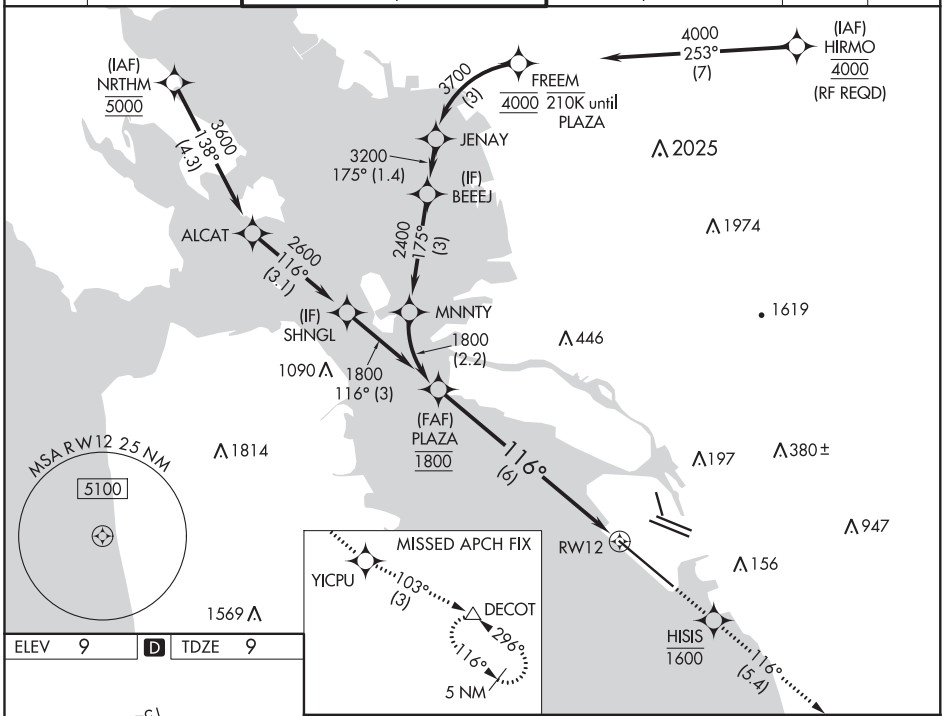

ELEV 9	D	TDZ 9



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

See planview for multiple IF locations.

	HISIS	5400	YICPU	tr	DECOT
	1600	tr 116°		103°	

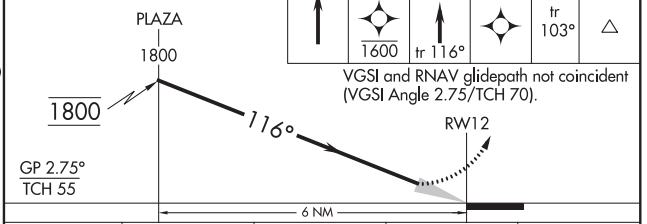

VGSI and RNAV glidepath not coincident (VGSI Angle 2.75/TCH 70).

CATEGORY	A	B	C	D
RNP 0.15 DA	289/24 280 (300-½)			
RNP 0.30 DA	386/35 377 (400-⅝)			

AUTHORIZATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	6213
278°	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 28L

METROPOLITAN OAKLAND INTL (OAK)

For uncompensated Baro-VNAV systems, procedure NA below 0°C (32°F) or above 54°C (130°F). GPS required.

MISSED APPROACH: Climb to 3000 on track 278° to OPLIE and on track 348° to REBAS and hold.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

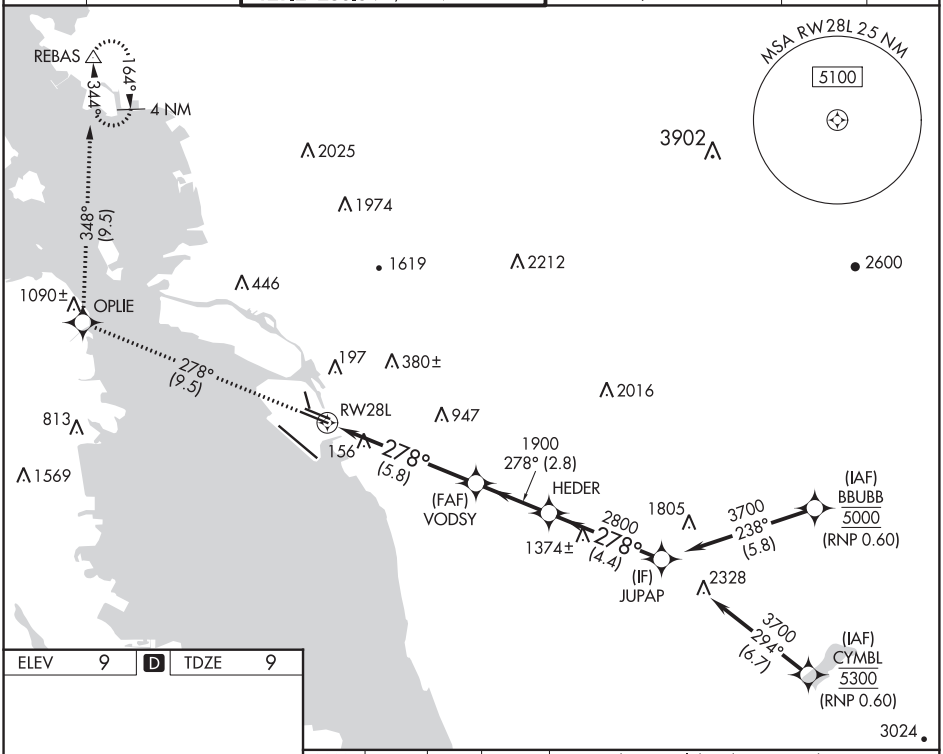

ELEV	9	D	TDZE	9



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

3000	OPLIE	tr 348°	REBAS
tr 278°			

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).

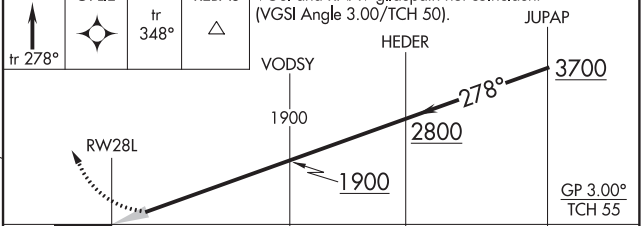

CATEGORY	A	B	C	D
RNP 0.15 DA	341/53	332 (400-1)		
RNP 0.30 DA	399-1¼	390 (400-1¼)		

AUTHORIZATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND, CALIFORNIA | AL-294 (FAA) | 17285

APP CRS	Rwy Idg	5458
278°	TDZE	7
	Apt Elev	9

RNAV (RNP) Z RWY 28R

METROPOLITAN OAKLAND INTL (OAK)

For uncompensated Baro-VNAV systems, procedure NA below 1°C (34°F) or above 54°C (130°F). For inop MALSR, increase RNP 0.11 DA all Cats visibility to RVR 4500. GPS required.

MALSR

MISSED APPROACH: Climb to 3000 on track 278° to ZERMO and on track 335° to REBAS and hold.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

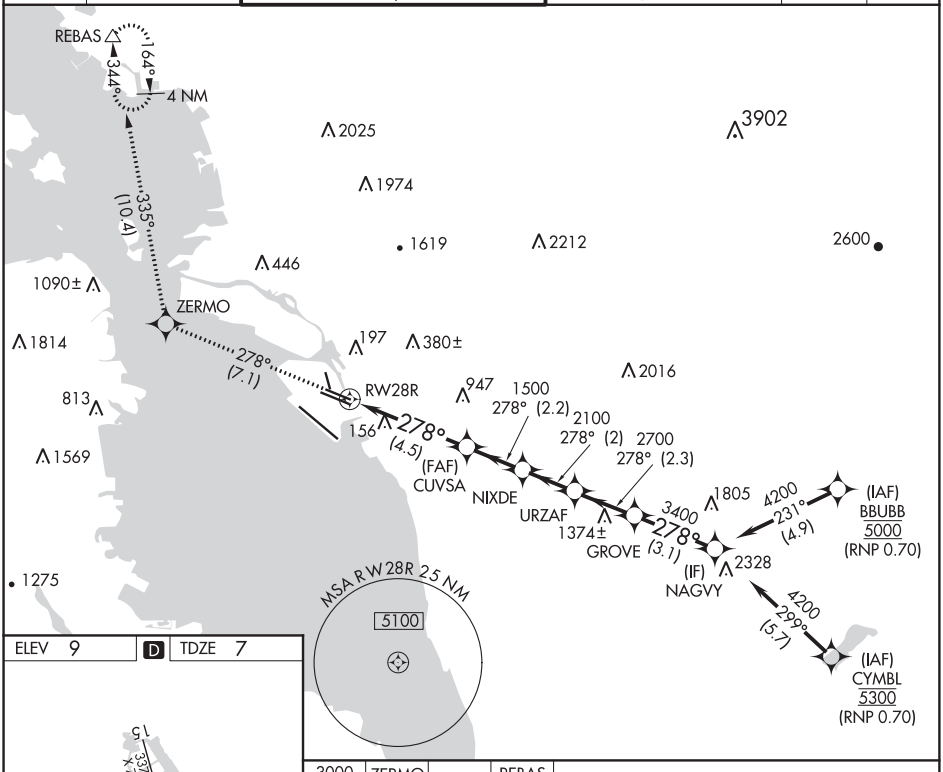

ELEV 9	D	TDZE 7



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

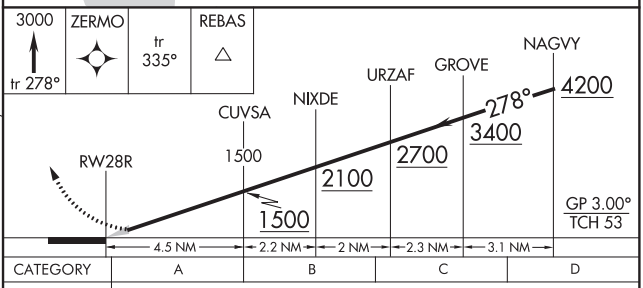

CATEGORY	A	B	C	D
RNP 0.11 DA	276/24		269 (300-½)	
RNP 0.30 DA	414/45		407 (500-⅞)	

AUTHORIZATION REQUIRED

OAKLAND, CALIFORNIA
Amdt 2 10DEC15

METROPOLITAN OAKLAND INTL (OAK)

37°43'N-122°13'W

RNAV (RNP) Z RWY 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	10000
296°	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 30

METROPOLITAN OAKLAND INTL (OAK)

GPS required. For uncompensated Baro-VNAV systems, procedure NA below 1°C (34°F) or above 54°C (130°F). For inop ALS increase RNP 0.11 visibility all Cats to RVR 4000.

ALSF-2

MISSED APPROACH: Climb to 4000 on track 296° to PLAZA and on track 282° to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

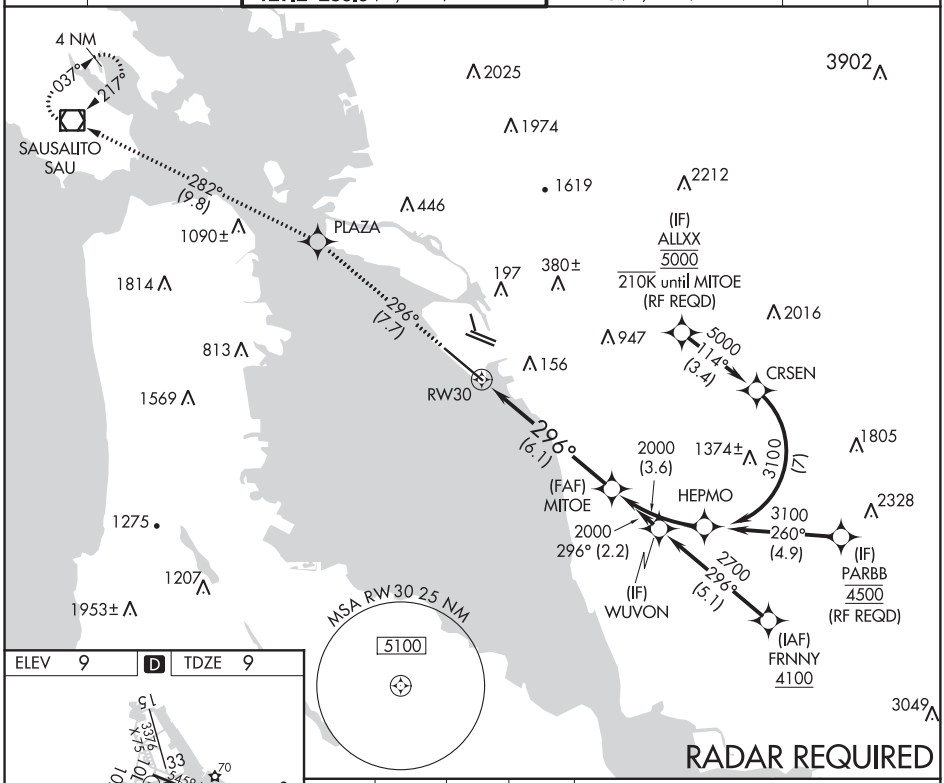

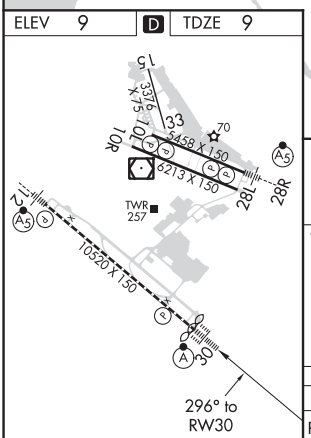

REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

4000	PLAZA	tr	SAU
tr 296°		282°	

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 71).

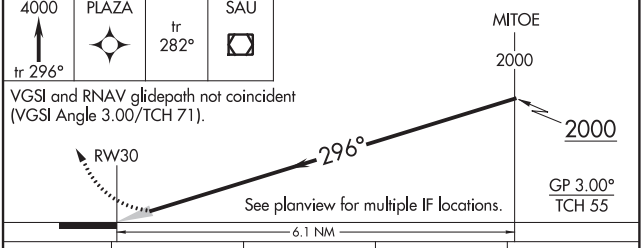

CATEGORY	A	B	C	D
RNP 0.11 DA	267/24		258 (300-½)	
RNP 0.30 DA	317/24		308 (400-½)	

AUTHORIZATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	5336
109°	TDZE	6
	Apt Elev	9

RNAV (GPS) RWY 10L

METROPOLITAN OAKLAND INTL (OAK)

DME/DME RNP-0.3 NA.
Helicopter visibility reduction below ¾ SM not authorized.

MISSED APPROACH: Climbing left turn to 5200 direct HAYZE and hold, continue climb-in-hold to 5200.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

Procedure NA for arrivals at MICRA on V107-301 westbound.

(IAF) MICRA

2600

4000 111° (8.8)

COMMO

3000 111° (4.6)

(IF) DATTS

1800 111° (5)

1090±

(FAF) ENCOL 1800

109°

(MAP) JEPAG

AKEVE 2.7 NM to JEPAG

Final approach course offset 11.16°.

MSA JEPAG 25 NM

5100

2025

1974

1619

2212

380 446

1814

197 380±

2016

813

143

947

156

1569

5 NM 095° 275°

HAYZE

1374±

1275

1207

1953±

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DATTS

3000

111°

ENCOL

2.79° TCH 49

1800

AKEVE 2.7 NM to JEPAG

0.9 NM to JEPAG

109°

1000

JEPAG

5 NM 2.7 NM 1.8 NM 0.9 0.5

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

5200 HAYZE

ELEV 9 D TDZE 6

109° to JEPAG

10L 10R 28L 28R 33 15 7 25

3375 X 75

3458 X 150

6213 X 150

10520 X 150

TWR 257

CATEGORY	A	B	C	D
LNAV MDA	500-1 494 (500-1)		500-1⅜ 494 (500-1⅜)	
C CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1380-3 1371 (1400-3)

REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

37°43′N-122°13′W

APP CRS	Rwy Idg	6213
111°	TDZE	9
	Apt Elev	9

RNAV (GPS) RWY 10R

METROPOLITAN OAKLAND INTL (OAK)

DME/DME RNP-0.3 NA.
Helicopter visibility reduction below ¾ SM not authorized.

MISSED APPROACH: Climbing left turn to 5200 direct HAYZE and hold, continue climb-in-hold to 5200.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

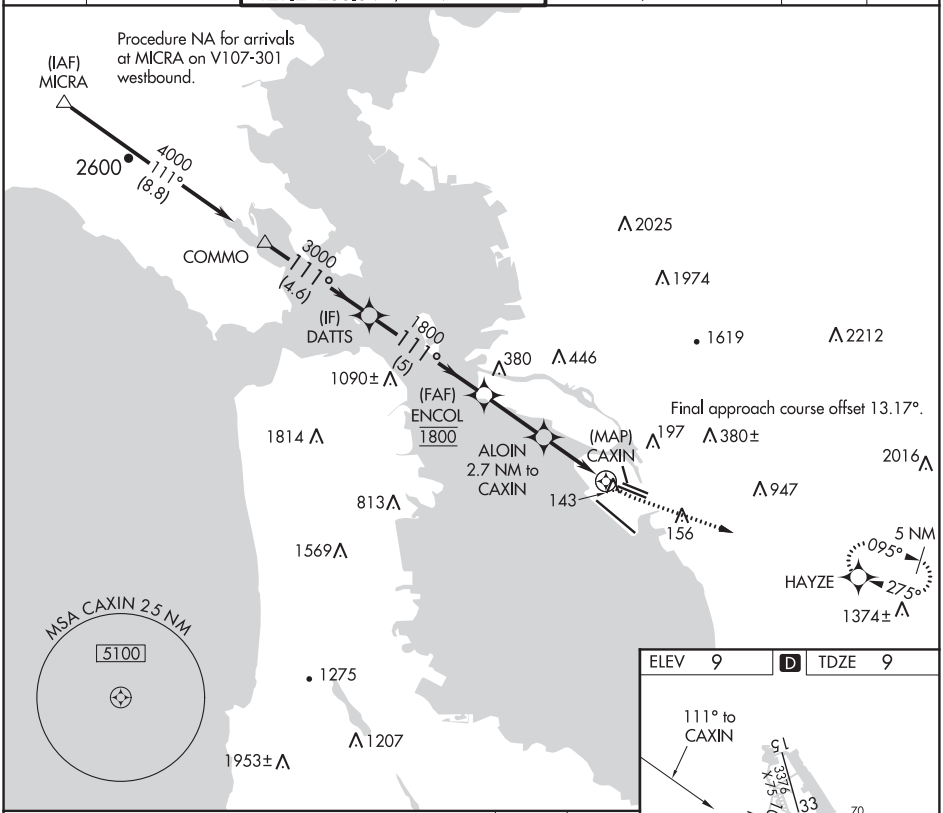

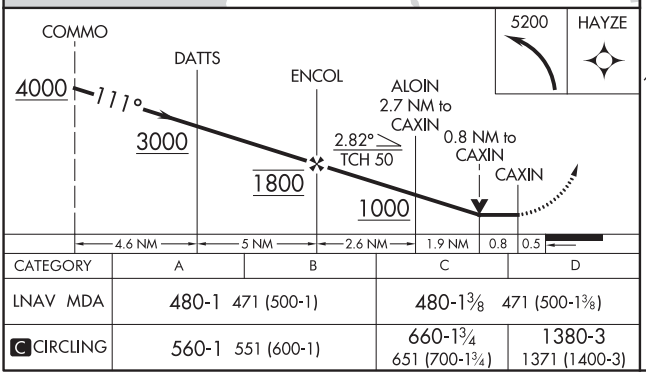

CATEGORY	A	B	C	D
LNAV MDA	480-1 471 (500-1)		480-1⅜ 471 (500-1⅜)	
C CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1380-3 1371 (1400-3)

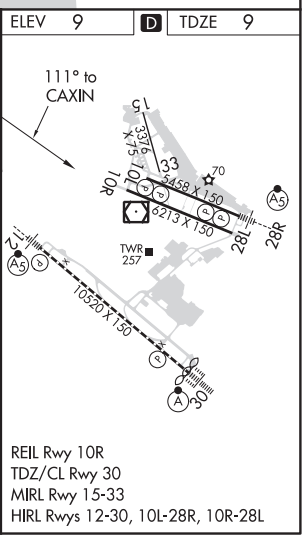

REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	10000
CH 86418	116°	TDZE	9
W12A		Apt Elev	9

RNAV (GPS) Y RWY 12

METROPOLITAN OAKLAND INTL (OAK)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb direct HISIS to cross HISIS at or below 1600, then climb to 5400 on track 111° to DECOT and hold, continue climb-in-hold to 5400.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

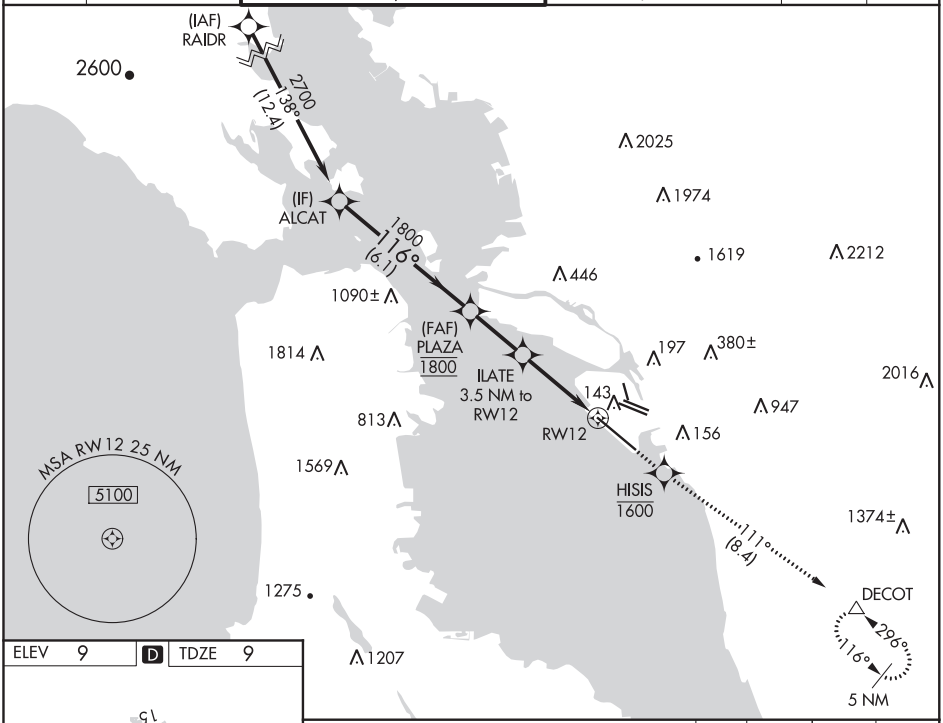

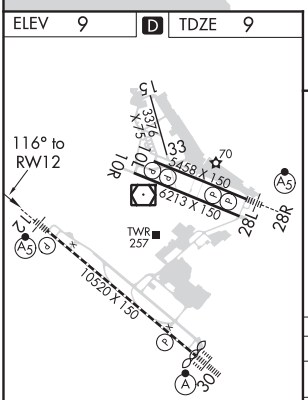

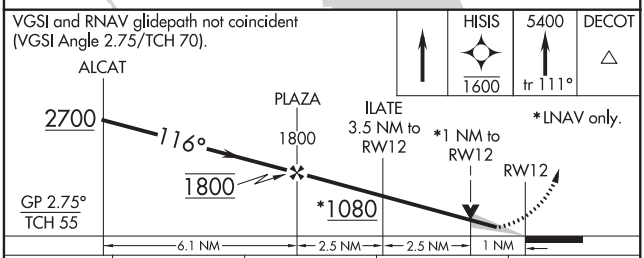

CATEGORY	A	B	C	D
LPV DA#	209/24 200 (200-½)			
LNAV/VNAV DA	304/27 295 (300-⅝)			
LNAV MDA	360/24 351 (400-½)		360/30 351 (400-⅝)	
C CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1380-3 1371 (1400-3)

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS CH 72700 W28A	APP CRS 278°	Rwy Idg 6213 TDZE 9 Apt Elev 9

RNAV (GPS) Y RWY 28L

METROPOLITAN OAKLAND INTL (OAK)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 4000 direct SOYOK and on track 285° to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

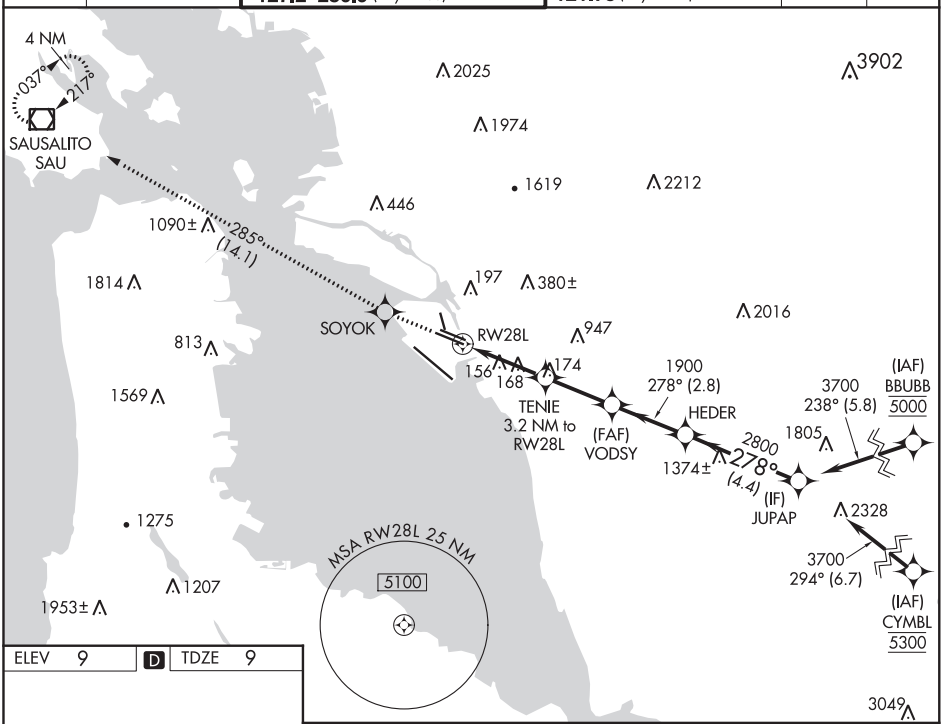

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 9 | D | TDZ 9



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

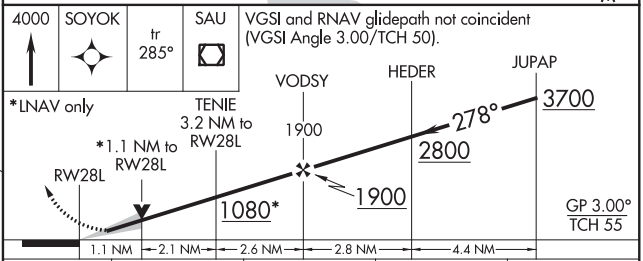

CATEGORY	A	B	C	D
LPV DA	209/40 200 (200-¾)			
LNAV/VNAV DA	387-1¼ 378 (400-1¼)			
LNAV MDA	420/55 411 (500-1)		420/60 411 (500-1¼)	
C CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1400-3 1391 (1400-3)

RNAV (GPS) Y RWY 28R

METROPOLITAN OAKLAND INTL (OAK)

WAAS	APP CRS	Rwy Idg	5458
CH 42535	278°	TDZE	7
W28B		Apt Elev	9

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct ZERMO and on track 335° to REBAS and hold.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

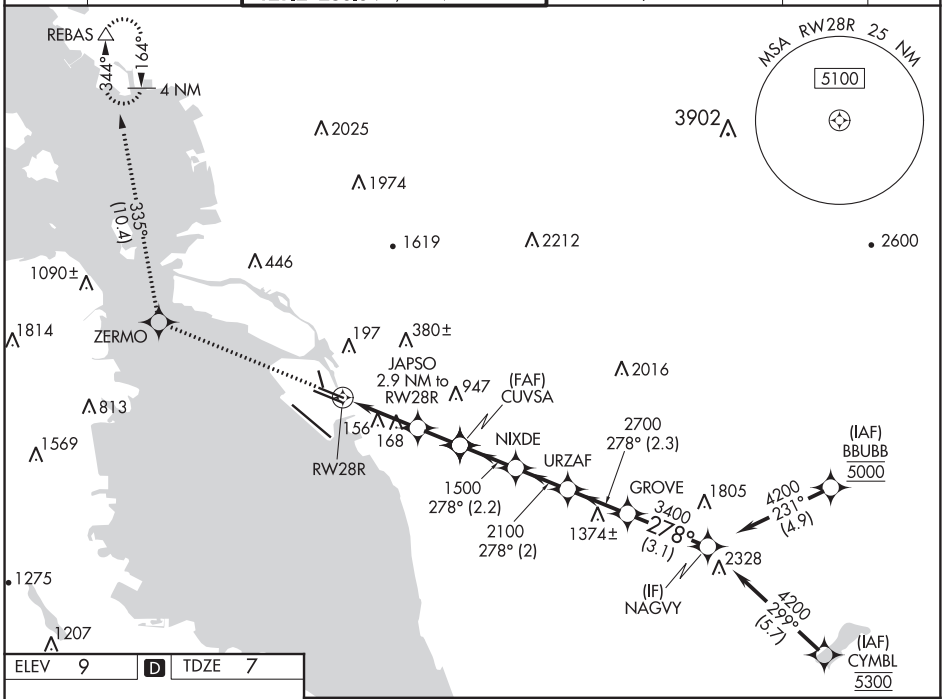

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 9 | D | TDZE 7



REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

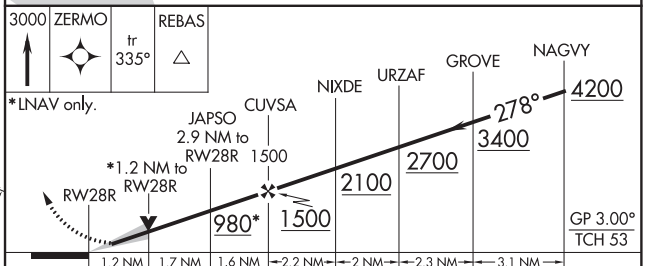

CATEGORY	A	B	C	D
LPV DA #	207/24 200 (200-½)			
LNAV/VNAV DA	387/40 380 (400-¾)			
LNAV MDA	440/24 433 (500-½)		440/40 433 (500-¾)	
C CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1400-3 1391 (1400-3)

RNAV (GPS) Y RWY 30

METROPOLITAN OAKLAND INTL (OAK)

WAAS CH 93535 W30A	APP CRS 296°	Rwy Idg 10000 TDZE 9 Apt Elev 9

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat C/D visibility to 1⅝ SM.

ALSF-2

MISSED APPROACH: Climb to 4000 direct PLAZA and on track 282° to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

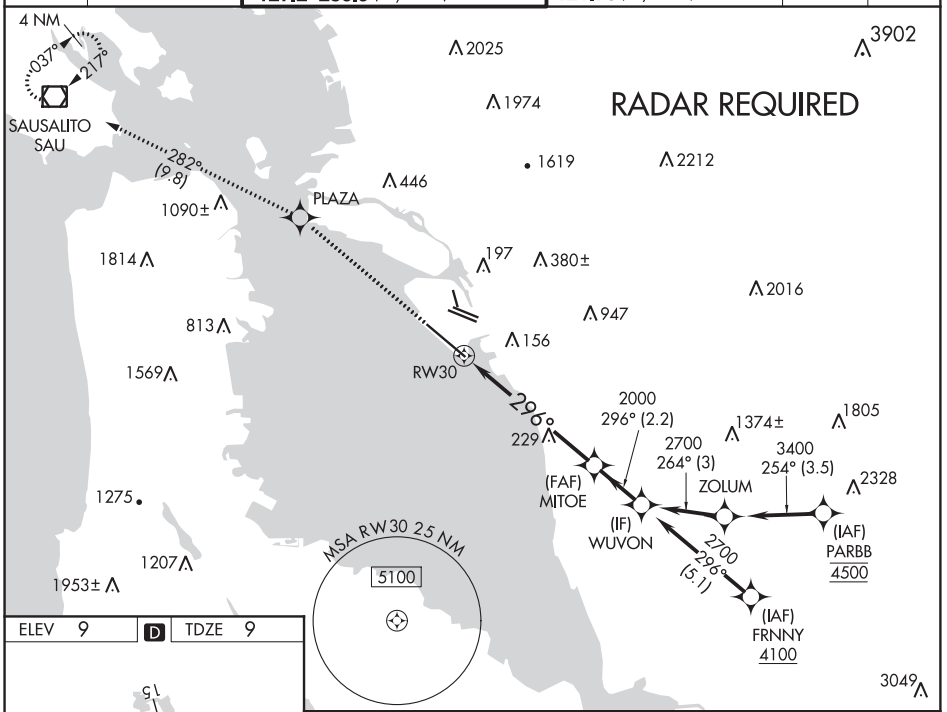

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

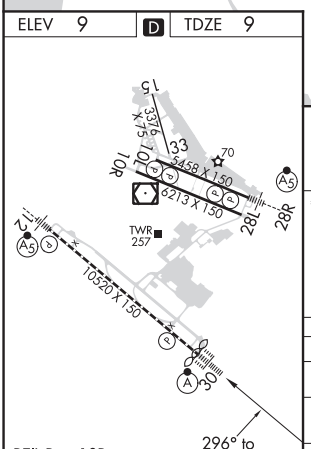

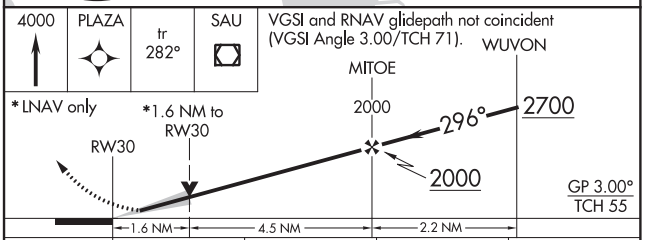

CATEGORY	A	B	C	D
LPV DA	209/18 200 (200-½)			
LNAV/VNAV DA	283/24 274 (300-½)			
LNAV MDA	580/24 571 (600-½)		580-1¼ 571 (600-1¼)	
C CIRCLING	580-1 571 (600-1)		660-1¾ 651 (700-1¾)	1400-3 1391 (1400-3)

OAKLAND, CALIFORNIA | AL-294 (FAA) | 17285

VOR RWY 10R

METROPOLITAN OAKLAND INTL (OAK)

VOR/DME OAK	APP CRS	Rwy Idg	6213
116.8	108°	TDZE	9
Chan 115		Apt Elev	9

Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 5300 on OAK VOR/DME R-093 to HAYZE INT/OAK 9 DME and hold, continue climb-in-hold to 5300.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON	CLNC DEL	CPDLC
133.775	125.35 263.15	118.3 291.65 (Rwys 10L/R-28L/R, 15-33) 127.2 256.9 (Rwy 12-30)	121.9 (Rwys 10L/R-28L/R, 15-33) 121.75 (Rwy 12-30)	121.1	

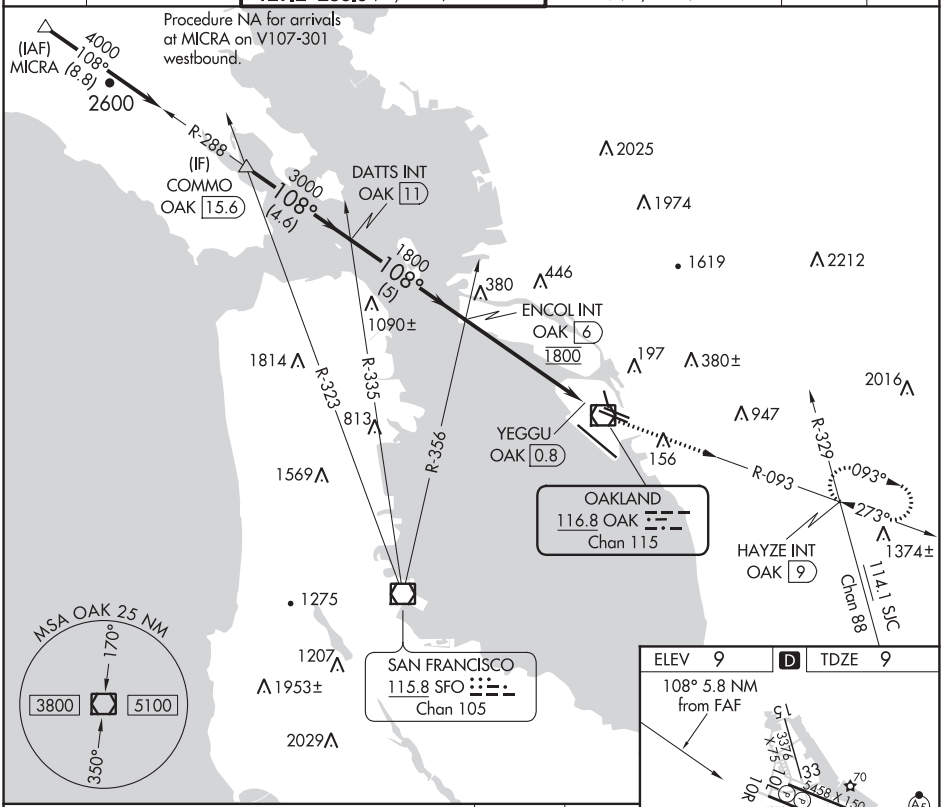

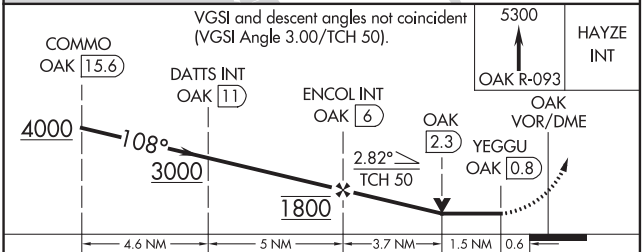

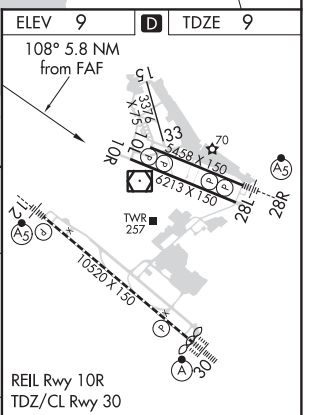

CATEGORY	A	B	C	D
S-10R	740-1 731 (800-1)		740-2 731 (800-2)	
C CIRCLING	740-1 731 (800-1)		740-2 731 (800-2)	1380-3 1371 (1400-3)

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

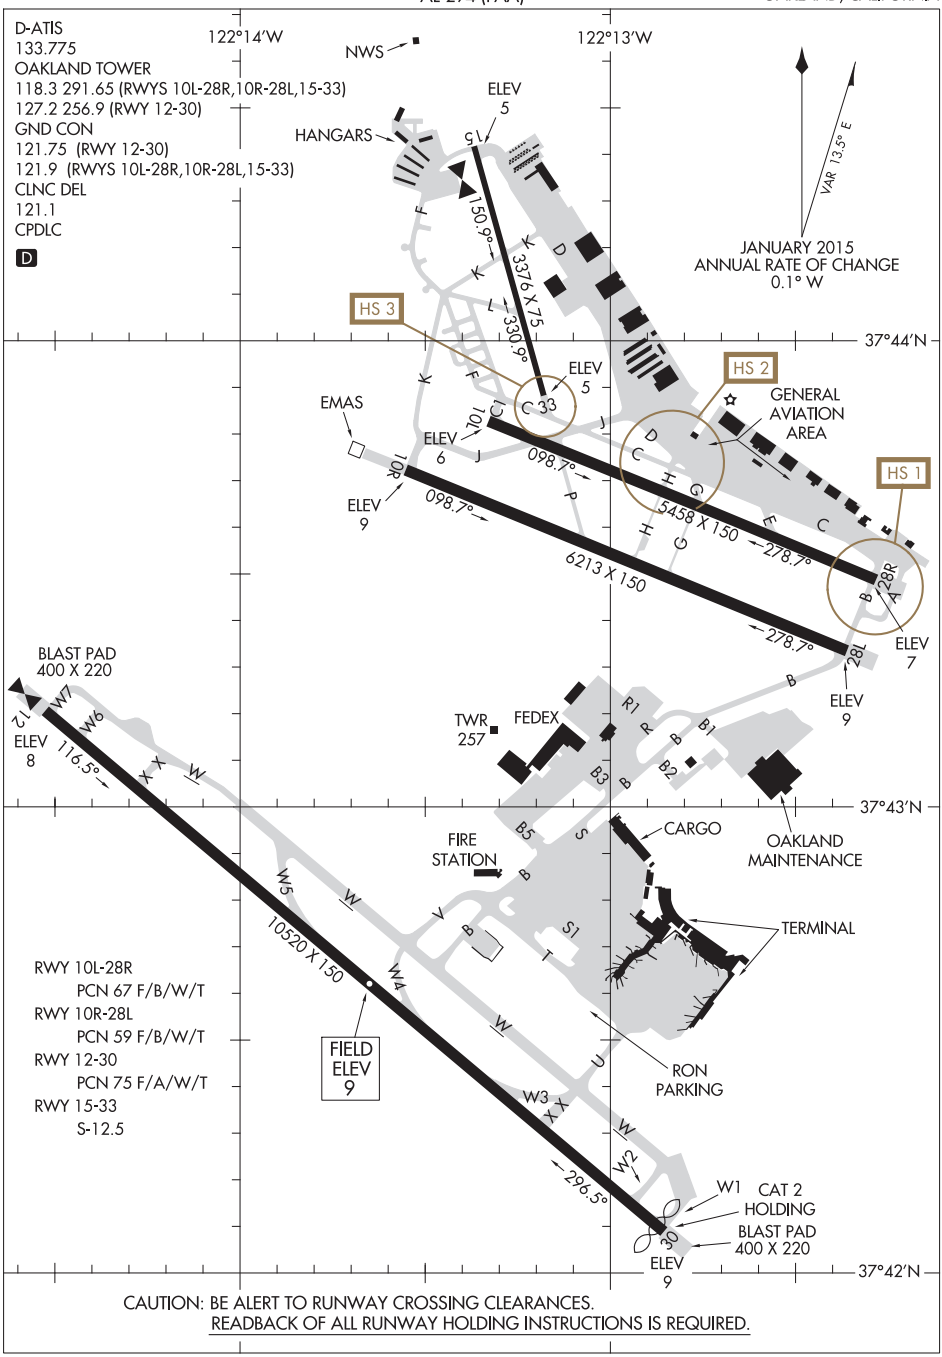

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

(CNDEL4.CNDEL) 18256

CNDEL FOUR DEPARTURE (RNAV)

AL-294 (FAA)

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

D-ATIS 133.775
CLNC DEL
121.1
CPDLC
GND CON
121.9 (Rwys 28L/R)
121.75 (Rwy 30)
OAKLAND TOWER
118.3 291.65 (Rwys 28L/R)
127.2 256.9 (Rwy 30)
NORCAL DEP CON
135.1 307.2

TOP ALTITUDE: 10000

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L, 28R: Climb heading 278° to 520, then direct to cross LEJAY at or below 2000, then on track 296° to CNDEL, then left turn direct to cross PORTE at or below 10000. Thence. . . .

TAKEOFF RUNWAY 30: Climb heading 296° to 520, then direct to cross LEJAY at or below 2000, then on track 296° to CNDEL, then left turn direct to cross PORTE at or below 10000. Thence. . . .

. . . . on (transition). Maintain 10000, expect filed altitude 10 minutes after departure.

CISKO TRANSITION (CNDEL4.CISKO)
EBAYE TRANSITION (CNDEL4.EBAYE)
LOSHN TRANSITION (CNDEL4.LOSHN)
NTELL TRANSITION (CNDEL4.NTELL)
YYUNG TRANSITION (CNDEL4.YYUNG)

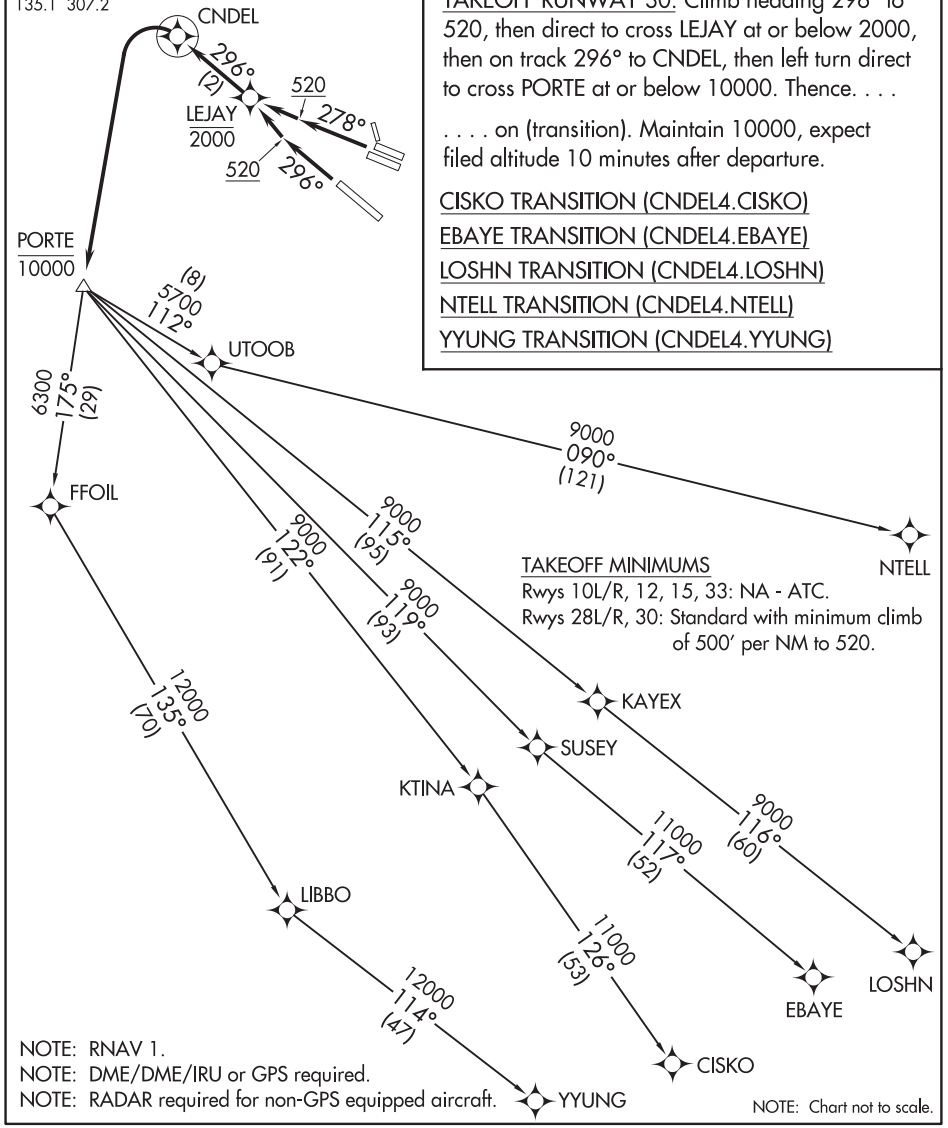

TAKEOFF MINIMUMS
Rwys 10L/R, 12, 15, 33: NA - ATC.
Rwys 28L/R, 30: Standard with minimum climb of 500′ per NM to 520.

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required for non-GPS equipped aircraft.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

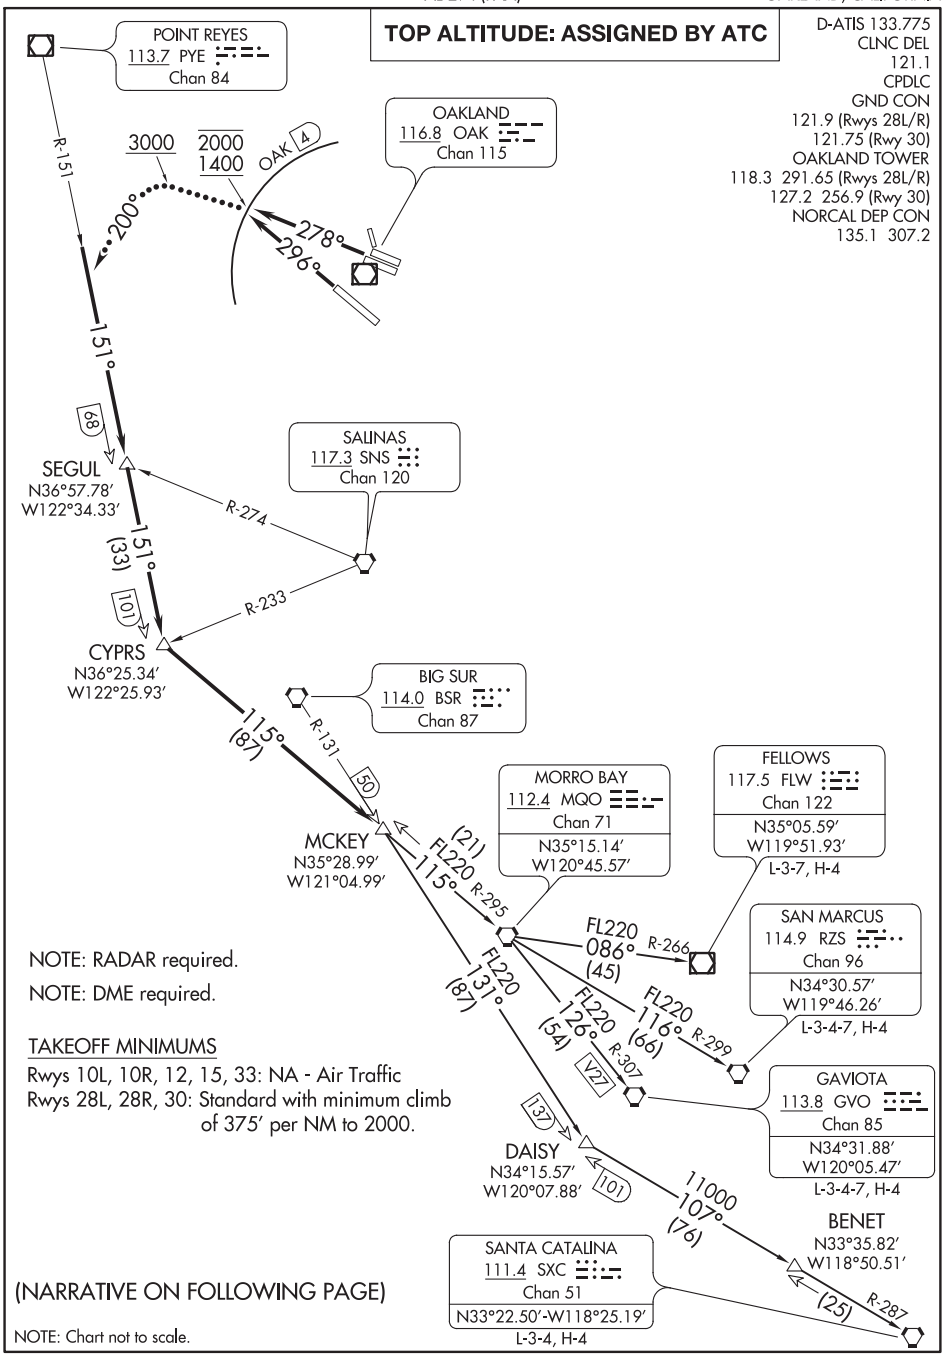
TOP ALTITUDE: ASSIGNED BY ATC
D-ATIS 133.775
CLNC DEL
121.1
CPDLC
GND CON
121.9 (Rwys 28L/R)
121.75 (Rwy 30)
OAKLAND TOWER
118.3 291.65 (Rwys 28L/R)
127.2 256.9 (Rwy 30)
NORCAL DEP CON
135.1 307.2
POINT REYES
113.7 PYE
Chan 84
OAKLAND
116.8 OAK
Chan 115
R-151
3000
2000
1400
OAK 4
200°
278°
296°
151°
68
SEGUL
N36°57.78′
W122°34.33′
SALINAS
117.3 SNS
Chan 120
R-274
151°
(33)
101
R-233
CYPRS
N36°25.34′
W122°25.93′
BIG SUR
114.0 BSR
Chan 87
R-131
115°
(87)
50
MCKEY
N35°28.99′
W121°04.99′
MORRO BAY
112.4 MQO
Chan 71
N35°15.14′
W120°45.57′
FELLOWS
117.5 FLW
Chan 122
N35°05.59′
W119°51.93′
L-3-7, H-4
(21)
FL220
115°
R-295
FL220
086°
(45)
R-266
SAN MARCUS
114.9 RZS
Chan 96
N34°30.57′
W119°46.26′
L-3-4-7, H-4
FL220
131°
(87)
FL220
126°
(54)
FL220
116°
(66)
R-299
R-307
V27
GAVIOTA
113.8 GVO
Chan 85
N34°31.88′
W120°05.47′
L-3-4-7, H-4
137
DAISY
N34°15.57′
W120°07.88′
101
11000
107°
(76)
BENET
N33°35.82′
W118°50.51′
SANTA CATALINA
111.4 SXC
Chan 51
N33°22.50′-W118°25.19′
L-3-4, H-4
(25)
R-287
NOTE: RADAR required.
NOTE: DME required.
TAKEOFF MINIMUMS
Rwys 10L, 10R, 12, 15, 33: NA - Air Traffic
Rwys 28L, 28R, 30: Standard with minimum climb of 375′ per NM to 2000.
(NARRATIVE ON FOLLOWING PAGE)
NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R: Climb heading 278° for RADAR vectors to PYE R-151, cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000. Thence . . . .

TAKEOFF RUNWAY 30: Climb heading 296° for RADAR vectors to PYE R-151, cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000. Thence . . . .

. . . . intercept and proceed on the PYE R-151 to SEGUL INT, then on PYE R-151 to CYPRS INT, then on MQO R-295 to MCKEY INT, then on assigned (transition). Maintain FL220. Expect clearance to filed altitude ten minutes after departure.

LOST COMMUNICATIONS: After reaching 3000, turn left heading 200° to intercept and proceed on PYE R-151, then resume own navigation.

FELLOWS TRANSITION (COAST9.FLW): From over MCKEY INT on MQO R-295 to MQO VORTAC, then on MQO R-086 and FLW R-266 to FLW VOR/DME.

GAVIOTA TRANSITION (COAST9.GVO): From over MCKEY INT on MQO R-295 to MQO VORTAC, then on MQO R-126 and GVO R-307 to GVO VORTAC.

SAN MARCUS TRANSITION (COAST9.RZS): From over MCKEY INT on MQO R-295 to MQO VORTAC, then on MQO R-116 and RZS R-299 to RZS VORTAC.

SANTA CATALINA TRANSITION (COAST9.SXC): From over MCKEY INT on BSR R-131 to DAISY INT, then on SXC R-287 to SXC VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020

HUSSH TWO DEPARTURE (RNAV)

SW-2, 30 JAN 2020 to 26 MAR 2020

(KATFH2.KATFH) 17285

KATFH TWO DEPARTURE (RNAV)

AL-294 (FAA)

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

D-ATIS 133.775
CLNC DEL
121.1
CPDLC
GND CON
121.9 (Rwys 10L/R)
121.75 (Rwy 12)
OAKLAND TOWER
118.3 291.65 (Rwys 10L/R)
127.2 256.9 (Rwy 12)
NORCAL DEP CON
135.1 307.2

TOP ALTITUDE: 3000

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 10L, 10R: Climb heading 098° to 520, then right turn direct to cross ROWLY at/below 3000, then on track 150° to cross VYYDA at/below 4000, then on track 150° to cross KATFH at/above 6000. Thence. . . .

TAKEOFF RUNWAY 12: Climb heading 116° to 520, then direct to cross ROWLY at/below 3000, then on track 150° to cross VYYDA at/below 4000, then on track 150° to cross KATFH at/above 6000. Thence. . . .

. . . .on (transition). Expect filed altitude 10 minutes after departure.

CISKO TRANSITION (KATFH2.CISKO)
EBAYE TRANSITION (KATFH2.EBAYE)
LOSHN TRANSITION (KATFH2.LOSHN)
NTELL TRANSITION (KATFH2.NTELL)

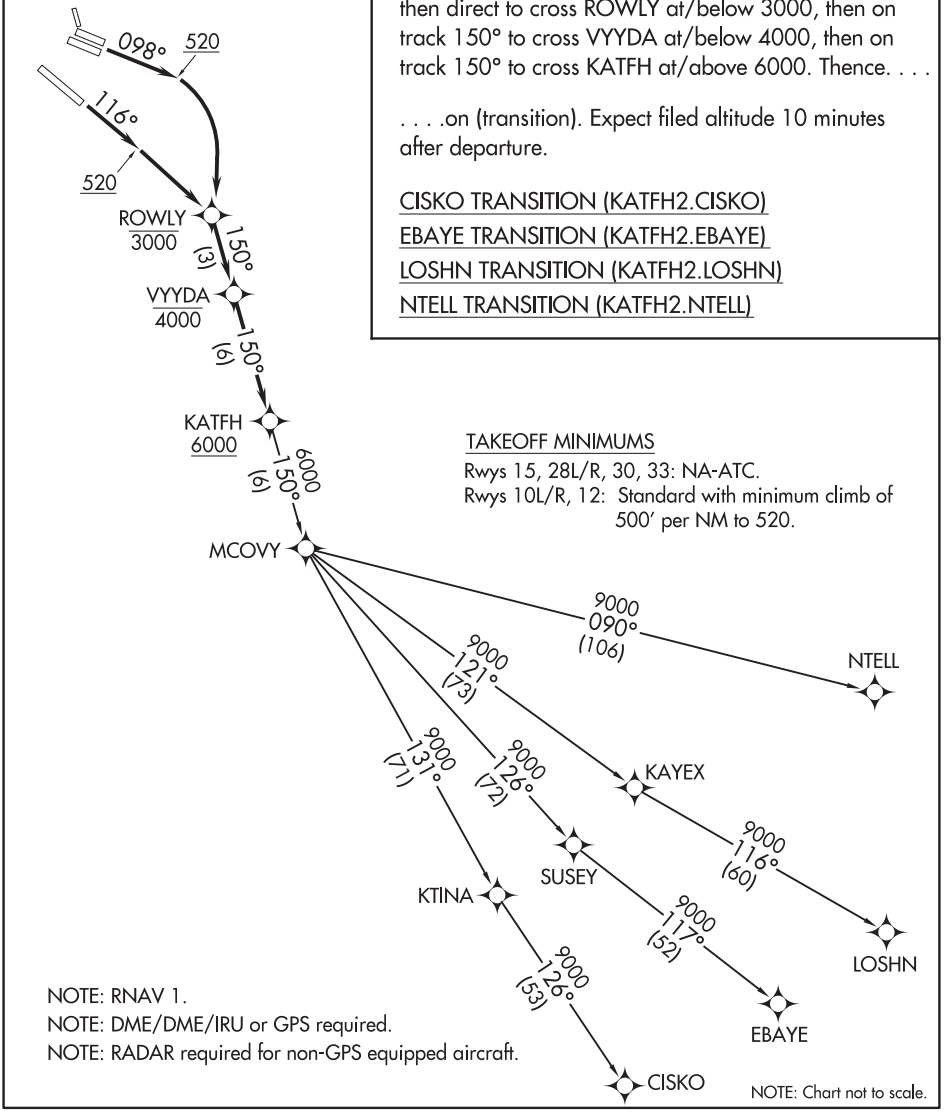

TAKEOFF MINIMUMS

Rwys 15, 28L/R, 30, 33: NA-ATC.
Rwys 10L/R, 12: Standard with minimum climb of 500' per NM to 520.

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required for non-GPS equipped aircraft.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

D-ATIS
133.775
CLNC DEL
121.1
CPDLC
NORCAL DEP CON
127.0 298.95

TOP ALTITUDE: ASSIGNED BY ATC

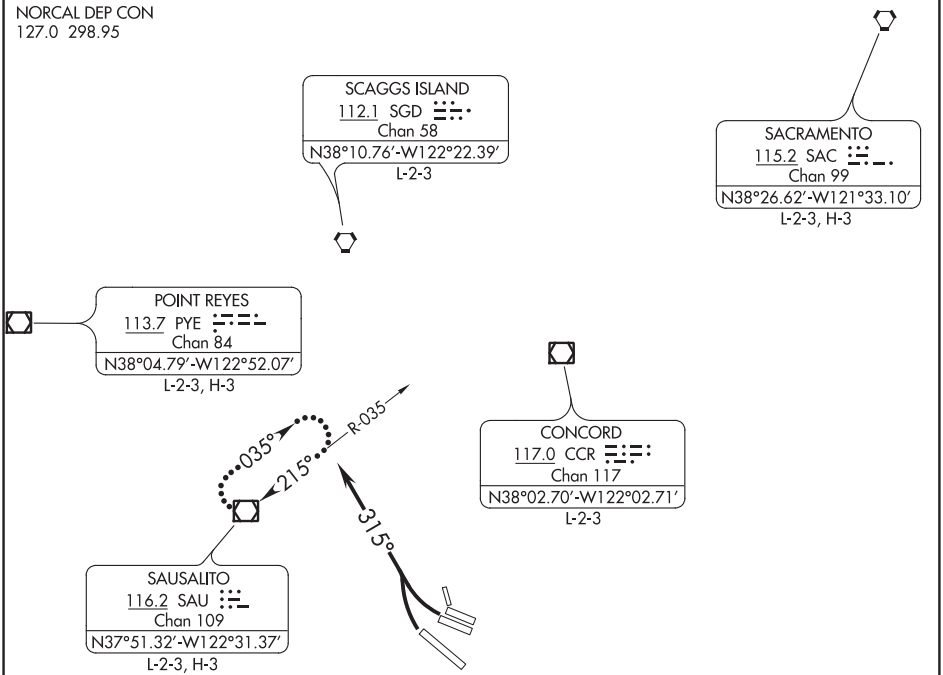

NOTE: RADAR required.

TAKEOFF MINIMUMS
Rwys 10L, 10R, 12, 15, 33: NA-Air Traffic.
Rwys 28L, 28R, 30: Standard with minimum climb of 375' per NM to 2000.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R and 30: Climbing right turn heading 315° for RADAR vectors to assigned route/fix. Maintain ATC assigned altitude. Expect filed altitude ten minutes after departure.

LOST COMMUNICATIONS: If not in contact with departure control after reaching 4000, proceed direct to SAU VOR/DME and hold on SAU R-035. Climb in holding pattern to assigned altitude, then proceed to assigned fix/route.

(NUEVO8.EUGEN) 17285

NUEVO EIGHT DEPARTURE

AL-294 (FAA)

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

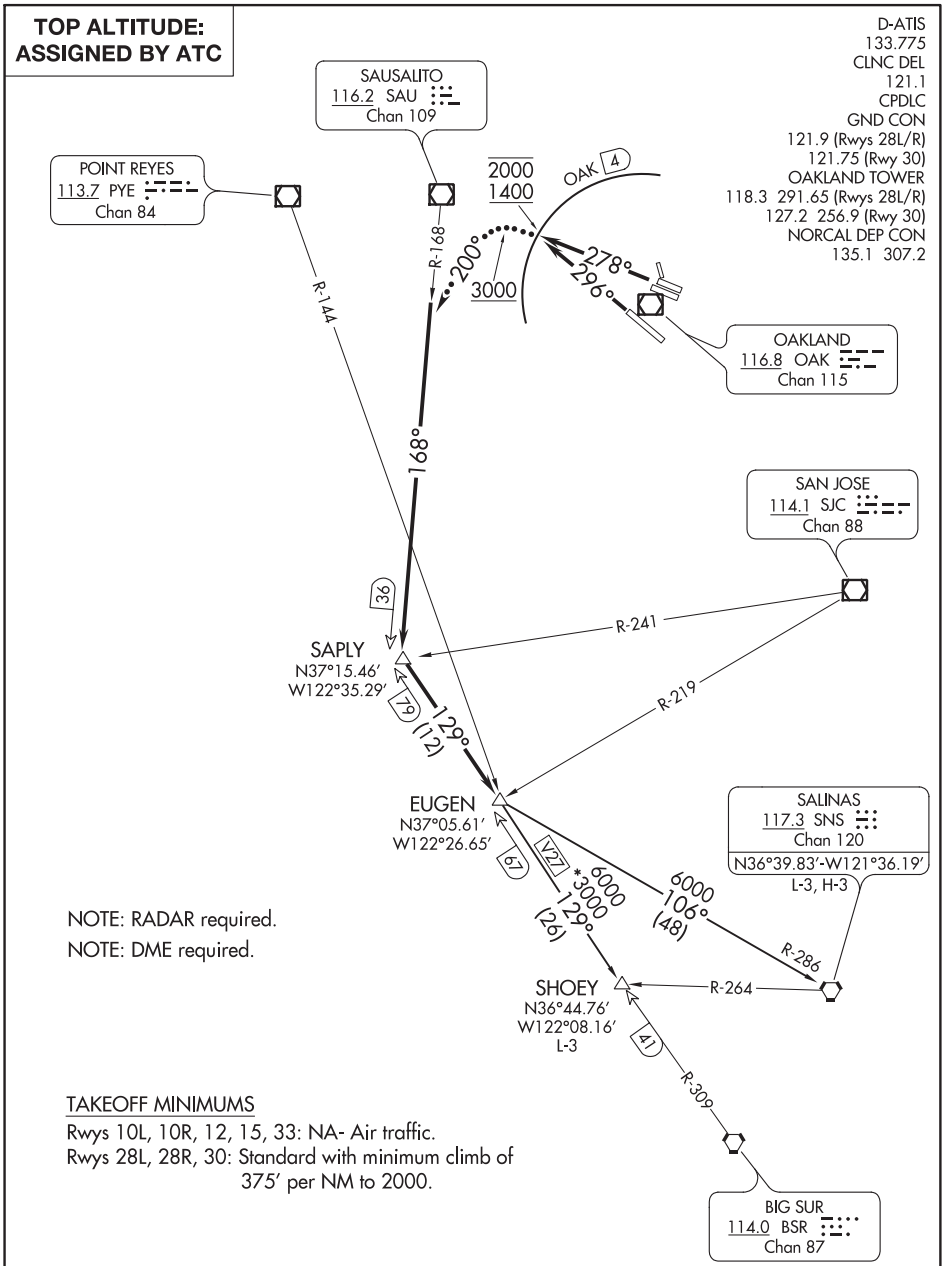

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R: Climb heading 278° for RADAR vectors to SAU R-168, cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000. Thence . . . .
TAKEOFF RUNWAY 30: Climb heading 296° for RADAR vectors to SAU R-168, cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000. Thence . . . .

. . . . intercept and proceed on the SAU R-168 to SAPLY INT and on BSR R-309 to EUGEN INT, then via assigned (transition). Expect clearance to filed altitude ten minutes after departure.

LOST COMMUNICATIONS: After reaching 3000, turn left heading 200° to intercept and proceed via SAU R-168, then resume own navigation.

SALINAS TRANSITION (NUEVO8.SNS): From over EUGEN INT on SNS R-286 to SNS VORTAC.
SHOEY TRANSITION (NUEVO8.SHOEY): From over EUGEN INT on BSR R-309 to SHOEY INT.

SW-2, 30 JAN 2020 to 26 MAR 2020

(OAK5.OAK) 20030

OAKLAND FIVE DEPARTURE

AL-294 (FAA)

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

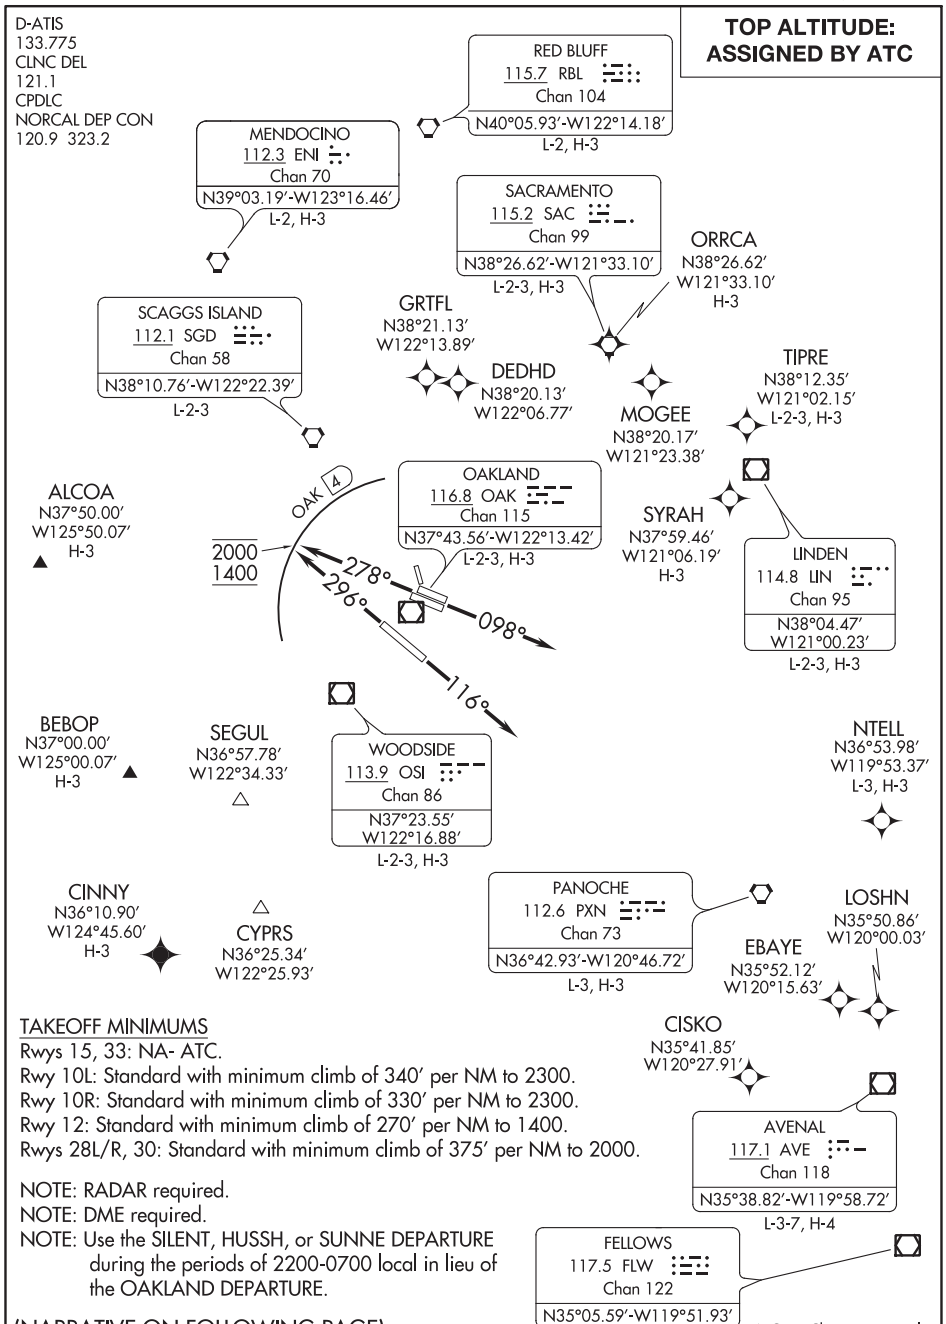

TAKEOFF MINIMUMS

Rwys 15, 33: NA- ATC.
Rwy 10L: Standard with minimum climb of 340' per NM to 2300.
Rwy 10R: Standard with minimum climb of 330' per NM to 2300.
Rwy 12: Standard with minimum climb of 270' per NM to 1400.
Rwys 28L/R, 30: Standard with minimum climb of 375' per NM to 2000.

NOTE: RADAR required.
NOTE: DME required.
NOTE: Use the SILENT, HUSSH, or SUNNE DEPARTURE during the periods of 2200-0700 local in lieu of the OAKLAND DEPARTURE.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 10L/R: Climb on heading 098° for RADAR vectors to assigned route/fix, thence. . . .
TAKEOFF RUNWAY 12: Climb on heading 116° for RADAR vectors to assigned route/fix, thence. . . .
TAKEOFF RUNWAYS 28L/R: Climb on heading 278° for RADAR vectors to assigned route/fix. Cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000, thence. . . .
TAKEOFF RUNWAY 30: Climb on heading 296° for RADAR vectors to assigned route/fix. Cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000, thence. . . .

. . . .maintain ATC assigned altitude. Expect filed altitude ten minutes after departure.

LOST COMMUNICATIONS: If not in contact with departure control after reaching 5000', continue climb to assigned altitude and proceed direct to assigned route/fix.

(QUAKE1.QUAKE) 20030

QUAKE ONE DEPARTURE

METROPOLITAN OAKLAND INTL (OAK)

AL-294 (FAA)

OAKLAND, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

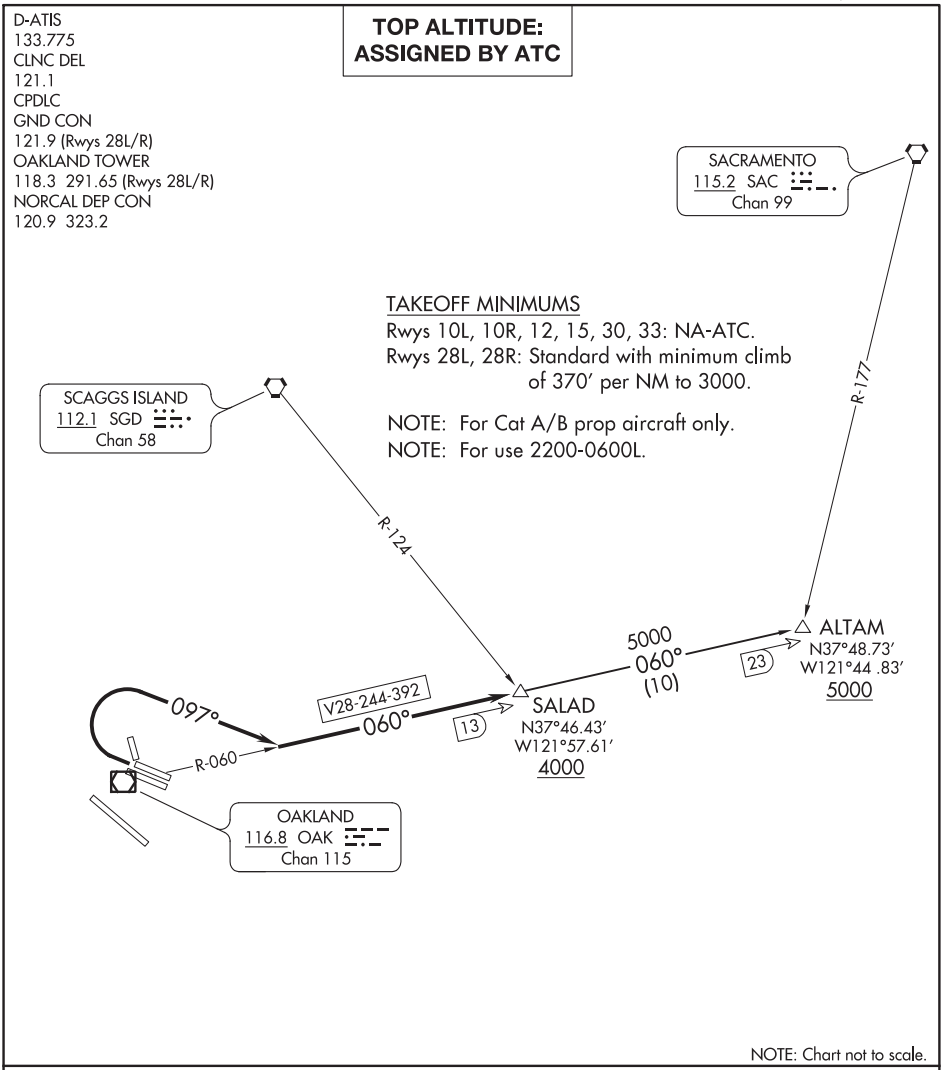

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28 L/R: Climbing right turn heading 097° to intercept OAK VOR/DME R-060 to cross SALAD/OAK 13 DME at or above 4000, thence . . . .

. . . . on ALTAM transition. Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

ALTAM TRANSITION (SALAD5.ALTAM): From over SALAD on OAK R-060 to ALTAM.

(SLNT1.REBAS) 20030

SILENT ONE DEPARTURE

AL-294 (FAA)

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

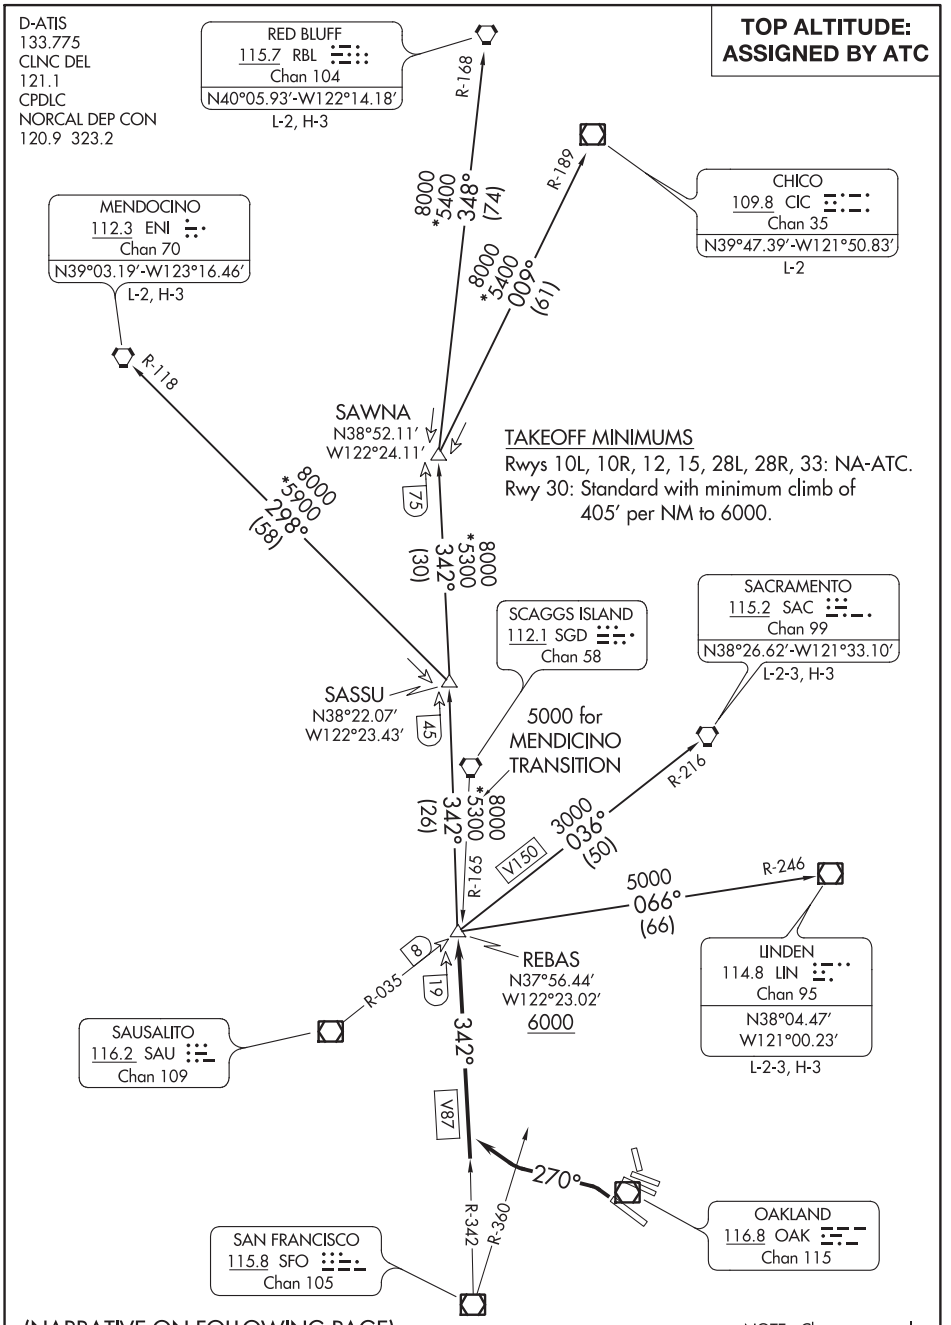

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 30: Climbing left turn heading 270° to V87 (commence right turn at SFO R-360) to REBAS INT/SFO 19 DME. Cross REBAS INT at or above 6000. Thence . . . .

. . . . (transition). Expect filed altitude 10 minutes after departure.

CHICO TRANSITION (SLNT1.CIC): From over REBAS INT on SFO R-342 to SAWNA INT, then on CIC R-189 to CIC VOR/DME.

LINDEN TRANSITION (SLNT1.LIN): From over REBAS INT on LIN R-246 to LIN VOR/DME.

MENDOCINO TRANSITION (SLNT1.ENI): From over REBAS INT on SFO R-342 to SASSU INT, then on ENI R-118 to ENI VORTAC.

RED BLUFF TRANSITION (SLNT1.RBL): From over REBAS INT on SFO R-342 to SAWNA INT, then on RBL R-168 to RBL VORTAC.

SACRAMENTO TRANSITION (SLNT1.SAC): From over REBAS INT on SAC R-216 to SAC VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020

(SKYL1.WAGES) 19227

SKYLINE ONE DEPARTURE

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

AL-294 (FAA)

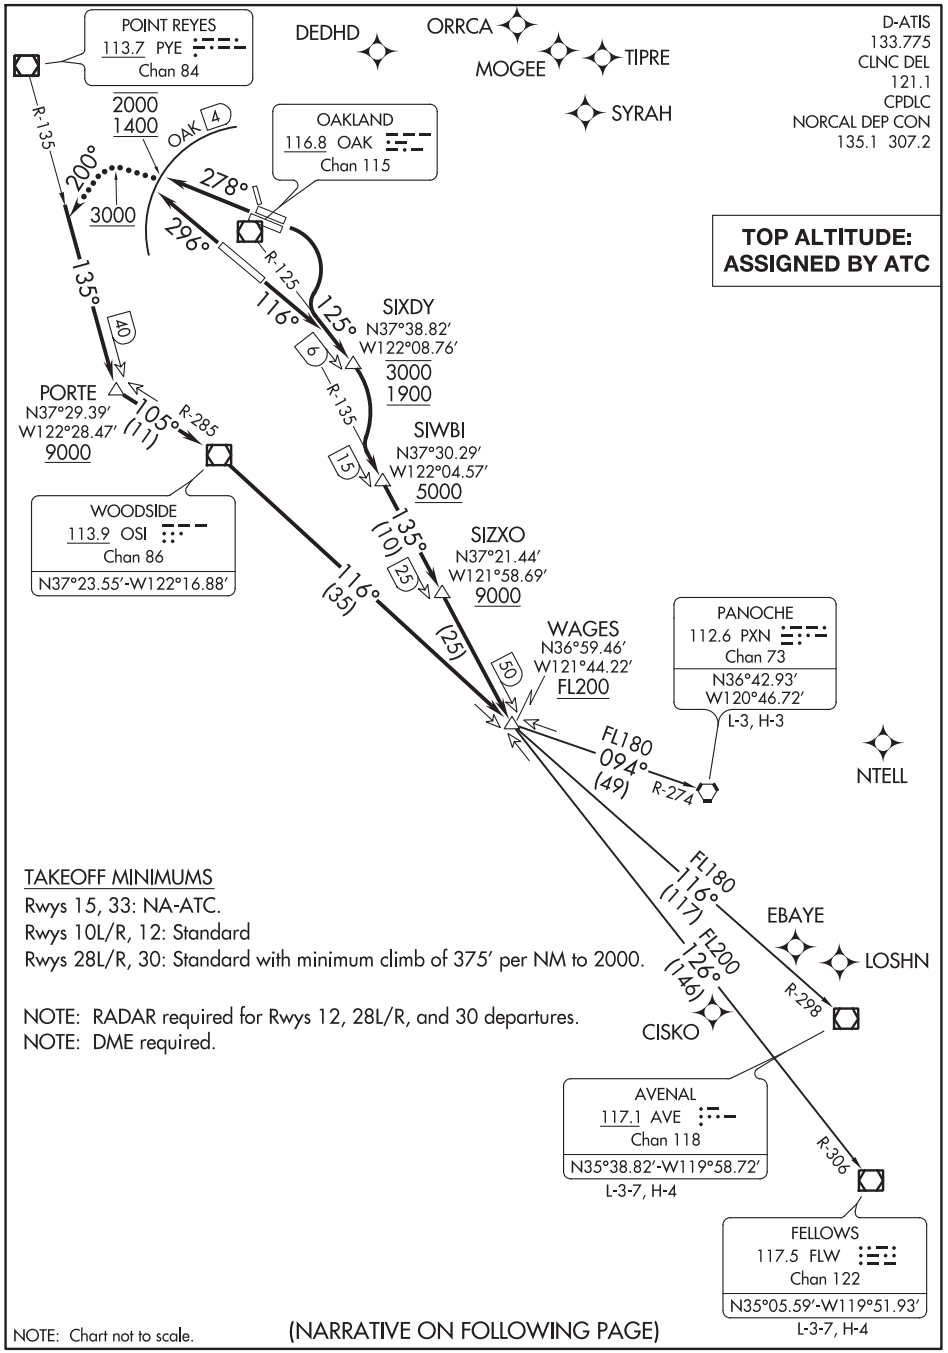

TAKEOFF MINIMUMS

Rwys 15, 33: NA-ATC.
Rwys 10L/R, 12: Standard
Rwys 28L/R, 30: Standard with minimum climb of 375' per NM to 2000.

NOTE: RADAR required for Rwys 12, 28L/R, and 30 departures.
NOTE: DME required.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

SKYLINE ONE DEPARTURE
(SKYL1.WAGES) 15AUG19

OAKLAND, CALIFORNIA
METROPOLITAN OAKLAND INTL (OAK)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 10L/R: Climbing right turn to intercept OAK R-125, to cross SIXDY/OAK VOR/DME 6 DME at or above 1900 and at or below 3000, then climbing right turn to intercept and proceed on the OAK R-135 to cross SIWBI/OAK 15 DME at or above 5000 and to cross SIZXO/OAK 25 DME at or above 9000 and to cross WAGES INT/OAK 50 DME at or above FL200, thence. . . .
TAKEOFF RUNWAY 12: Climb on heading 116° for vectors to assigned route/fix, thence. . . .
TAKEOFF RUNWAYS 28L/R: Climb on heading 278° for vectors to PYE R-135 to cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000. Intercept and proceed on the PYE R-135 to cross PORTE INT/PYE 40 DME at or above 9000, then on OSI R-285 to OSI VOR/DME, then on OSI R-116 to cross WAGES INT/OSI 35 DME at or above FL200, thence. . . .
TAKEOFF RUNWAY 30: Climb on heading 296° for vectors to assigned route/fix. Cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000, thence. . . .

. . . .on (transition) or (assigned route) maintain ATC assigned altitude.
Expect filed altitude 10 minutes after departure.

LOST COMMUNICATIONS
TAKEOFF RUNWAYS 28L/R and 30: After reaching 3000, turn left heading 200°, intercept and proceed via the PYE R-135. Resume your own navigation.

AVENAL TRANSITION (SKYL1.AVE): From over WAGES INT on OSI R-116 and AVE R-298 to AVE VOR/DME.
FELLOWS TRANSITION (SKYL1.FLW): From over WAGES INT on FLW R-306 to FLW VOR/DME.
PANOCHE TRANSITON (SKYL1.PXN): From over WAGES INT on PXN R-274 to PXN VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020

(SUNNE1.SUNNE) 20030

SUNNE ONE DEPARTURE

AL-294 (FAA)

METROPOLITAN OAKLAND INTL (OAK)
OAKLAND, CALIFORNIA

D-ATIS
133.775
CLNC DEL
121.1
CPDLC
NORCAL DEP CON
135.1 307.2

TOP ALTITUDE: 5000

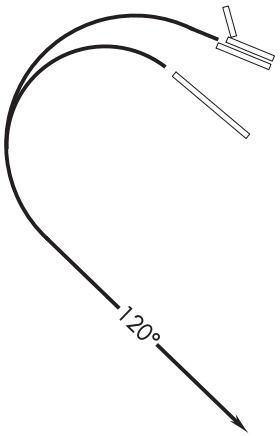

TAKEOFF MINIMUMS
Rwys 10L/R, 12, 15, 33: NA-Air Traffic.
Rwys 28L/R, 30: Standard.

SUNNE △
N37°26.29′
W122°00.77′

NOTE: RADAR required.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R, 30: Climbing left turn on heading 120° for vectors to SUNNE. Maintain 5000. Expect higher altitude five minutes after departure.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME CIC	APP CRS	Rwy Idg	N/A
109.8	238°	TDZE	N/A
Chan 35		Apt Elev	215

VOR or GPS-A

HAIGH FIELD (O37)

T NA — Use Chico altimeter setting, when not received, use Redding altimeter setting.

MISSED APPROACH: Climbing right turn to 2500 via CIC R-238 to GONGS INT and hold.

OAKLAND CENTER	UNICOM
132.2 350.3	122.7 (CTAF) L

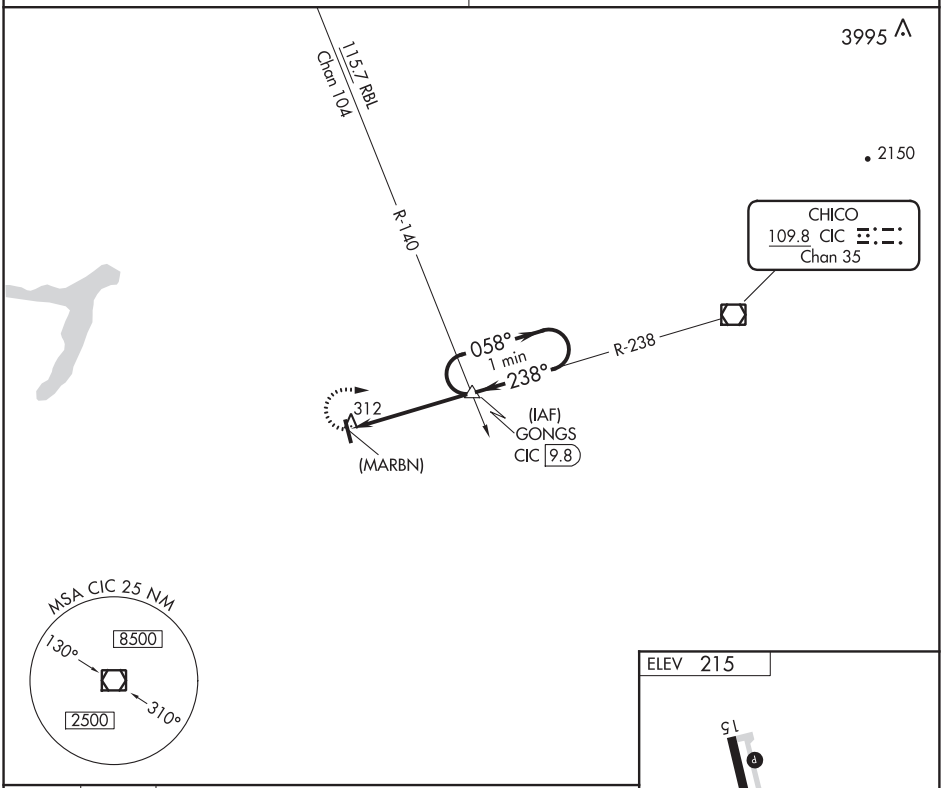

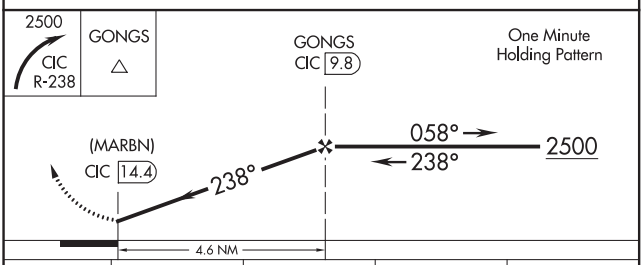

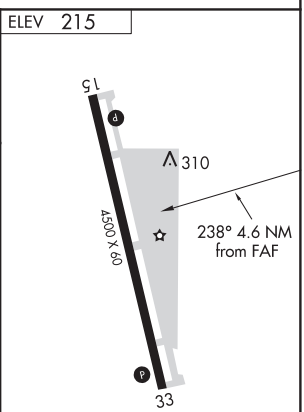

CATEGORY	A	B	C	D
CIRCLING	1100-1¼ 885 (900-1¼)		1100-2¾ 885 (900-2¾)	1100-3 885 (900-3)
REDDING ALTIMETER SETTING MINIMUMS				
CIRCLING	1220-1¼ 1005 (1100-1¼)	1220-1½ 1005 (1100-1½)	1220-3 1005 (1100-3)	

MIRL Rwy 15-33 L

FAF to MAP 4.6 NM

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

OROVILLE, CALIFORNIA | AL-5938 (FAA) | 18200

WAAS	APP CRS	Rwy Idg	6020
CH 49026	017°	TDZE	182
W02A		Apt Elev	194

RNAV (GPS) RWY 2
OROVILLE MUNI (OVE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). Circling NA northeast of Rwy 13-31. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 650 then climbing right turn to 6000 direct MRGGO and hold, continue climb-in-hold to 6000.

ASOS	NORCAL APP CON	UNICOM
121.425	125.4 259.1	122.8 (CTAF) L

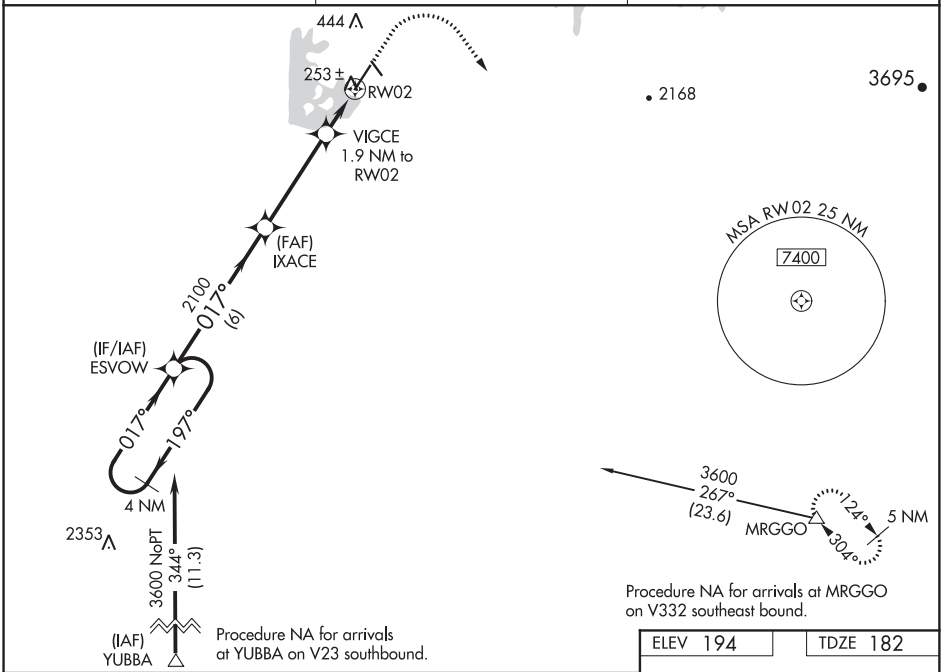

VGSI and RNAV glidepath angles not coincident (VGSI Angle 3.00/TCH 44).

650	6000	MRGGO
↑	↗	△

*LNAV only

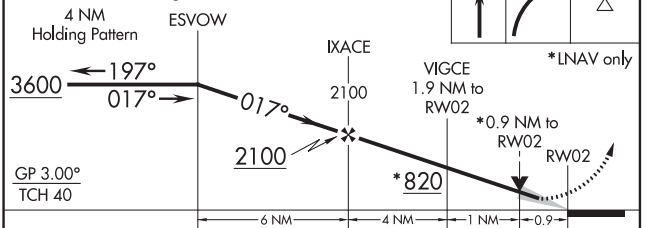

CATEGORY	A	B	C	D
LPV DA	432-⅞	250 (300-⅞)		
LNAV/VNAV DA	432-⅞	250 (300-⅞)		
LNAV MDA	520-1	338 (400-1)		
C CIRCLING	580-1 386 (400-1)	660-1 466 (500-1)	660-1½ 466 (500-1½)	780-2 586 (600-2)

ELEV 194 | TDZE 182

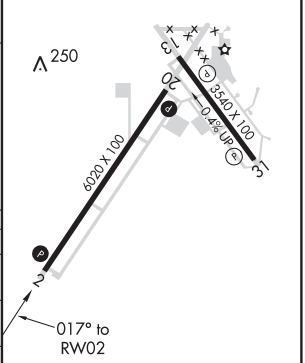

REIL Rwys 2 and 20 L
HIRL Rwys 2-20 and 13-31 L

SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME MYV 110.8 Chan 45	APP CRS 338°	Rwy Idg N/A TDZE N/A Apt Elev 194

VOR-A
OROVILLE MUNI (OVE)

Circling NA northeast of Rwy 13-31. DME required.

MISSED APPROACH: Climbing left turn to 3000 on MYV VOR/DME R-338 to HAZED/MYV 11.6 DME and hold.

ASOS 121.425	NORCAL APP CON 125.4 259.1	UNICOM 122.8 (CTAF) L

DME REQUIRED

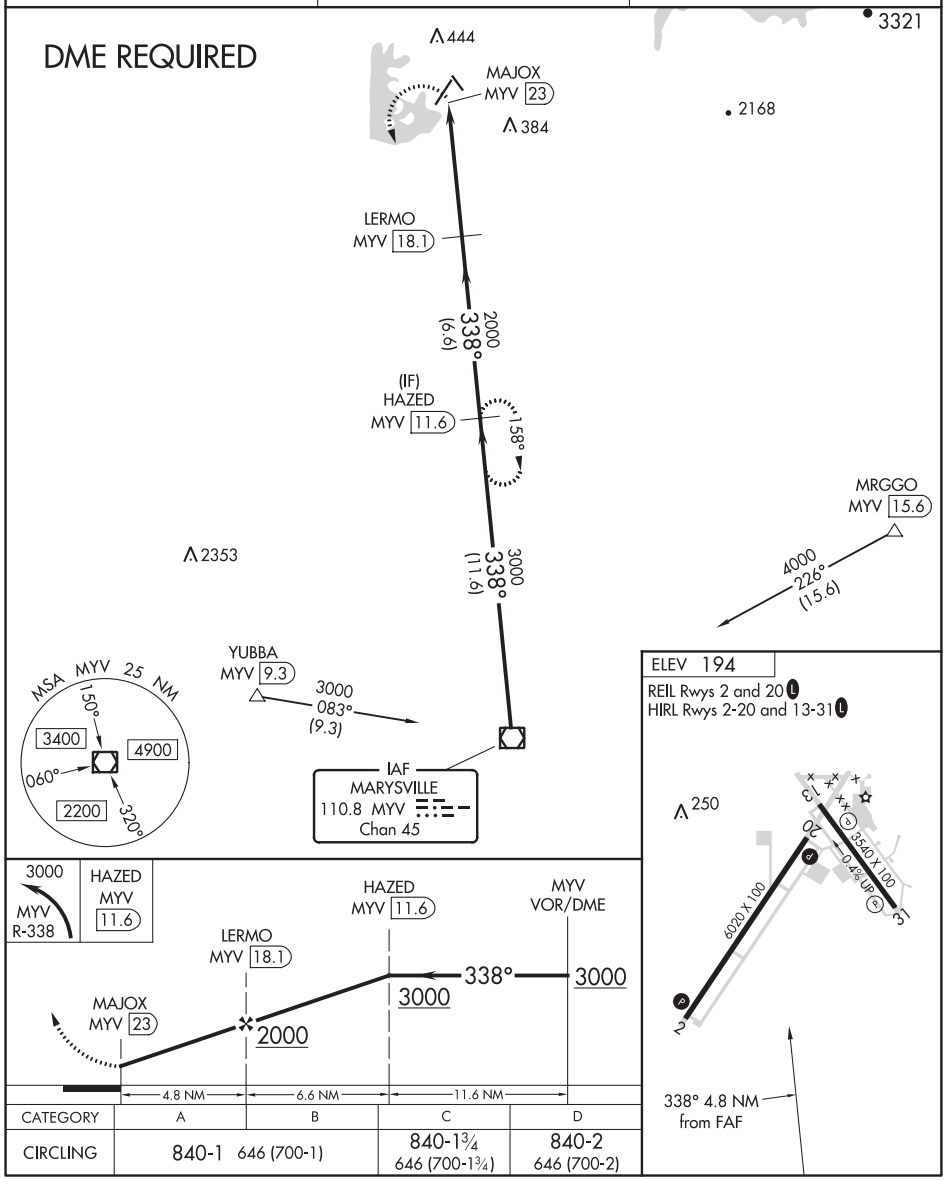

CATEGORY	A	B	C	D
CIRCLING	840-1 646 (700-1)		840-1¾ 646 (700-1¾)	840-2 646 (700-2)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

PALO ALTO, CALIFORNIA | AL-9216 (FAA) | 20030

APP CRS	Rwy Idg	2443
322°	TDZE	7
	Apt Elev	7

RNAV (GPS) RWY 31

PALO ALTO (PAO)

RNP APCH.

Circling NA southwest of Rwy 13-31. Rwy 31 helicopter visibility reduction below 1 SM NA. Procedure NA at night. When control tower closed, use Norman Y Mineta San Jose Intl altimeter setting and increase all MDAs 40 feet.

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 direct SJC VOR/DME and hold.

ATIS	NORCAL APP CON	PALO ALTO TOWER★	GND CON	UNICOM
135.275	121.3 270.35	118.6 (CTAF)	125.0	122.95

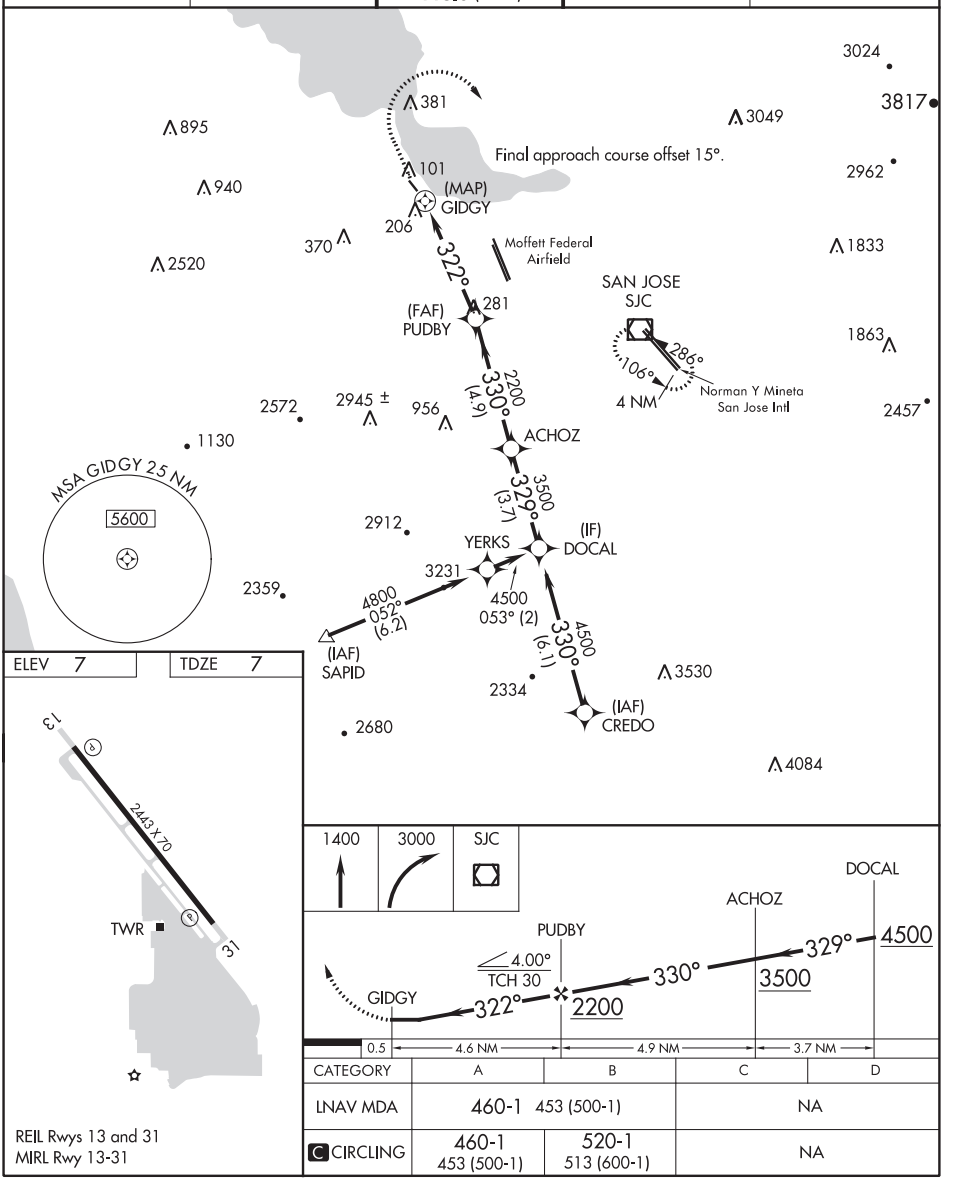

ELEV 7 | TDZ 7

CATEGORY	A	B	C	D
LNAV MDA	460-1 453 (500-1)		NA	
C CIRCLING	460-1 453 (500-1)	520-1 513 (600-1)	NA	

REIL Rwys 13 and 31
MIRL Rwy 13-31

PALO ALTO, CALIFORNIA
Amdt 2 10OCT19

37°28'N-122°07'W

PALO ALTO (PAO)

RNAV (GPS) RWY 31

SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME SJC	APP CRS	Rwy Idg	2443
114.1	286°	TDZE	7
Chan 88		Apt Elev	7

VOR RWY 31

PALO ALTO (PAO)

DME Required

Circling NA southwest of Rwy 13-31. Rwy 31 helicopter visibility reduction below 1 SM NA. When control tower closed, use Norman Y Mineta San Jose Intl altimeter setting and increase all MDAs 40 feet. Procedure NA at night.

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct SJC VOR/DME and hold.

ATIS	NORCAL APP CON	PALO ALTO TOWER★	GND CON	UNICOM
135.275	121.3 270.35	118.6 (CTAF)	125.0	122.95

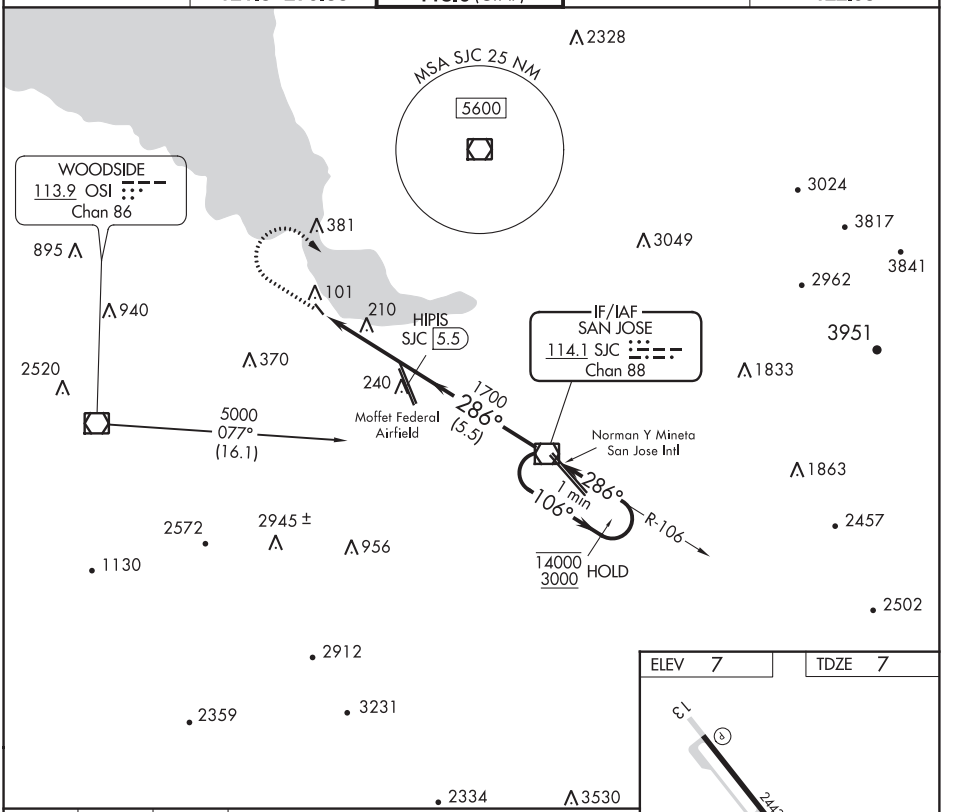

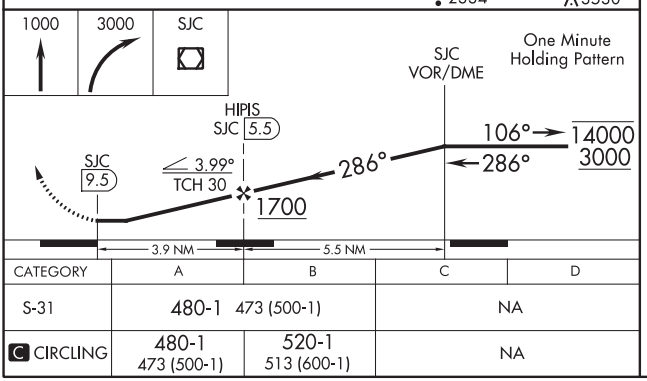

CATEGORY	A	B	C	D
S-31	480-1	473 (500-1)	NA	
C CIRCLING	480-1 (473 (500-1))	520-1 (513 (600-1))	NA	

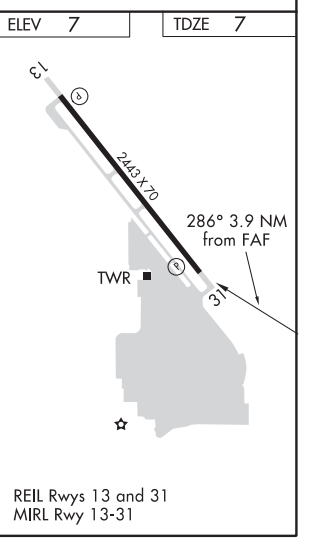

REIL Rwys 13 and 31
MIRL Rwy 13-31

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

20030

AIRPORT DIAGRAM

AL-9216 (FAA)

PALO ALTO (PAO)
PALO ALTO, CALIFORNIA

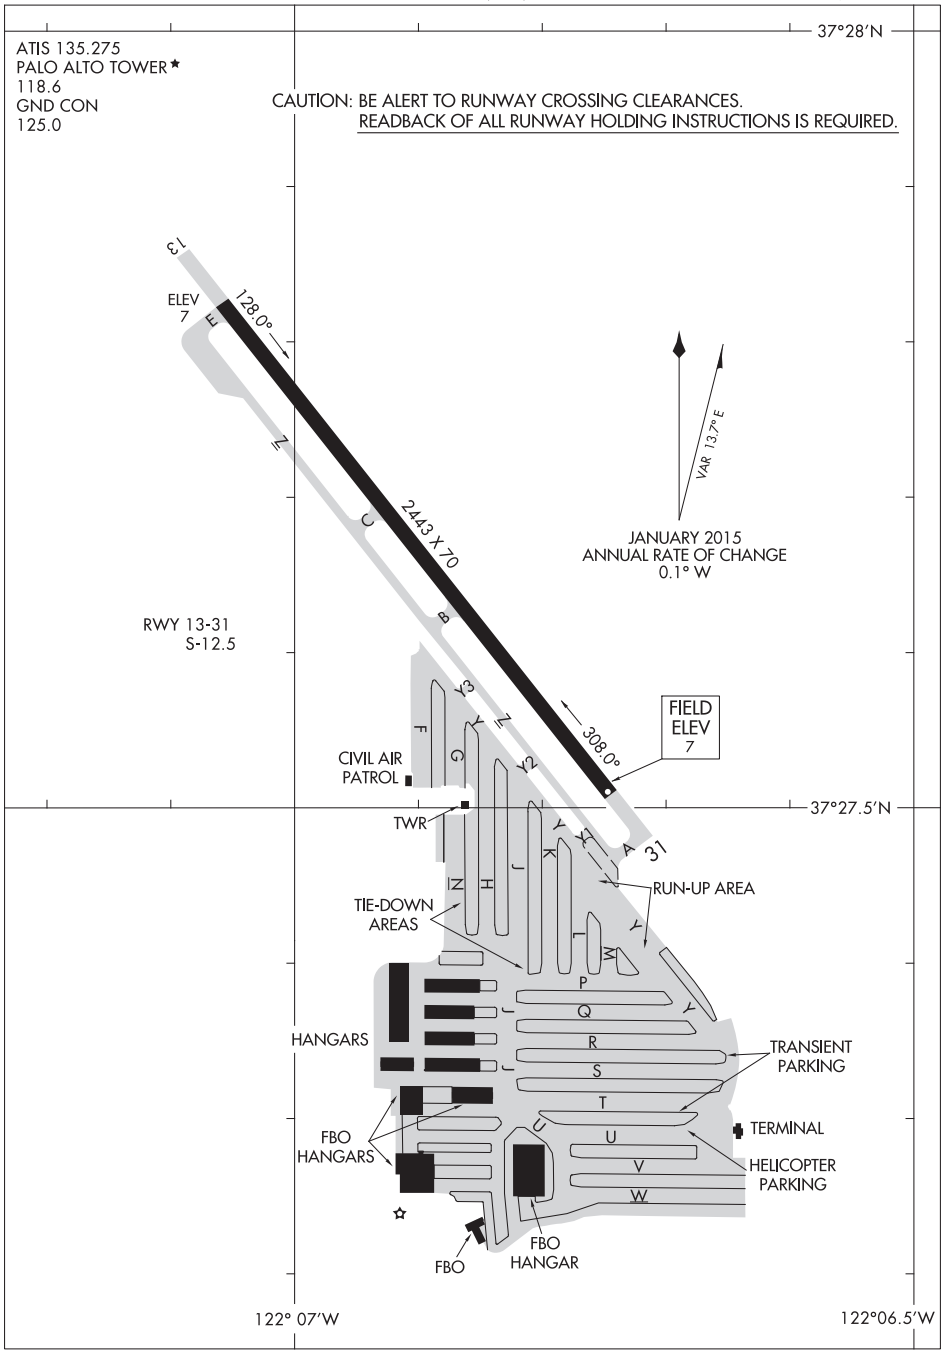

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
20030

PALO ALTO, CALIFORNIA
PALO ALTO (PAO)

RNAV (GPS) RWY 29

PETALUMA MUNI (O69)

WAAS	APP CRS	Rwy Idg	3600
CH 49124	290°	TDZE	86
W29A		Apt Elev	90

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Night landing: Rwy 11 NA.

MISSED APPROACH: Climb to 3500 direct XIKIY and on track 216° to HIRUV.

AWOS-3P	OAKLAND CENTER	UNICOM
132.325	127.8 353.5	122.7 (CTAF) L

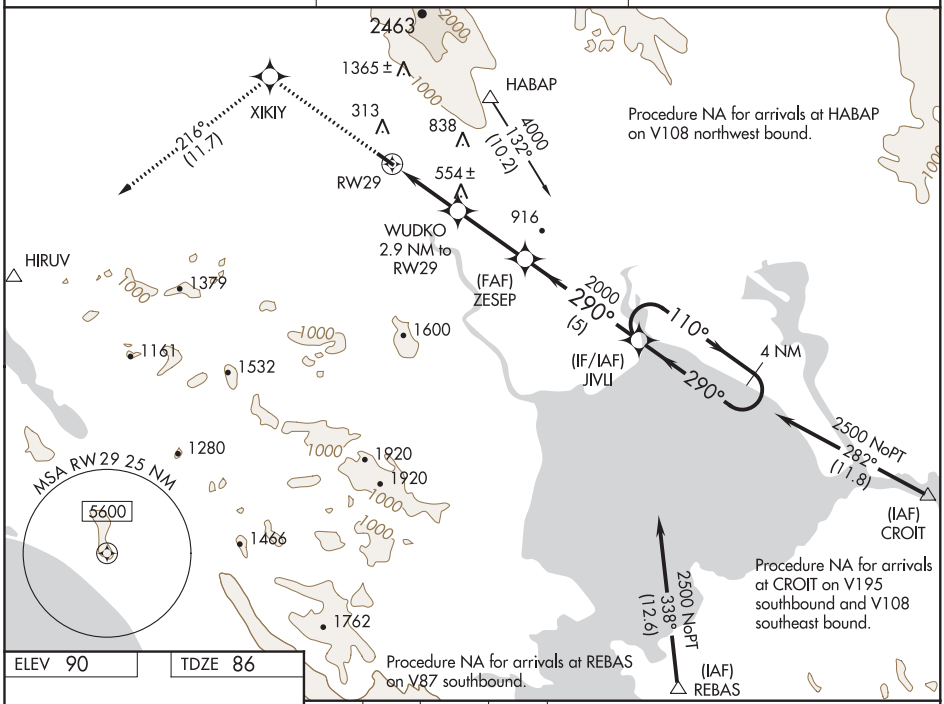

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 90 TDZE 86



REIL Rwy 29 L
MIRL Rwy 11-29 L

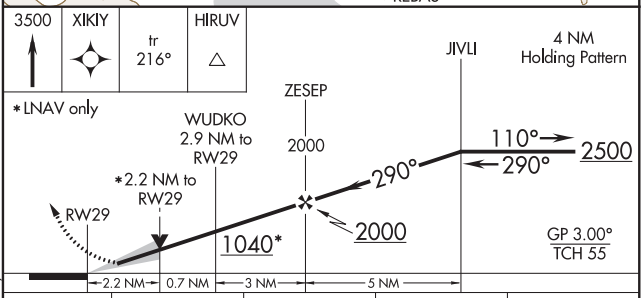

CATEGORY	A	B	C	D
LPV DA	356-⅞	270 (300-⅞)	NA	
LNAV/VNAV DA	707-2½	621 (700-2½)	NA	
LNAV MDA	820-1	734 (800-1)	NA	
CIRCLING	820-1	730 (800-1)	NA	

PETALUMA, CALIFORNIA | AL-6838 (FAA) | 19115

VOR RWY 29

PETALUMA MUNI (O69)

VORTAC SGD	APP CRS	Rwy Idg	3600
112.1	276°	TDZE	86
Chan 58		Apt Elev	90

Night landing: Rwy 11 NA, Rwy 29 operational VGSI required, remain on or above VGSI glidepath until threshold. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2000 via SGD R-276 then climbing left turn to 3500 direct PYE VOR/DME.

AWOS-3P	OAKLAND CENTER	UNICOM
132.325	127.8 353.5	122.7 (CTAF)

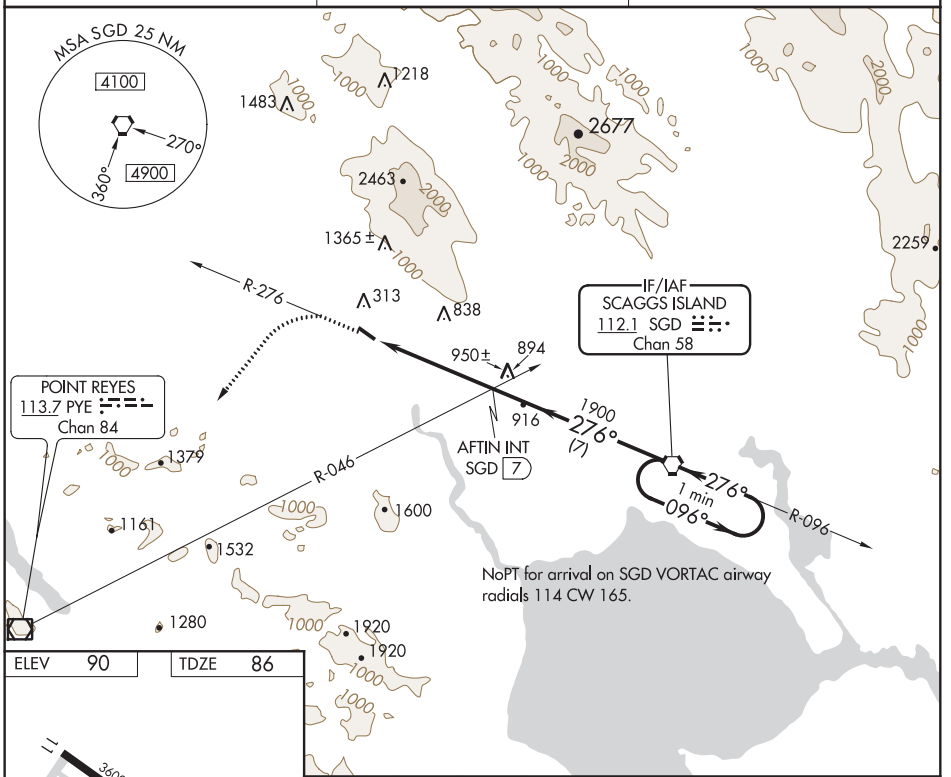

ELEV	90	TDZE	86



2000	3500	PYE
SGD R-276		

DME unusable from SGD VORTAC 11.1 DME to MAP.

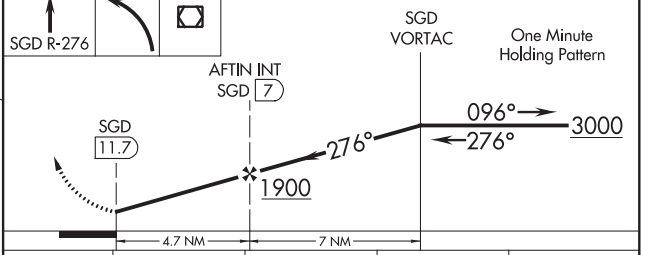

REIL Rwy 29 (L)
MIRL Rwy 11-29 (L)

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

CATEGORY	A	B	C	D
S-29	1260-1¼ 1174 (1200-1¼)	1260-1½ 1174 (1200-1½)	NA	
CIRCLING	1260-1⅛ 1170 (1200-1⅛)	1260-1½ 1170 (1200-1½)	NA	

PETALUMA, CALIFORNIA
Orig-D 15SEP16

38°15'N-122°36'W

PETALUMA MUNI (O69)
VOR RWY 29

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS CH 78324 W05A	APP CRS 049°	Rwy Idg 3910 TDZE 2585 Apt Elev 2585

RNAV (GPS) RWY 5

PLACERVILLE (PVF)

Night landing: Rwy 23 NA. Baro-VNAV NA when using Auburn altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). Circling NA northwest of Rwy 5-23. DME/DME RNP-0.3 NA. VDP NA with Auburn altimeter setting. When local altimeter setting not received, use Auburn altimeter setting and increase all DA/MDA 200 feet, and all visibilities ¾ mile.

MISSED APPROACH: Climb to 3050 then climbing right turn to 4500 direct TRIPP and hold.

AWOS-3	NORCAL APP CON	UNICOM
128.125	127.4 317.5	122.8 (CTAF) L

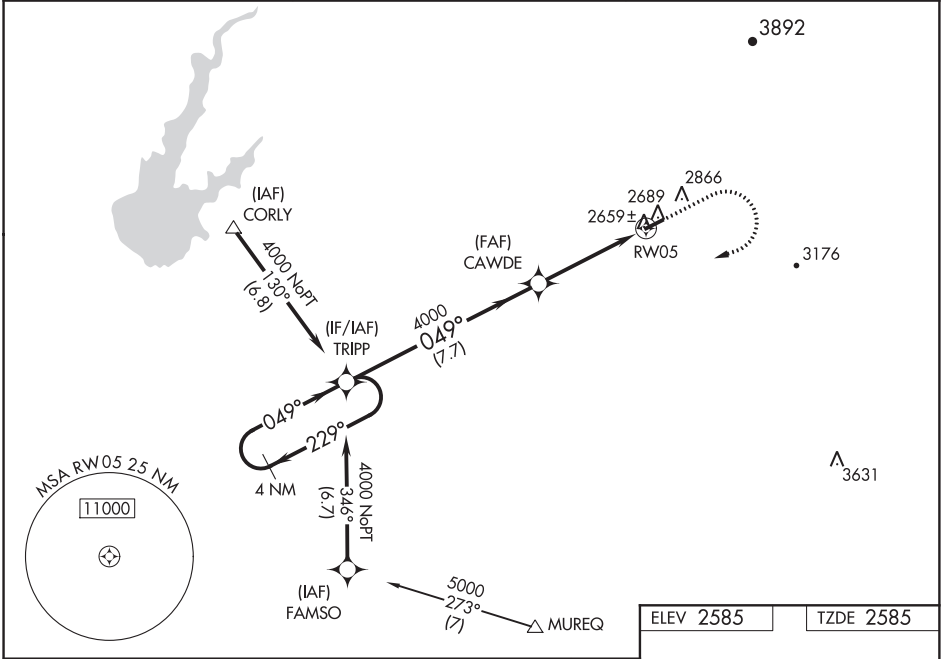

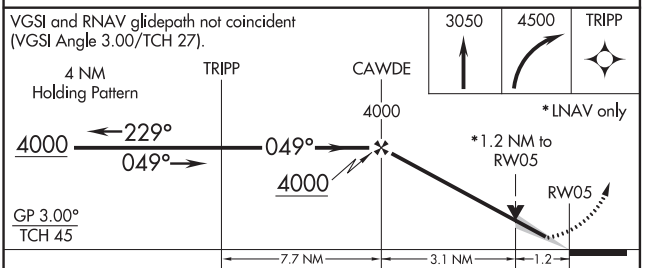



CATEGORY	A	B	C	D
LPV DA	2835-¾	250 (300-¾)	NA	
LNAV/VNAV DA	2874-1	289 (300-1)	NA	
LNAV MDA	3040-1	455 (500-1)	NA	
CIRCLING	3200-1 615 (700-1)	3260-1 675 (700-1)	NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

PORTERVILLE, CALIFORNIA

AL-569 (FAA)

18312

GPS RWY 12

PORTERVILLE MUNI (PTV)

APP CRS	Rwy Idg	5960
120°	TDZE	437
	Apt Elev	442

T
NA

MISSED APPROACH: Climbing right turn to 3100 direct TTE VOR/DME and hold.

AWOS-3PT	BAKERSFIELD APP CON ★	UNICOM
134.625	120.5	122.8 (CTAF) L

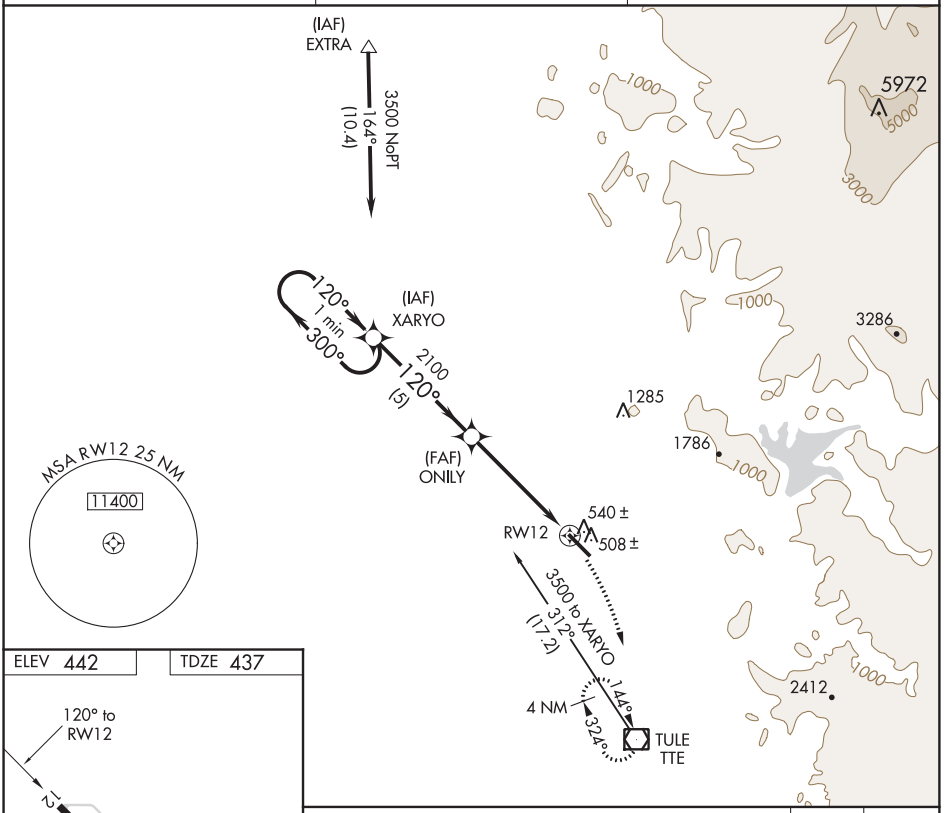

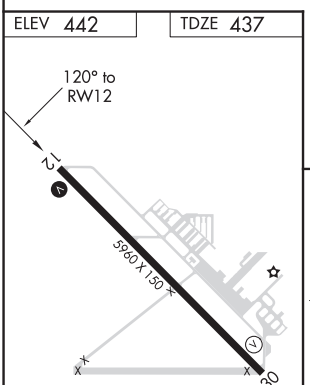

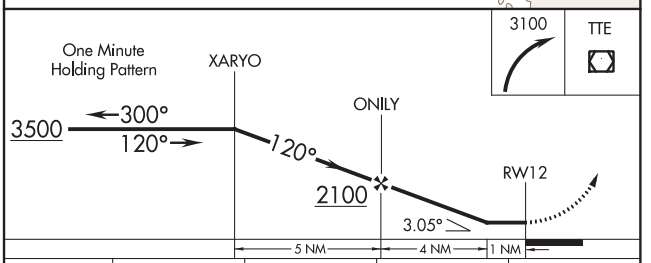

CATEGORY	A	B	C	D
S-12	800-1 363 (400-1)			800-1¼ 363 (400-1¼)
CIRCLING	880-1 438 (500-1)	900-1 458 (500-1)	900-1½ 458 (500-1½)	1000-2 558 (600-2)

REIL Rwy 30
HIRL Rwy 12-30 L

PORTERVILLE, CALIFORNIA
Orig 13AUG98

36°02'N-119°04'W

PORTERVILLE MUNI (PTV)

GPS RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

GPS RWY 30

PORTERVILLE MUNI (PTV)

APP CRS	Rwy Idg	5960
314°	TDZE	442
	Apt Elev	442

IAF ARM APPROACH MODE PRIOR TO IAF.
NA Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing left turn to 3100 direct TTE VOR/DME and hold.

AWOS-3PT	BAKERFIELD APP CON★	UNICOM
134.625	120.5	122.8 (CTAF) L

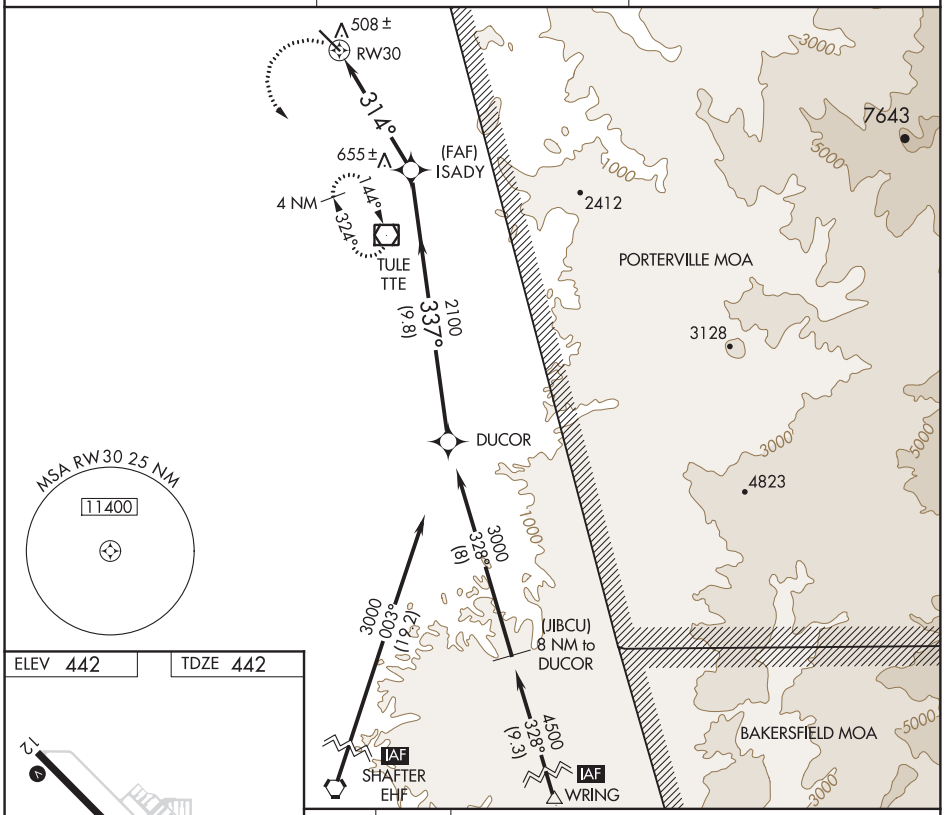

ELEV 442 TDZE 442



REIL Rwy 30
HIRL Rwy 12-30 L

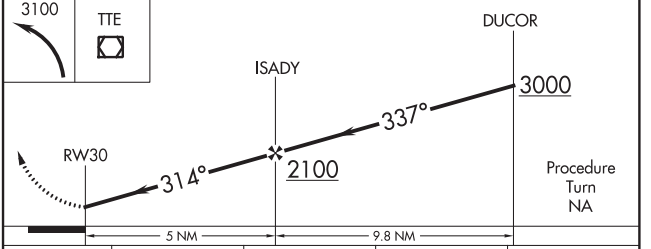

314° to RW30

CATEGORY	A	B	C	D
S-30	900-1 458 (500-1)		900-1¼ 458 (500-1¼)	900-1½ 458 (500-1½)
CIRCLING	900-1 458 (500-1)		900-1½ 458 (500-1½)	1000-2 558 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

PORTERVILLE, CALIFORNIA | AL-569 (FAA) | 18312

VOR/DME TTE	APP CRS	Rwy Idg	N/A
109.2	327°	TDZE	N/A
Chan 29		Apt Elev	442

VOR or GPS-A

PORTERVILLE MUNI (PTV)

MISSED APPROACH: Climbing left turn to 3100 direct TTE VOR/DME and hold.

AWOS-3PT	BAKERFIELD APP CON★	UNICOM
134.625	120.5	122.8 (CTAF) L

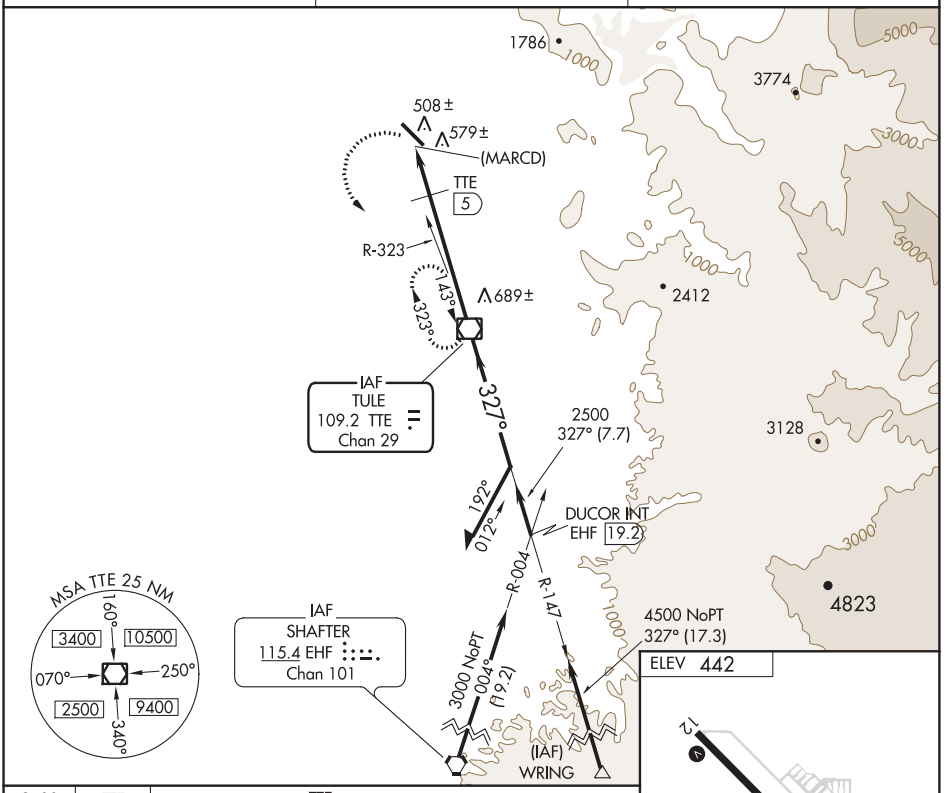

CATEGORY	A	B	C	D
CIRCLING	980-1 538 (600-1)		980-1½ 538 (600-1½)	1000-2 558 (600-2)
DME MINIMA				
CIRCLING	880-1 438 (500-1)	900-1 458 (500-1)	900-1½ 458 (500-1½)	1000-2 558 (600-2)

FAF to MAP 6.9 NM

Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 15

RED BLUFF MUNI (RBL)

WAAS CH 73008 W15A	APP CRS 151°	Rwy Idg 5431 TDZE 352 Apt Elev 352

T Circling to Rwy 33 NA at night. Baro-VNAV and VDP NA when using Redding altimeter setting. For A uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received; use Redding altimeter setting and increase all DA/MDA 80 feet and increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cat C/D and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3500 direct TOWAN and hold.

ASOS	OAKLAND CENTER	UNICOM
120.775	132.2 350.3	123.0 (CTAF) L

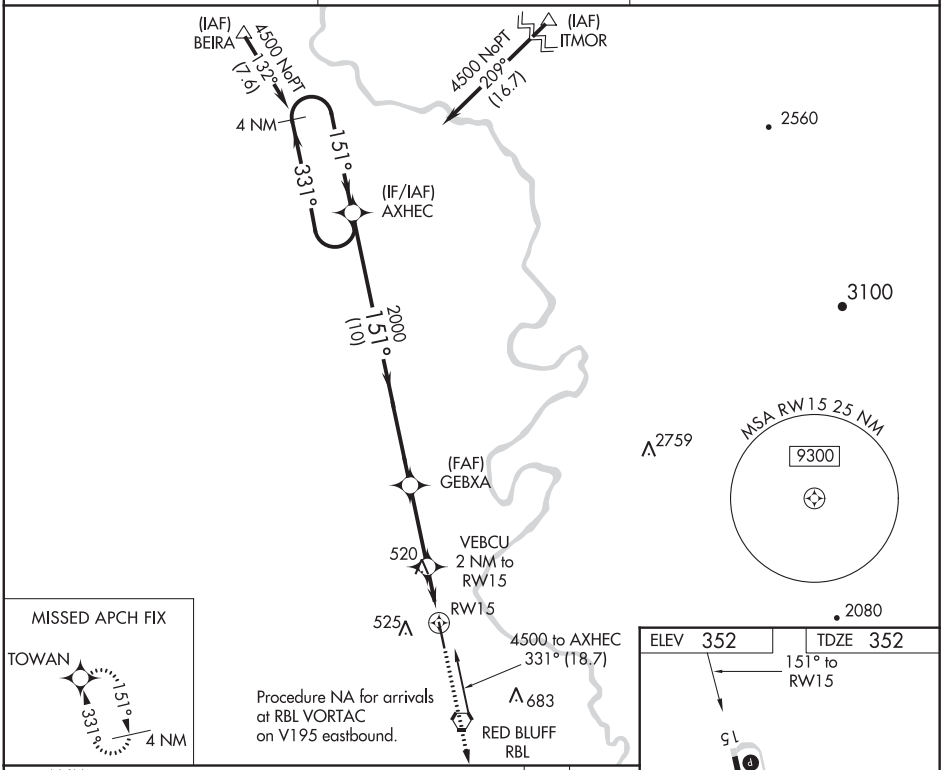

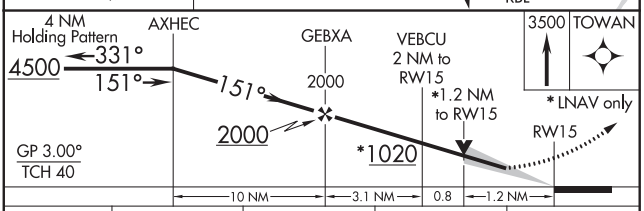

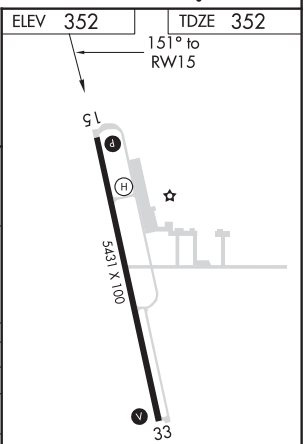

CATEGORY	A	B	C	D
LPV DA	602-⅞ 250 (300-⅞)			
LNAV/VNAV DA	655-1 303 (400-1)			
LNAV MDA	780-1 428 (500-1)		780-1¼ 428 (500-1¼)	
C CIRCLING	860-1 508 (600-1)		900-1½ 548 (600-1½)	1060-2¼ 708 (800-2¼)

MIRL Rwy 15-33 L
REIL Rwys 15 and 33

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 33

RED BLUFF MUNI (RBL)

WAAS	APP CRS	Rwy Idg	5431
CH 42609	331°	TDZE	352
W33A		Apt Elev	352

Baro-VNAV NA when using Redding altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Redding altimeter setting and increase all DA/MDA 80 feet and increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, LNAV Cat C visibility ¼ SM and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 4000 direct PUVGE and track 028° to HOMAN and hold.

ASOS	OAKLAND CENTER	UNICOM
120.775	132.2 350.3	123.0 (CTAF) L

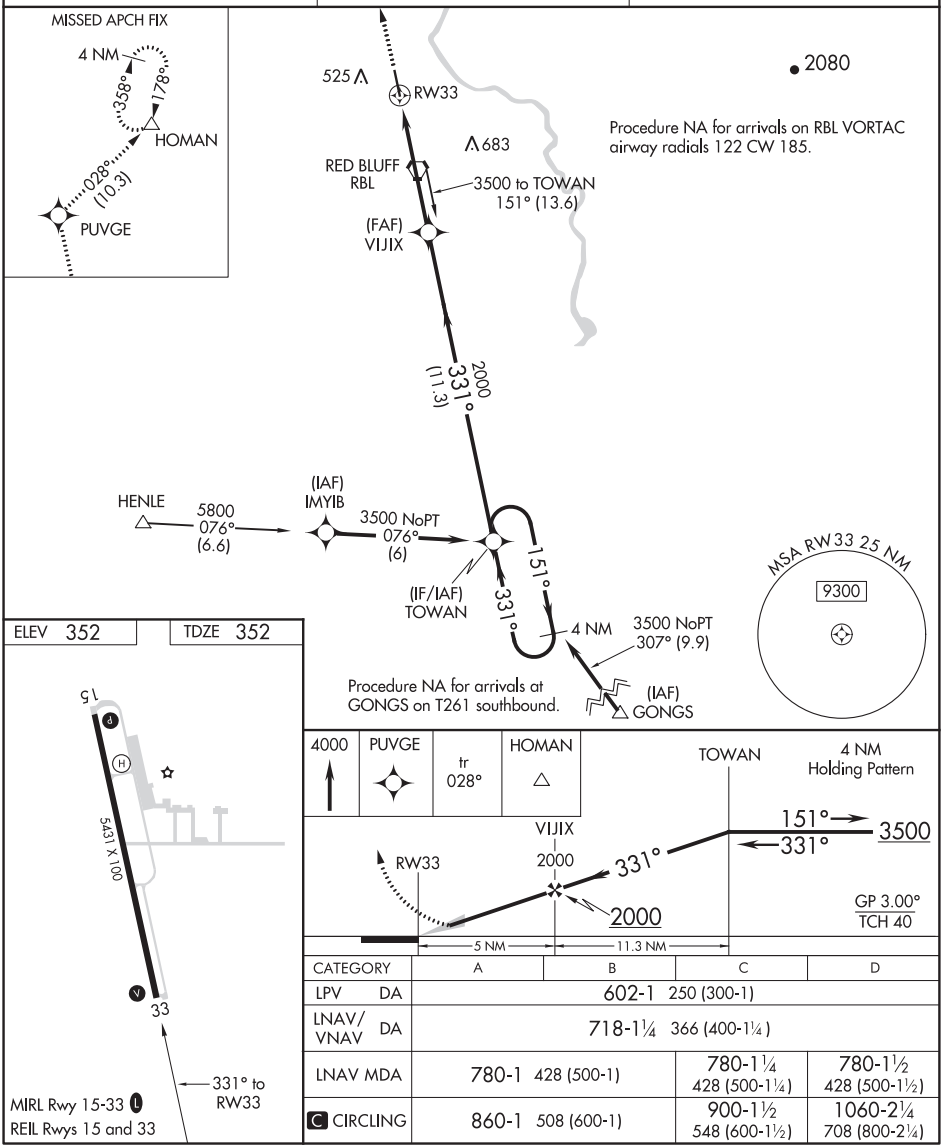

CATEGORY	A	B	C	D
LPV DA	602-1 250 (300-1)			
LNAV/VNAV DA	718-1¼ 366 (400-1¼)			
LNAV MDA	780-1 428 (500-1)		780-1¼ 428 (500-1¼)	780-1½ 428 (500-1½)
C CIRCLING	860-1 508 (600-1)		900-1½ 548 (600-1½)	1060-2¼ 708 (800-2¼)

SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC RBL	APP CRS	Rwy Idg 5431
115.7	149°	TDZE 352
Chan 104		Apt Elev 352

VOR/DME RWY 15

RED BLUFF MUNI (RBL)

Circling to Rwy 33 NA at night. When local altimeter setting not received, use Redding altimeter setting and increase all MDAs 80 feet and all Cat C/D visibilities ¼ mile. VDP NA with Redding altimeter setting.

MISSED APPROACH: Climb to 2000 direct RBL VORTAC and hold.

ASOS	OAKLAND CENTER	UNICOM
120.775	132.2 350.3	123.0 (CTAF) L

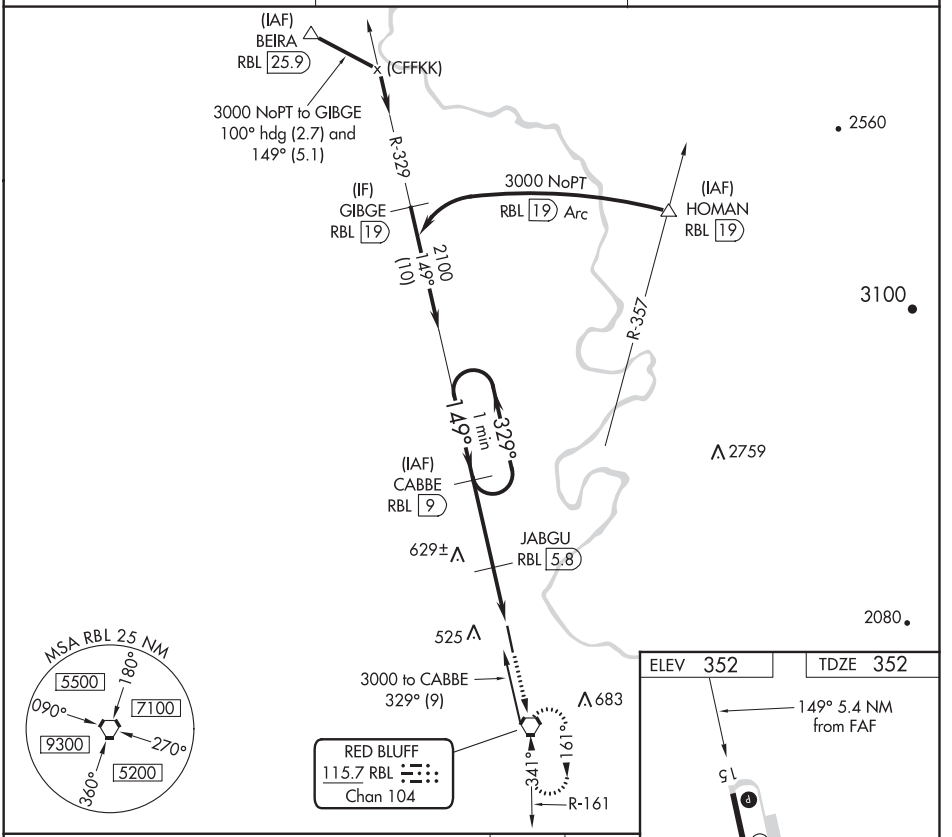

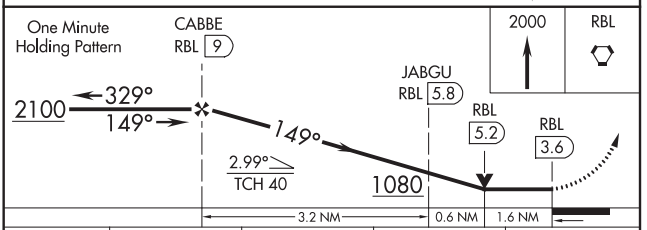

CATEGORY	A	B	C	D
S-15	880-1 528 (600-1)		880-1½ 528 (600-1½)	
CIRCLING	880-1 528 (600-1)		900-1½ 548 (600-1½)	1060-2¼ 708 (800-2¼)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RED BLUFF, CALIFORNIA | AL-344 (FAA) | 18032

VORTAC RBL	APP CRS	Rwy Idg	5431
115.7	328°	TDZE	352
Chan 104		Apt Elev	352

VOR RWY 33

RED BLUFF MUNI (RBL)

Visibility reduction by helicopters NA.
When local altimeter setting not received, use Redding altimeter setting and increase all MDA 80 feet, and increase visibilities S-33 Cat C and D ¼ mile.

MISSED APPROACH: Climb to 1500, then climbing right turn to 2000 direct RBL VORTAC and hold.

ASOS	OAKLAND CENTER	UNICOM
120.775	132.2 350.3	123.0 (CTAF) L

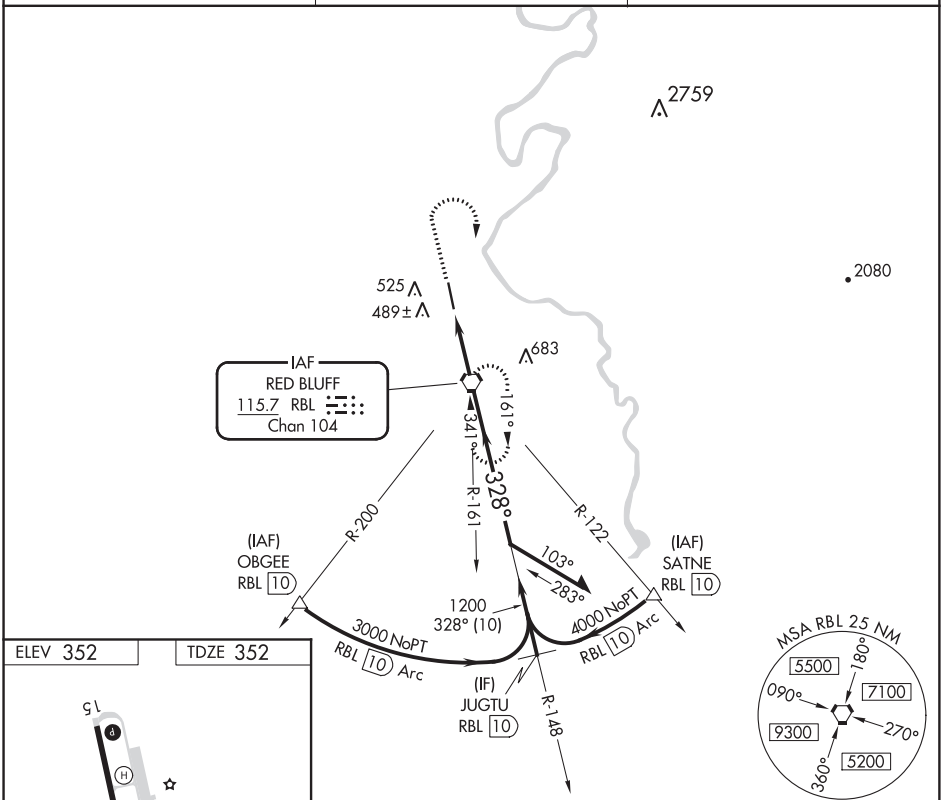

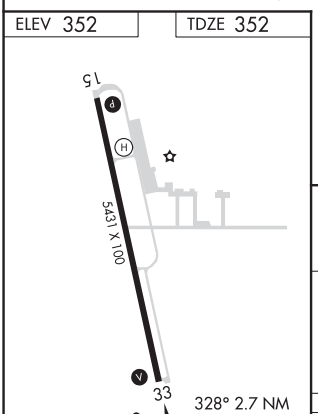

FAF to MAP 2.7 NM					
Knots	60	90	120	150	180
Min:Sec	2:42	1:48	1:21	1:05	0:54

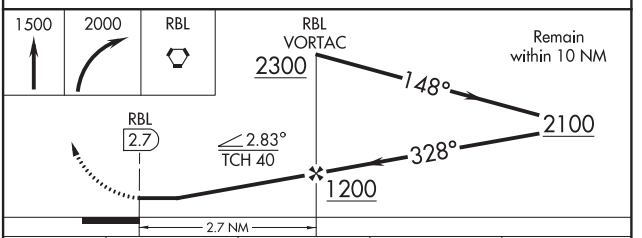

CATEGORY	A	B	C	D
S-33	740-1 388 (400-1)			740-1¼ 388 (400-1¼)
CIRCLING	860-1 508 (600-1)		860-1½ 508 (600-1½)	920-2 568 (600-2)

RED BLUFF, CALIFORNIA
Amdt 8A 06MAR14

40°09'N-122°15'W

RED BLUFF MUNI (RBL)
VOR RWY 33

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-RDD	APP CRS	Rwy Idg	7003
108.7	346°	TDZE	499
Chan 24		Apt Elev	505

ILS or LOC RWY 34

REDDING MUNI (RDD)

DME required for LOC only.

For inop ALS, increase S-ILS 34 Cat E visibility to ¾ SM and S-LOC 34 Cat C/D/E visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 5000 on heading 090° and RDD R-044 to ITMOR INT/RDD 12 DME and hold, continue climb-in-hold to 5000.

ATIS	OAKLAND CENTER	REDDING TOWER ★	GND CON	UNICOM
124.1	132.2 350.3	119.8 (CTAF) L 269.25	121.7	122.95

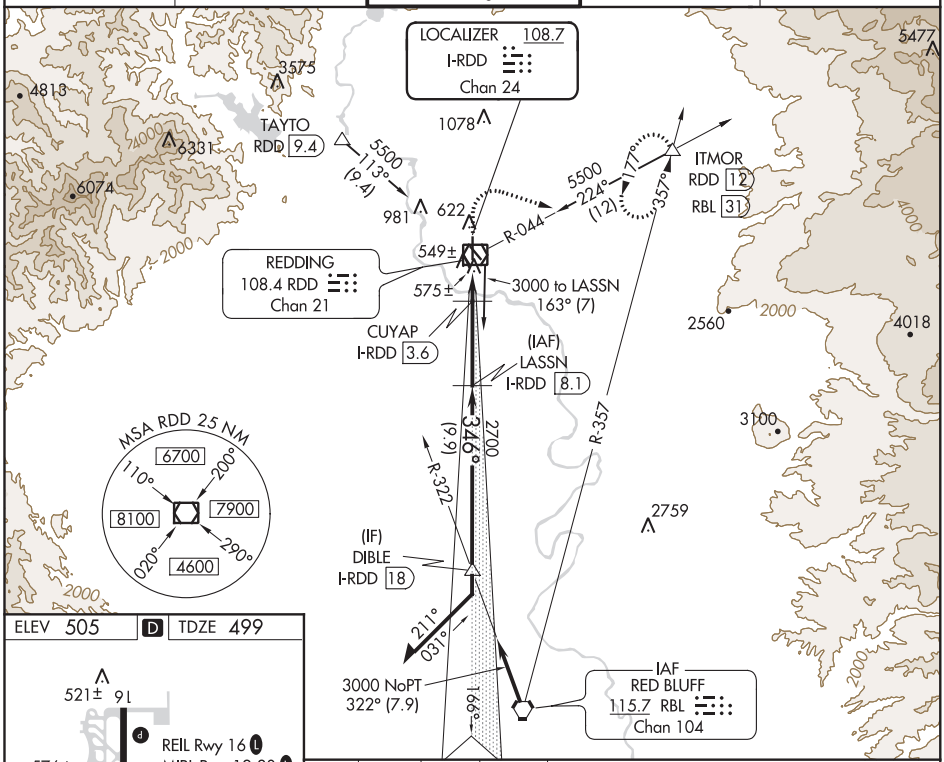

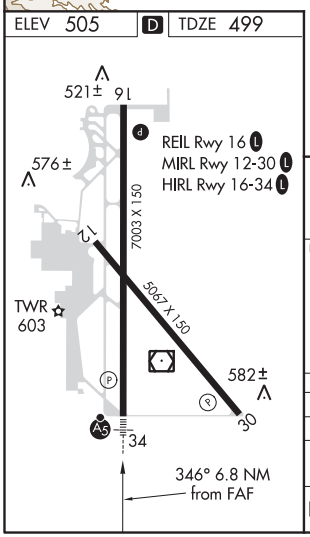

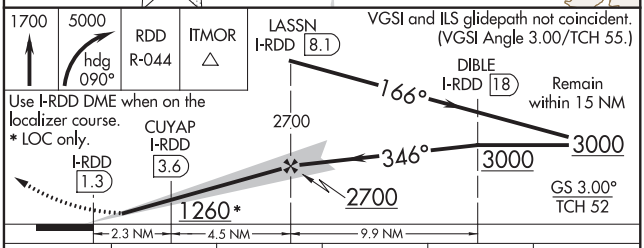

CATEGORY	A	B	C	D	E
S-ILS 34	699-½ 200 (200-½)				
S-LOC 34	840-½ 341 (400-½)		840-⅝ 341 (400-⅝)		
C CIRCLING	940-1 435 (500-1)	1000-1 495 (500-1)	1120-1¾ 615 (700-1¾)	1340-2¾ 835 (900-2¾)	1340-3 835 (900-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

REDDING, CALIFORNIA | AL-688 (FAA) | 20030

RNAV (GPS) RWY 16

REDDING MUNI (RDD)

WAAS CH 86443 W16A	APP CRS 166°	Rwy Idg 7003 TDZE 505 Apt Elev 505

RNP APCH.

Rwy 16 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 53°C.

MISSED APPROACH: Climb to 3000 direct UKDOW and hold.

ATIS	OAKLAND CENTER	REDDING TOWER *	GND CON	UNICOM
124.1	132.2 350.3	119.8 (CTAF) L 269.25	121.7	122.95

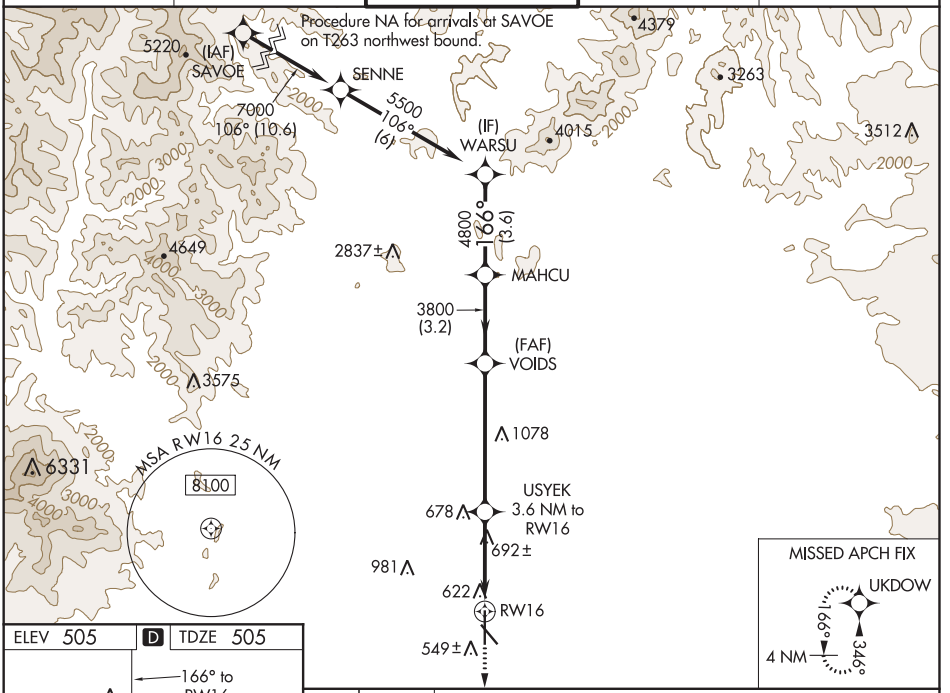

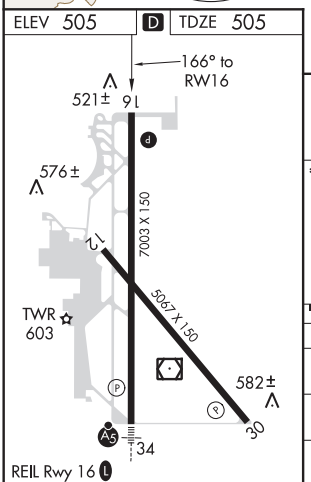

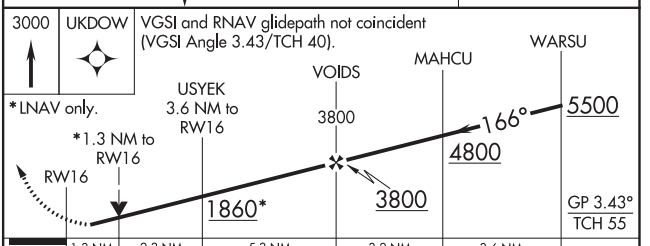

CATEGORY	A	B	C	D
LPV DA	755-¾ 250 (300-¾)		775-⅞ 270 (300-⅞)	
LNAV/VNAV DA	892-1⅛ 387 (400-1⅛)			
LNAV MDA	960-1 455 (500-1)		960-1⅜ 455 (500-1⅜)	
C CIRCLING	960-1 455 (500-1)	1000-1 495 (500-1)	1120-1¾ 615 (700-1¾)	1340-2¾ 835 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS CH 56402 W34A	APP CRS 346°	Rwy Idg 7003 TDZE 499 Apt Elev 505

RNAV (GPS) RWY 34
REDDING MUNI (RDD)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C, D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 5000 direct ITMOR, continue climb-in-hold to 5000.

ATIS	OAKLAND CENTER	REDDING TOWER ★	GND CON	UNICOM
124.1	132.2 350.3	119.8 (CTAF) L 269.25	121.7	122.95

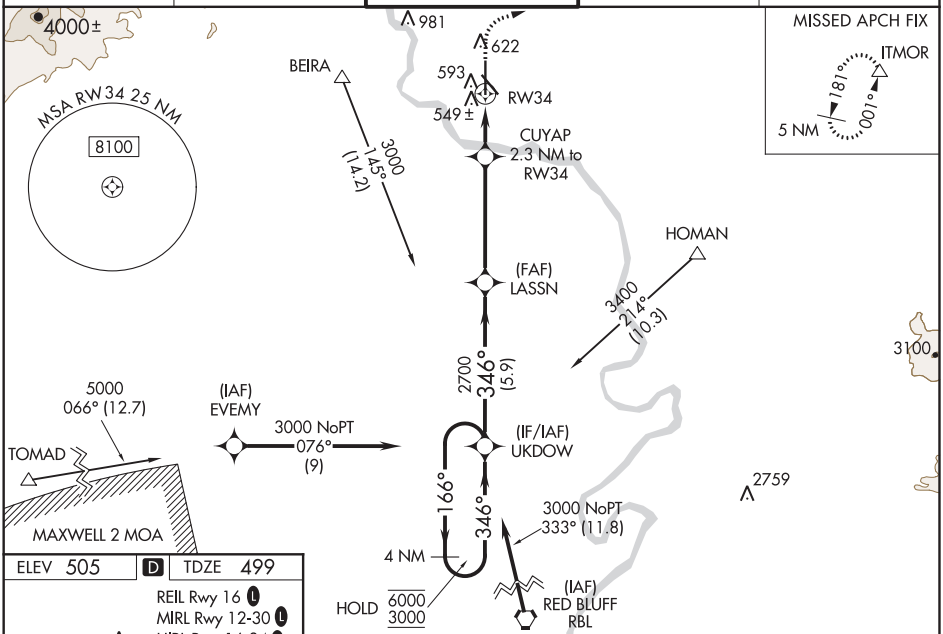

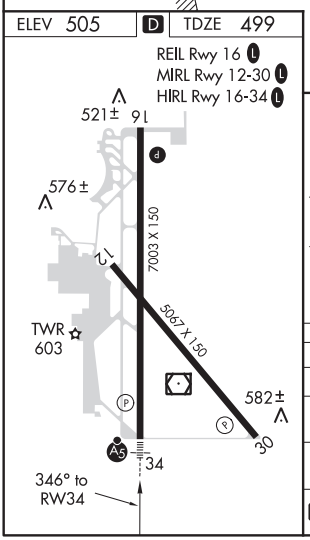

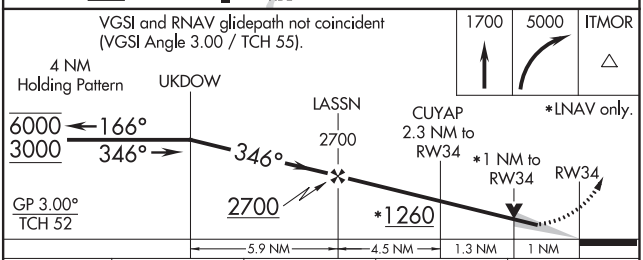

CATEGORY	A	B	C	D
LPV DA	699-½ 200 (200-½)			
LNAV/VNAV DA	754-½ 255 (300-½)			
LNAV MDA	860-½ 361 (400-½)		860-⅝ 361 (400-⅝)	
C CIRCLING	940-1 435 (500-1)	1000-1 495 (500-1)	1120-1¾ 615 (700-1¾)	1340-2¾ 835 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

REDDING, CALIFORNIA | AL-688 (FAA) | 20030

LOC/DME I-RDD	APP CRS	Rwy Idg 7003
108.7	166°	TDZE 505
Chan 24		Apt Elev 505

LOC BC RWY 16

REDDING MUNI (RDD)

DME required.

Rwy 16 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 then climbing left turn to 5000 on heading 015° and RDD VOR/DME R-044 to ITMOR INT/RDD 12 DME and hold, continue climb-in-hold to 5000.

ATIS	OAKLAND CENTER	REDDING TOWER ★	GND CON	UNICOM
124.1	132.2 350.3	119.8 (CTAF) L 269.25	121.7	122.95

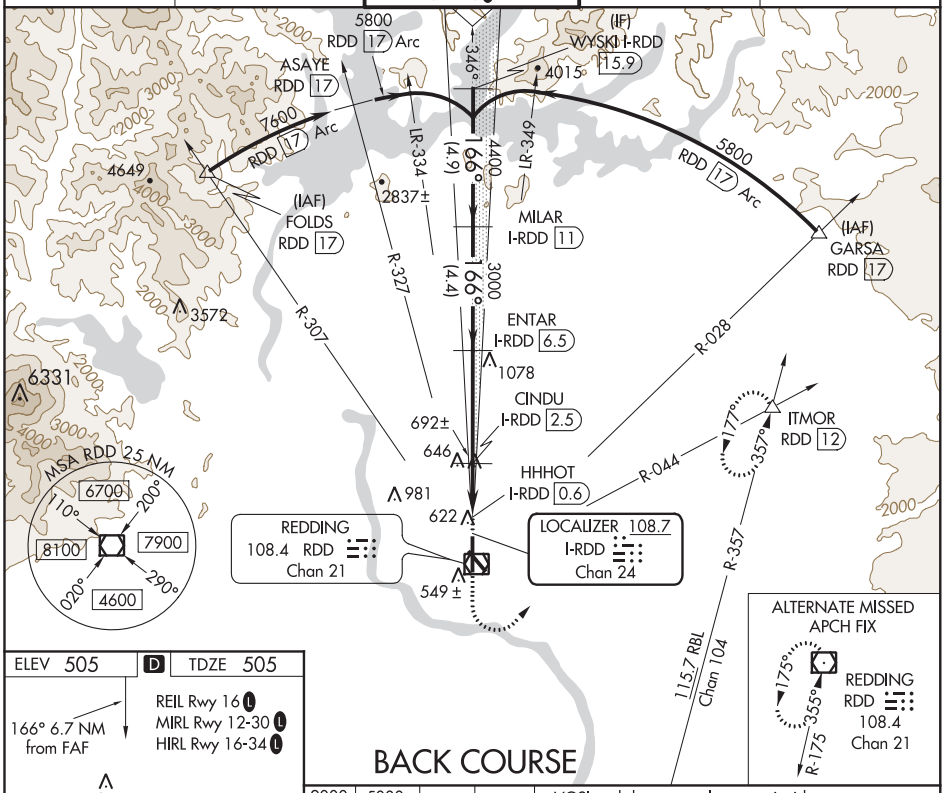

ELEV 505 | D | TDZE 505

166° 6.7 NM from FAF

REIL Rwy 16 L
MIRL Rwy 12-30 L
HIRL Rwy 16-34 L

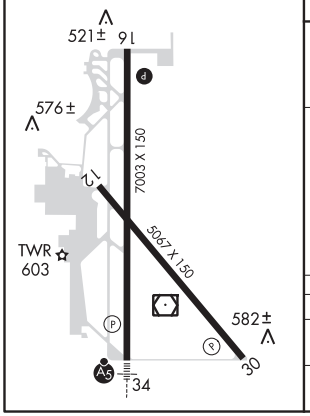

BACK COURSE

2000	5000	RDD R-044	ITMOR
	hdg 015°		

VGSI and descent angles not coincident (VGSI Angle 3.43/TCH 40).

Disregard glideslope indications.

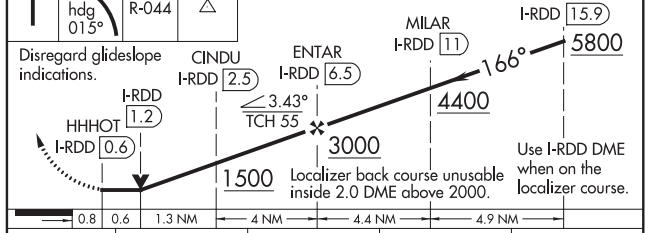

CATEGORY	A	B	C	D
S-16	960-1 455 (500-1)		960-1⅜ 455 (500-1⅜)	
C CIRCLING	960-1 455 (500-1)	1000-1 495 (500-1)	1120-1¾ 615 (700-1¾)	1340-2¾ 835 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME RDD	APP CRS	Rwy Idg	7003
108.4	355°	TDZE	499
Chan 21		Apt Elev	505

VOR RWY 34
REDDING MUNI (RDD)

T A Inop table does not apply to S-34 Cats C/D. MACHL fix minimums: for inop ALS, increase S-34 Cat C/D visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 2100 then climbing right turn to 5300 on heading 090° and on RDD VOR/DME R-044 to ITMOR INT and hold, continue climb-in-hold to 5300.

ATIS	OAKLAND CENTER	REDDING TOWER ★	GND CON	UNICOM
124.1	132.2 350.3	119.8 (CTAF) L 269.25	121.7	122.95

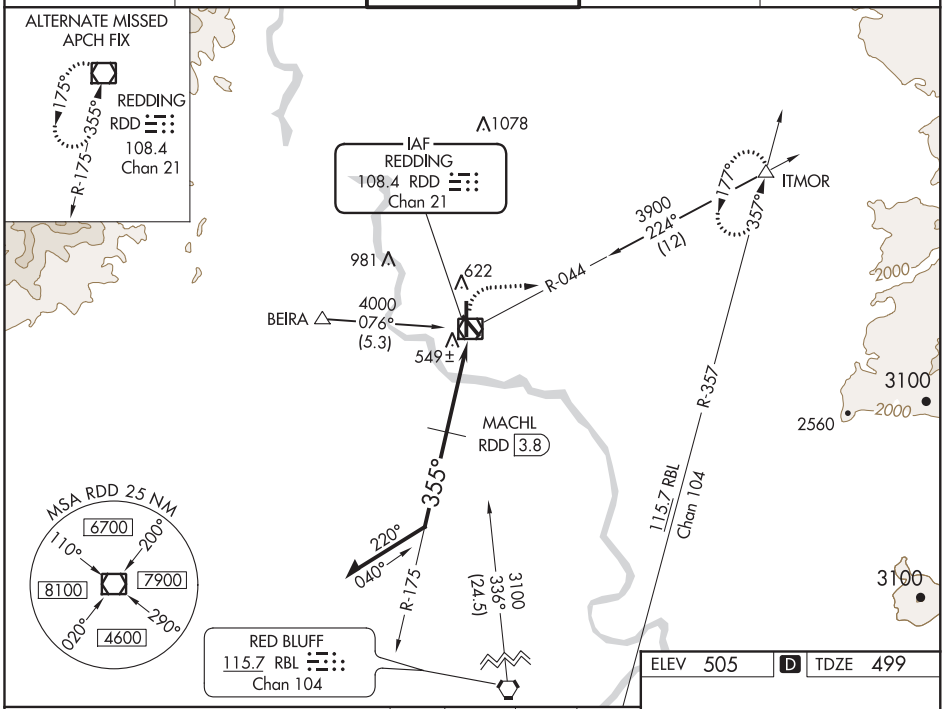

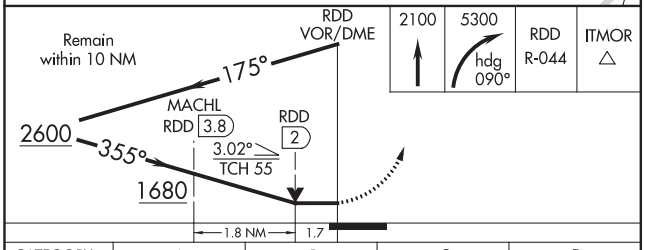

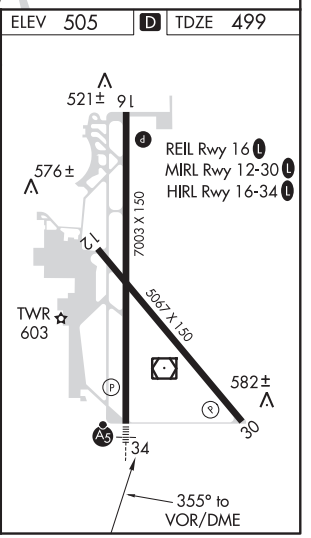

CATEGORY	A	B	C	D
S-34	1680-¾ 1181 (1200-¾)	1680-1 1181 (1200-1)	1680-3	1181 (1200-3)
C CIRCLING	1680-1¼ 1175 (1200-1¼)	1680-1½ 1175 (1200-1½)	1680-3	1175 (1200-3)
MACHL FIX MINIMUMS				
S-34	1100-½ 601 (600-½)		1100-1⅜ 601 (600-1⅜)	
C CIRCLING	1100-1 595 (600-1)		1120-1¾ 615 (700-1¾)	1340-2¾ 835 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

18032

AIRPORT DIAGRAM

REDDING MUNI (RDD)
REDDING, CALIFORNIA

AL-688 (FAA)

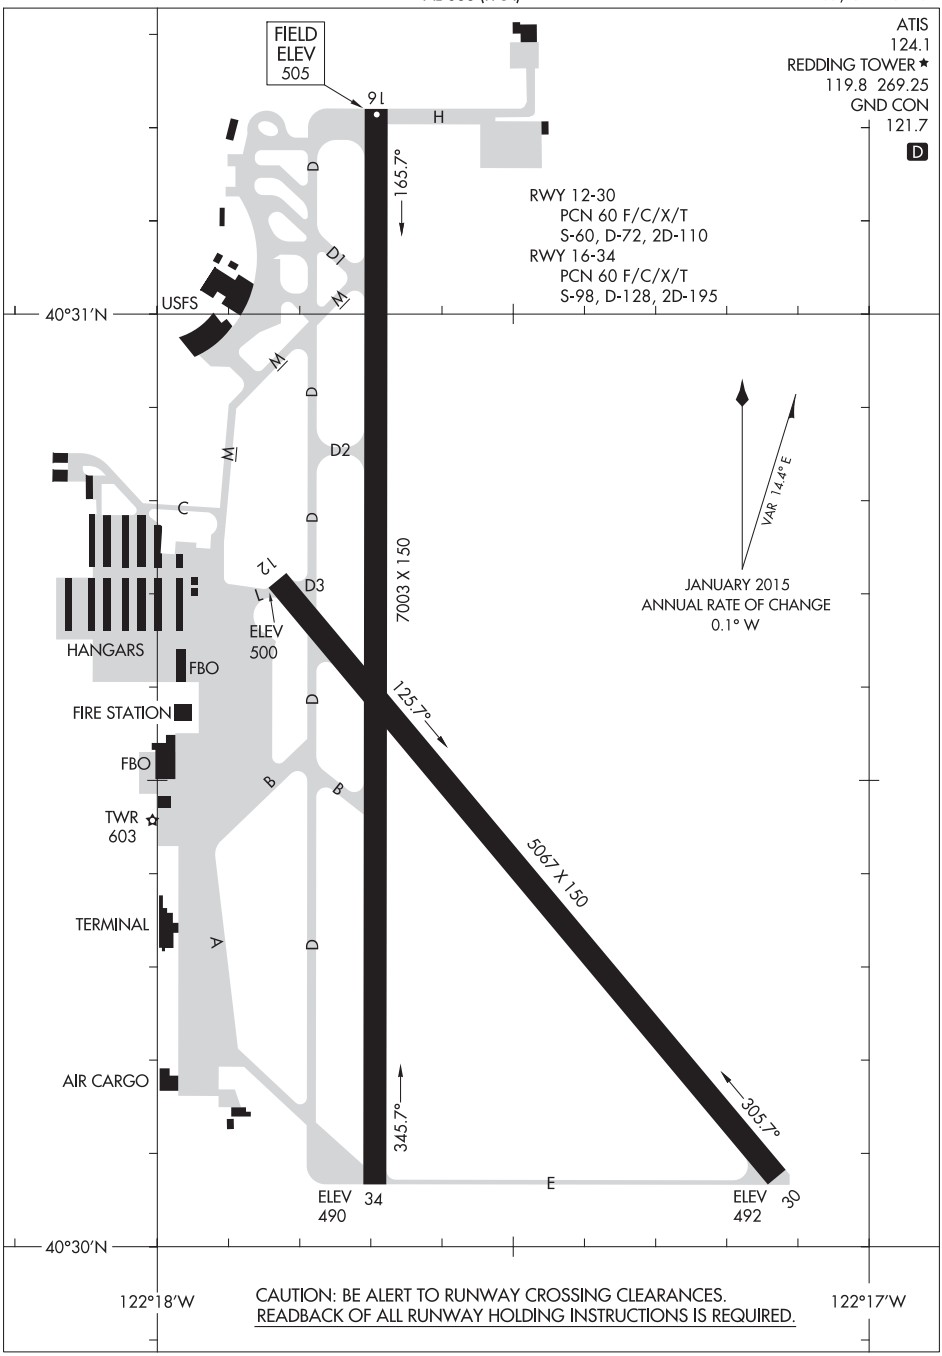

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
18032
REDDING, CALIFORNIA
REDDING MUNI (RDD)

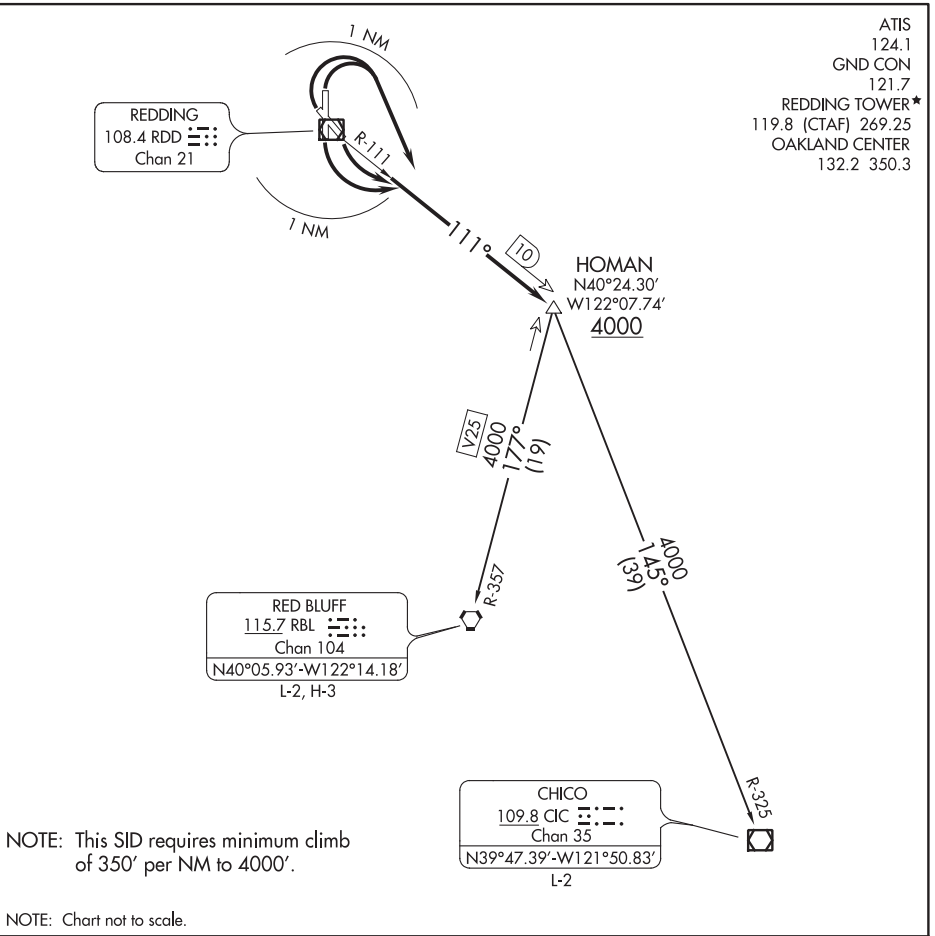

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 12, 16: Turn left within 1 NM, thence. . . .
TAKEOFF RUNWAYS 30, 34: Turn right within 1 NM, thence. . . .

. . . .Intercept the RDD R-111, direct HOMAN INT, cross HOMAN INT at or above 4000'; then via (transition) or (assigned route). Expect clearance to filed altitude 10 minutes after departure.

CHICO TRANSITION (HOMAN2.CIC): From over HOMAN INT on CIC R-325 to CIC VOR/DME.
RED BLUFF TRANSITION (HOMAN2.RBL): From over HOMAN INT on RBL R-357 to RBL VORTAC.

(KENDL4.KENDL) 20030

KENDL FOUR DEPARTURE

AL-688 (FAA)

REDDING MUNI (RDD)
REDDING, CALIFORNIA

ATIS
124.1
REDDING TOWER*
119.8 269.25
OAKLAND CENTER
132.2 350.3

TOP ALTITUDE: ASSIGNED BY ATC

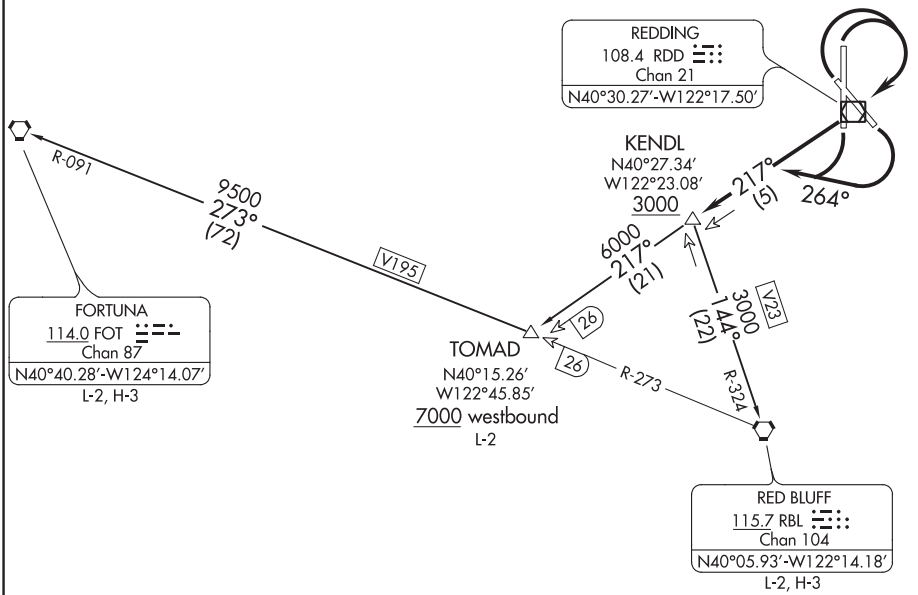

TAKEOFF MINIMUMS
Rwys 12: Standard with minimum climb of 410' per NM to 3000.
Rwy 16: Standard with minimum climb of 495' per NM to 3000.
Rwy 30: Standard with minimum climb of 440' per NM to 3000.
Rwy 34: Standard with minimum climb of 410' per NM to 3000.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 12 and 16: Climbing right turn heading 264° to intercept RDD VOR/DME R-217 to KENDL, cross KENDL at or above 3000, thence . . .
TAKEOFF RUNWAYS 30 and 34: Climbing right turn direct RDD VOR/DME then on RDD VOR/DME R-217 to KENDL, cross KENDL at or above 3000, thence . . .

. . . . via (transition) or (assigned route) maintain ATC assigned altitude.

FORTUNA TRANSITION (KENDL4.FOT): From over KENDL on RDD R-217 to TOMAD, thence on RBL R-273 and FOT R-091 to FOT VORTAC.
RED BLUFF TRANSITION (KENDL4.RBL): From over KENDL on RBL R-324 to RBL VORTAC.
TOMAD TRANSITION (KENDL4.TOMAD): From over KENDL on RDD R-217 to TOMAD.

SW-2, 30 JAN 2020 to 26 MAR 2020

KREST THREE DEPARTURE

AL-688 (FAA)

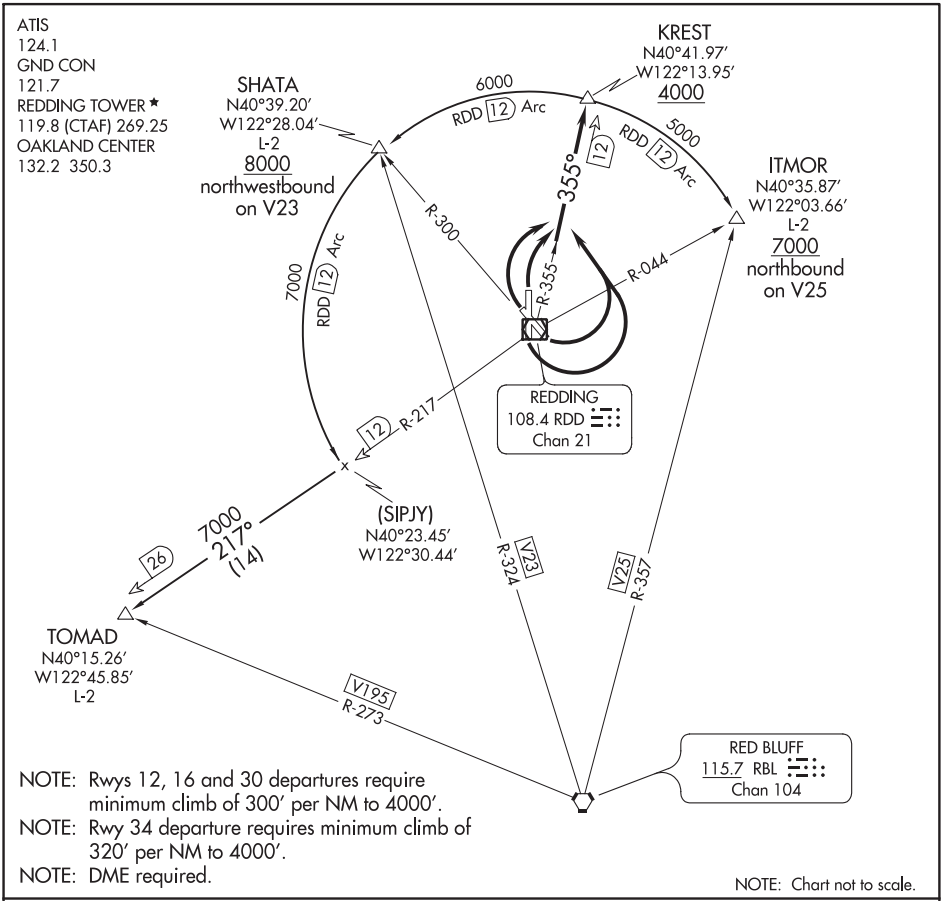

NOTE: Rwys 12, 16 and 30 departures require minimum climb of 300' per NM to 4000'.
NOTE: Rwy 34 departure requires minimum climb of 320' per NM to 4000'.
NOTE: DME required.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 12 and 16: Turn left immediately after departure to intercept and proceed on the RDD R-355 to KREST DME Fix. Cross KREST DME Fix at or above 4000, thence on (transition) or (assigned route).
TAKEOFF RUNWAYS 30 and 34: Turn right immediately after departure to intercept and proceed on RDD R-355 to KREST DME Fix. Cross KREST DME Fix at or above 4000, thence on (transition) or (assigned route).

ITMOR TRANSITION (KREST3.ITMOR): From over KREST DME Fix on RDD 12 DME Arc clockwise to ITMOR INT.
SHATA TRANSITION (KREST3.SHATA): From over KREST DME Fix on RDD 12 DME Arc counterclockwise to SHATA INT.
TOMAD TRANSITION (KREST3.TOMAD): From over KREST DME Fix on RDD 12 DME Arc counterclockwise to RDD R-217, thence on RDD R-217 to TOMAD INT.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(SHA4.RDD) 20030

SHASTA FOUR DEPARTURE

AL-688 (FAA)

REDDING MUNI (RDD)
REDDING, CALIFORNIA

ATIS
124.1
GND CON
121.7
REDDING TOWER ★
119.8 (CTAF) 269.25
OAKLAND CENTER
132.2 350.3

TOP ALTITUDE: ASSIGNED BY ATC

KLAMATH FALLS
115.9 LMT
Chan 106
N42°09.19'-W121°43.65'
L-2, H-3

FORT JONES
109.6 FJS
Chan 33
N41°26.98'-W122°48.39'
L-2

346°
306°
126°
166°

REDDING
108.4 RDD
Chan 21
N40°30.27'-W122°17.50'
L-2, H-3

TAKEOFF MINIMUMS

Rwy 12: Standard with a minimum climb of 375' per NM to 13900.
Rwy 16: Standard with a minimum climb of 370' per NM to 13900.
Rwy 30: Standard with a minimum climb of 460' per NM to 8400.
Rwy 34: Standard with a minimum climb of 452' per NM to 8200.

RED BLUFF
115.7 RBL
Chan 104
N40°05.93'-W122°14.18'
L-2, H-3

341°
161°
R-161

MUSTANG
117.9 FMG
Chan 126
N39°31.88'-W119°39.36'
L-9, H-3

WILLIAMS
114.4 ILA
Chan 91
N39°04.27'-W122°01.63'
L-2-3, H-3

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 12: Climb heading 126° (or ATC assigned 344° CW 234°), thence . . . .
TAKEOFF RUNWAY 16: Climb heading 166° (or ATC assigned 354° CW 234°), thence . . . .
TAKEOFF RUNWAY 30: Climb heading 306° (or ATC assigned 134° CW 004°), thence . . . .
TAKEOFF RUNWAY 34: Climb heading 346° (or ATC assigned 174° CW 004°), thence . . . .

. . . . expect vectors to join assigned route. Maintain ATC assigned altitude; expect filed altitude/flight level ten minutes after departing.

LOST COMMUNICATIONS: If no contact with Oakland Center after reaching 4000 proceed to RBL VORTAC and hold.

NOTE: RADAR required.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	3300
CH 77841	155°	TDZE	386
W16A		Apt Elev	386

RNAV (GPS) RWY 16

REEDLEY MUNI (O32)

T NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 16-34. Baro-VNAV and VDP NA when using Fresno Yosemite Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fresno Yosemite Intl altimeter setting: increase all DAs 41 feet and all visibilities ⅛ SM; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 3100 direct DEICE and hold, continue climb-in-hold to 3100.

AWOS-3PT	FRESNO APP CON	UNICOM
120.175	132.35 323.25	122.7 (CTAF) L

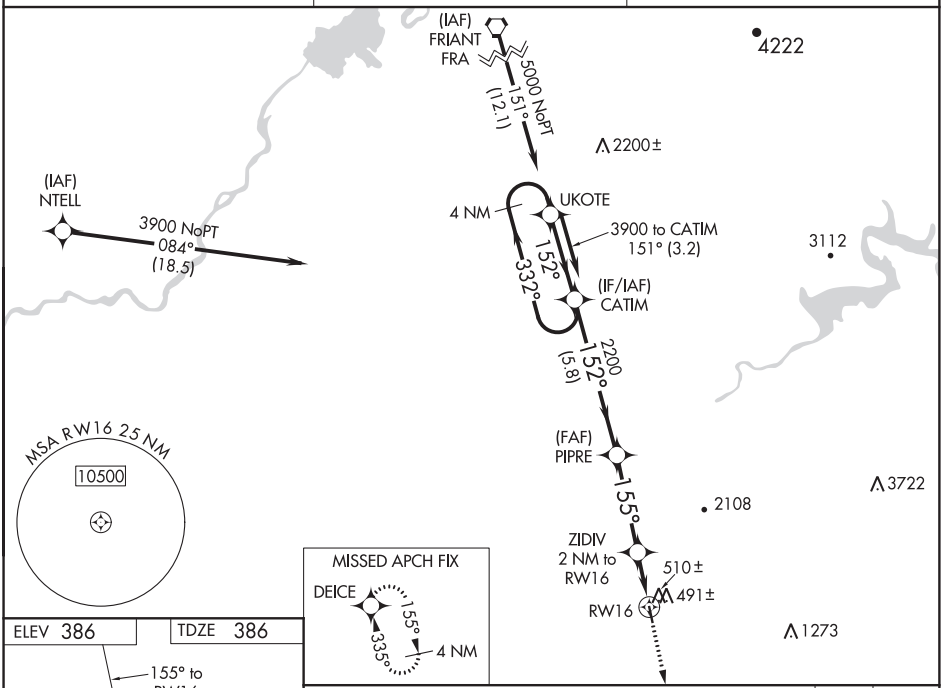

CATEGORY	A	B	C	D
LPV DA	636-¾	250 (300-¾)		NA
LNAV/VNAV DA	672-⅞	286 (300-⅞)		NA
LNAV MDA	760-1	374 (400-1)		NA
C CIRCLING	800-1 414 (500-1)	840-1 454 (500-1)		NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 34

REEDLEY MUNI (O32)

WAAS	APP CRS	Rwy Idg	3300
CH 99641	335°	TDZE	386
W34A		Apt Elev	386

T NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 16-34. Baro-VNAV and VDP NA when using Fresno Yosemite Intl altimeter setting. Rwy 34 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fresno Yosemite Intl altimeter setting: increase all DAs 41 feet and all visibilities ⅛ SM; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 860 then climbing left turn to 3100 direct DEICE and hold, continue climb-in-hold to 3100.

AWOS-3PT	FRESNO APP CON	UNICOM
120.175	132.35 323.25	122.7 (CTAF) L

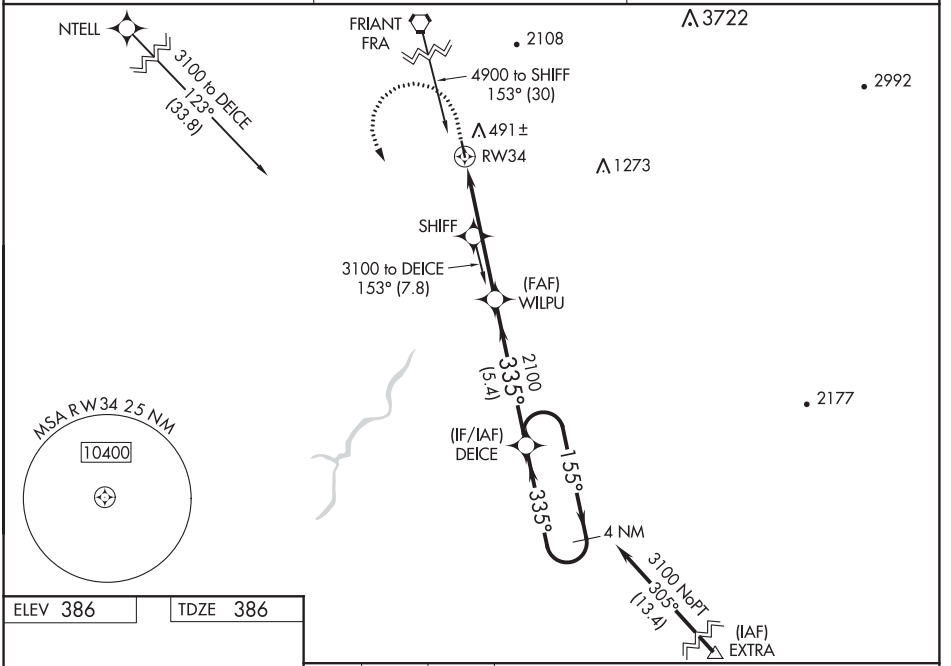

ELEV 386	TDZE 386

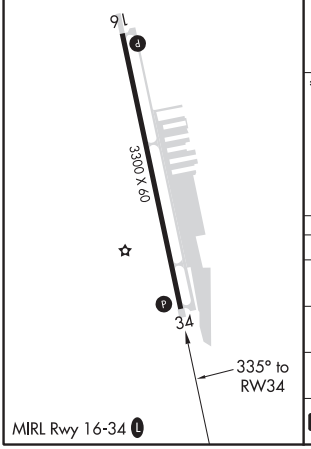

MIRL Rwy 16-34 L

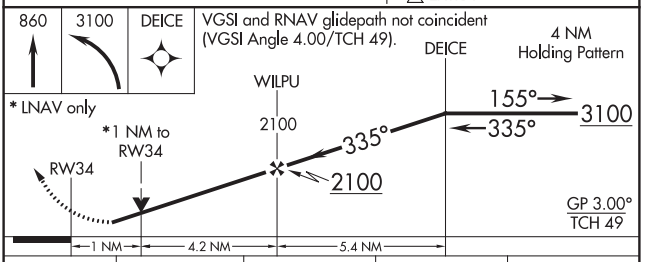

CATEGORY	A	B	C	D
LPV DA	636-¾	250 (300-¾)	NA	
LNAV/VNAV DA	740-1	354 (400-1)	NA	
LNAV MDA	860-1	474 (500-1)	NA	
C CIRCLING	860-1	474 (500-1)	NA	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	4199
CH 82325	252°	TDZE	23
W25A		Apt Elev	23

RNAV (GPS) RWY 25
RIO VISTA MUNI (O88)

Circling Rwy 33 NA at night. DME/DME RNP-0.3 NA. VDP NA when using Concord altimeter setting. When local altimeter setting not received, use Concord altimeter setting and increase all MDA 60 feet and increase LP and LNAV Cat C visibility ⅛ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 500 then climbing right turn to 3100 direct JIRAG and hold, continue climb-in-hold to 3100.

AWOS-AV	TRAVIS APP CON	UNICOM
127.075	119.9 322.325	122.725 (CTAF) L

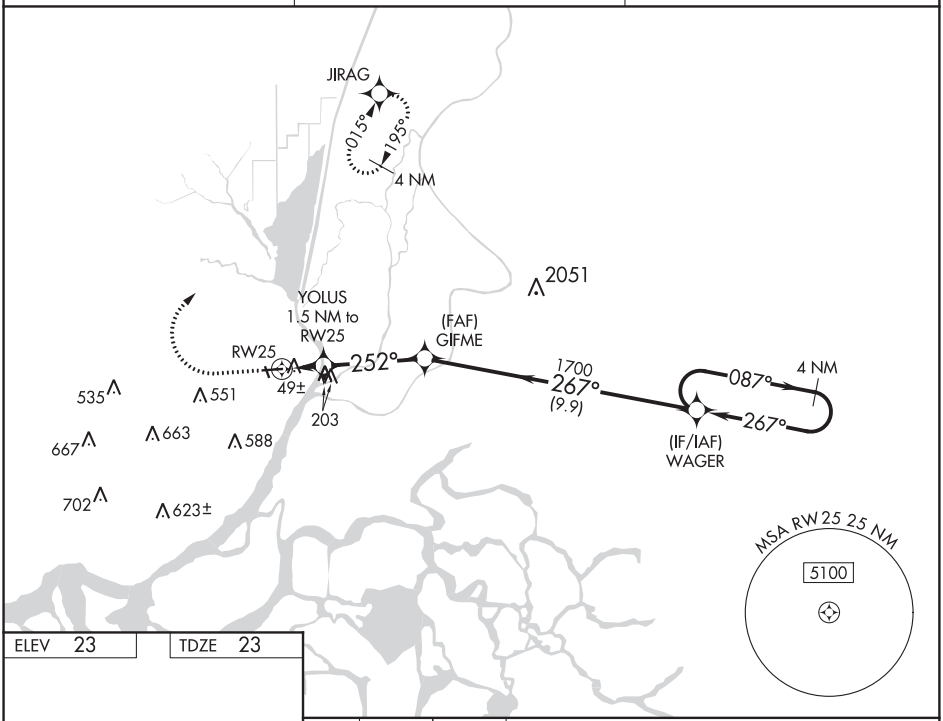

ELEV 23	TDZE 23



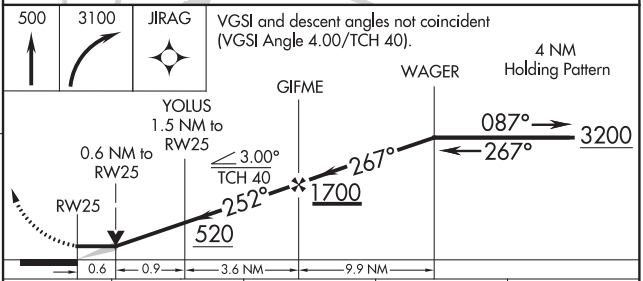

CATEGORY	A	B	C	D
LP MDA	300-1 277 (300-1)		300-⅞ 277 (300-⅞)	NA
LNAV MDA	460-1 437 (500-1)		460-1¼ 437 (500-1¼)	NA
CIRCLING	520-1 497 (500-1)	560-1 537 (600-1)	580-1½ 557 (600-1½)	NA

REIL Rwy 25 L
MIRL Rwys 7-25 and 15-33 L

SW-2, 30 JAN 2020 to 26 MAR 2020

RIO VISTA, CALIFORNIA

AL-5597 (FAA)

17173

VOR/DME-A

RIO VISTA MUNI (088)

VORTAC SAC	APP CRS	Rwy Idg	N/A
115.2	189°	TDZE	N/A
Chan 99		Apt Elev	23

T NA — When local altimeter setting not received, use Concord altimeter setting and increase all MDA 60 feet, increase Cat C visibility ¼ mile. Night Landing Rwy 33 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climbing left turn to 3000 on SAC VORTAC R-178 to SAC VORTAC and hold.

AWOS-AV	TRAVIS APP CON	UNICOM
127.075	119.9 322.325	122.725 (CTAF) L

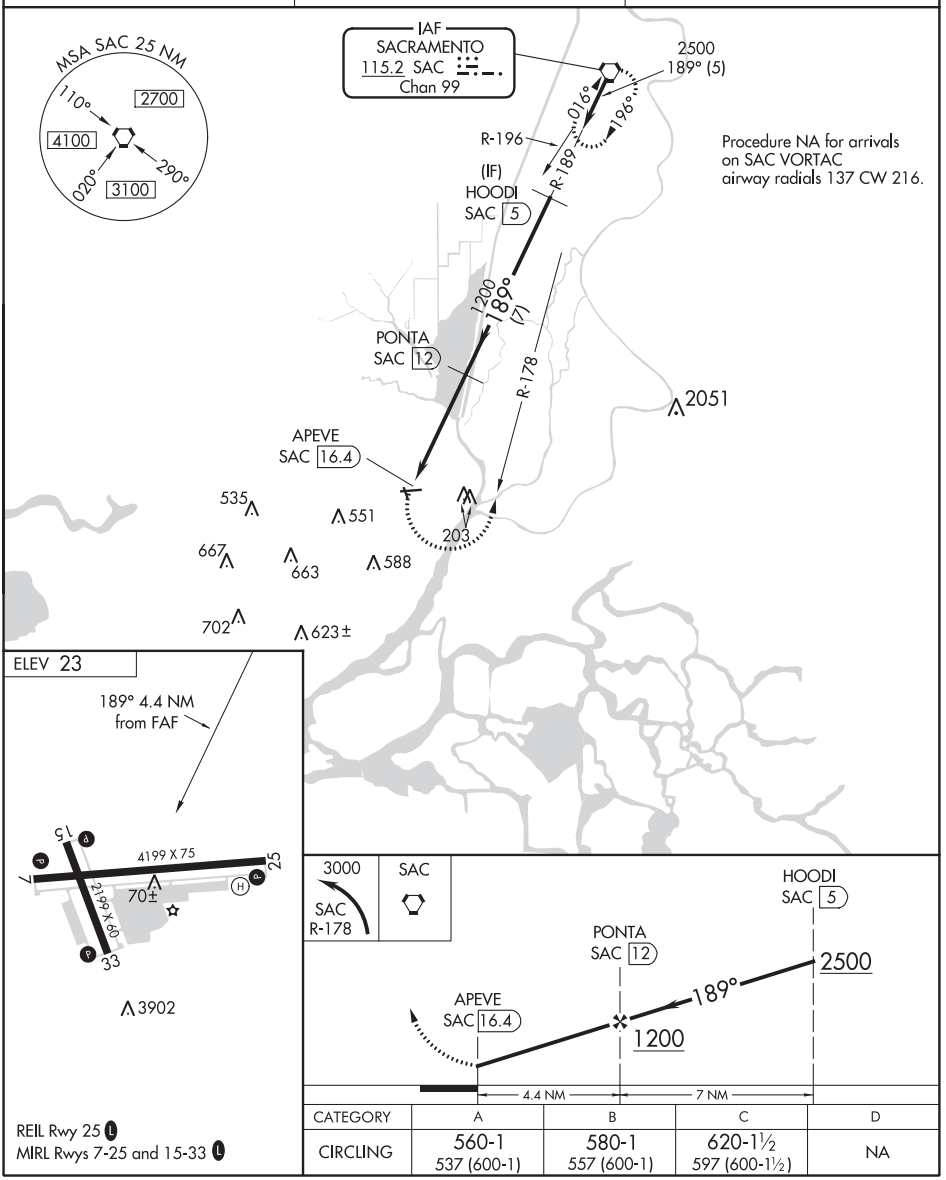

CATEGORY	A	B	C	D
CIRCLING	560-1 537 (600-1)	580-1 557 (600-1)	620-1½ 597 (600-1½)	NA

REIL Rwy 25 L

MIRL Rwys 7-25 and 15-33 L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC I-MCC	APP CRS	Rwy Idg	10599
109.7	163°	TDZE	77
		Apt Elev	77

ILS or LOC RWY 16

MC CLELLAN AIRFIELD (MCC)

NA DME from MCC VOR/DME. If local altimeter setting is not received, use Sacramento Intl altimeter setting and increase all DH/MDAs 40 feet.

SSALR

MISSED APPROACH: Climb to 1200 then climbing right turn to 2200 via MCC VOR/DME R-344 to BONDZ/MCC 8 DME/RADAR and hold.

AWOS-3	NORCAL APP CON	CLNC DEL	UNICOM
125.975	127.4 317.5	119.825	122.975 (CTAF) L

DME or RADAR REQUIRED

1869±

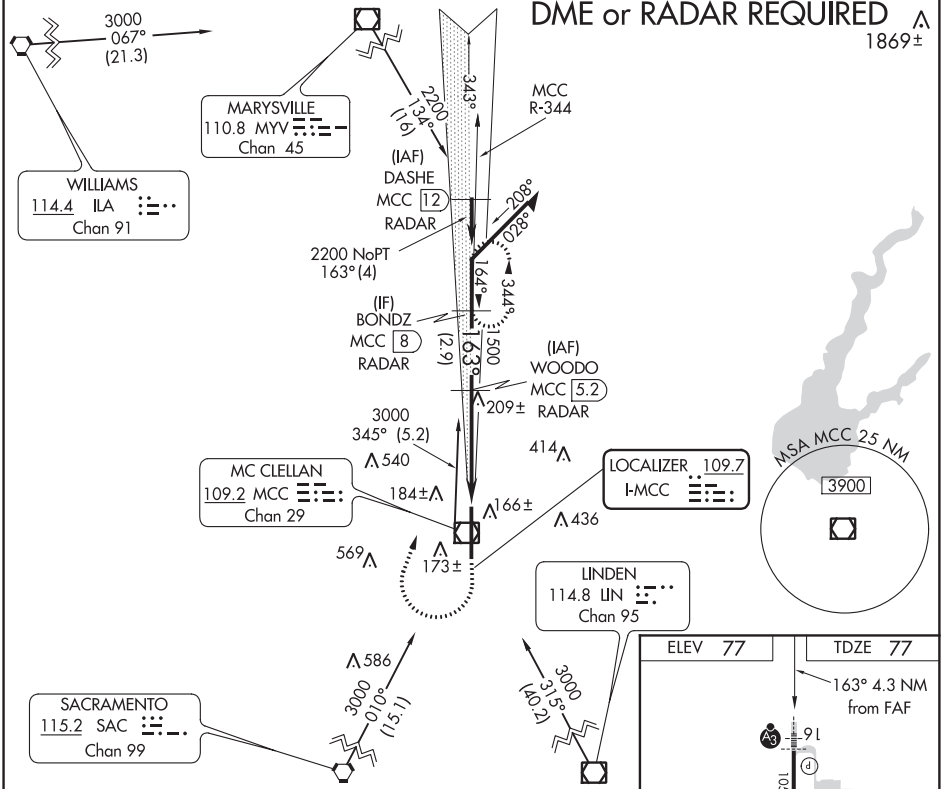

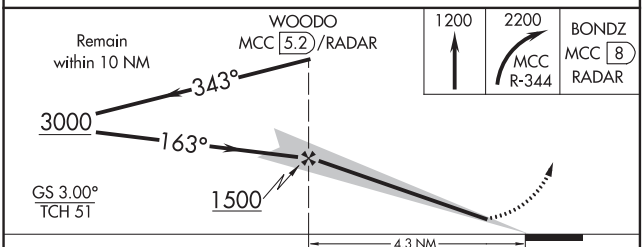

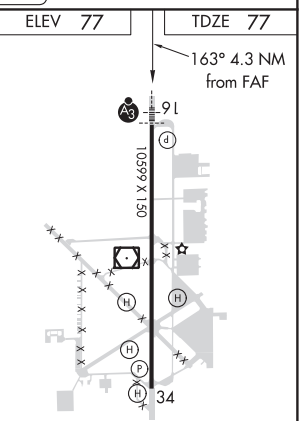

HIRL Rwy 16-34 L

CATEGORY	A	B	C	D
S-ILS 16	277-½ 200 (200-½)			
S-LOC 16	460-½ 383 (400-½)			460-¾ 383 (400-¾)
CIRCLING	NA			

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VOR/DME MCC	APP CRS	Rwy Idg	10599
109.2	333°	TDZE	72
Chan 29		Apt Elev	77

VOR/DME RWY 34

MC CLELLAN AIRFIELD (MCC)

NA VDP NA when using Sacramento Intl altimeter setting. When local altimeter setting not received, use Sacramento Intl altimeter setting and increase all MDAs 40 feet.

MISSED APPROACH: Climbing right turn to 2200 via MCC R-344 to BONDZ/MCC 8 DME/RADAR and hold.

AWOS-3	NORCAL APP CON	CLNC DEL	UNICOM
125.975	127.4 317.5	119.825	122.975 (CTAF) L

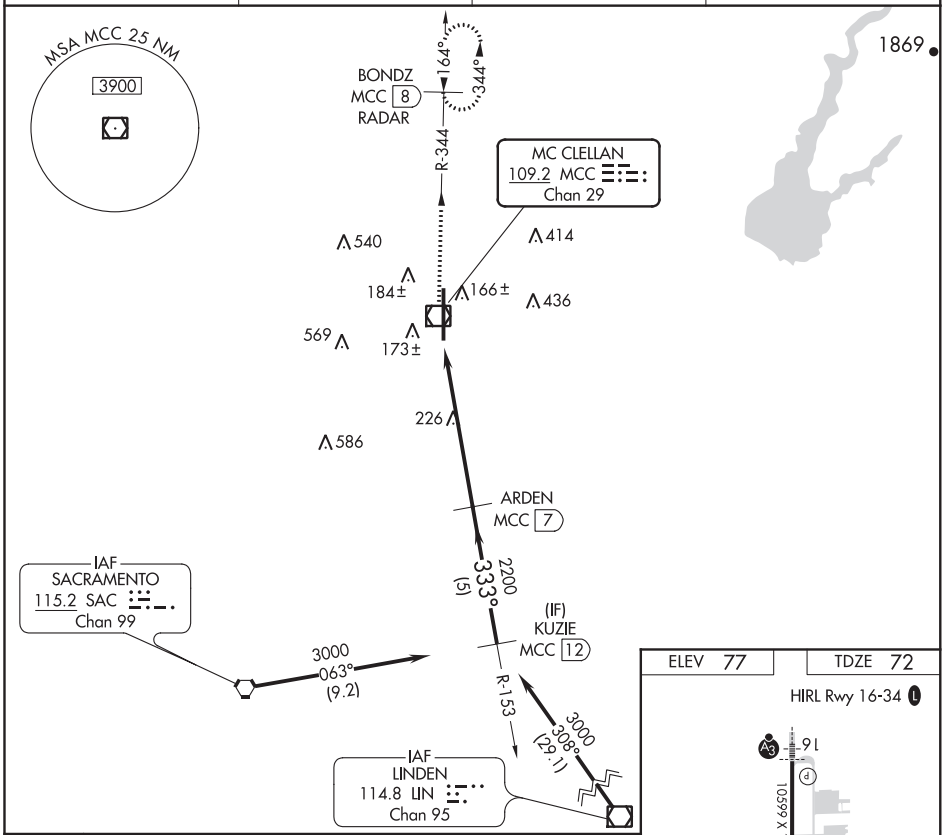

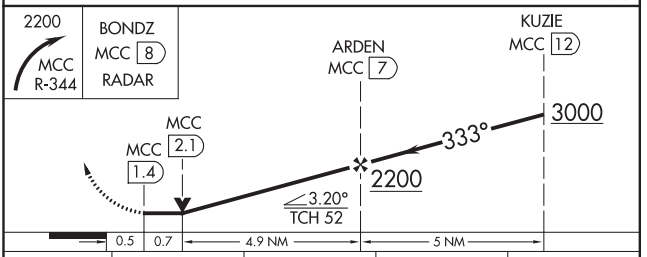

CATEGORY	A	B	C	D
S-34	500-1 428 (500-1)		500-1¼ 428 (500-1¼)	500-1½ 428 (500-1½)
CIRCLING	NA			

ELEV 77 TDZE 72

HIRL Rwy 16-34 L

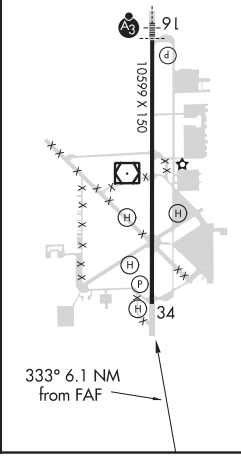

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

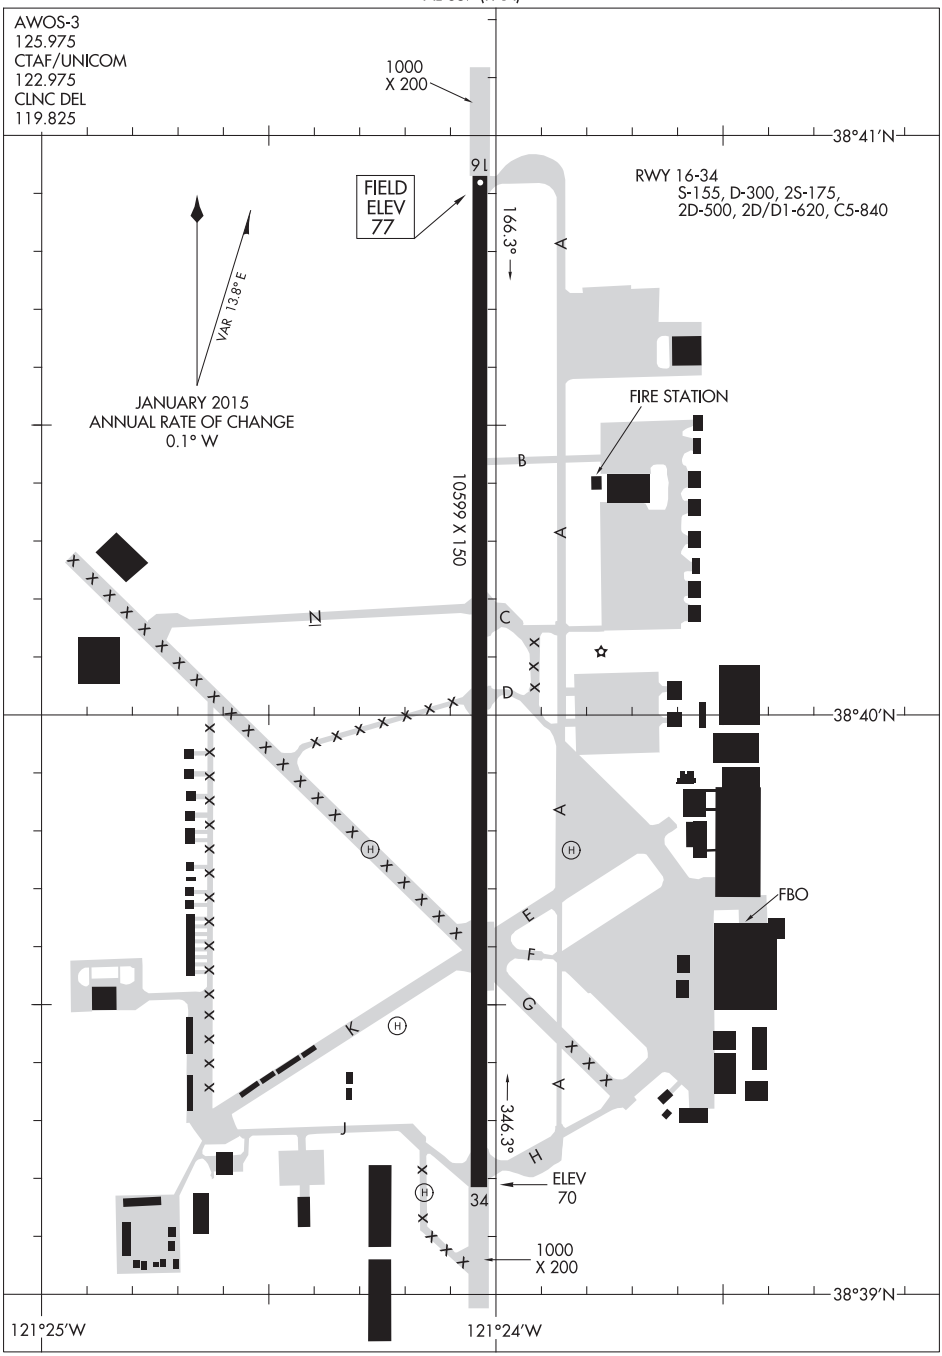

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC I-SAC	APP CRS	Rwy Idg	5503
110.3	019°	TDZE	21
		Apt Elev	24

ILS or LOC RWY 2
SACRAMENTO EXECUTIVE (SAC)

When local altimeter setting not received, use Sacramento Intl altimeter setting and increase DA to 322, increase all MDA 40 feet. Autopilot coupled approach NA below 335 feet. For inop MALSR, increase S-ILS 2 all Cats visibility to ⅞ SM and S-LOC 2 Cat C/D visibility to 1 SM. For inop MALSR when using Sacramento Intl altimeter setting, increase S-ILS 2 all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 600 then climbing left turn to 1600 direct SAC VORTAC and hold.

ATIS	NORCAL APP CON	EXEC TOWER ★	GND CON	UNICOM
125.5	125.25 257.9	119.5 (CTAF) L 278.8	125.0	122.95

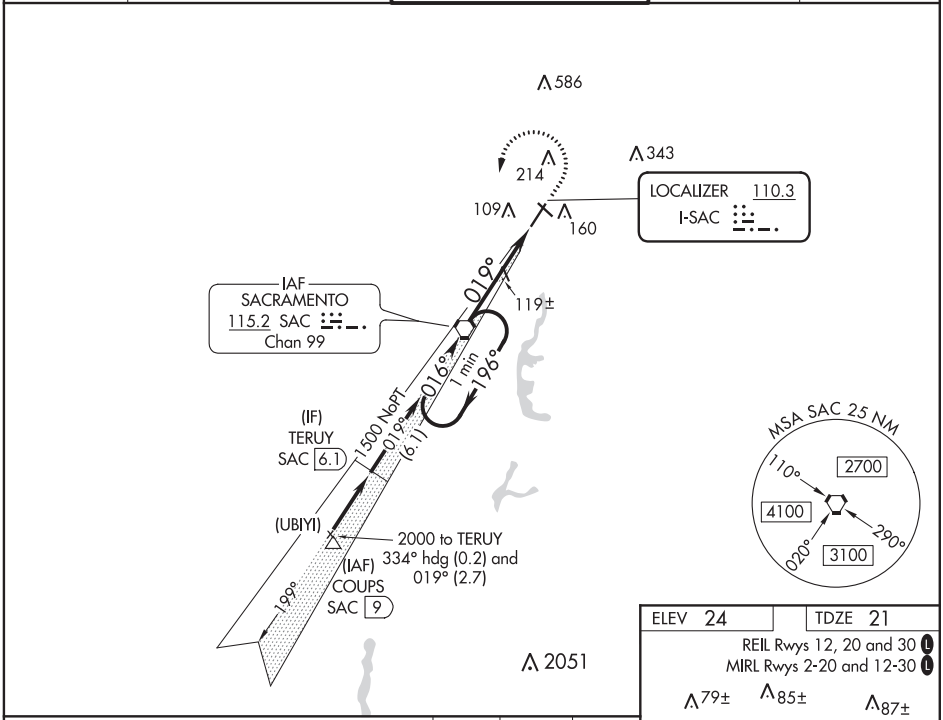

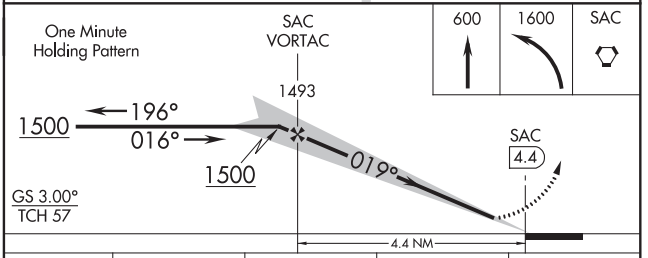

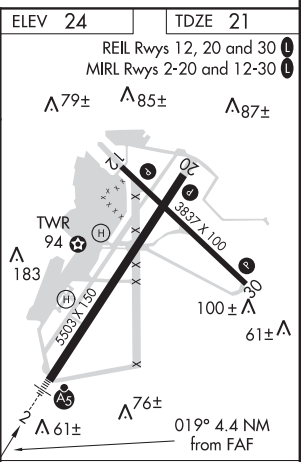

CATEGORY	A	B	C	D
S-ILS 2	294-½ 273 (300-½)			
S-LOC 2	380-½ 359 (400-½)		380-⅝ 359 (400-⅝)	
CIRCLING	500-1 476 (500-1)	520-1 496 (500-1)	520-1½ 496 (500-1½)	580-2 556 (600-2)

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	5503
CH 62810	019°	TDZE	21
W02A		Apt Elev	24

RNAV (GPS) RWY 2
SACRAMENTO EXECUTIVE (SAC)

Baro-VNAV NA when using Sacramento Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Sacramento Intl altimeter setting and increase LPV DA to 322; increase LNAV/VNAV DA to 401 and all visibilities ⅛ mile; increase all MDA 40 feet and LNAV Cats C/D visibility ⅛ mile. For inop MALSR, increase LPV all Cats visibility to ⅞. For inop MALSR when using Sacramento Intl altimeter setting, increase LPV all Cats visibility to 1.

MALSR

MISSED APPROACH: Climb to 3000 direct HOGBI and on track 027° to ROZZY and hold.

ATIS	NORCAL APP CON	EXEC TOWER*	GND CON	UNICOM
125.5	125.25 257.9	119.5 (CTAF) L 278.8	125.0	122.95

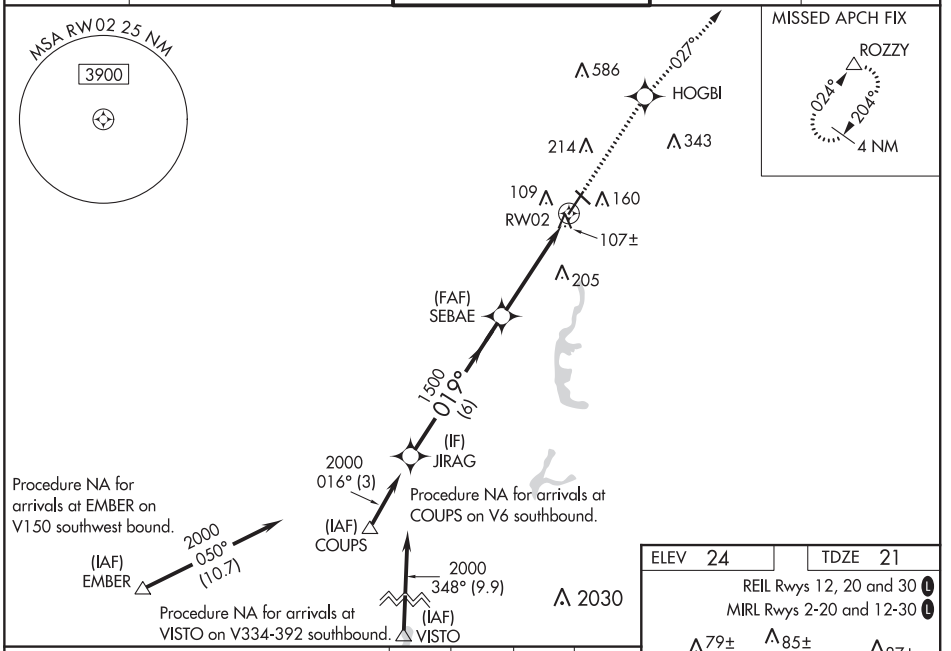

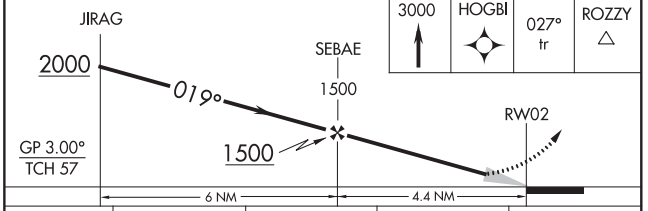

CATEGORY	A	B	C	D
LPV DA	294-½	273 (300-½)		
LNAV/VNAV DA	373-⅝	352 (400-⅝)		
LNAV MDA	440-½	419 (500-½)	440-¾	419 (500-¾)
CIRCLING	500-1 476 (500-1)	520-1 496 (500-1)	520-1½ 496 (500-1½)	580-2 556 (600-2)

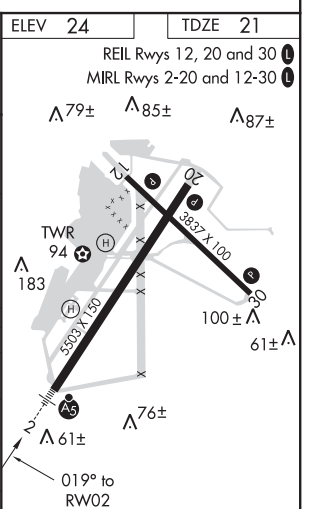

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC SAC	APP CRS	Rwy Idg	5503
115.2	016°	TDZE	21
Chan 99		Apt Elev	24

VOR RWY 2

SACRAMENTO EXECUTIVE (SAC)

T A When local altimeter setting not received, use Sacramento Intl altimeter setting and increase all MDA 40 feet.

MALSR

MISSED APPROACH: Climbing left turn to 1600 direct SAC VORTAC and hold.

ATIS	NORCAL APP CON	EXEC TOWER ★	GND CON	UNICOM
125.5	125.25 257.9	119.5 (CTAF) L 278.8	125.0	122.95

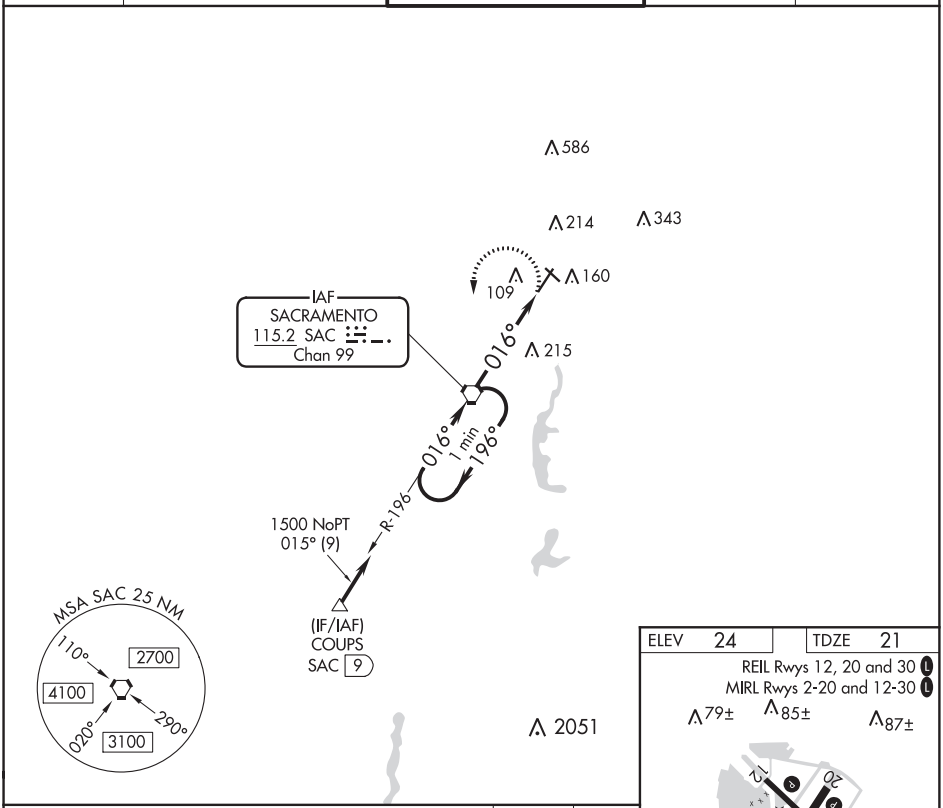

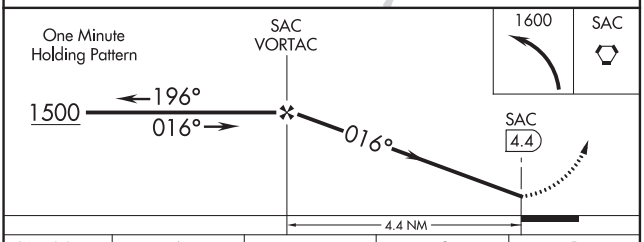

CATEGORY	A	B	C	D
S-2	520-½ 499 (500-½)		520-1 499 (500-1)	
CIRCLING	520-1 496 (500-1)		520-1½ 496 (500-1½)	580-2 556 (600-2)

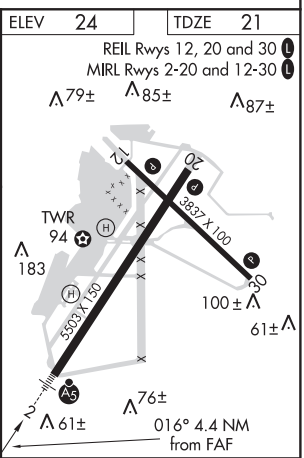

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

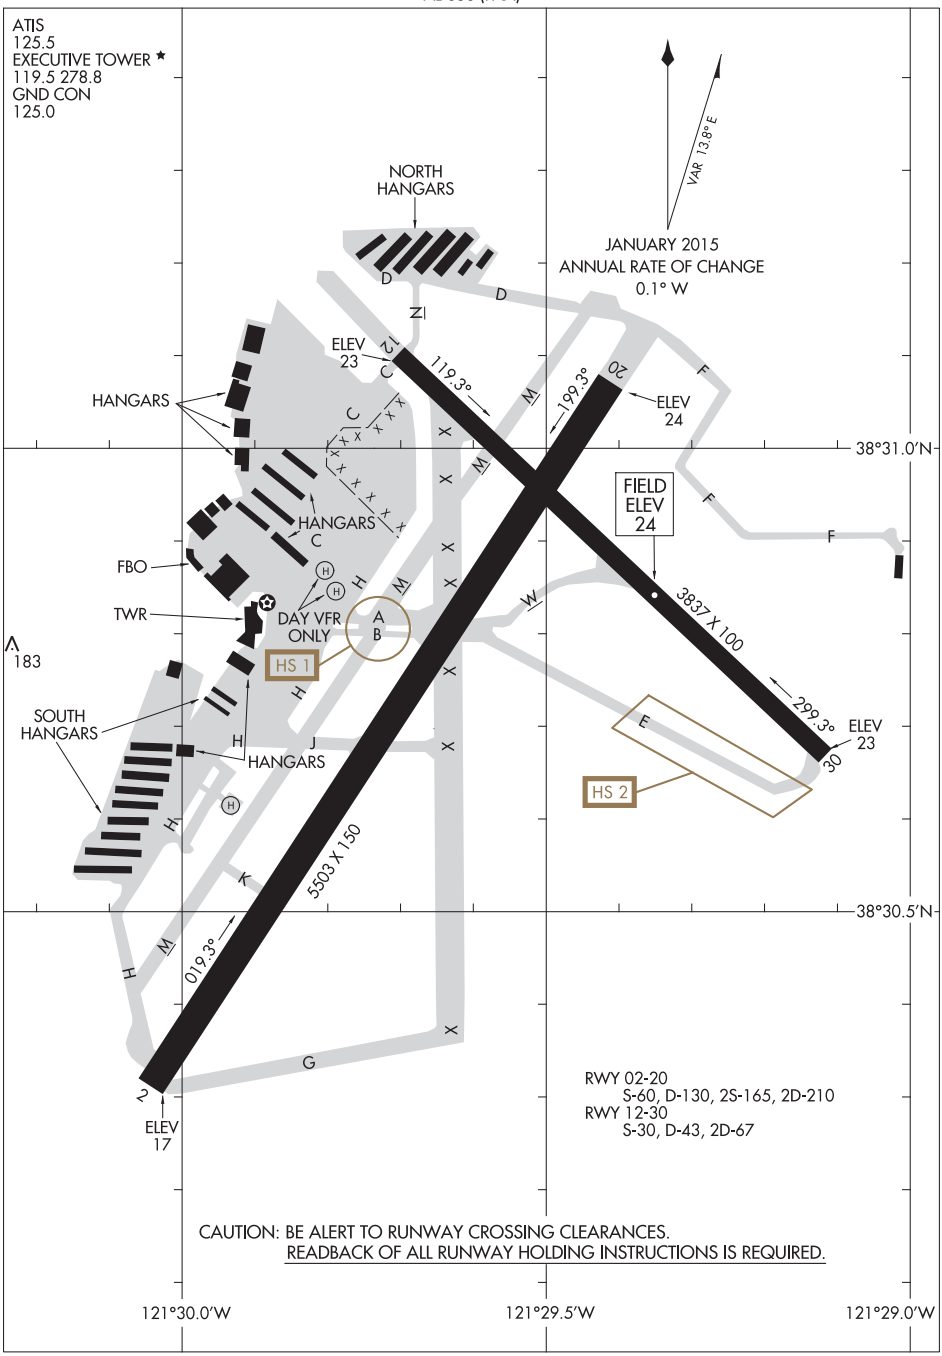

SW-2, 30 JAN 2020 to 26 MAR 2020

ILS or LOC RWY 16L

SACRAMENTO INTL (SMF)

LOC/DME I-MDK	APP CRS	Rwy Idg	8605
111.75	168°	TDZE	27
Chan 54 (Y)		Apt Elev	27

Circling NA west of Rwy 16L-34R. DME or RADAR required. Simultaneous approach authorized. For inop ALS, increase S-LOC 16L Cat C/D visibility to 1⅜ SM and S-LOC 16L JOBUD fix minimums Cat C/D visibility to RVR 4500.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct SAC VORTAC and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

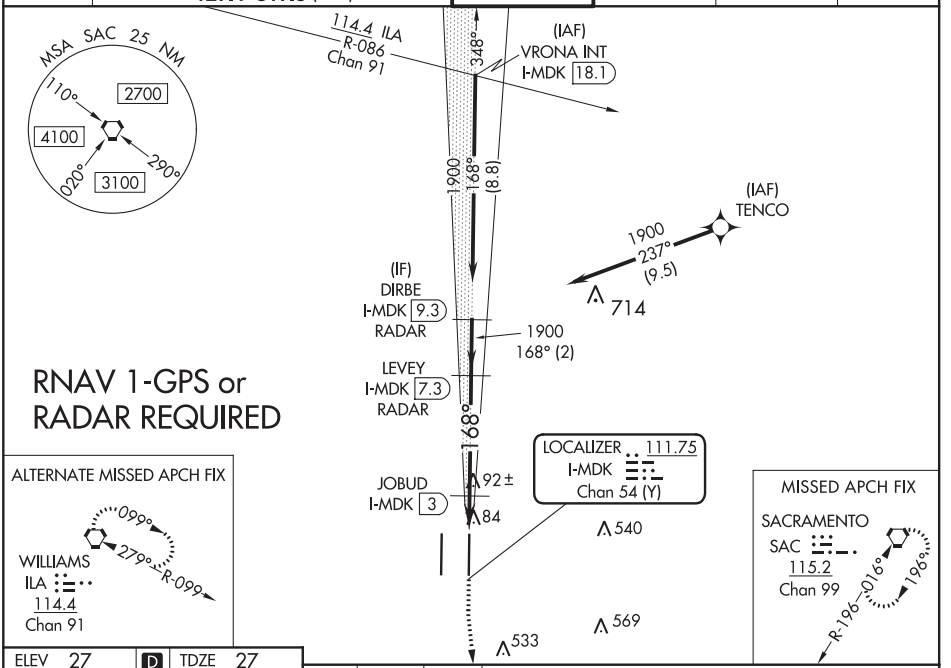

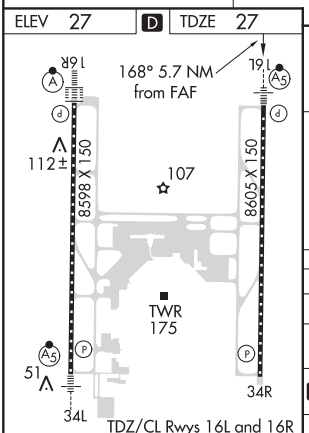

FAF to MAP 5.7 NM					
Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

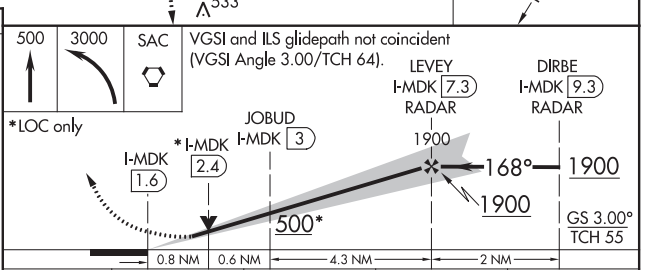

CATEGORY	A	B	C	D
S-ILS 16L	227/18	200 (200-½)		
S-LOC 16L	500/24	473 (500-½)	500/50	473 (500-1)
C CIRCLING	500-1	473 (500-1)	500-1½ 473 (500-1½)	840-2¾ 813 (900-2¾)
JOBUD FIX MINIMUMS (DME REQUIRED)				
S-LOC 16L	340/24	313 (400-½)		
C CIRCLING	400-1 373 (400-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	840-2¾ 813 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-SMF	APP CRS	Rwy Idg	8598
111.1	168°	TDZE	25
Chan 48		Apt Elev	27

ILS or LOC RWY 16R

SACRAMENTO INTL (SMF)

Simultaneous approach authorized with Rwy 16L. DME or RADAR required. Circling NA east of Rwy 16R-34L.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 350° and SAC VORTAC R-329 to GRIME INT/SAC 35.2 DME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

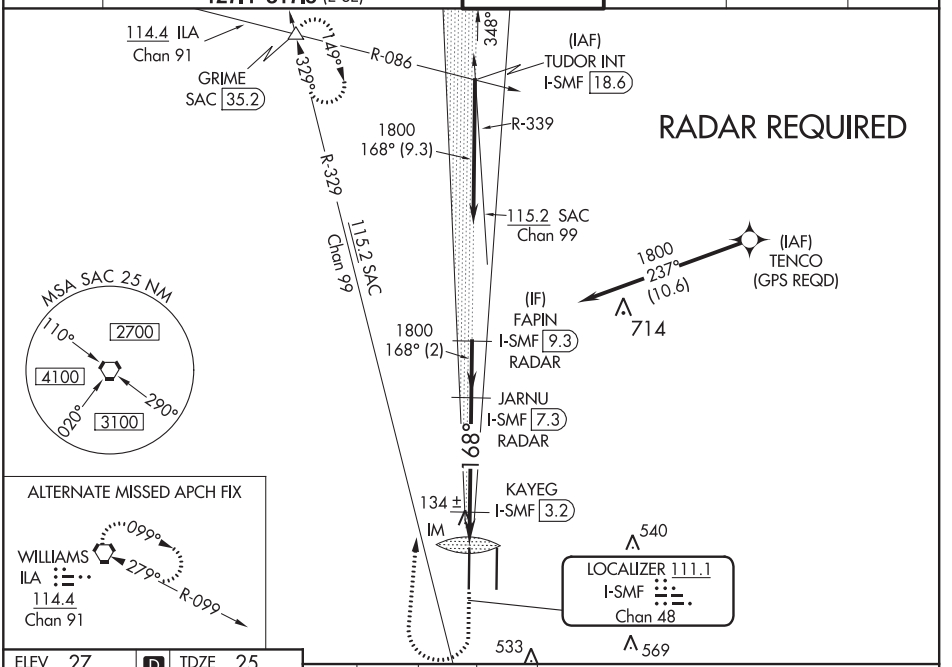

ELEV 27	D	TDZE 25

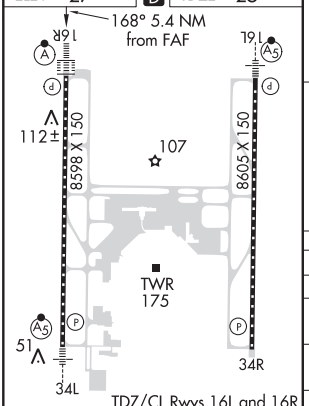

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

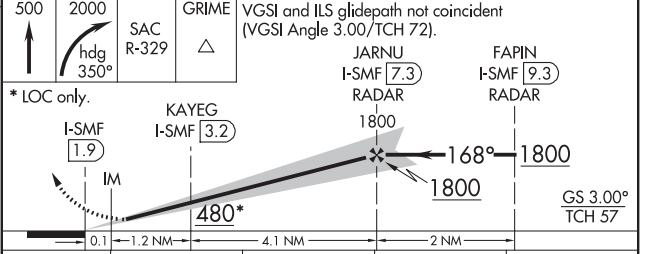

CATEGORY	A	B	C	D
S-ILS 16R	225/18		200 (200-½)	
S-LOC 16R	480/24 455 (500-½)		480/45 455 (500-⅞)	
C CIRCLING	480-1 453 (500-1)		480-1½ 453 (500-1½)	580-2 553 (600-2)
KAYEG FIX MINIMUMS (DME REQUIRED)				
S-LOC 16R	400/24 375 (400-½)		400/35 375 (400-⅝)	
C CIRCLING	440-1 413 (500-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	580-2 553 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SACRAMENTO, CALIFORNIA | AL-5490 (FAA) | 18312

LOC/DME I-HUX	APP CRS	Rwy Idg	8598
111.1	348°	TDZE	24
Chan 48		Apt Elev	27

ILS or LOC RWY 34L

SACRAMENTO INTL (SMF)

RADAR or DME required for LOC only.

For inop ALS, increase S-LOC 34L Cats C and D visibility to RVR 6000.
Circling NA east of Rwy 16R-34L.
*RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 on heading 320° and on SAC VORTAC R-329 to GRIME INT/SAC 35.2 DME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	







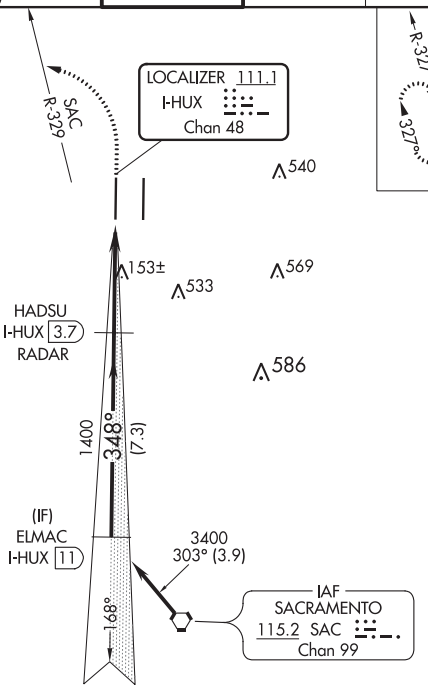

Procedure NA for arrivals on SAC VORTAC airway radials 257 CW 329.

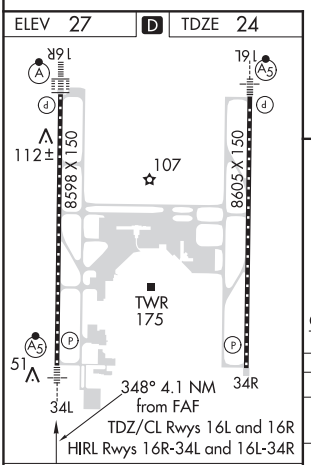

FAF to MAP 4.1 NM

Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

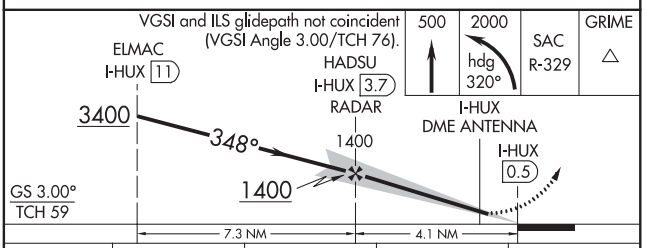

CATEGORY	A	B	C	D
S-ILS 34L*	224/24 200 (200-½)			
S-LOC 34L	420/24 396 (400-½)		420/35 396 (400-⅝)	420/40 396 (400-¾)
C CIRCLING	440-1 413 (500-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	580-2 553 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-SMF	APP CRS	Rwy Idg	8598
111.1	168°	TDZE	25
Chan 48		Apt Elev	27

ILS RWY 16R (SA CAT I)

SACRAMENTO INTL (SMF)

Simultaneous approach authorized with Rwy 16L. DME or RADAR required. Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DH.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 350° and SAC VORTAC R-329 to GRIME INT/SAC 35.2 DME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

114.4 ILA Chan 91

GRIME SAC 35.2

R-086 R-329 R-339 348° 329° 149°

(IAF) TUDOR INT I-SMF 18.6

1800 168° (9.3)

RADAR REQUIRED

115.2 SAC Chan 99

(IAF) TENCO (GPS REQD) 1800 237° (10.6) 714

(IF) FAPIN I-SMF 9.3 RADAR 1800 168° (2)

JARNU I-SMF 7.3 RADAR

168°

MSA SAC 25 NM 110° 2700 4100 290° 020° 3100

ALTERNATE MISSED APCH FIX

WILLIAMS ILA 114.4 Chan 91 099° 279° R-099

134 ± 84 IM 252 124 540 580 533

LOCALIZER 111.1 I-SMF Chan 48

ELEV 27 D TDZ 25

16R 16L A5 d 112 ± 8598 X 150 8605 X 150 107 TWR 175 51 34L 34R P

TDZ/CL Rwys 16L and 16R
HIRL Rwys 16R-34L and 16L-34R

500	2000 hdg 350°	SAC R-329	GRIME

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).

JARNU I-SMF 7.3 RADAR 1800 FAPIN I-SMF 9.3 RADAR 1800 IM 168° 1800 1800 GS 3.00° TCH 57

1074' 5.4 NM 2 NM

CATEGORY	A	B	C	D
S-ILS 16R	RA 154/14 150 DA 175			

SA CATEGORY I ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SACRAMENTO, CALIFORNIA AL-5490 (FAA) 17173

ILS RWY 16R (CAT II & III)

SACRAMENTO INTL (SMF)

LOC/DME I-SMF	APP CRS	Rwy Idg	8598
111.1	168°	TDZE	25
Chan 48		Apt Elev	27

Simultaneous approach authorized with Rwy 16L. DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 350° and SAC VORTAC R-329 to GRIME INT/SAC 35.2 DME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

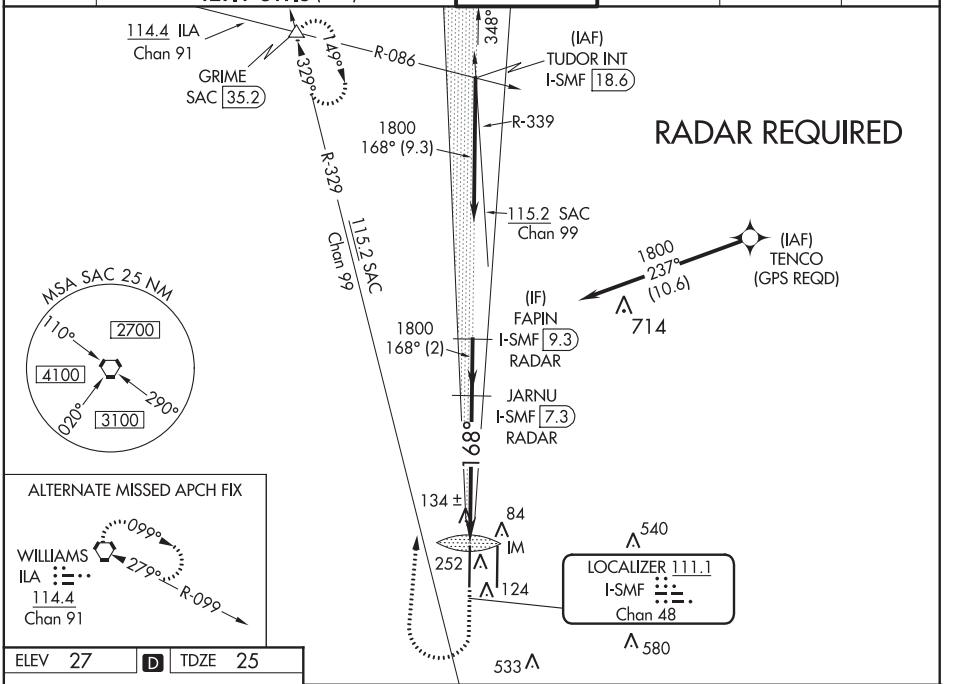

ELEV 27 D TDZE 25

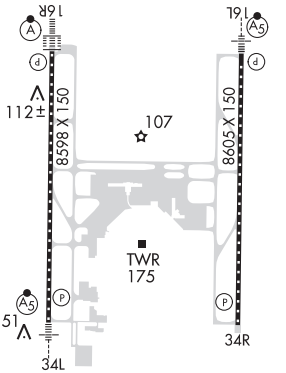

TDZ/CL Rwys 16L and 16R
HIRL Rwys 16R-34L and 16L-34R

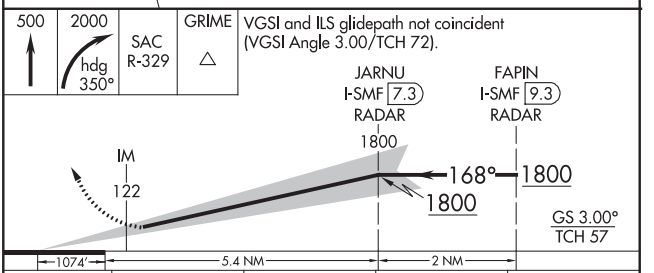

CATEGORY	A	B	C	D
S-ILS 16R	CAT II RA 103/12 100 DA 125			
S-ILS 16R	CAT IIIa RVR 07			
S-ILS 16R	CAT IIIb RVR 06			
S-ILS 16R	CAT IIIc NA			

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SACRAMENTO, CALIFORNIA 38°42'N-121°35'W SACRAMENTO INTL (SMF)

Amdt 16B 25JUN15

ILS RWY 16R (CAT II & III)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME	APP CRS	Rwy Idg	8605
I-MDK 111.75 Chan 54 (Y)	168°	TDZE	27
		Apt Elev	27

ILS RWY 16L (SA CAT II)

SACRAMENTO INTL (SMF)

DME or RADAR required. Simultaneous approach authorized.
Reduced lighting: Requires specific OPSEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct SAC VORTAC and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

MSA SAC 25 NM
110° 2700
4100
020° 3100
290°

114.4 ILA R-086 Chan 91

348°

(IAF) VRONA INT I-MDK 18.1

1900 168° (8.8)

(IAF) TENCO

1900 237° (9.5)

714

(IF) DIRBE I-MDK 9.3 RADAR

1900 168° (2)

LEVEY I-MDK 7.3 RADAR

168°

LOCALIZER 111.75 I-MDK Chan 54 (Y)

92±

84

540

569

533

RNAV 1-GPS or RADAR REQUIRED

ALTERNATE MISSED APCH FIX

099° 279° R-099

WILLIAMS ILA 114.4 Chan 91

MISSED APCH FIX

SACRAMENTO SAC 115.2 Chan 99

196° R-196 016°

ELEV 27 D TDZ 27

16R 16L

112±

8598 X 150

8605 X 150

107

TWR 175

51

34L 34R

TDZ/CL Rwys 16L and 16R
HIRL Rwys 16R-34L and 16L-34R

500 3000 SAC

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 64).

LEVEY I-MDK 7.3 RADAR

DIRBE I-MDK 9.3 RADAR

1900 168° 1900 1900

GS 3.00° TCH 55

1059' 5.7 NM 2 NM

CATEGORY	A	B	C	D
S-ILS 16L	RA 108/12 100 DA 127			

SA CATEGORY II ILS-SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	8605
168°	TDZE	27
	Apt Elev	27

RNAV (RNP) Z RWY 16L

SACRAMENTO INTL (SMF)

For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). GPS required.

MALSR

MISSED APPROACH: Climb to 3000 then right turn direct GRIME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

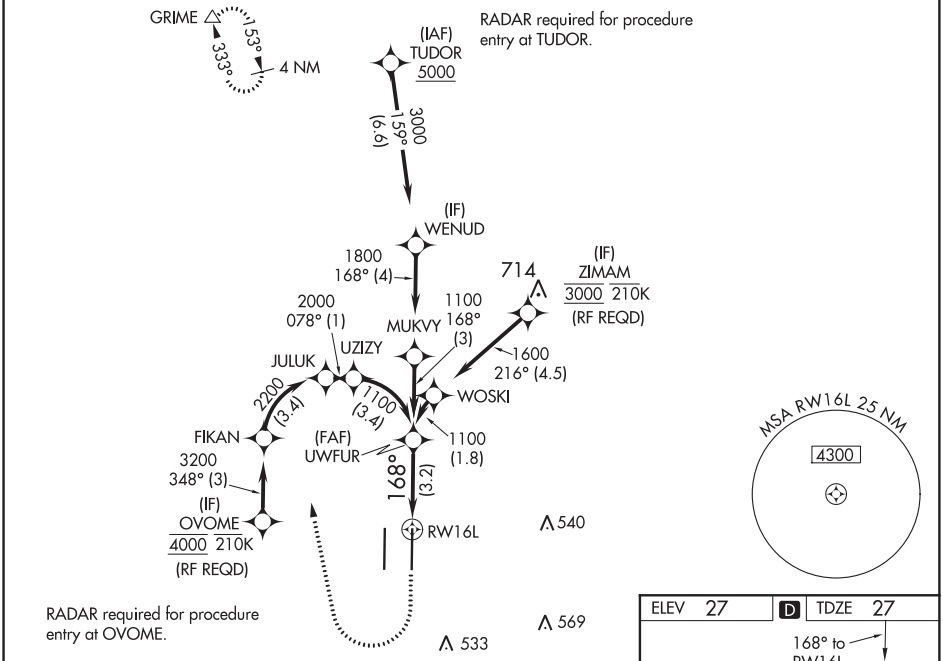

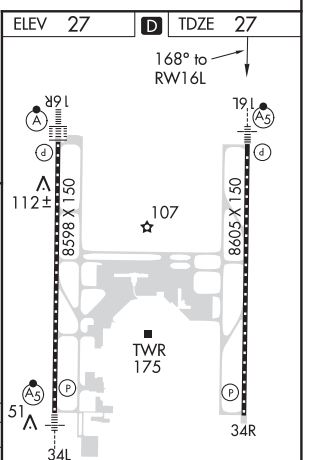

TDZ/CL Rwys 16L and 16R
HIRL Rwys 16R-34L and 16L-34R

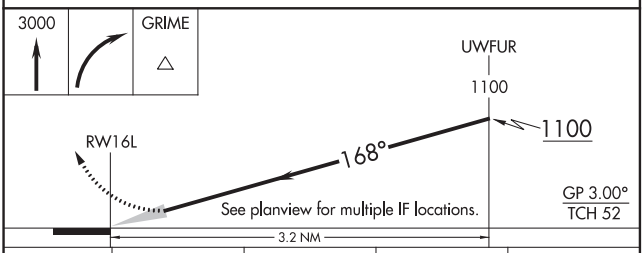

CATEGORY	A	B	C	D
RNP 0.30 DA	322-½	295 (300-½)		

AUTHORIZATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	8598
168°	TDZE	25
	Apt Elev	27

RNAV (RNP) Z RWY 16R

SACRAMENTO INTL (SMF)

For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). GPS required. For inop ALSF-2, increase RNP 0.10 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct GRIME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

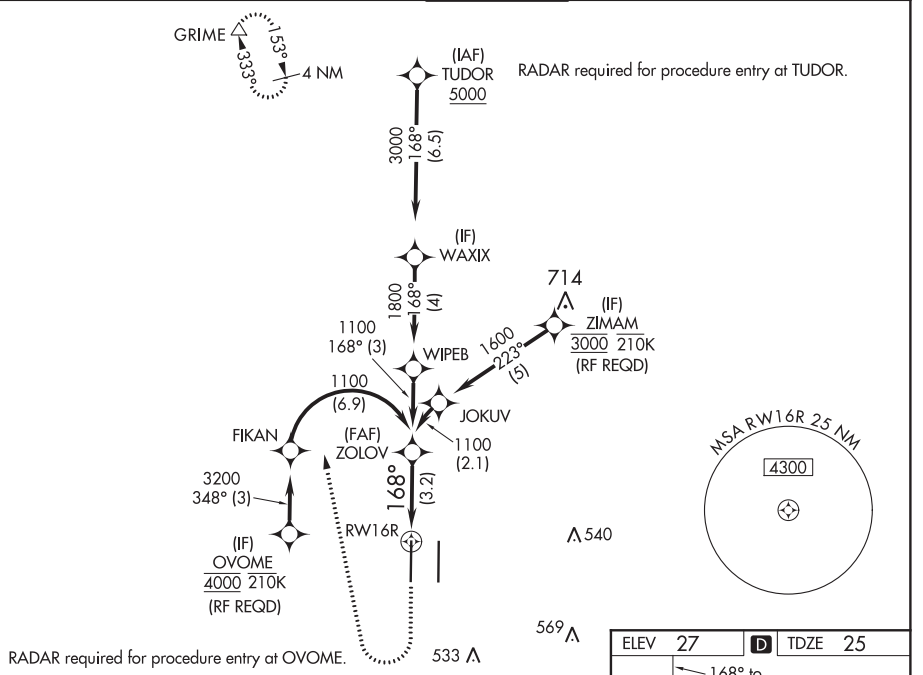

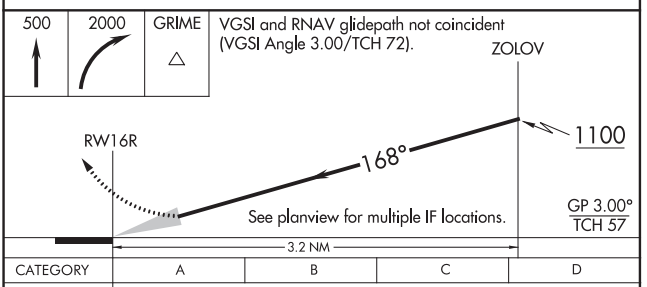

CATEGORY	A	B	C	D
RNP 0.10 DA	323/24 298 (300-½)			
RNP 0.30 DA	388/40 363 (400-¾)			

AUTHORIZATION REQUIRED

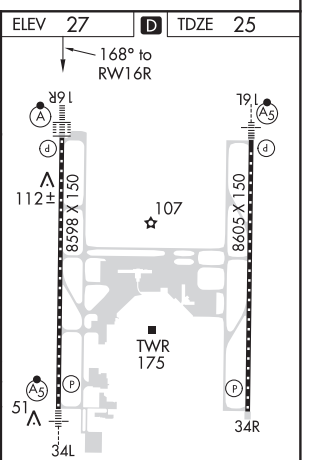

TDZ/CL Rwys 16L and 16R
HIRL Rwys 16R-34L and 16L-34R

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SACRAMENTO, CALIFORNIA AL-5490 (FAA) 18312

APP CRS	Rwy Idg	8598
348°	TDZE	24
	Apt Elev	27

RNAV (RNP) Z RWY 34L

SACRAMENTO INTL (SMF)

For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). GPS required. For inop MALSR, increase RNP 0.30 all Cats visibility to RVR 5000.

MALSR

MISSED APPROACH: Climb to 2000 on track 348° to JARNU and on track 321° to GRIME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

MISSED APCH FIX

GRIME 153° 333° 4 NM

(IAF) PIECH (RF REQD)

321° (14.4)

4000 173° (33.8)

JARNU

348° (6.8)

714

(IF) BANZA 4000 210K

RW34L

3200 168° (3)

348° (3.2)

540

569

533

ZITUL

(FAF) WOMAV

1100 (6.9)

1100 348° (8.2)

(IF) ELMAC

MSA RW34L 25 NM 4300

3400 026° (9.9)

(IAF) ISYOH 6000

ELEV 27 D TDZE 24

19R 19L

112± 8598 X 150 8605 X 150

107

TWR 175

51

34L 34R

348° to RW34L

TDZ/CL Rwys 16L and 16R

HIRL Rwys 16R-34L and 16L-34R

WOMAV 1100 1100 348° RW34L

GP 3.00° TCH 59

3.2 NM

2000 tr 348° JARNU tr 321° GRIME

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.30 DA	327/26 303 (300-½)			

AUTHORIZATION REQUIRED

SACRAMENTO, CALIFORNIA

Amdt 1 30APR15

38°42'N-121°35'W

SACRAMENTO INTL (SMF)

RNAV (RNP) Z RWY 34L

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (RNP) Z RWY 34R

SACRAMENTO INTL (SMF)

APP CRS	Rwy Idg	8605
348°	TDZE	24
	Apt Elev	27

For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). GPS required.

MISSED APPROACH: Climb to 2000 on track 348° to ZUNEG and track 315° to GRIME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

MISSED APCH FIX

GRIME 153° 339° 4 NM

(IAF) PIECH (RF REQD)

4000 173° (33.8)

315° (13.9) ZUNEG

348° (8)

714

(IF) BANZA 4000 210K

3200 168° (3)

RW34R

540

348° (3.2)

569

ZITUL

2000 078° (1)

(FAF) JUNBO

533

2200 (3.4)

1100 (3.5)

PUGYI LERIY

1100 348° (7.4)

MSA RW34R 25 NM 4300

(IF) FIPIN

3400 027° (11.1)

(IAF) ISYOH 6000

ELEV 27 D TDZE 24

16R 16L 112± 8598 X 150 107 8605 X 150 TWR 175 51 34L 34R 348° to RW34R

TDZ/CL Rwys 16L and 16R

HIRL Rwys 16R-34L and 16L-34R

JUNBO 1100 1100 348° RW34R

GP 3.00° TCH 64

See planview for multiple IF locations.

3.2 NM

2000 tr 348°	ZUNEG	tr 315°	GRIME

CATEGORY	A	B	C	D
RNP 0.10 DA	319-7/8	295 (300-7/8)		
RNP 0.30 DA	385-1 1/8	361 (400-1 1/8)		

AUTHORIZATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Y RWY 16L

SACRAMENTO INTL (SMF)

WAAS	APP CRS	Rwy Idg	8605
CH 78327	168°	TDZE	27
W16B		Apt Elev	27

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). Circling NA west of Rwy 16L-34R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cat C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct ORRCA and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

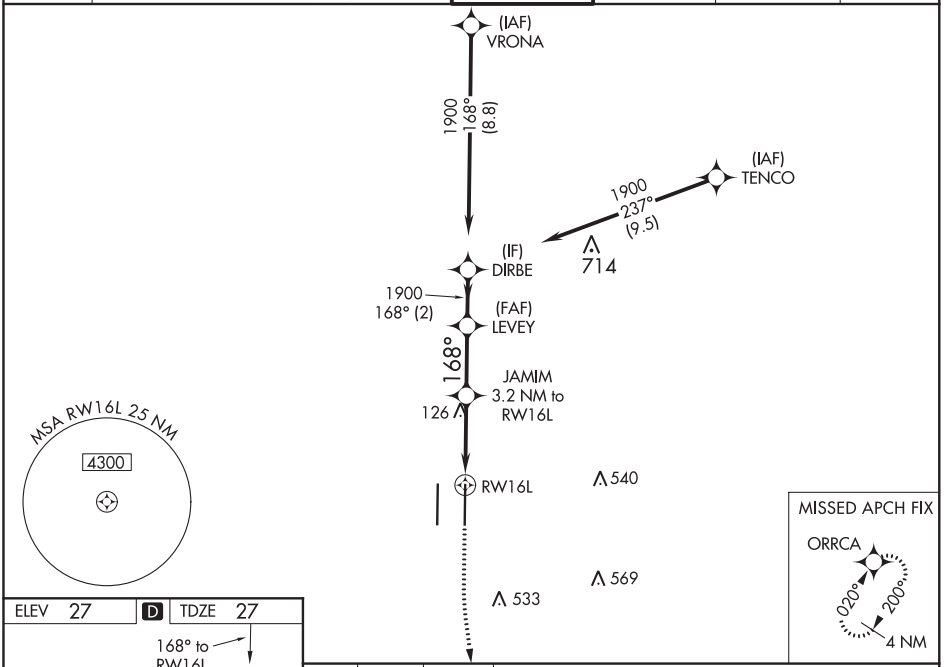

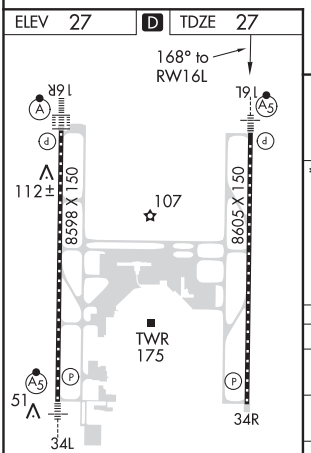

TDZ/CL Rwys 16L and 16R
HIRL Rwys 16R-34L and 16L-34R

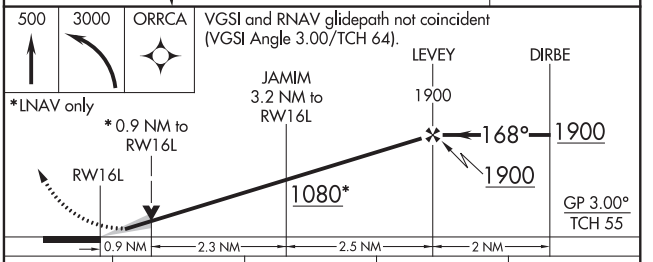

CATEGORY	A	B	C	D
LPV DA	227/18 200 (200-½)			
LNAV/VNAV DA	277/24 250 (300-½)			
LNAV MDA	380/24 353 (400-½)		380/30 353 (400-⅝)	
C CIRCLING	400-1 373 (400-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	840-2¾ 813 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Y RWY 16R

SACRAMENTO INTL (SMF)

WAAS	APP CRS	Rwy Idg	8598
CH 65728	168°	TDZE	25
W16A		Apt Elev	27

DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV all Cats visibility to RVR 5500. Circling NA east of Rwy 16R-34L. Simultaneous approach authorized with Rwy 16L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F).

ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct GRIME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

RADAR REQUIRED

GRIME 153° 333° 4 NM

(IAF) TUDOR

1800 168° (9.3)

(IAF) TENCO

1800 237° (10.6)

714

(IF) FAPIN

1800 168° (2)

(FAF) JARNU

168°

AMUNE 3.2 NM to RW16R

134 ±

RW16R

540

569

533

MSA RW16R 25 NM 4300

ELEV 27 D TDZE 25

168° to RW16R

16R 19L

112 ±

8598 X 150

8605 X 150

107

TWR 175

51

34L 34R

TDZ/CL Rwys 16L and 16R
HIRL Rwys 16R-34L and 16L-34R

500 2000 GRIME

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

*LNAV only

*1 NM to RW16R

RW16R

AMUNE 3.2 NM to RW16R

JARNU 1800

FAPIN

168° 1800

1800

1100*

GP 3.00° TCH 57

1 NM 2.2 NM 2.2 NM 2 NM

CATEGORY	A	B	C	D
LPV DA	225/18 200 (200-½)			
LNAV/VNAV DA	323/24 298 (300-½)			
LNAV MDA	400/24 375 (400-½)		400/35 375 (400-⅝)	
C CIRCLING	440-1 413 (500-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	580-2 553 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

SACRAMENTO, CALIFORNIA AL-5490 (FAA) 17229

WAAS	APP CRS	Rwy Idg	8598
CH 86602	348°	TDZE	24
W34A		Apt Elev	27

RNAV (GPS) Y RWY 34L

SACRAMENTO INTL (SMF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (24°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA east of Rwy 16R-34L. For inop MALSR, increase LPV all Cats visibility to RVR 4000 and LNAV Cat C/D visibility to RVR 5500.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2000 direct RATBE and track 327° to GRIME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

MISSED APCH FIX

GRIME 153° 333° 4 NM

327° (18.1)

RATBE

RW34L 130

CANLO 1.7 NM to RW34L 132±

(FAF) AMEME

1400 348° (7.3)

(IF) ELMAC

3400 026° (9.9)

(IAF) ISYOH

540 569 533 586

MSA RW34L 25 NM 4300

ELEV 27 D TDZE 24

16R 16L 34R 34L 8598 X 150 8605 X 150 112± 107 TWR 175 51

348° to RW34L

TDZ/CL Rwys 16L and 16R
HIRL Rwys 16R-34L and 16L-34R

2000 RATBE tr 327° GRIME

ELMAC 3400 348° AMEME 1400 1400 CANLO 1.7 NM to RW34L *0.9 NM to RW34L RW34L *620

*LNAV only

GP 3.00° TCH 59

7.3 NM 2.4 NM 0.8 NM 0.9 NM

CATEGORY	A	B	C	D
LPV DA #	224/24	200 (200-½)		
LNAV/VNAV DA	313/24	289 (300-½)		
LNAV MDA	380/24	356 (400-½)	380/30	356 (400-⅝)
C CIRCLING	440-1 413 (500-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	580-2 553 (600-2)

SACRAMENTO, CALIFORNIA
Amdt 2A 17AUG17

38°42'N-121°35'W

SACRAMENTO INTL (SMF)

RNAV (GPS) Y RWY 34L

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	8605
348°	TDZE	24
	Apt Elev	27

RNAV (GPS) Y RWY 34R

SACRAMENTO INTL (SMF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA west of Rwy 16L-34R. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct OSAVE and track 324° to GRIME and hold.

D-ATIS	NORCAL APP CON	CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	125.7 256.7	121.7 256.7	121.1 256.7	

MISSED APCH FIX

GRIME 153° 333° 4 NM

324° (18.5) OSAVE 84 130 RW34R

AMNIC 2.2 NM to RW34R 148± 533

(FAF) CEDRA

1400 348° (6.4)

(IF) FIPIN

(IAF) ISYOH 3400 027° (11.1)

708 540 569

MSA RW34R 25 NM 4300

ELEV 27 D TDZE 24

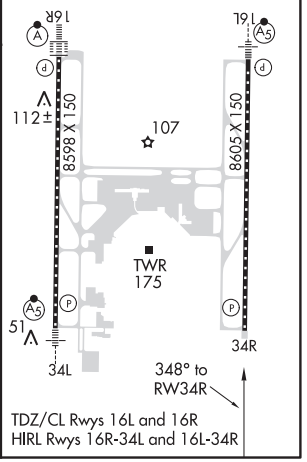

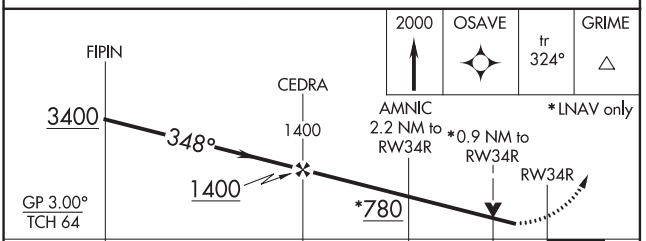

CATEGORY	A	B	C	D
LNAV/VNAV DA	316-⅞	292 (300-⅞)		
LNAV MDA	380-1	356 (400-1)		
C CIRCLING	400-1 373 (400-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	840-2¾ 813 (900-2¾)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19059
AIRPORT DIAGRAM

AL-5490 (FAA)

SACRAMENTO INTL (SMF)
SACRAMENTO, CALIFORNIA

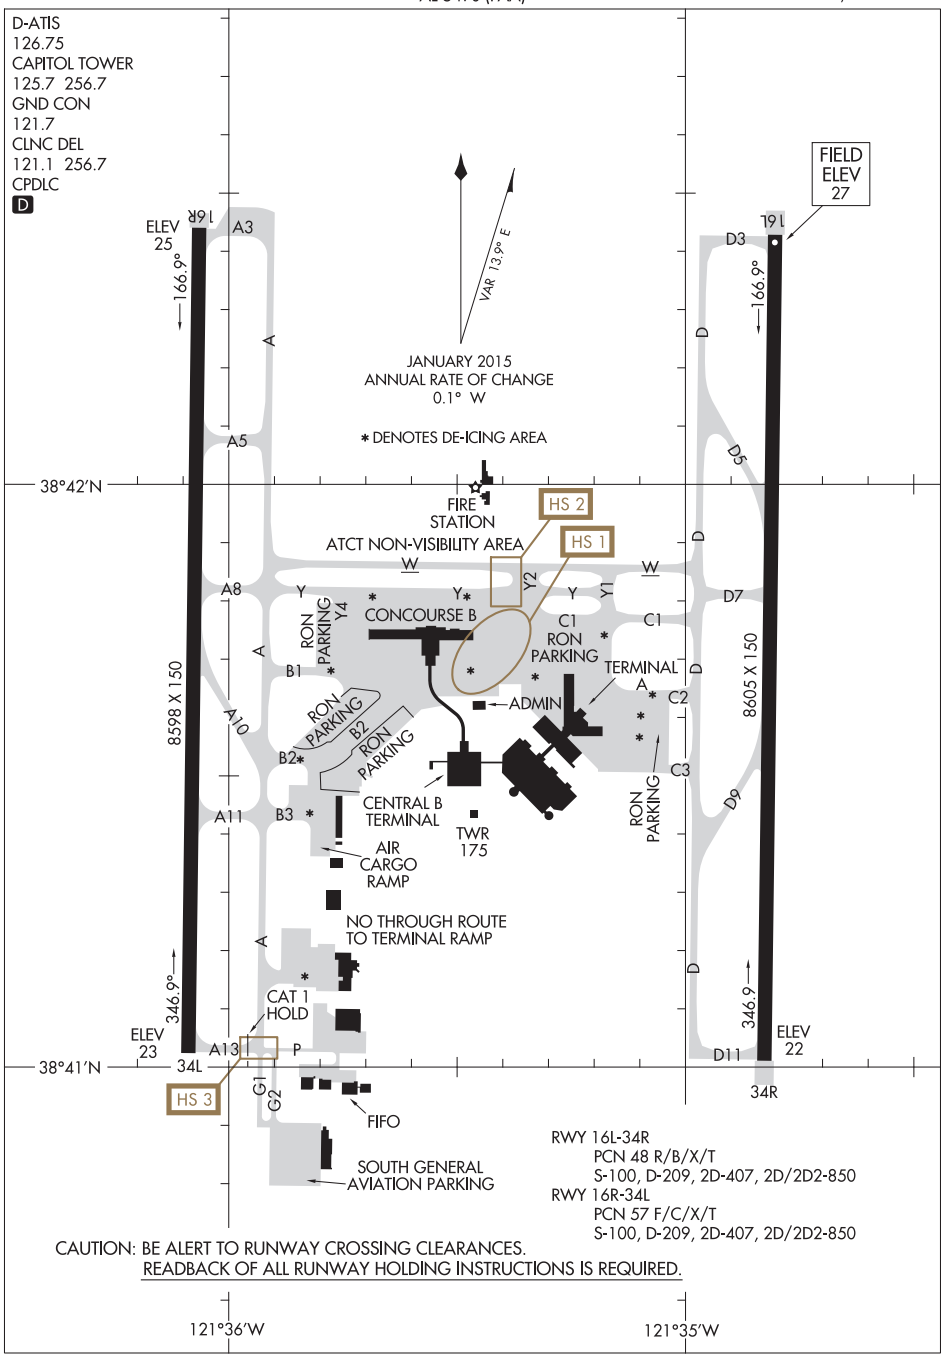

RWY 16L-34R
PCN 48 R/B/X/T
S-100, D-209, 2D-407, 2D/2D2-850
RWY 16R-34L
PCN 57 F/C/X/T
S-100, D-209, 2D-407, 2D/2D2-850

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

AIRPORT DIAGRAM
19059
SACRAMENTO, CALIFORNIA
SACRAMENTO INTL (SMF)

SW-2, 30 JAN 2020 to 26 MAR 2020

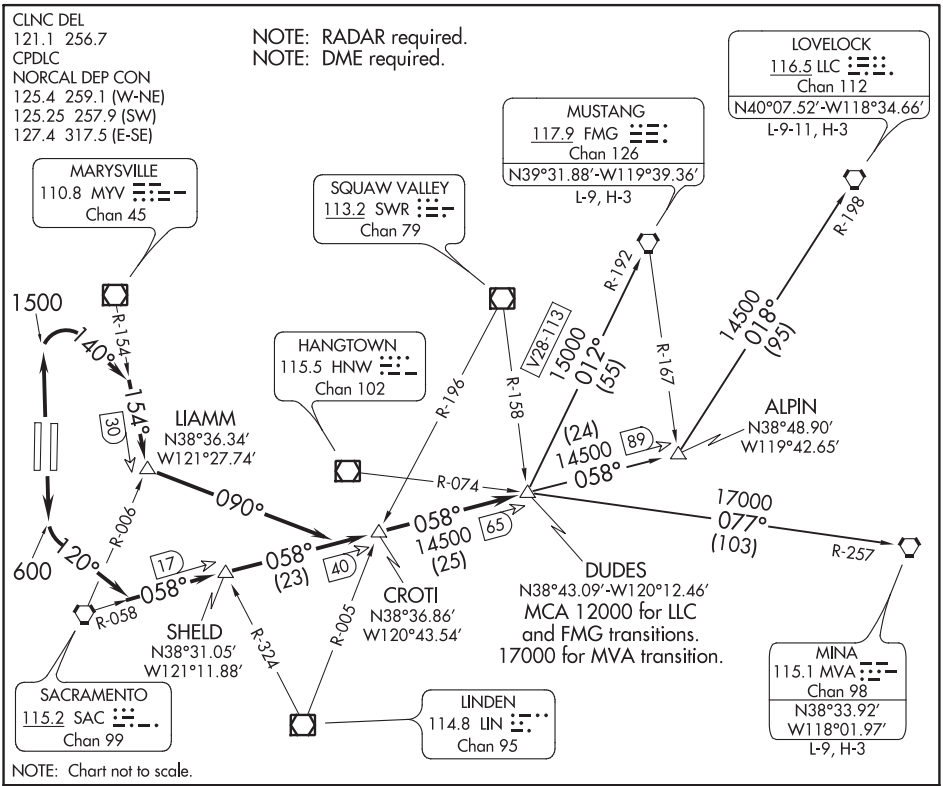

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 16L/R: Maintain rwy heading until 600', then turn left to a 120° heading to intercept and proceed via the SAC R-058 to DUDES INT, then via (transition) or (assigned route). Expect further clearance to filed altitude after CROTI INT.
TAKEOFF RUNWAYS 34L/R: Maintain rwy heading until 1500', then turn right to a 140° heading to intercept and proceed via the MYV R-154 to LIAMM INT, then turn left to a 090° heading to intercept and proceed via the SAC R-058 to DUDES INT, then via (transition) or (assigned route). Expect further clearance to filed altitude after CROTI INT.

LOST COMMUNICATIONS:
TAKEOFF RUNWAYS 34L/R: Maintain rwy heading until 1500', then turn right heading 140° to intercept and proceed via the MYV R-154 to intercept and proceed via the SAC R-058 to DUDES INT. Then resume own navigation.

LOVELOCK TRANSITION (DUDES9.LLC): From over DUDES INT via the SAC R-058 and the LLC R-198 to LLC VORTAC.
MINA TRANSITION (DUDES9.MVA): From over DUDES INT via the MVA R-257 to MVA VORTAC.
MUSTANG TRANSITION (DUDES9.FMG): From over DUDES INT via the FMG R-192 to FMG VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020

(FTHIL2.FTHIL) 18312

FTHIL TWO DEPARTURE (RNAV)

AL-5490 (FAA)

SACRAMENTO INTL (SMF)
SACRAMENTO, CALIFORNIA

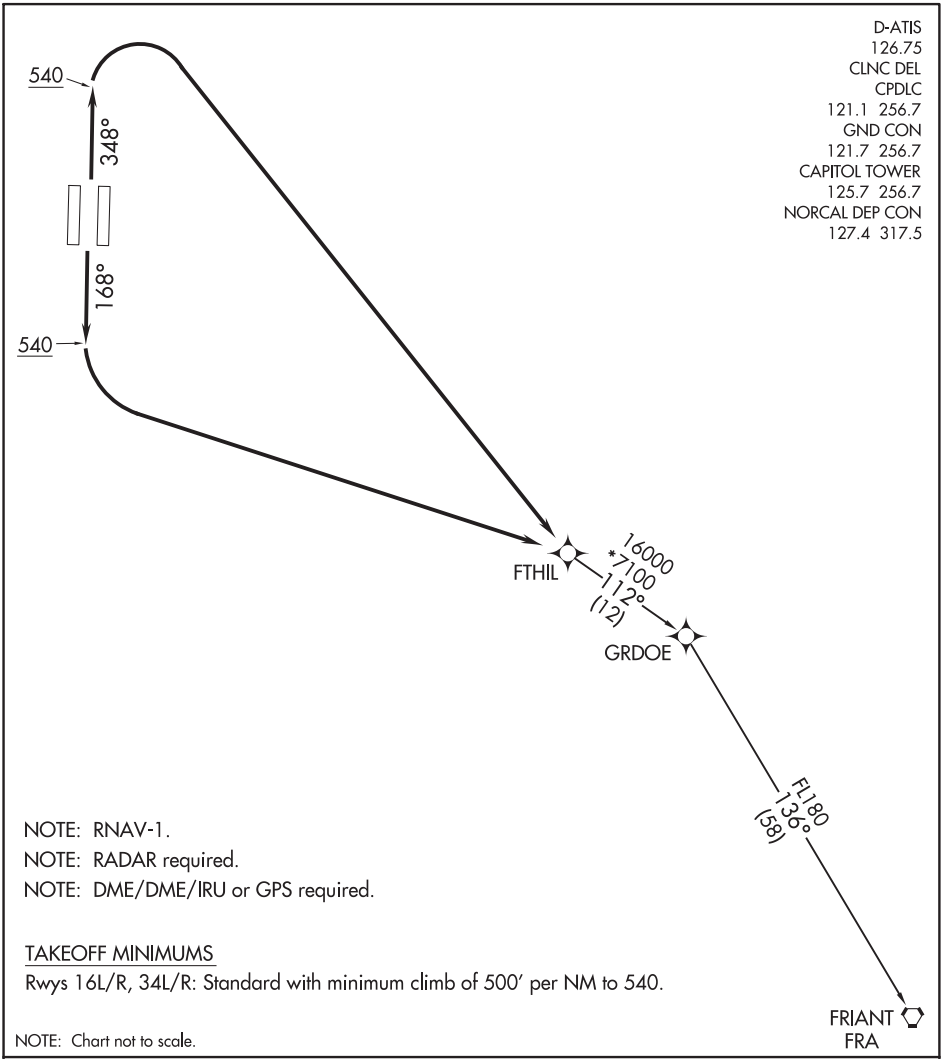

NOTE: RNAV-1.

NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

TAKEOFF MINIMUMS

Rwys 16L/R, 34L/R: Standard with minimum climb of 500′ per NM to 540.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 16L/R: Climb heading 168° to 540, then left turn direct to FTHIL. Thence. . . .

TAKEOFF RUNWAYS 34L/R: Climb heading 348° to 540, then right turn direct to FTHIL. Thence. . . .

. . . . on transition. Maintain FL190. Expect filed altitude 10 minutes after departure.

FRIANT TRANSITION (FTHIL2.FRA)

RVRCT TWO DEPARTURE (RNAV)

(RVRCT2.RVRCT) 30APR15

SACRAMENTO, CALIFORNIA

SACRAMENTO INTL (SMF)

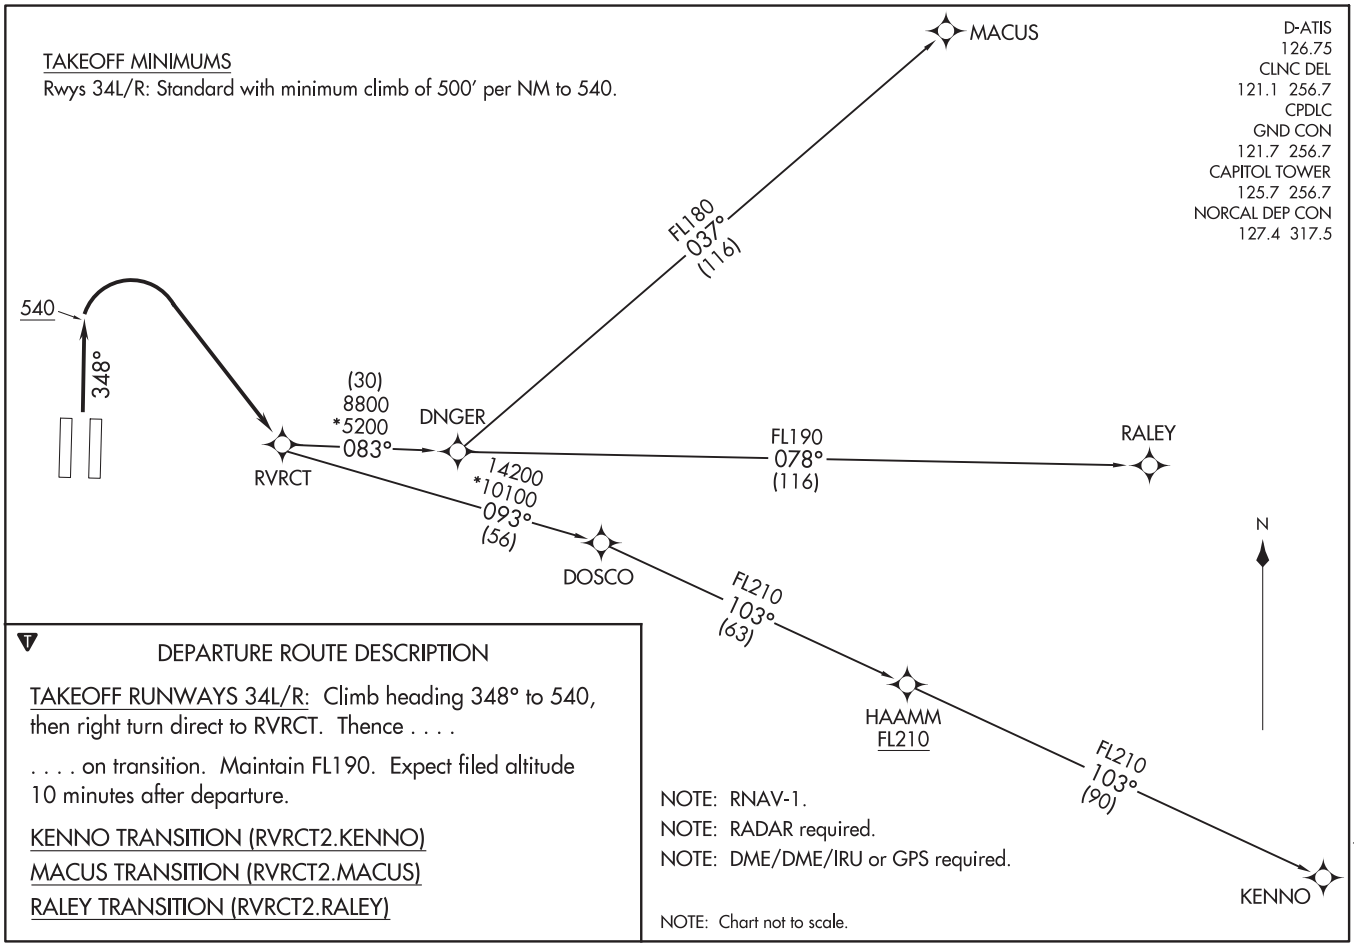

(RVRCT2.RVRCT) 18312

RVRCT TWO DEPARTURE (RNAV)

AL-5490 (FAA)

SACRAMENTO INTL (SMF)

SACRAMENTO, CALIFORNIA

SCTWN TWO DEPARTURE (RNAV)

(SCTWN2.SCTWN) 30APR15

SACRAMENTO, CALIFORNIA

SACRAMENTO INTL (SMF)

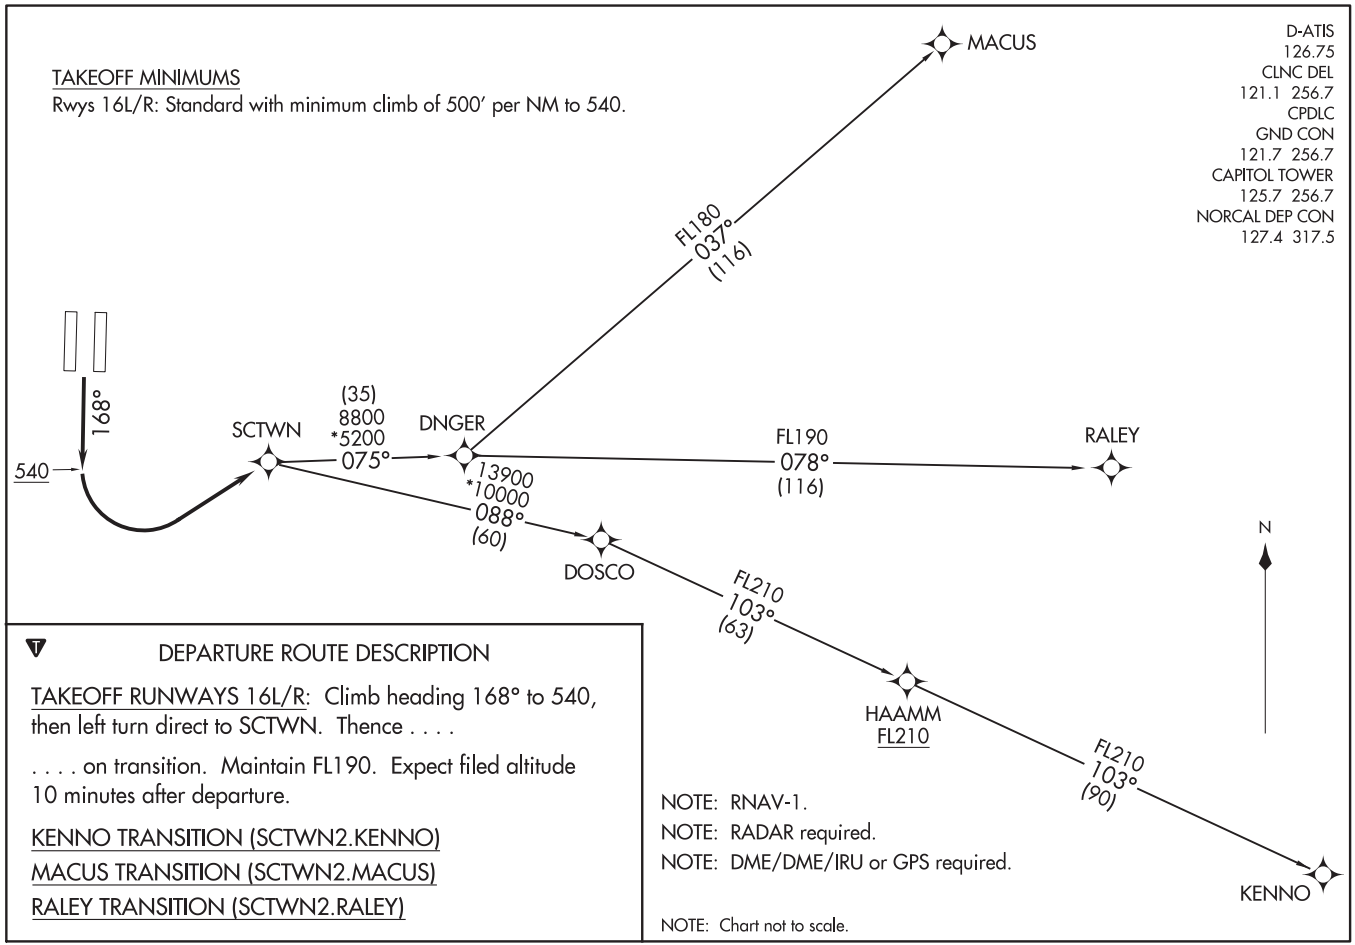

(SCTWN2.SCTWN) 18312

SCTWN TWO DEPARTURE (RNAV)

AL-5490 (FAA)

SACRAMENTO INTL (SMF)

SACRAMENTO, CALIFORNIA

LOC/DME I-MHR	APP CRS	Rwy Idg 11301
111.35	221°	TDZE 98
Chan 50 (Y)		Apt Elev 98

ILS or LOC RWY 22L

SACRAMENTO MATHER (MHR)

DME required for LOC only.

T A Circling NA northwest of Rwy 4R-22L. For inop ALS, increase S-ILS Cat E visibility to RVR 4000 and S-LOC Cat C/D/E visibility to RVR 6000. #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR A5

MISSED APPROACH: Climb to 700 then climbing left turn to 3000 on heading 090° and SAC VORTAC R-058 to COSKA INT/ SAC 24.2 DME and hold.

ATIS	NORCAL APP CON	MATHER TOWER ★	GND CON	CLNC DEL	UNICOM
118.325	127.4 317.5	120.65 (CTAF) L 282.25	121.85 307.9	121.85 307.9	122.95

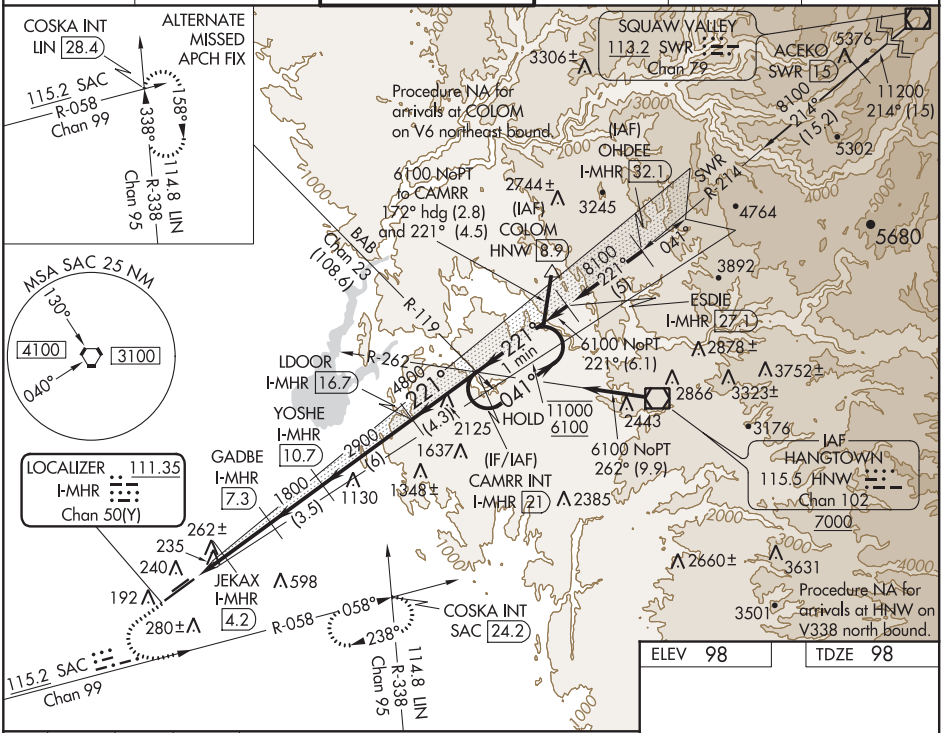

ELEV 98	TDZE 98

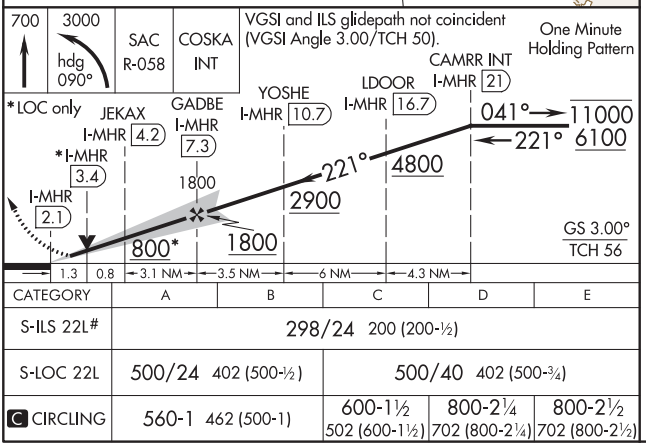

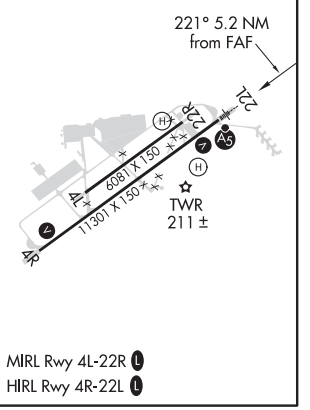

CATEGORY	A	B	C	D	E
S-ILS 22L#	298/24 200 (200-½)				
S-LOC 22L	500/24 402 (500-½)		500/40 402 (500-¾)		
C CIRCLING	560-1 462 (500-1)		600-1½ 502 (600-1½)	800-2¼ 702 (800-2¼)	800-2½ 702 (800-2½)

MIRL Rwy 4L-22R L
HIRL Rwy 4R-22L L

SW-2, 30 JAN 2020 to 26 MAR 2020

SACRAMENTO, CALIFORNIA | AL-356 (FAA) | 19339

LOC/DME I-MHR	APP CRS	Rwy Idg 11301
111.35	221°	TDZE 98
Chan 50 (Y)		Apt Elev 98

ILS RWY 22L (SA CAT I & II)

SACRAMENTO MATHER (MHR)

SA CAT I: Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DH.
SA CAT II: Reduced lighting; requires specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

MALSR

MISSED APPROACH: Climb to 700 then climbing left turn to 3000 on heading 090° and SAC VORTAC R-058 to COSKA INT/SAC 24.2 DME and hold.

ATIS	NORCAL APP CON	MATHER TOWER ★	GND CON	CLNC DEL	UNICOM
118.325	127.4 317.5	120.65 (CTAF) L 282.25	121.85 307.9	121.85 307.9	122.95

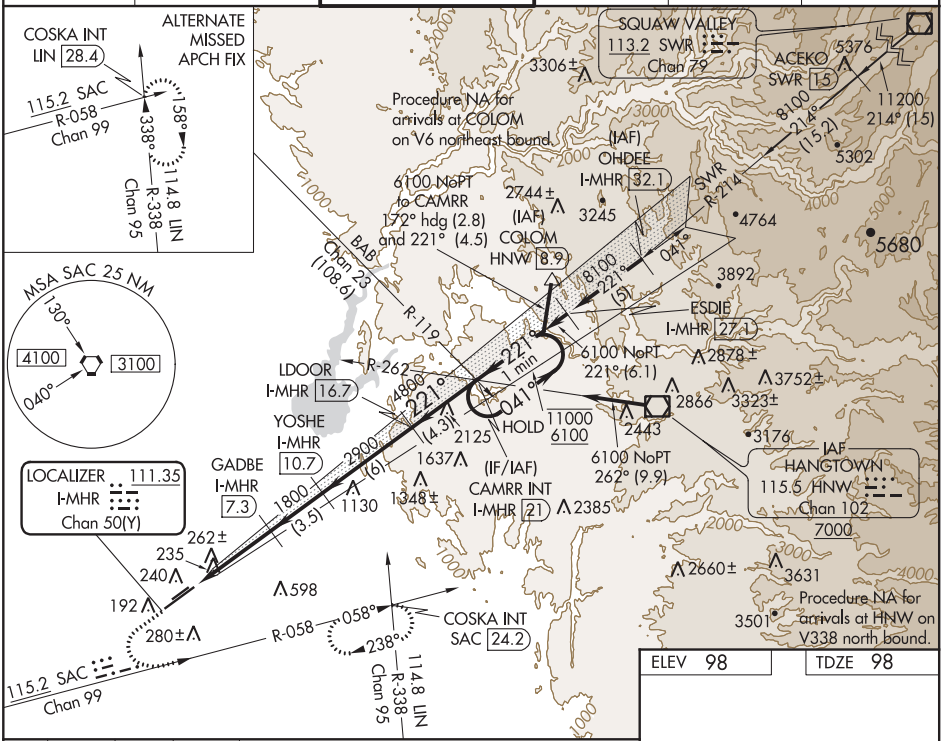

ELEV 98	TDZE 98

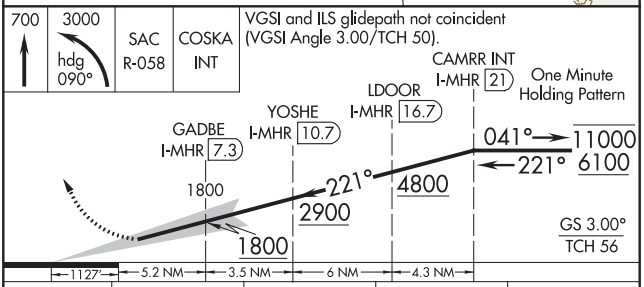

CATEGORY	A	B	C	D
S-ILS 22L	SA CAT I	RA 136/14	150	DA 248
S-ILS 22L	SA CAT II	RA 95/12	100	DA 198

SA CATEGORY I & II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED



MIRL Rwy 4L-22R L
HIRL Rwy 4R-22L L

SACRAMENTO, CALIFORNIA
Amdt 7 05DEC19

38°33'N-121°18'W

SACRAMENTO MATHER (MHR)

ILS RWY 22L (SA CAT I & II)

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	11301
CH 45601	041°	TDZE	81
W04A		Apt Elev	98

RNAV (GPS) RWY 4R
SACRAMENTO MATHER (MHR)

RNP APCH.

T A Circling NA northwest of Rwy 4R-22L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 37°C.

MISSED APPROACH: Climb to 3300 direct STNGR and hold.

ATIS	NORCAL APP CON	MATHER TOWER ★	GND CON	CLNC DEL	UNICOM
118.325	127.4 317.5	120.65 (CTAF) L 282.25	121.85 307.9	121.85 307.9	122.95

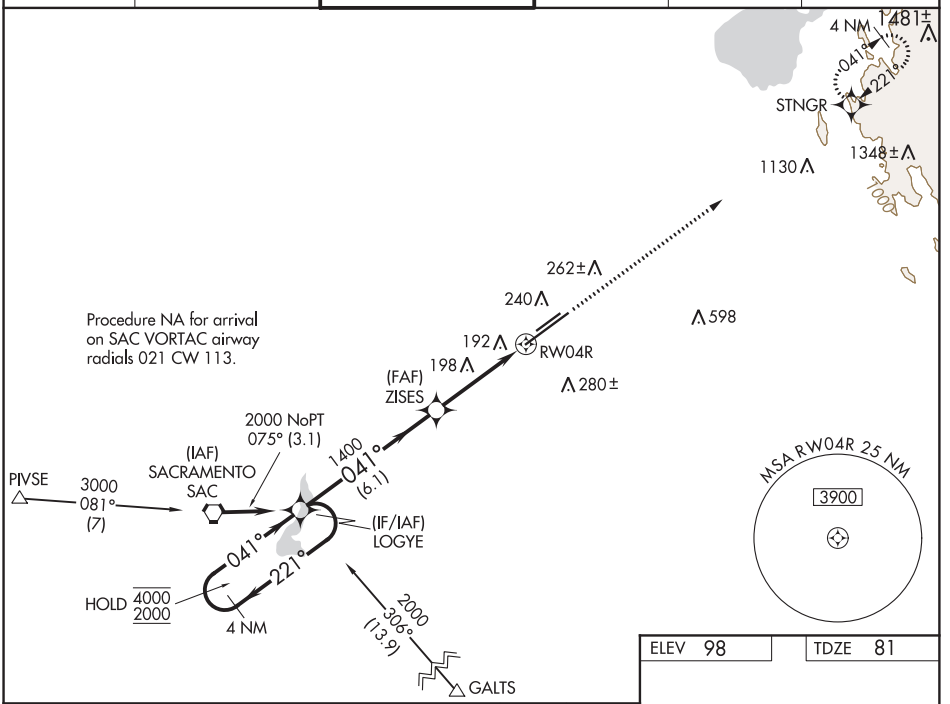

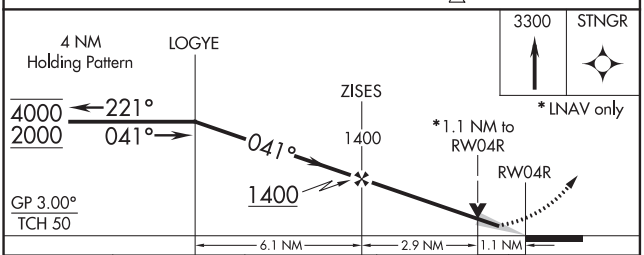



CATEGORY	A	B	C	D
LPV DA	331-¾ 250 (300-¾)			
LNAV/VNAV DA	375-1 294 (300-1)			
LNAV MDA	480-1 399 (400-1)		480-1¼ 399 (400-1¼)	
C CIRCLING	560-1 462 (500-1)	580-1 482 (500-1)	600-1½ 502 (600-1½)	800-2¼ 702 (800-2¼)

MIRL Rwy 4L-22R L
HIRL Rwy 4R-22L L

SW-2, 30 JAN 2020 to 26 MAR 2020

SACRAMENTO, CALIFORNIA AL-356 (FAA) 20030

RNAV (GPS) RWY 22L

SACRAMENTO MATHER (MHR)

WAAS CH 40225 W22A	APP CRS 221°	Rwy Idg 11301 TDZE 98 Apt Elev 98

RNP APCH.

T A Circling NA northwest of Rwy 4R-22L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅛ SM and LNAV Cat C/D visibility to 1⅜ SM.

MALSR A5

MISSED APPROACH: Climb to 3000 direct XAKBE and on track 233° to SAC VORTAC and hold.

ATIS	NORCAL APP CON	MATHER TOWER ★	GND CON	CLNC DEL	UNICOM
118.325	127.4 317.5	120.65 (CTAF) L 282.25	121.85 307.9	121.85 307.9	122.95

MISSED APCH FIX

SACRAMENTO SAC

049° 229° 4 NM

Procedure NA for arrivals at HAGAN on V392-494 northbound.

Procedure NA for arrivals on HNW VOR/DME airway radials 180 CW 303.

HAGAN (12.2) 168° 4300

4 NM HOLD 6000 3500

HANGTOWN HNW

041° 221° 2125

5200 249° (15)

2600 221° (3.4)

(IF/IAF) STNGR 1637

JASOD 1130 1348 ±

1800 221° (4.1)

JEKAX 2.1 NM to RW22L

(FAF) GADBE

2385

262 ±

240 295 ± RW22L

192 598

280 ±

MSA RW22L 25 NM 4200 1000

XAKBE

233° (8.2)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 98 TDZE 98

3000	XAKBE	tr 233°	SAC

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).

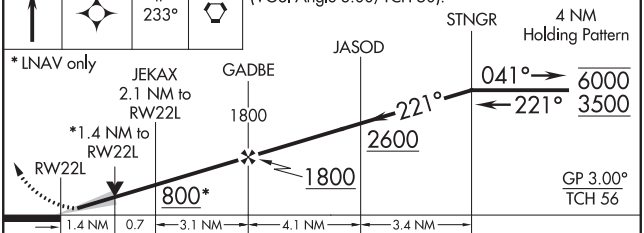



CATEGORY	A	B	C	D
LPV DA	298-½ 200 (200-½)			
LNAV/VNAV DA	517-¾ 419 (500-¾)			
LNAV MDA	580-½ 482 (500-½)		580-1 482 (500-1)	
C CIRCLING	580-1 482 (500-1)		600-1½ 502 (600-1½)	800-2¼ 702 (800-2¼)

MIRL Rwy 4L-22R L

HIRL Rwy 4R-22L L

SACRAMENTO, CALIFORNIA

Amdt 3A 30JAN20

38°33'N-121°18'W

SACRAMENTO MATHER (MHR)

RNAV (GPS) RWY 22L

VORTAC SAC	APP CRS	Rwy Idg	11301
115.2	045°	TDZE	81
Chan 99		Apt Elev	99

VOR RWY 4R
SACRAMENTO MATHER (MHR)

Circling not authorized north of Rwy 4L-22R.

MISSED APPROACH: Climbing right turn to 3000 via heading 090° and SAC R-058 to COSKA INT/SAC 24.2 DME and hold.

ATIS	NORCAL APP CON	MATHER TOWER ★	GND CON	CLNC DEL	UNICOM
118.325	127.4 317.5	120.65 (CTAF) L 282.25	121.85 307.9	121.85 307.9	122.95

RADAR or DME REQUIRED

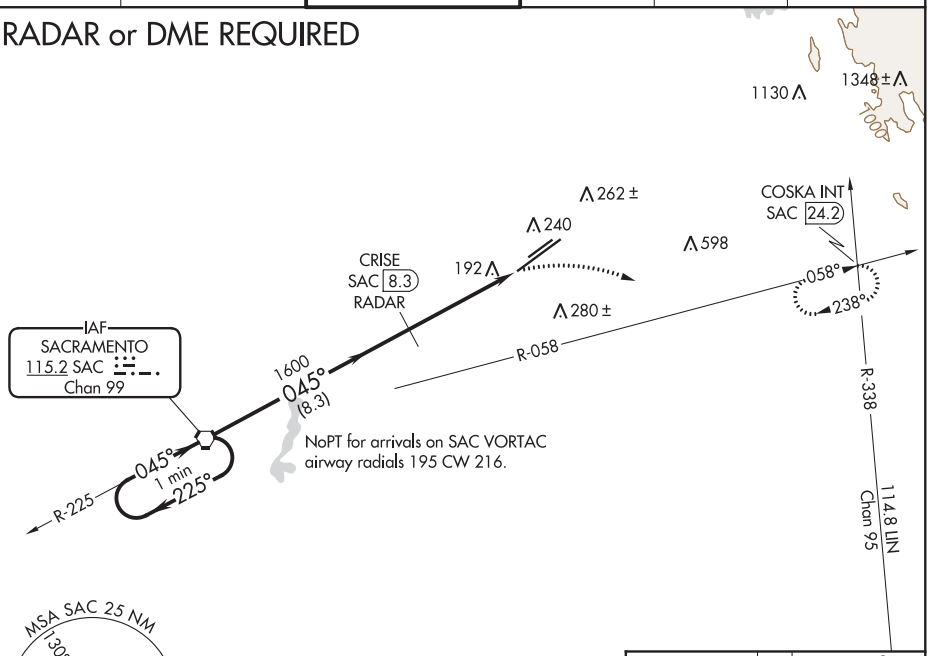



Λ 2051

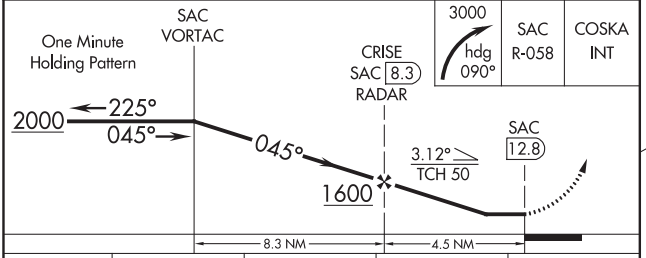

CATEGORY	A	B	C	D
S-4R	560-1	479 (500-1)	560-1¼ 479 (500-1¼)	560-1½ 479 (500-1½)
CIRCLING	560-1	461 (500-1)	560-1½ 461 (500-1½)	660-2 561 (600-2)

ELEV	99	TDZE	81



MIRL Rwy 4L-22R L
HIRL Rwy 4R-22L L

FAF to MAP 4.5 NM					
Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19059

AIRPORT DIAGRAM

AL-356 (FAA)

SACRAMENTO MATHER (MHR)

SACRAMENTO, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
19059
SACRAMENTO, CALIFORNIA
SACRAMENTO MATHER (MHR)

LOC I-SNS	APP CRS	Rwy Idg	4825
108.5	311°	TDZE	82
		Apt Elev	85

ILS RWY 31
SALINAS MUNI (SNS)

When local altimeter setting not received, use Monterey Rgnl altimeter setting and increase S-ILS 31 DA 53 feet.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 via SNS R-275 to MARNA INT/10.9 DME and hold.

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) L 239.3	121.7	122.95

ADF or DME REQUIRED

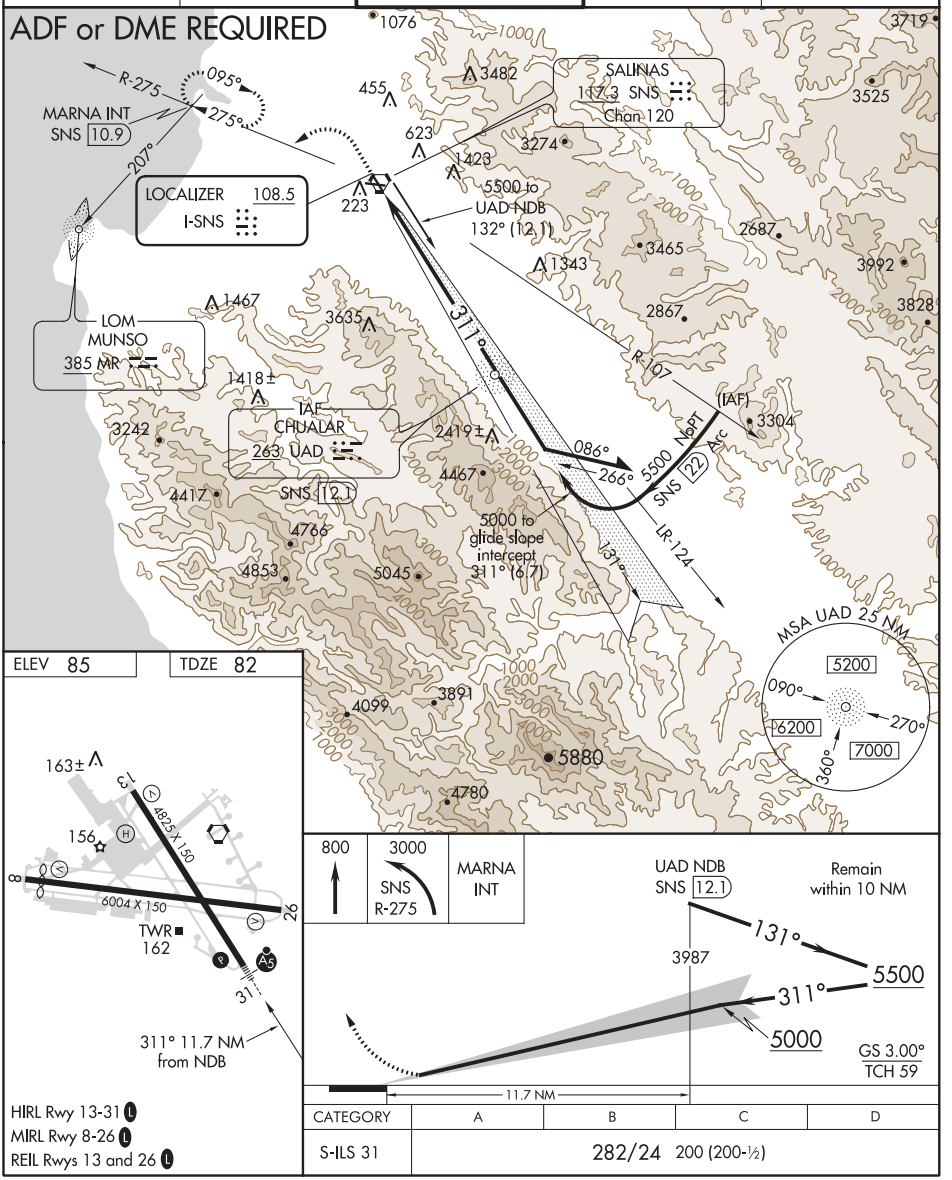

CATEGORY	A	B	C	D
S-ILS 31	282/24 200 (200-½)			

HIRL Rwy 13-31 L
MIRL Rwy 8-26 L
REIL Rwys 13 and 26 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SALINAS, CALIFORNIA AL-363 (FAA) 18088

APP CRS	Rwy Idg	4825
132°	TDZE	85
	Apt Elev	85

RNAV (GPS) RWY 13

SALINAS MUNI (SNS)

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
When local altimeter setting not received, use Monterey Rgnl altimeter setting and increase all MDA 60 feet and increase LNAV Cat C and D visibility ¼ mile.

MISSED APPROACH: Climbing right turn to 3000 direct MARNA and hold.

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) L 239.3	121.7	122.95

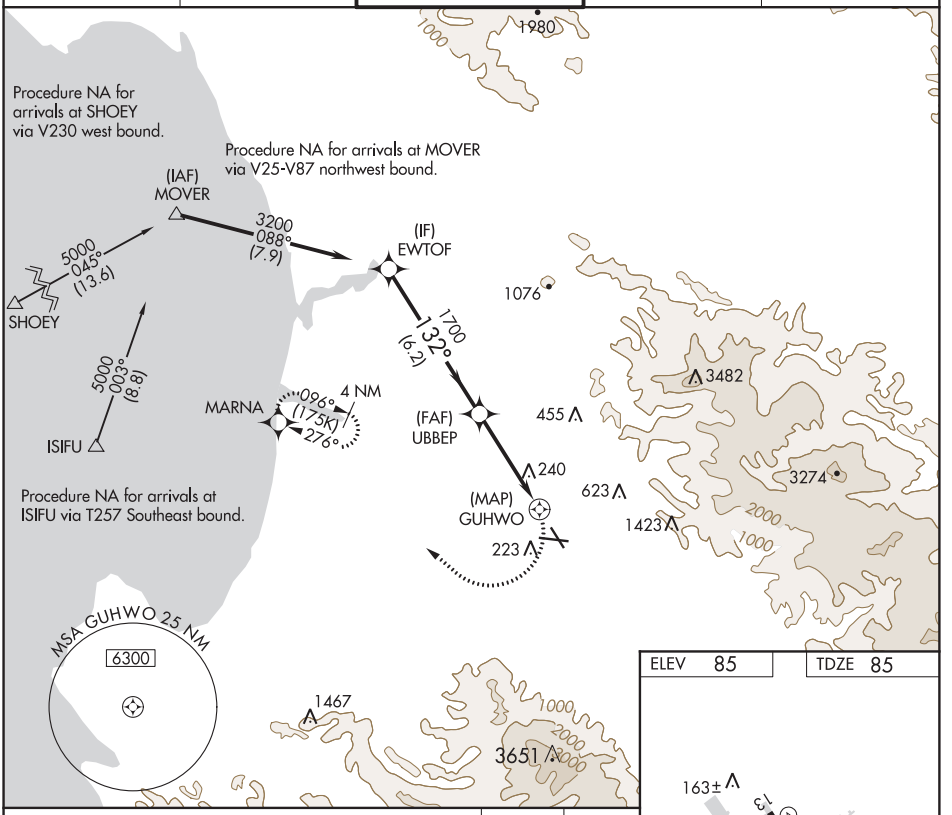

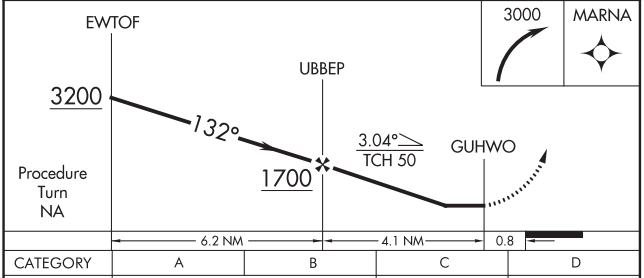

CATEGORY	A	B	C	D
LNAV MDA	540-1 455 (500-1)		540-1¼ 455 (500-1¼)	540-1½ 455 (500-1½)
CIRCLING	540-1 455 (500-1)		540-1½ 455 (500-1½)	760-2¼ 675 (700-2¼)

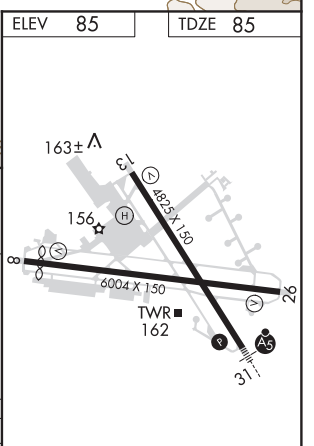

HIRL Rwy 13-31 L
MIRL Rwy 8-26 L
REIL Rwys 13 and 26 L

SALINAS, CALIFORNIA
Orig 27AUG09

36°40'N-121°36'W

SALINAS MUNI (SNS)

RNAV (GPS) RWY 13

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Y RWY 31

SALINAS MUNI (SNS)

APP CRS	Rwy Idg	4825
312°	TDZE	82
	Apt Elev	85

For inoperative MALSR, increase LNAV Cat D visibility to RVR 6000. DME/DME RNP-0.3 NA. When local altimeter not received, use Monterey Rgnl altimeter setting and increase all MDA 60 feet and increase LNAV Cat C visibility to RVR 4000.

MALSR

MISSED APPROACH: Climb to 3000 direct MAFAF and left turn via track 267° to MARNA and hold.

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) L 239.3	121.7	122.95

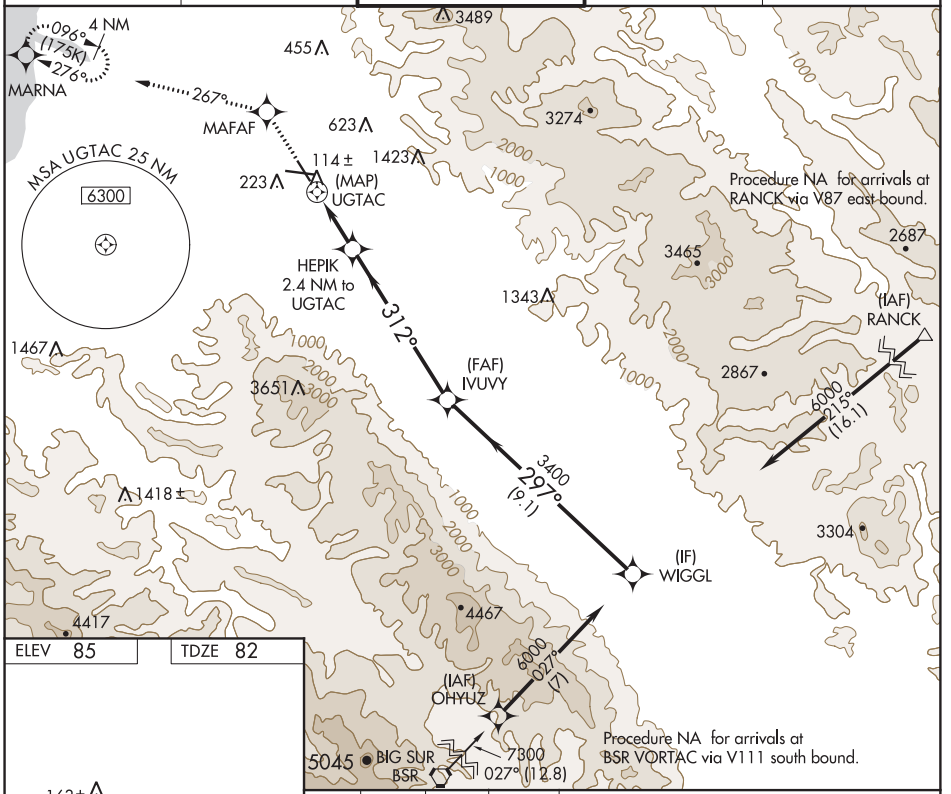

ELEV	85

TDZE	82



HIRL Rwy 13-31 L
MIRL Rwy 8-26 L
REIL Rwys 13 and 26 L

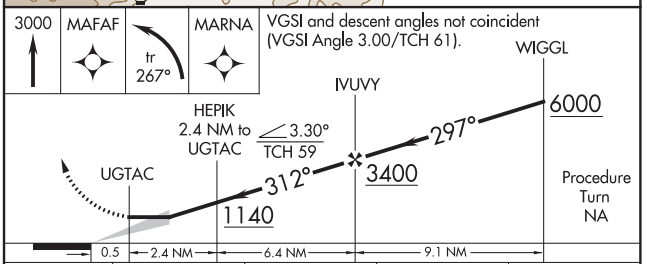

CATEGORY	A	B	C	D
LNAV MDA	440/24 358 (400-½)			440/50 358 (400-1)
CIRCLING	500-1 415 (500-1)	540-1 455 (500-1)	540-1½ 455 (500-1½)	760-2¼ 675 (700-2¼)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SALINAS, CALIFORNIA AL-363 (FAA) 18088

WAAS	APP CRS	Rwy Idg	4825
CH 69513	312°	TDZE	82
W31A		Apt Elev	85

RNAV (GPS) Z RWY 31

SALINAS MUNI (SNS)

Baro-VNAV NA when using Monterey Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 50°C (122°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Monterey Rgnl altimeter setting and increase all DA 53 feet and LNAV/VNAV all Cats visibility to RVR 5000.

MALSR

MISSED APPROACH: Climb to 3000 direct MAFAF and left turn via track 267° to MARNA and hold.

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) L 239.3	121.7	122.95

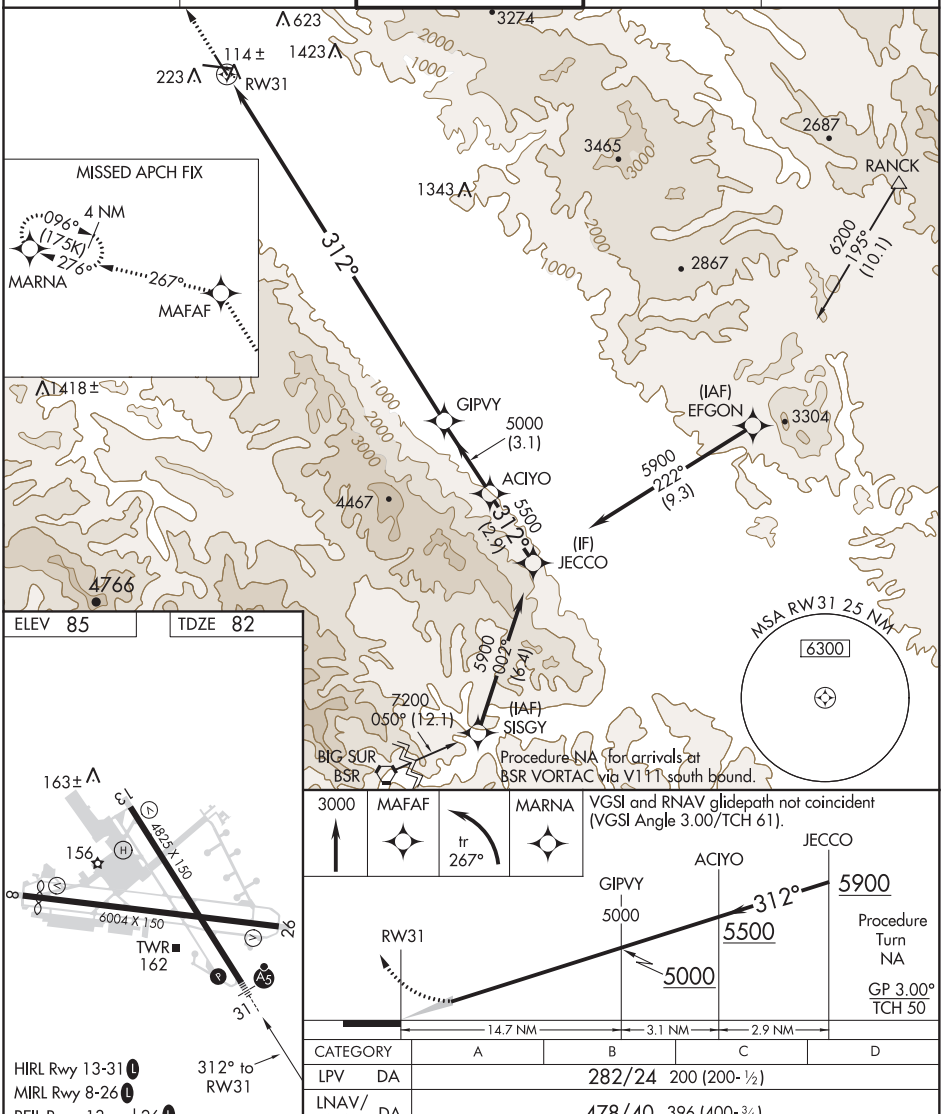

CATEGORY	A	B	C	D
LPV DA	282/24 200 (200-½)			
LNAV/VNAV DA	478/40 396 (400-¾)			

SALINAS, CALIFORNIA
Orig-A 29JUL10

36°40'N-121°36'W

SALINAS MUNI (SNS)

RNAV (GPS) Z RWY 31

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME RWY 31

SALINAS MUNI (SNS)

LOC I-SNS	APP CRS	Rwy Idg	4825
108.5	311°	TDZE	79
		Apt Elev	84

For inoperative MALSR increase S-LOC 31 Cat D visibility to RVR 5000.
Simultaneous reception of I-SNS and SNS DME required.

MALSR

MISSED APPROACH: Climb to 800, then climbing left turn to 3000 via SNS R-275 to MARNA INT/10.9 DME and hold.

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) L 239.3	121.7	122.95

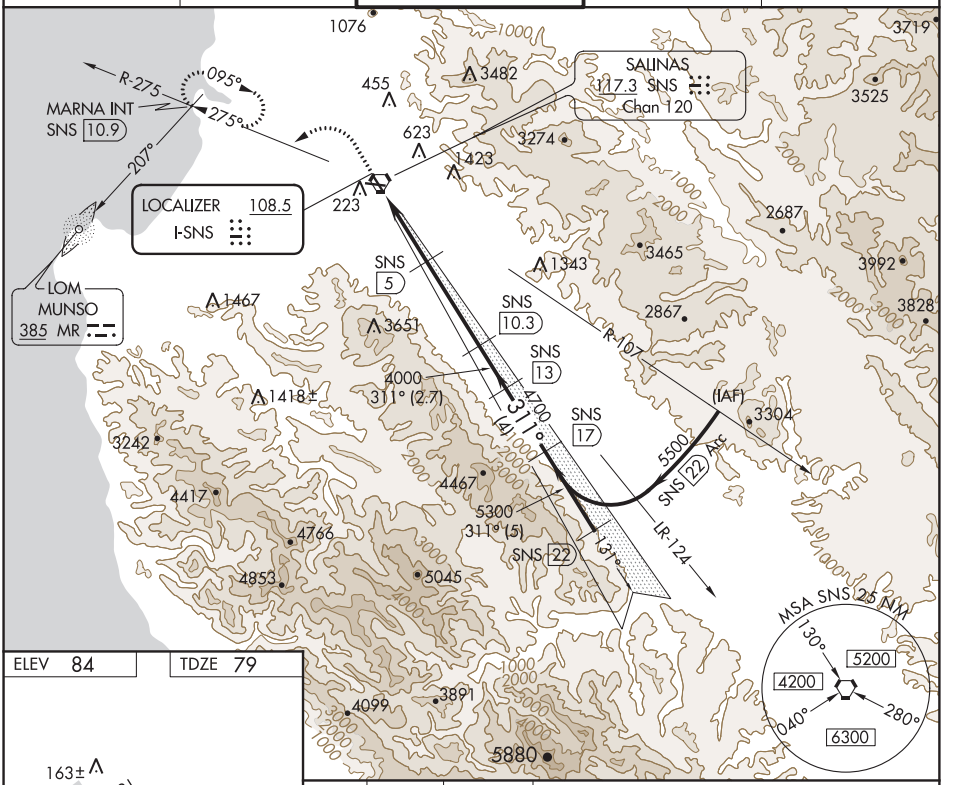

ELEV 84	TDZE 79



HIRL Rwy 13-31 L
MIRL Rwy 8-26 L
REIL Rwys 13 and 26 L

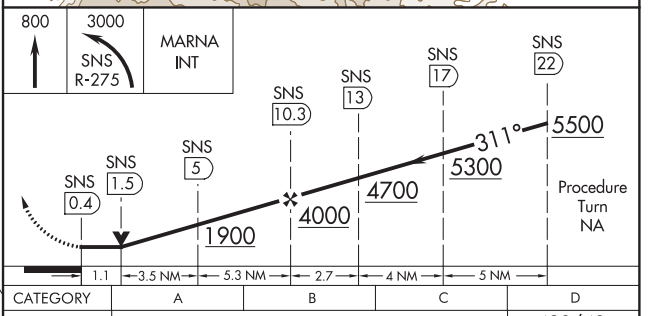

CATEGORY	A	B	C	D
S-31	420/24 341 (400-½)			420/40 341 (400-¾)
CIRCLING	560-1 476 (500-1)	580-1 496 (500-1)	580-1½ 496 (500-1½)	780-2¼ 696 (700-2¼)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SALINAS, CALIFORNIA | AL-363 (FAA) | 17173

VORTAC SNS 117.3 Chan 120	APP CRS 122°	Rwy Idg 4825 / TDZE 81 / Apt Elev 84

VOR RWY 13

SALINAS MUNI (SNS)

MISSED APPROACH: Climbing right turn to 3000 via SNS R-275 to MARNA INT and hold.

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) L 239.3	121.7	122.95

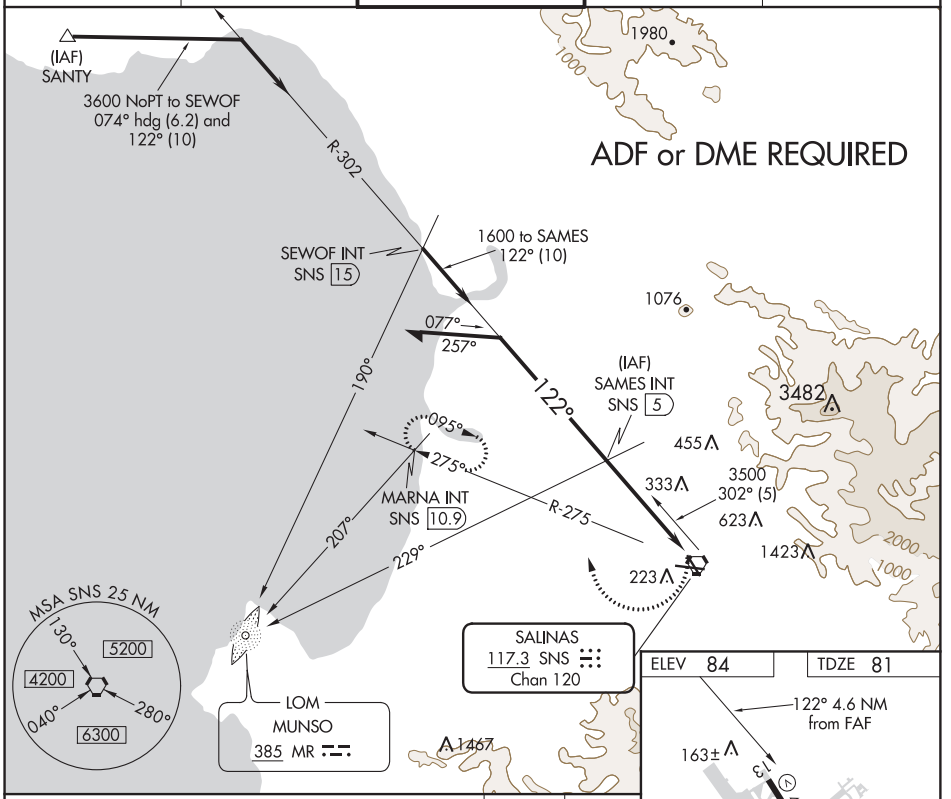

CATEGORY	A	B	C	D
S-13	500-1 419 (500-1)		500-1¼ 419 (500-1¼)	1020-3 939 (1000-3)
CIRCLING	560-1 476 (500-1)	580-1 496 (500-1)	580-1½ 496 (500-1½)	1020-3 936 (1000-3)

HIRL Rwy 13-31 L
MIRL Rwy 8-26 L
REIL Rwys 13 and 26 L

FAF to MAP 4 NM					
Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20

SALINAS, CALIFORNIA
Amdt 11D 13DEC12

36°40'N-121°36'W

SALINAS MUNI (SNS)
VOR RWY 13

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

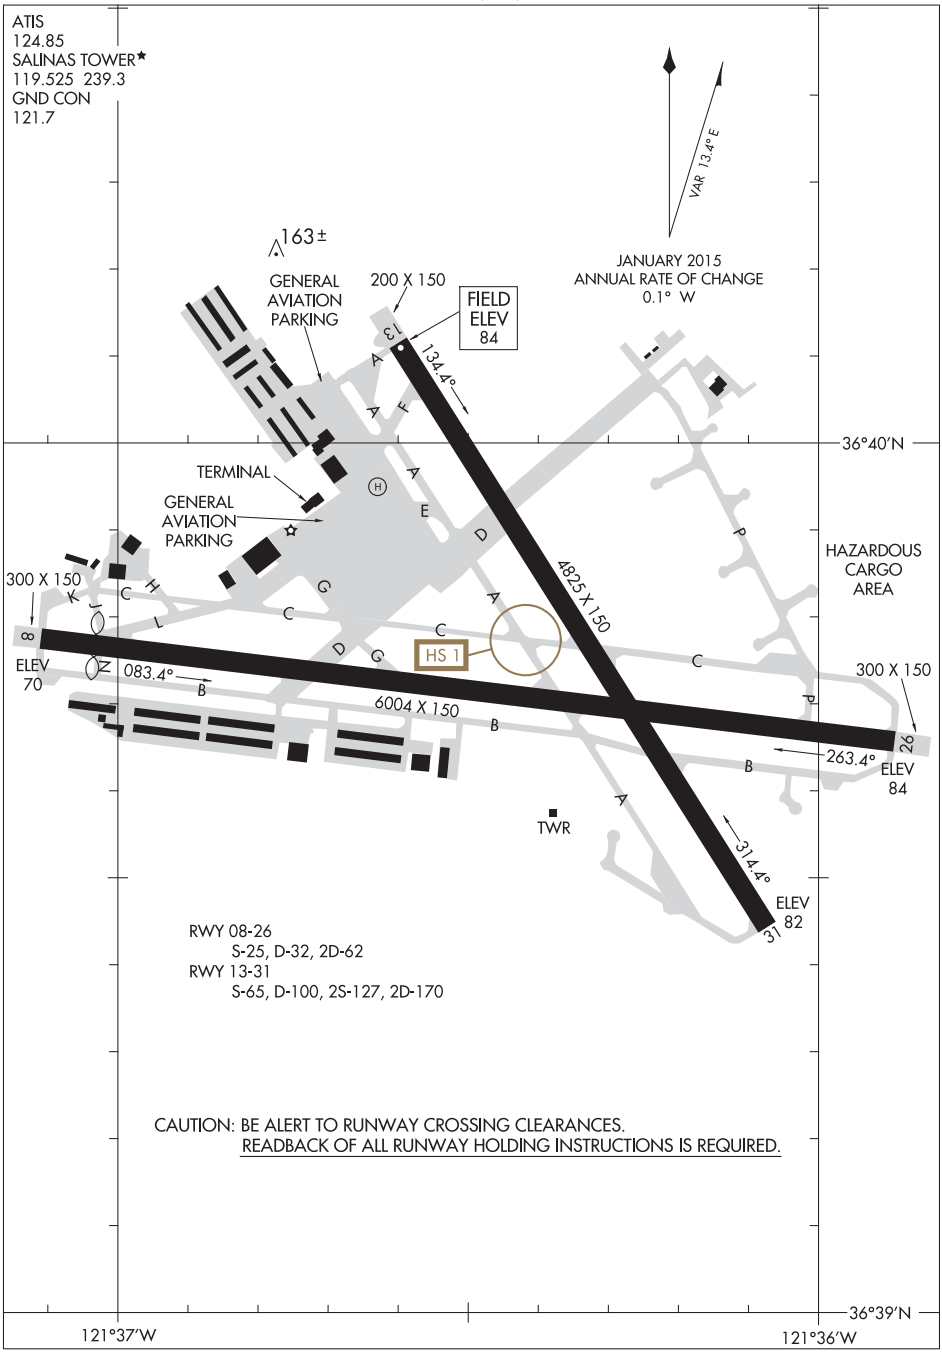

SW-2, 30 JAN 2020 to 26 MAR 2020

(CHLN3.SNS) 18312

CHALONE THREE DEPARTURE

AL-363 (FAA)

SALINAS MUNI (SNS)
SALINAS, CALIFORNIA

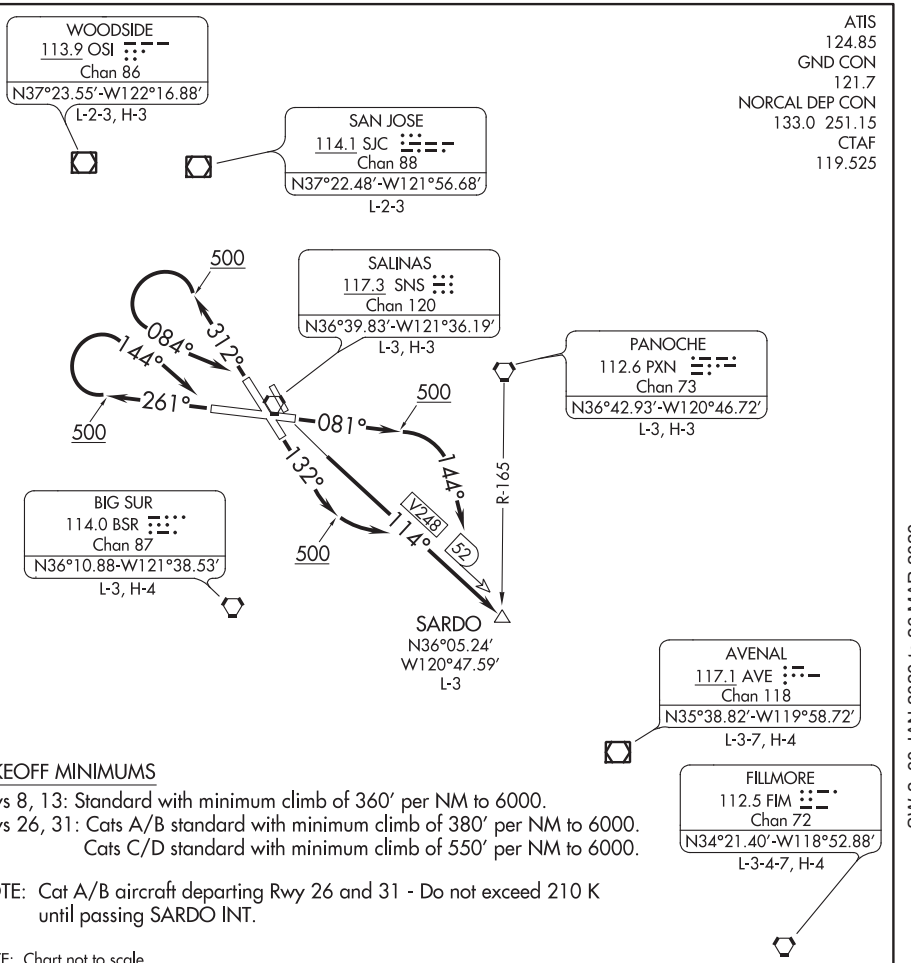

TAKEOFF MINIMUMS

Rwys 8, 13: Standard with minimum climb of 360' per NM to 6000.
Rwys 26, 31: Cats A/B standard with minimum climb of 380' per NM to 6000.
Cats C/D standard with minimum climb of 550' per NM to 6000.

NOTE: Cat A/B aircraft departing Rwy 26 and 31 - Do not exceed 210 K until passing SARDO INT.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 8: Climb heading 081° to 500 then climbing right turn heading 144° to intercept SNS R-114 (V248) southeast bound to SARDO INT. Thence . . . .

TAKEOFF RUNWAY 13: Climb heading 132° to 500 then climbing left turn to intercept SNS R-114 (V248) southeast bound to SARDO INT. Thence . . . .

TAKEOFF RUNWAY 26: Climb heading 261° to 500 then climbing right turn heading 144° to intercept SNS R-114 (V248) southeast bound to SARDO INT. Thence . . . .

TAKEOFF RUNWAY 31: Climb heading 312° to 500 then climbing left turn heading 084° to intercept SNS R-114 (V248) southeast bound to SARDO INT. Thence . . . .

. . . .Proceed on assigned route. Expect clearance to filed altitude 5 minutes after departure.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

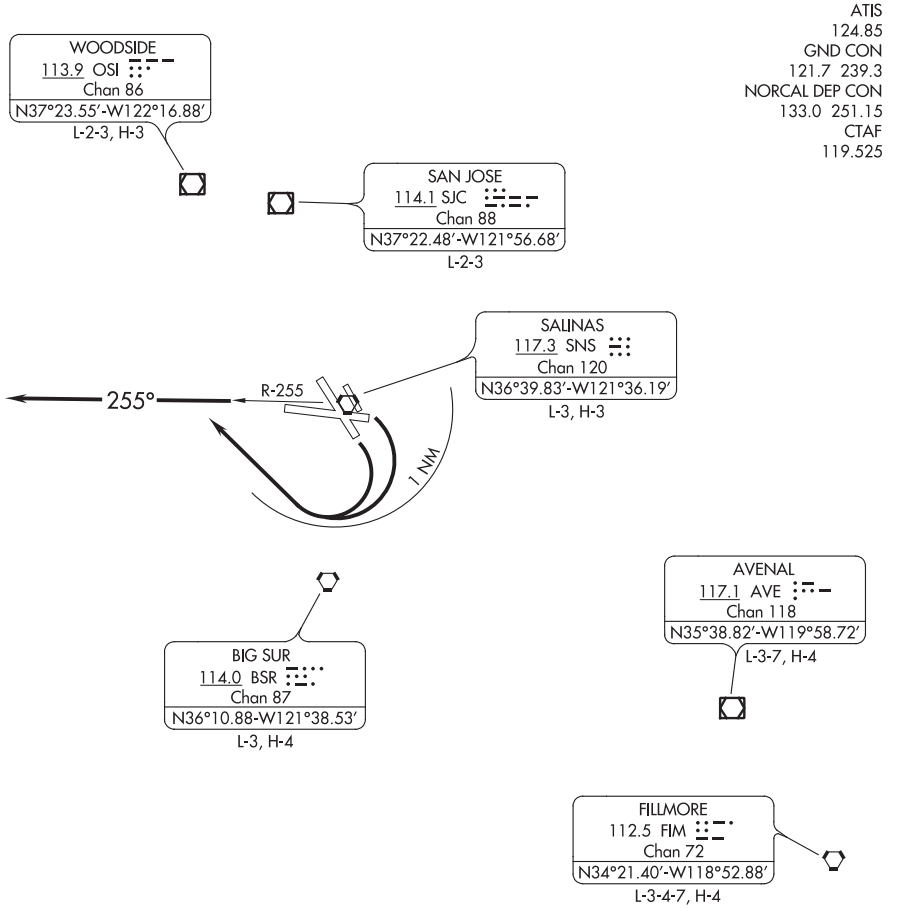

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

All aircraft expect vectors to assigned route. Maintain 6000'. Expect clearance to filed altitude five minutes after departure.

TAKEOFF RUNWAYS 8 and 13: Turn right within one mile to intercept and climb via SNS R-255 for vector.

TAKEOFF RUNWAYS 26 and 31: Climb on SNS R-255 for vector.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN ANDREAS, CALIFORNIA | AL-6708 (FAA) | 19171

RNAV (GPS) RWY 31

CALAVERAS CO-MAURY RASMUSSEN FIELD (CPU)

WAAS CH 81842 W31A	APP CRS 311°	Rwy Idg 3602 / TDZE 1328 / Apt Elev 1328

RNP APCH.

T A — Circling NA southwest of Rwy 31-13.

MISSED APPROACH: Climb to 4400 direct ZEGEX and hold, continue climb-in-hold to 4400.

AWOS-3P	NORCAL APP CON	UNICOM
118.525	125.1 363.2	123.0 (CTAF) L

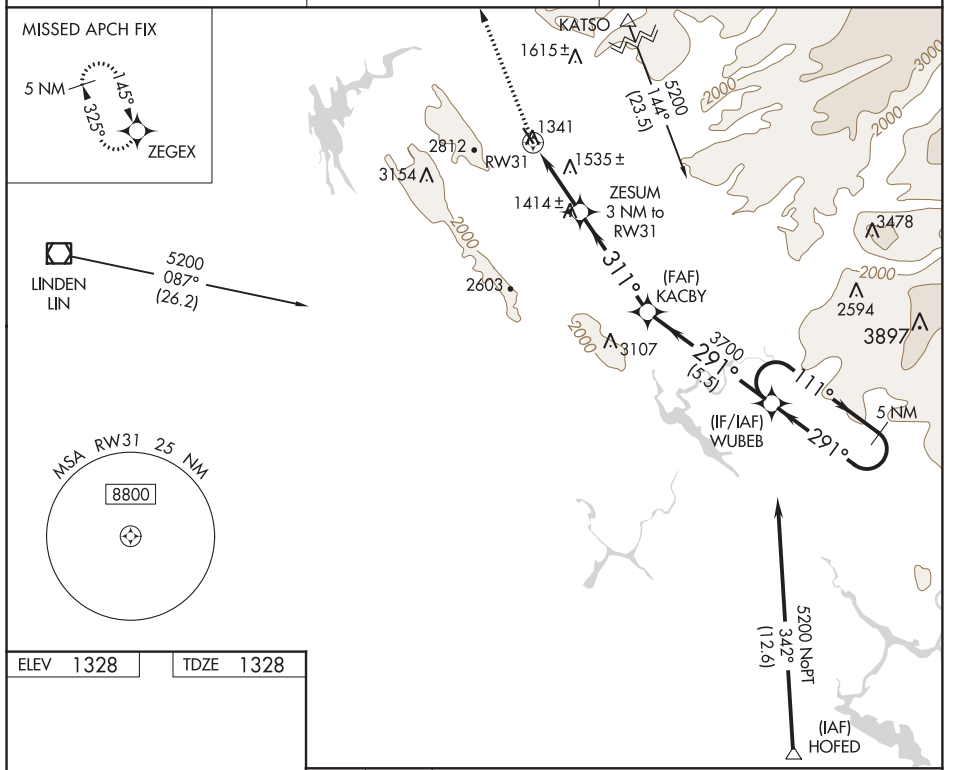

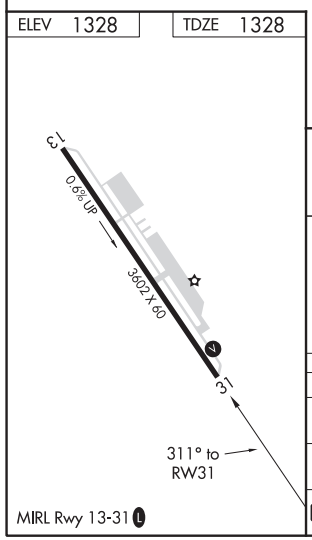

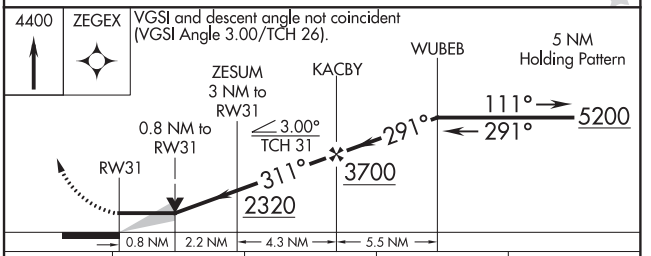

CATEGORY	A	B	C	D
LP MDA	1600-1 272 (300-1)			NA
LNAV MDA	1860-1 532 (600-1)		1860-1½ 532 (600-1½)	NA
C CIRCLING	1860-1 532 (600-1)	2040-1 712 (800-1)	2360-3 1032 (1100-3)	NA

SAN ANDREAS, CALIFORNIA
Amdt 1A 20JUN19

CALAVERAS CO-MAURY RASMUSSEN FIELD (CPU)
38°09′N-120°39′W
RNAV (GPS) RWY 31

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	2621
297°	TDZE	5
	Apt Elev	5

RNAV (GPS) Y RWY 30

SAN CARLOS (SQL)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use San Francisco Intl altimeter setting and increase all MDA 40 feet. Rwy 30 visibility reduction by helicopters below 1 SM NA. Circling NA west of Rwy 12-30.

MISSED APPROACH: Climbing left turn to 5400 direct AMEBY and hold, continue climb-in-hold to 5400.

ATIS	NORCAL APP CON	SAN CARLOS TOWER ★	GND CON	UNICOM
125.9	133.95 317.6	119.0 (CTAF) L 326.2	121.6	122.95

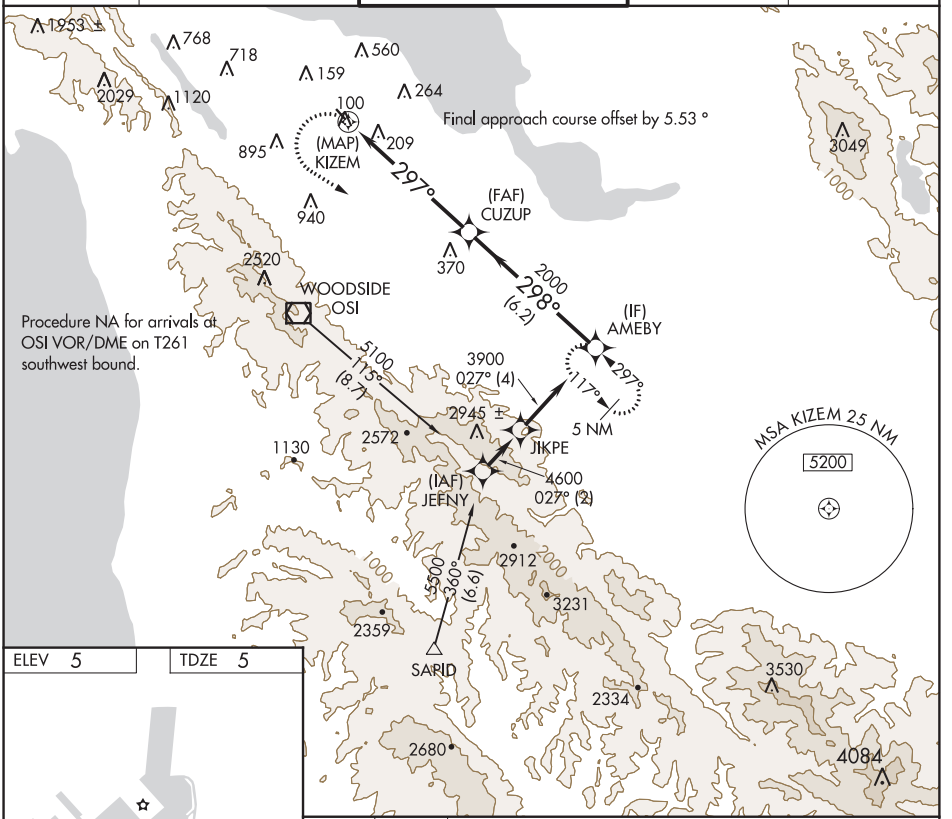

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 5	TDZE 5

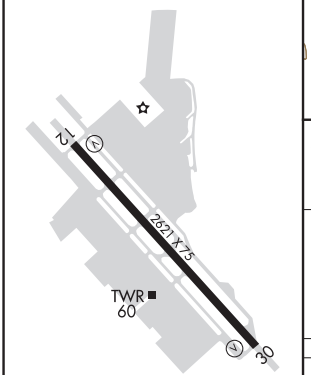

REIL Rwys 12 and 30 L
MIRL Rwy 12-30 L

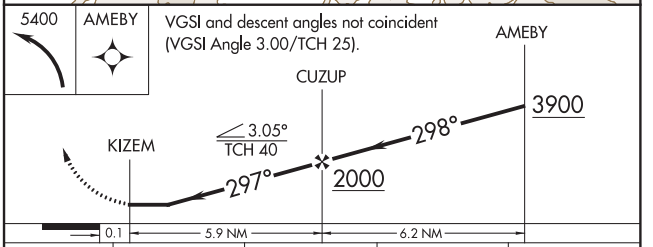

CATEGORY	A	B	C	D
LNAV MDA	1260-1¼ 1255 (1300-1¼)		NA	
CIRCLING	1260-1¼ 1255 (1300-1¼)	1260-1½ 1255 (1300-1½)	NA	

SAN CARLOS, CALIFORNIA | AL-9219 (FAA) | 18256

APP CRS	Rwy Idg	2621
297°	TDZE	5
	Apt Elev	5

RNAV (GPS) Z RWY 30

SAN CARLOS (SQL)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use San Francisco Intl altimeter setting and increase all MDA 40 feet. Rwy 30 visibility reduction by helicopters below 1 SM NA.

MISSED APPROACH: Climbing left turn to 5400 direct AMEBY and hold, continue climb-in-hold to 5400. Missed approach requires minimum climb of 302 feet per NM to 5400.

ATIS	NORCAL APP CON	SAN CARLOS TOWER ★	GND CON	UNICOM
125.9	133.95 317.6	119.0 (CTAF) L 326.2	121.6	122.95

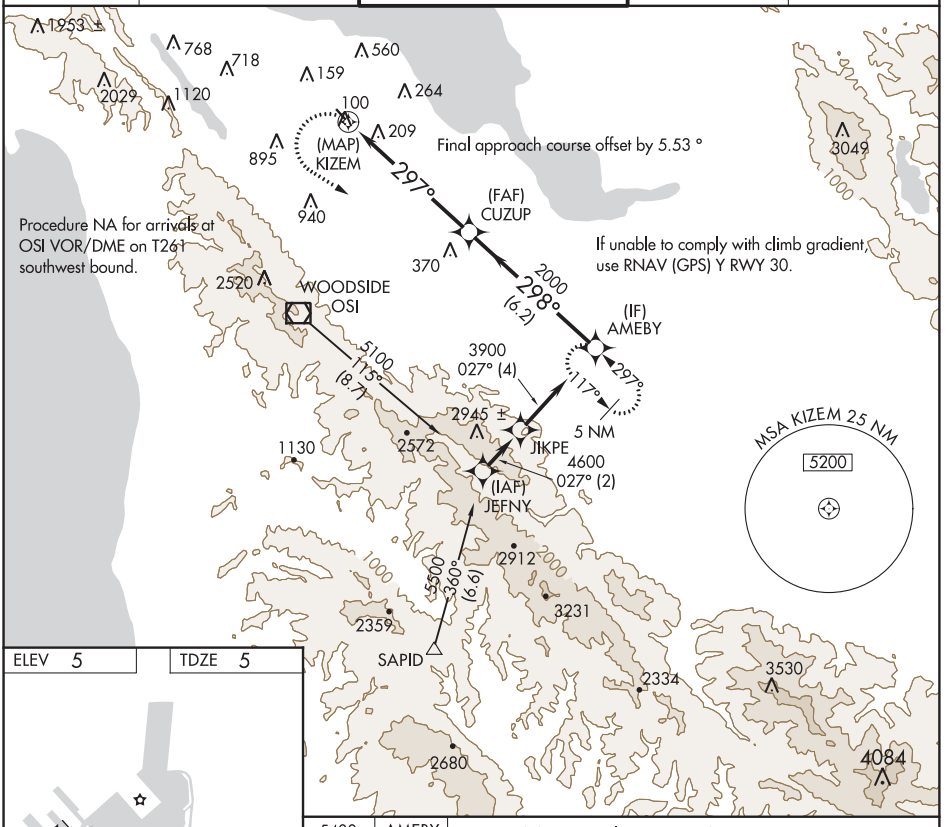

ELEV 5	TDZE 5

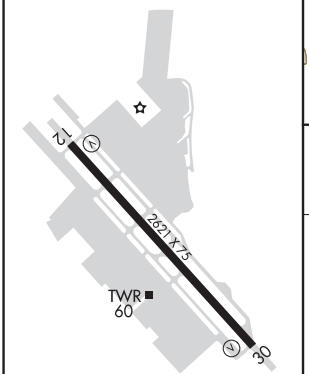

REIL Rwys 12 and 30 L
MIRL Rwy 12-30 L

5400	AMEBY

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).

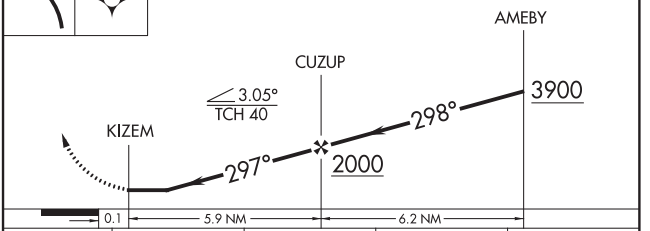

CATEGORY	A	B	C	D
LNAV MDA	900-1¼ 895 (900-1¼)	900-1½ 895 (900-1½)	NA	

SAN CARLOS, CALIFORNIA
Amdt 1B 27APR17

37°31'N-122°15'W

SAN CARLOS (SQL)

RNAV (GPS) Z RWY 30

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AL-9219 (FAA)

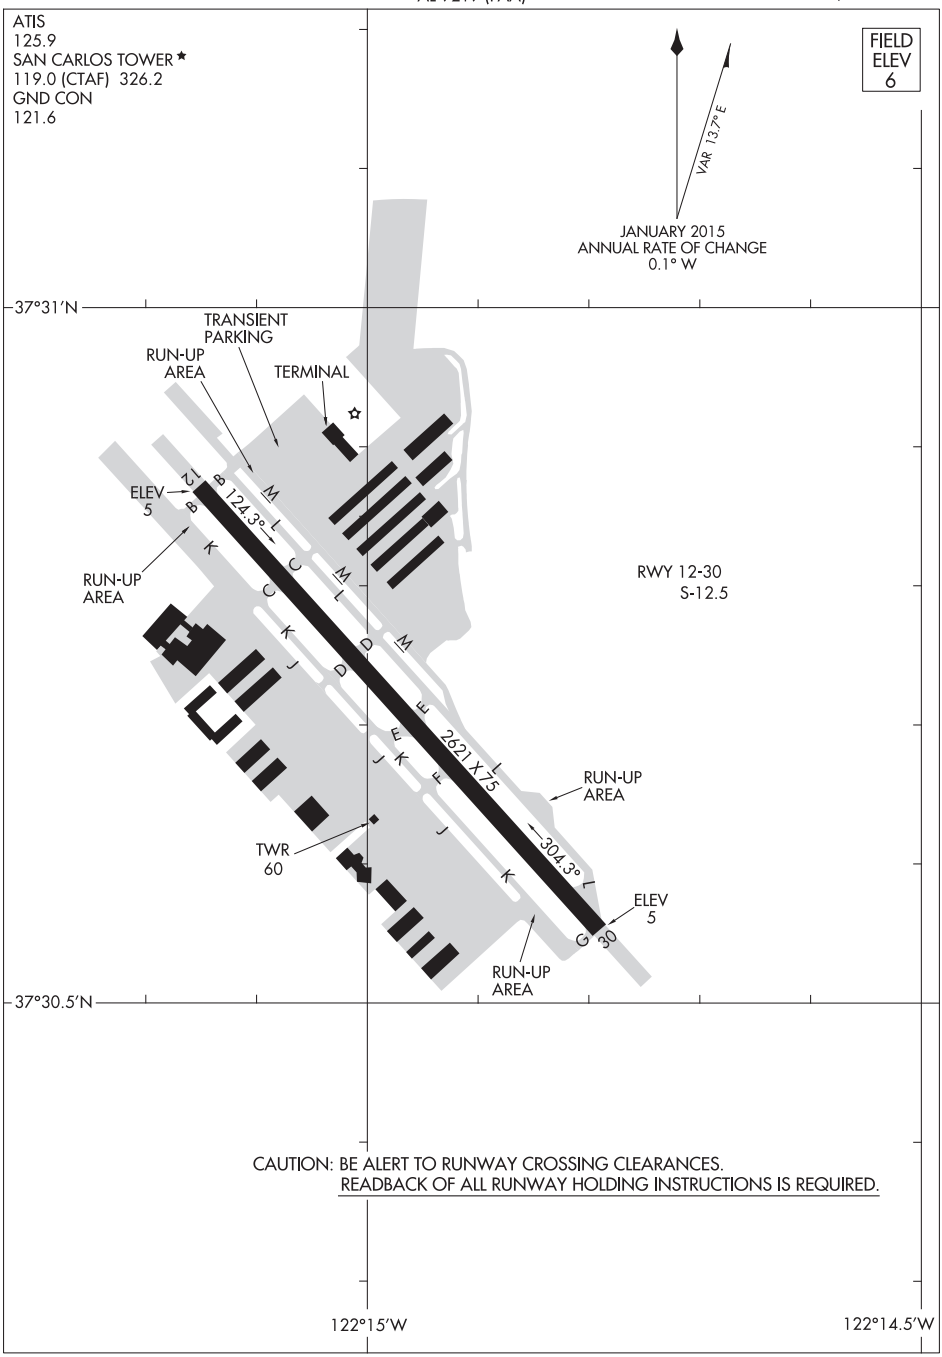

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN FRANCISCO, CALIFORNIA AL-375 (FAA) 19171

ILS or LOC RWY 19L

SAN FRANCISCO INTL (SFO)

LOC/DME I-SIA	APP CRS		19L	19R
108.9	194°	Rwy Idg	8650	7650
Chan 26		TDZE	11	11
		Apt Elev	13	13

T A Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on the glideslope. Sidestep NA until passing ROGGE INT. For inop ALS, increase S-ILS 19L all Cats visibility to RVR 4500. Inop table does not apply to Sidestep 19R or S-LOC 19L Cats C/D.

MALSF Rwy 19L (A4)

MISSED APPROACH: Climb to 520 then climbing left turn to 4000 on SFO VOR/DME R-101 to DUMBA INT/SFO 15 DME and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

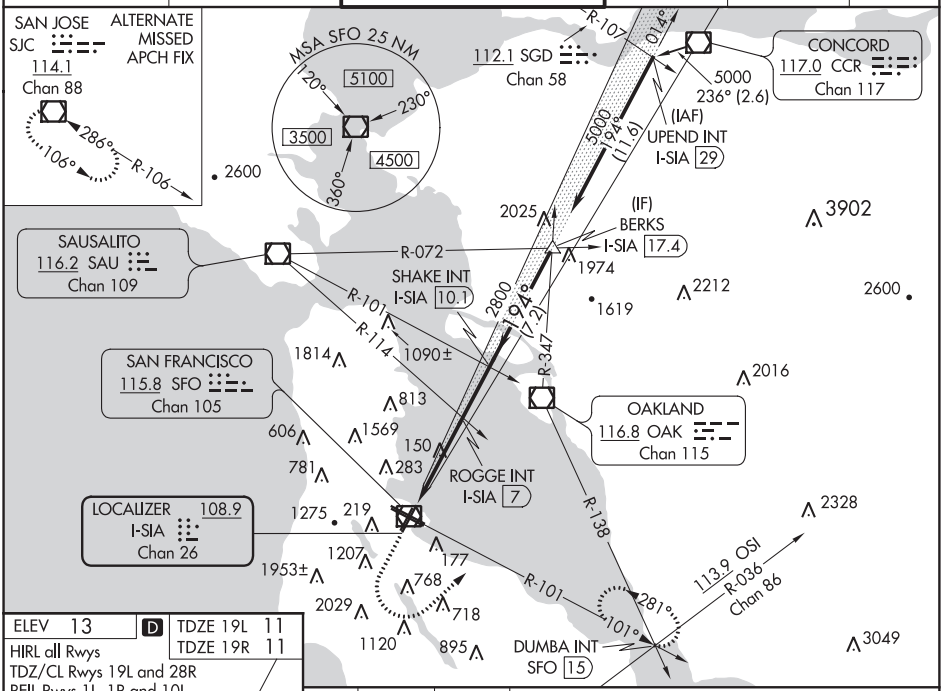

ELEV 13 D TDZE 19L 11 TDZE 19R 11

HIRL all Rwys

TDZ/CL Rwys 19L and 28R

REIL Rwys 1L, 1R and 10L



FAF to MAP 8.6 NM					
Knots	60	90	120	150	180
Min:Sec	8:36	5:44	4:18	3:26	2:52

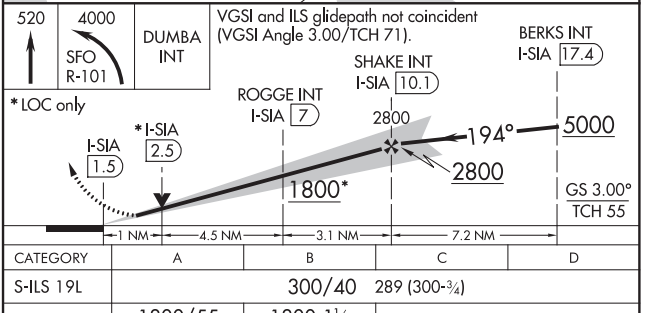

CATEGORY	A	B	C	D
S-ILS 19L	300/40 289 (300-¾)			
S-LOC 19L	1800/55 1789 (1800-1)	1800-1¼ 1789 (1800-1¼)	1800-3 1789 (1800-3)	
ROGGE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 19L	400/40 389 (400-¾)		400/45 389 (400-⅞)	
SIDESTEP 19R	400/55 389 (400-1)		400-1½ 389 (400-1½)	400-2 389 (400-2)

SAN FRANCISCO, CALIFORNIA

Amdt 22A 20JUN19

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)

ILS or LOC RWY 19L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-SFO	APP CRS	Rwy Idg	10275
109.55	284°	TDZE	13
Chan 32 (Y)		Apt Elev	13

ILS or LOC RWY 28L

SAN FRANCISCO INTL (SFO)

RNAV 1- GPS or RADAR required for procedure entry. DME required.

T A Circling NA to Rwys 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. LOC procedure NA during simultaneous operations. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glideslope.
#RVR 1800 authorized with use of FD or AP or HUD to DA.
##For inop ALS, increase S-ILS 28L all Cats visibility to 2½ SM.
**For inop ALS increase S-LOC 28L Cat C/D visibility to 2½ SM.

MALSR (A5)

MISSED APPROACH: Climb to 4000 on SFO VOR/DME R-275 to OLYMM INT/SFO 15.4 DME and hold, continue climb-hold to 4000.
†Missed approach requires minimum climb of 330 feet per NM to 1600.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

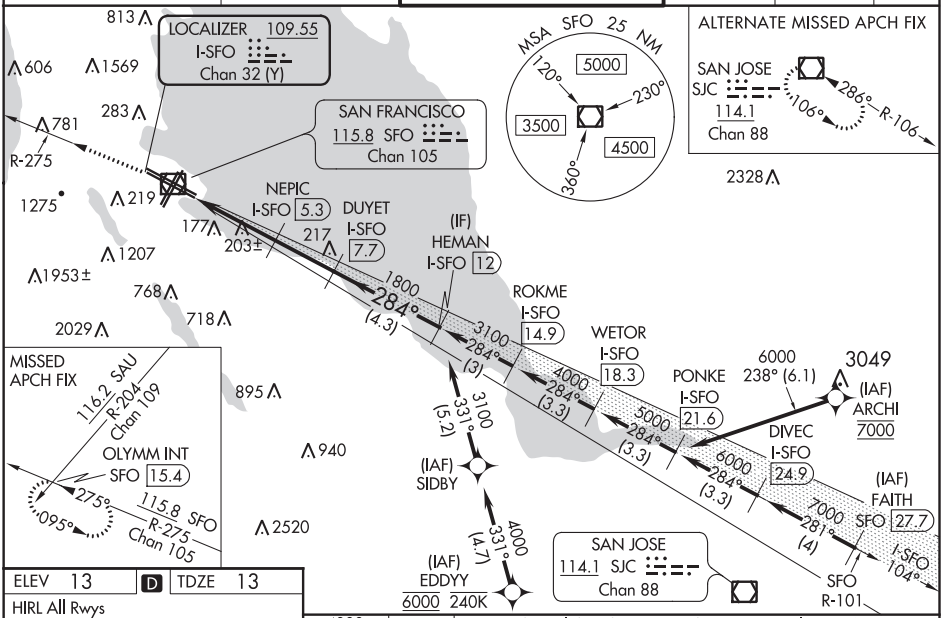

ELEV 13	D	TDZE 13

HIRL All Rwys
TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L



4000 SFO R-275 | OLYMM INT

VGSI and ILS glidepath not coincident (VGSI Angle 2.85/TCH 67).
Use I-SFO DME when on the localizer course.

*LOC only

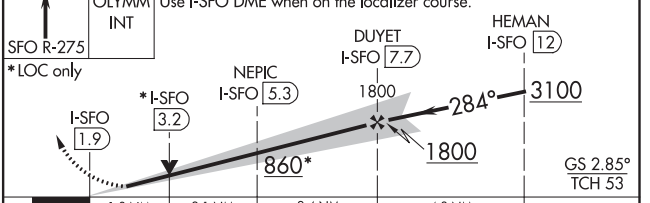

CATEGORY	A	B	C	D
S-ILS 28L#†	213/24 200 (200-½)			
S-ILS 28L##	789-1¾ 776 (800-1¾)			
S-LOC 28L†	460/24 447 (500-½)		460/45 447 (500-⅞)	
S-LOC 28L**	860/24 847 (900-½)	860/40 847 (900-¾)	860-1⅞ 847 (900-1⅞)	
C CIRCLING	860-1¼ 847 (900-1¼)	960-1¼ 947 (1000-1¼)	1560-3 1547 (1600-3)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN FRANCISCO, CALIFORNIA AL-375 (FAA) 19171

ILS or LOC RWY 28R

SAN FRANCISCO INTL (SFO)

LOC/DME I-GWQ	APP CRS		28R	28L
111.7	284°	Rwy Idg	11236	10275
Chan 54		TDZE	13	13
		Apt Elev	13	13

RNAV 1-GPS or RADAR required for procedure entry.

Circling NA to Rwys 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. For inop ALS increase S-LOC 28R# Cat C/D visibility to 1⅜ SM. LOC procedure NA during simultaneous operations. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glideslope.

ALSF-2 Rwy 28R (A)

MALSR Rwy 28L (A5)

MISSED APPROACH: Climb to 3000 on SFO VOR/DME R-281 to VIKYU INT/SFO 12 DME and hold.
Missed approach requires minimum climb of 350 feet per NM to 1900; if unable to meet climb gradient, see ILS or LOC RWY 28L.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

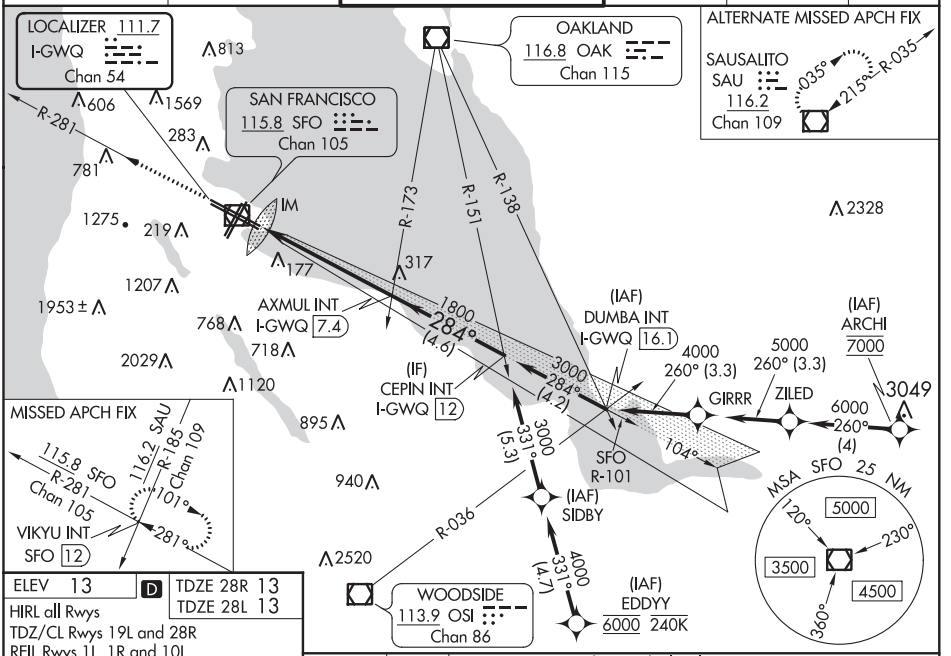

ELEV 13 D	TDZE 28R 13
HIRL all Rwys	TDZE 28L 13
TDZ/CL Rwys 19L and 28R	
REIL Rwys 1L, 1R and 10L	



FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

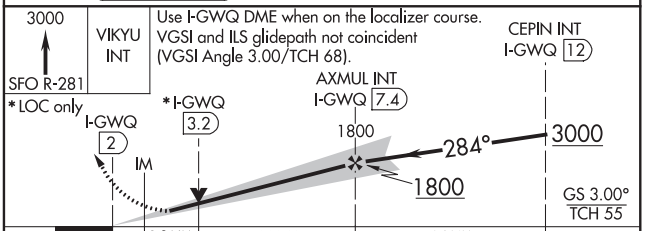

CATEGORY	A	B	C	D
S-ILS 28R#	213/18 200 (200-½)			
S-LOC 28R#	480/24 467 (500-½)		480/50 467 (500-1)	
SIDESTEP # 28L	480/55 467 (500-1)			480-1½ 467 (500-1½)
C CIRCLING	740-1 727 (800-1)	960-1¼ 947 (1000-1¼)	1560-3 1547 (1600-3)	NA

SAN FRANCISCO, CALIFORNIA
Amdt 15A 03JAN19

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)

ILS or LOC RWY 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-GWQ	APP CRS	Rwy Idg	11236
111.7	284°	TDZE	13
Chan 54		Apt Elev	13

ILS RWY 28R (SA CAT I)

SAN FRANCISCO INTL (SFO)

RNAV 1-GPS or RADAR required for procedure entry.

T Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DH.

ALSF-2

MISSED APPROACH: Climb to 3000 on SFO VOR/DME R-281 to VIKYU INT/SFO 12 DME and hold.
*Missed approach requires minimum climb of 350 feet per NM to 1900; if unable to meet climb gradient, see ILS or LOC RWY 28L.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

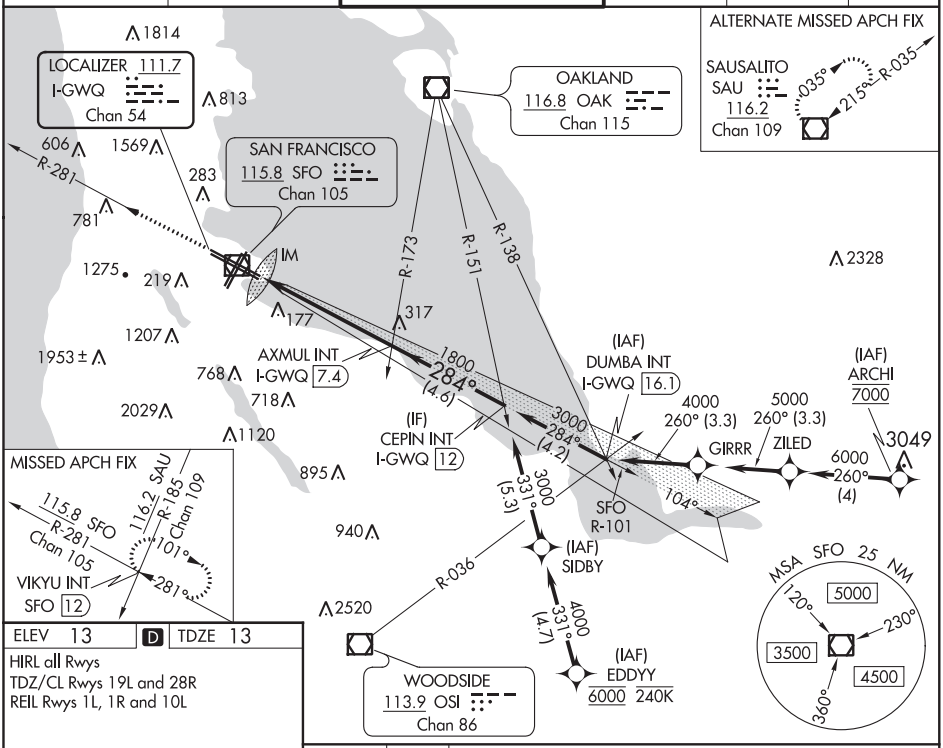

ELEV 13	D	TDZE 13

HIRL all Rwys
TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L



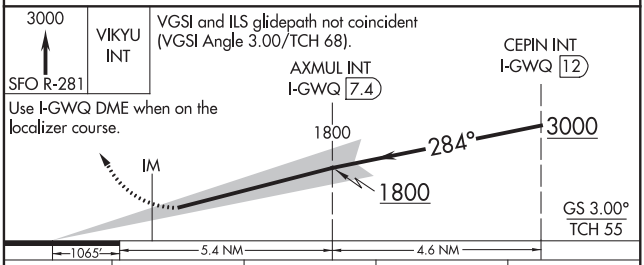

CATEGORY	A	B	C	D
S-ILS 28R*	RA 163/14 150 DA 163			

SA CATEGORY I ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020

SAN FRANCISCO, CALIFORNIA | AL-375 (FAA) | 19171

LOC/DME I-GWQ	APP CRS	Rwy Idg	11236
111.7	284°	TDZE	13
Chan 54		Apt Elev	13

ILS RWY 28R (CAT II & III)

SAN FRANCISCO INTL (SFO)

RNAV 1-GPS or RADAR required for procedure entry.

ALSF-2

MISSED APPROACH: Climb to 3000 on SFO VOR/DME R-281 to VIKYU INT/SFO 12 DME and hold.
*Missed approach requires minimum climb of 350 feet per NM to 1900; if unable to meet climb gradient, see ILS or LOC RWY 28L.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

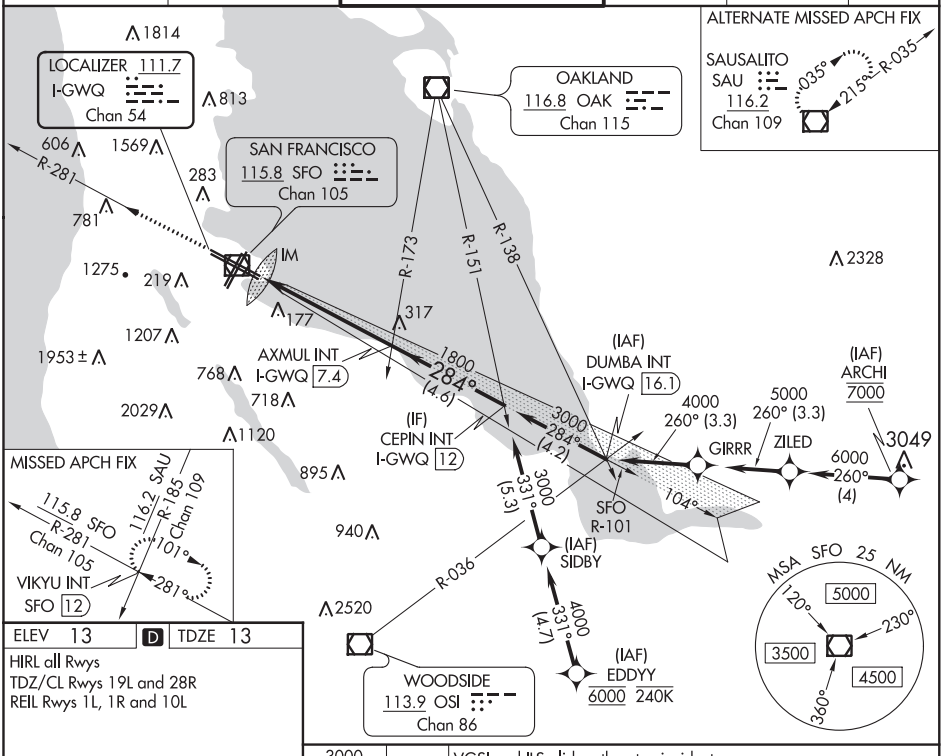

ELEV 13 | D | TDZE 13

HIRL all Rwys
TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L



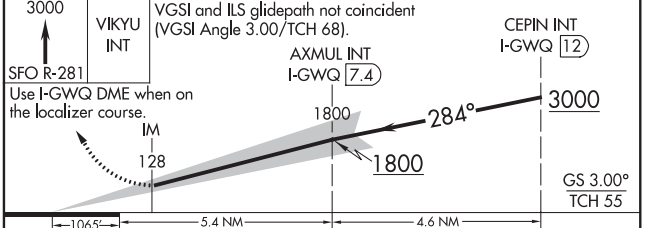

CATEGORY	A	B	C	D
S-ILS 28R*	CAT II RA 113/12 100 DA 113			
S-ILS 28R*	CAT III RVR 06			

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SAN FRANCISCO, CALIFORNIA
Amdt 15A 03JAN19

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)
ILS RWY 28R (CAT II & III)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-SFO	APP CRS	Rwy Idg	10275
109.55	284°	TDZE	13
Chan 32 (Y)		Apt Elev	13

ILS RWY 28L (SA CAT II)

SAN FRANCISCO INTL (SFO)

RNAV 1- GPS or RADAR required for procedure entry. DME required.

T
A Reduced lighting: requires specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

MALSR (A5)

MISSED APPROACH: Climb to 4000 on SFO VOR/DME R-275 to OLYMM INT/ SFO 15.4 DME and hold, continue climb-in-hold to 4000.
†Missed approach requires minimum climb of 330 feet per NM to 1600.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

LOCALIZER 109.55 I-SFO Chan 32 (Y)

SAN FRANCISCO 115.8 SFO Chan 105

MSA SFO 25 NM: 120°–230° 5000; 230°–360° 4500; 360°–120° 3500

ALTERNATE MISSED APCH FIX: SAN JOSE SJC 114.1 Chan 88; 106°–286° R-106

MISSED APCH FIX: 116.2 SAU R-204 Chan 109; OLYMM INT SFO 15.4; 275°–095° 115.8 SFO R-275 Chan 105

DUYET I-SFO 7.7 (IF) HEMAN I-SFO 12 ROKME I-SFO 14.9 WETOR I-SFO 18.3 PONKE I-SFO 21.6 DIVEC I-SFO 24.9 FAITH SFO 27.7 I-SFO

(IAF) ARCHI 7000 6000 238° (6.1) 3049

(IAF) SIDBY 4000 331° (4.7)

(IAF) EDDYY 6000 240K

SAN JOSE 114.1 SJC Chan 88

SFO R-101

ELEV 13 D TDZE 13

HIRL All Rwys
TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L



4000 SFO R-275 | OLYMM INT

VGSI and ILS glidepath not coincident (VGSI Angle 2.85/TCH 67).

Use I-SFO DME when on the localizer course.

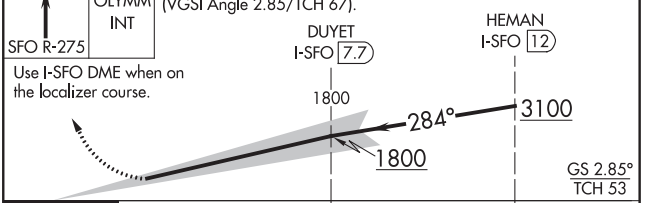

CATEGORY	A	B	C	D
S-ILS 28L†	RA 106/12 100 DA 113			

SA CAT II ILS - SPECIAL AIRCREW AND AIRCRAFT CERTIFICATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN FRANCISCO, CALIFORNIA | AL-375 (FAA) | 19171

APP CRS	Rwy Idg	11236
284°	TDZE	13
	Apt Elev	13

RNAV (RNP) Y RWY 28R

SAN FRANCISCO INTL (SFO)

RNP AR APCH, RF required.

T For uncompensated Baro-VNAV systems, procedure NA below 3°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 3000 on track 284° to VIKYU and hold.
*Missed approach requires minimum climb of 250 feet per NM to 1600.
#Missed approach requires minimum climb of 350 feet per NM to 2100.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

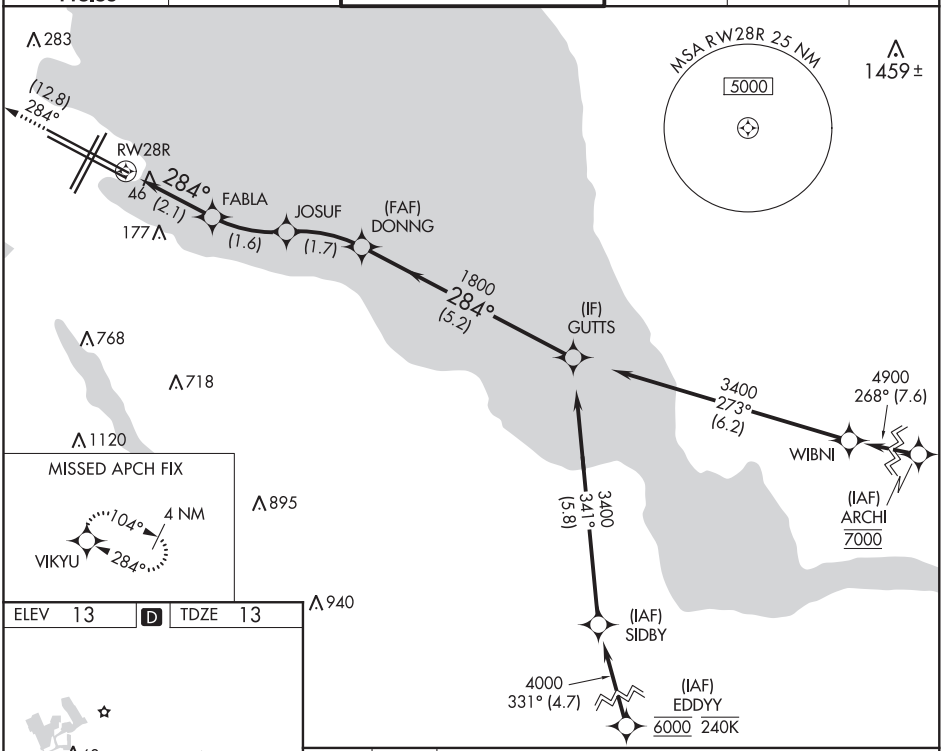

ELEV 13 | D | TDZE 13



TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

3000 tr 284° | VIKYU

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 68)

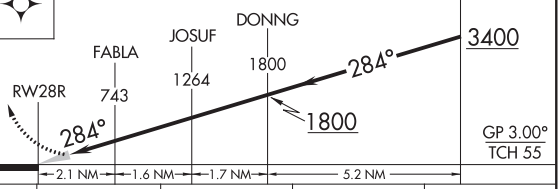

CATEGORY	A	B	C	D
RNP 0.11 DA*	263/24 250 (300-½)			
RNP 0.30 DA#	326/24 313 (400-½)			

AUTHORIZATION REQUIRED

SAN FRANCISCO, CALIFORNIA
Amdt 5 13SEP18

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)

RNAV (RNP) Y RWY 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (RNP) Z RWY 10R

SAN FRANCISCO INTL (SFO)

APP CRS	Rwy Idg	10704
104°	TDZE	10
	Apt Elev	13

For uncompensated Baro-VNAV systems, procedure NA below 2°C (36°F) or above 54°C (130°F). GPS required. When VGSI inop, procedure NA at night.

MISSED APPROACH: Climb to 3600 on track 104° to IGUKE and on track 103° to DUMBA and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

Procedure NA for arrivals at STINS on V25-199 and V27 northwest bound.

(IAF) STINS

3500 119° (9.3)

(IF) DOTNE

1900 104° (6.2)

606 (FAF) JULOS

781

26 RW10R

1275

219

177 104° (7.2)

IGUKE

1207

1953±

768

718

2029

1120

895

940

103° (8.7)

DUMBA

284° 104° 4 NM

1974 1619 2212 1090± 1814 813 1569 283

MSA RW10R 25 NM 5100

2520

ELEV 13 D TDZE 10

104° to RW10R

68 144 161 101 19R 1L 1R 10L 1870 X 200 1138 TWR 221 7L 7R 10R 28L 28R 20 99 136 184±

TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).

3600 tr 104° IGUKE tr 103° DUMBA

DOTNE 3500 104° JULOS 1900 1900 RW10R

GP 3.00° TCH 60

6.2 NM 5.8 NM

CATEGORY	A	B	C	D
RNP 0.20 DA	396-1¼ 386 (400-1¼)			
RNP 0.30 DA	1108-4 1098 (1100-4)			

AUTHORIZATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	11193
104°	TDZE	7
	Apt Elev	13

RNAV (GPS) RWY 10L

SAN FRANCISCO INTL (SFO)

DME/DME RNP-0.3 NA.
Helicopter visibility reduction below RVR 4000 NA.

MISSED APPROACH: Climb to 4000 direct DUMBA and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

Procedure NA for arrivals at STINS on V25-199 and V27 northwest bound.

(IAF) STINS

3500 118° (9.2)

(IF) NORMM

1800 104° (6.4)

(FAF) XATTU

RW10L

MSA RW10L 25 NM

5100

2025 1974 2212 1619 1090± 1814 813 606 1569 283 781 1275 219 177 1207 1953± 768 718 2029 1120 895 940 2520

DUMBA 284° 104° 4 NM

ELEV 13 D TDZE 7

104° to RW10L

68 144 1870 X 200 1381 TWR 221 8650 X 200 X 200 8650 X 200 99 136 184± 20 10L 10R 16L 16R 28L 28R 1L 1R

TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R, and 10L
HIRL all Rwys

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 80).

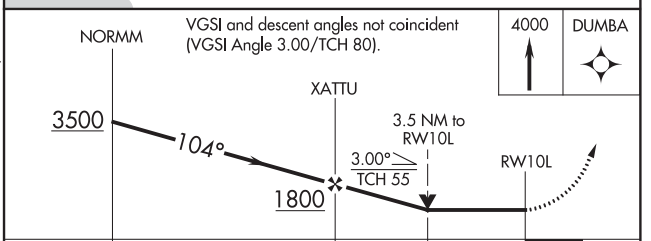

CATEGORY	A	B	C	D
LNAV MDA	1200/60 1193 (1200-1¼)	1200-1½ 1193 (1200-1½)	1200-3 1193 (1200-3)	

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS CH 58015 W19A	APP CRS 194°	Rwy Idg 8650 TDZE 11 Apt Elev 13

RNAV (GPS) RWY 19L

SAN FRANCISCO INTL (SFO)

RNP APCH.

Helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. For inop ALS, increase LPV Cat A/B visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat A/B to RVR 5500. Inop table does not apply to LPV Cat C/D.

MALSF

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct DUMBA and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

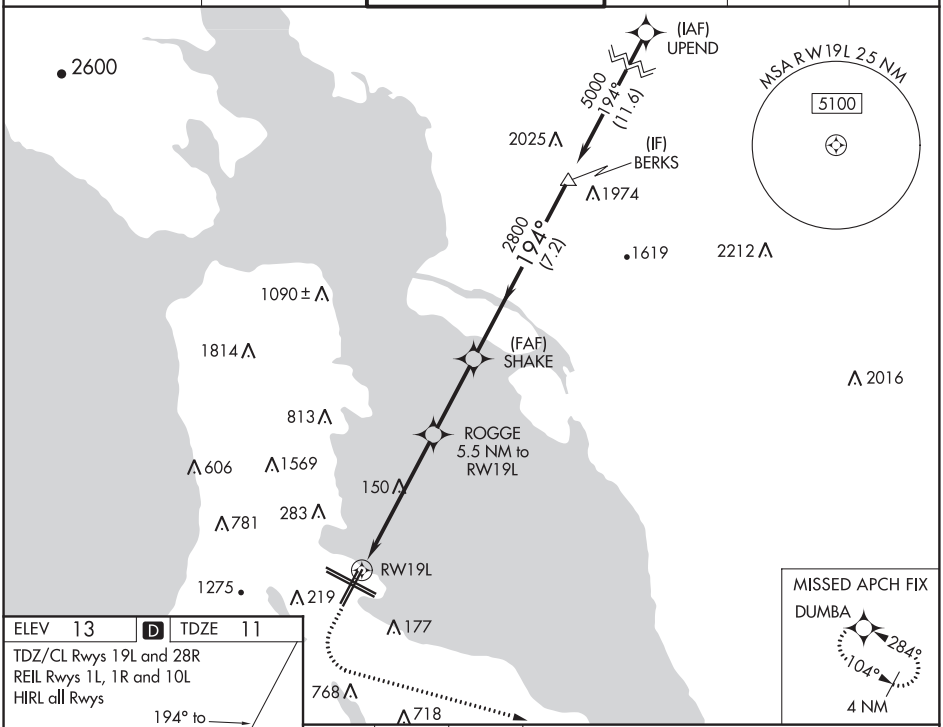

ELEV 13 | D | TDZE 11

TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

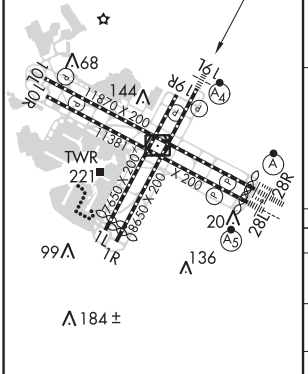

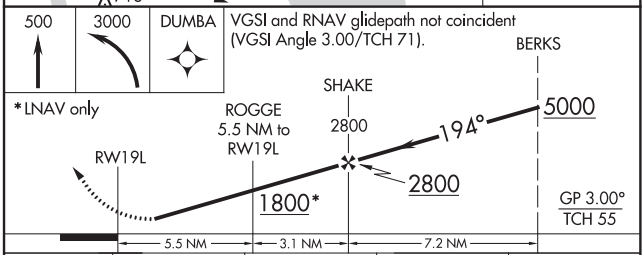

CATEGORY		A	B	C	D
LPV	DA	293/40	282 (300-¾)	293/50	282 (300-1)
LNAV/VNAV	DA	350/40	339 (400-¾)	350/50	339 (400-1)
LNAV	MDA	560/40	549 (600-¾)	560-1⅜	549 (600-1⅜)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN FRANCISCO, CALIFORNIA AL-375 (FAA) 19171

WAAS CH 53533 W19B	APP CRS 194°	Rwy Idg 7650 TDZE 11 Apt Elev 13

RNAV (GPS) RWY 19R

SAN FRANCISCO INTL (SFO)

RNP APCH.

LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 42°C. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glidepath. Simultaneous approach NA below 28°C (52°F).

MISSED APPROACH: Climb to 600 then climbing left turn to 3000 direct KATFH and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

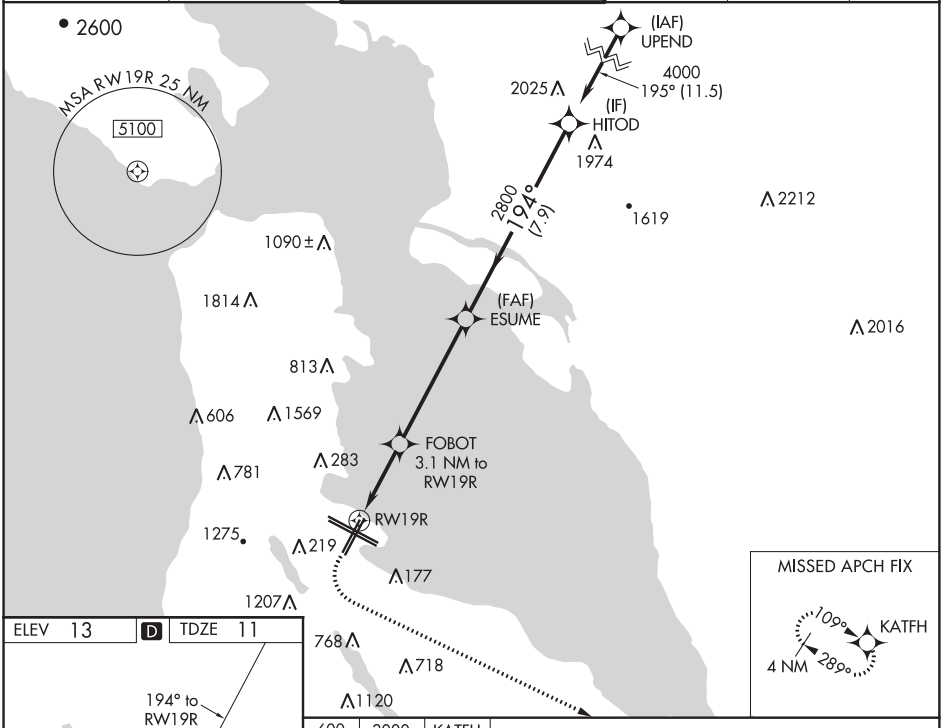

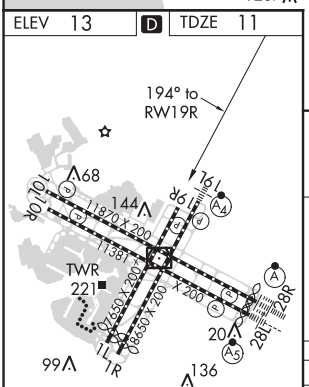

TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

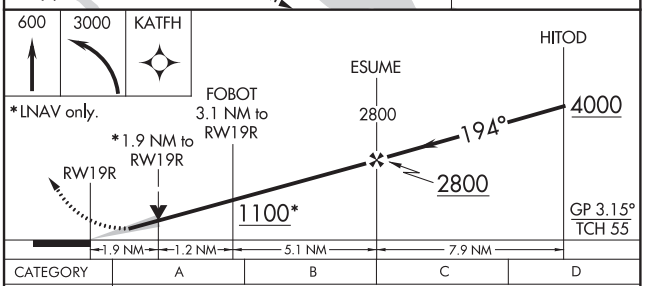

CATEGORY	A	B	C	D
LPV DA	382/55 371 (400-1)			
LNAV/VNAV DA	449-1¼ 438 (500-1¼)			
LNAV MDA	660/55 649 (700-1)		660-1⅞ 649 (700-1⅞)	

SAN FRANCISCO, CALIFORNIA
Amdt 3 13SEP18

37°37′N-122°23′W

SAN FRANCISCO INTL (SFO)

RNAV (GPS) RWY 19R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg 10275
CH 53415	284°	TDZE 13
W28B		Apt Elev 13

RNAV (GPS) RWY 28L

SAN FRANCISCO INTL (SFO)

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. For inop ALS, increase LPV † all Cats visibility to 2½ SM, increase LNAV/VNAV all Cats visibility to 2 SM. Circling NA to Rwys 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night.
#RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR (A5)

MISSED APPROACH: Climb to 1020 then climbing left turn to 4000 direct OLYMM and hold, continue climb-in-hold to 4000.
#Missed approach requires minimum climb of 330 feet per NM to 1600.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

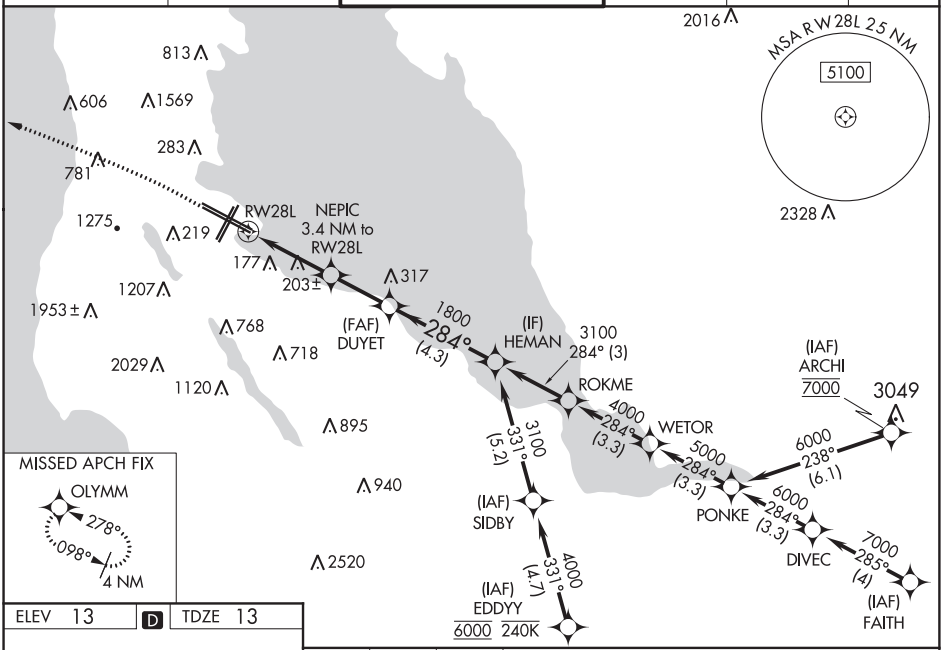

ELEV 13	D	TDZE 13



HIRL all Rwys
TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L

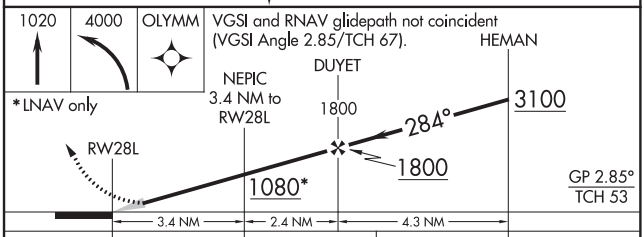

CATEGORY	A	B	C	D
LPV DA#	213/24 200 (200-½)			
LPV DA†	798-1¾ 785 (800-1¾)			
LNAV/VNAV DA	770-1¾ 757 (800-1¾)			
LNAV MDA	1020/40 1007 (1100-¾)	1020/55 1007 (1100-1)	1020-2½ 1007 (1100-2½)	
C CIRCLING	1020-1¼ 1007 (1100-1¼)	1020-1½ 1007 (1100-1½)	1560-3 1547 (1600-3)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN FRANCISCO, CALIFORNIA | AL-375 (FAA) | 19171

APP CRS	Rwy Idg	11236
281°	TDZE	13
	Apt Elev	13

RNAV (GPS) X RWY 28R

SAN FRANCISCO INTL (SFO)

T NA

Runway 28L and 28R separated by 750 feet centerline to centerline. DME/DME RNP-0.3 NA. When executing a missed approach or go-around, unless otherwise instructed by ATC, initially turn right to 030° utilizing heading mode. Inoperative table does not apply. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C (36°F) or above 54°C (130°F).

*If a go-around executed after passing DARNE, go-around requires a minimum climb of 380 feet per NM to 1800.

ALSF-2

MISSED APPROACH: Climbing right turn to 3000 on heading 030° then direct OAK VOR/DME and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

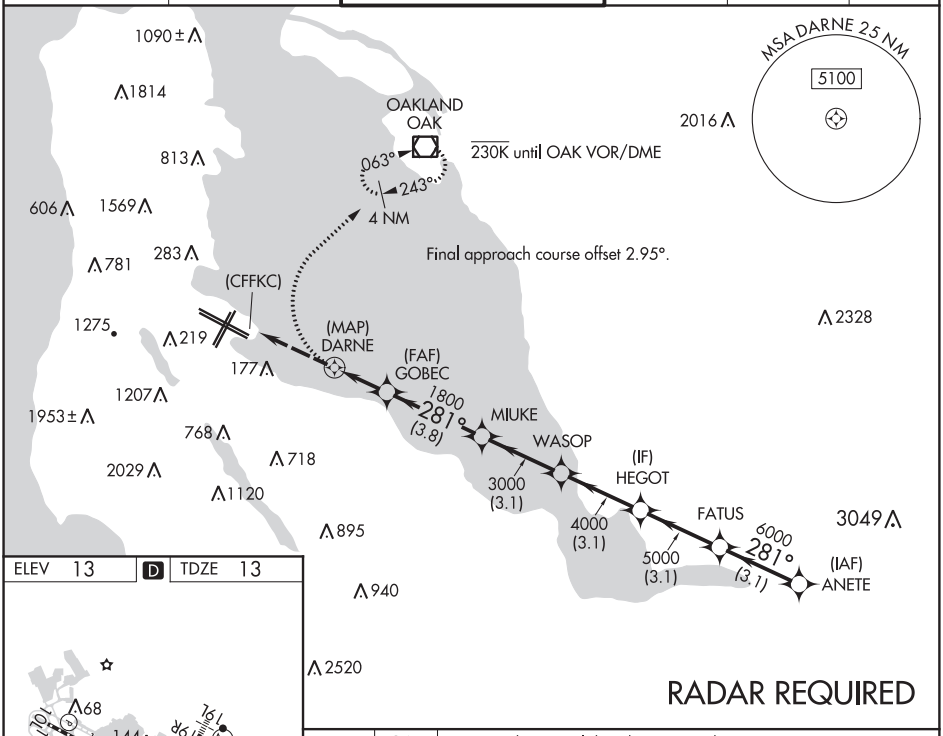

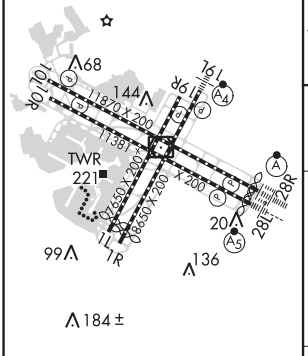

TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R, and 10L
HIRL all Rwys

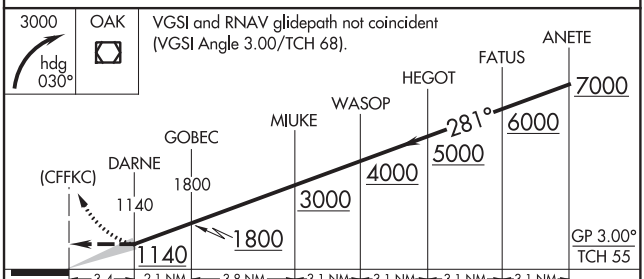

CATEGORY	A	B	C	D
LNAV/VNAV DA*	1140-4 1127 (1200-4)			

SAN FRANCISCO, CALIFORNIA | 37°37'N-122°23'W | SAN FRANCISCO INTL (SFO)

Amdt 1B 13OCT16

RNAV (GPS) X RWY 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Y RWY 10R

SAN FRANCISCO INTL (SFO)

APP CRS	Rwy Idg	10704
104°	TDZE	10
	Apt Elev	13

DME/DME RNP-0.3 NA. When VGSI inop, procedure NA at night. Helicopter visibility reduction below RVR 5000 NA.

MISSED APPROACH: Climb to 4000 direct DUMBA and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

Procedure NA for arrivals at STINS on V25-199 and V27 northwest bound.

(IAF) STINS

3500 119° (9.3)

(IF) DOTNE

1900 104° (6.2)

(FAF) JULOS

RW10R

MSA RW10R 25 NM 5100

1974 2212 1619 1090± 1814 813 1569 606 283 781 1275 219 177 1207 1953± 768 718 2029 1120 895 940 2520

DUMBA 284° 104° 4 NM

ELEV 13 D TDZE 10

104° to RW10R

TWR 221

68 144 1870 X 200 1139 161 10R 28L 7650 X 200 8650 X 200 99 11L 11R 136 20 28R 184±

TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 68).

4000 DUMBA

DOTNE 3500 104° JULOS 1900 3.00° TCH 60 RW10R

6.2 NM 5.8 NM

CATEGORY	A	B	C	D
LNAV MDA	1200/60 1190 (1200-1¼)	1200-1½ 1190 (1200-1½)	1200-3	1190 (1200-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN FRANCISCO, CALIFORNIA AL-375 (FAA) 19171

WAAS CH 48803 W28A	APP CRS 284°	Rwy Idg 11236 TDZE 13 Apt Elev 13

RNAV (GPS) Z RWY 28R

SAN FRANCISCO INTL (SFO)

RNP APCH.

Circling NA to Rwys 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¾ SM, increase LNAV Cat C/D visibility to 2 SM.

ALSF-2

MISSED APPROACH: Climb to 3200 direct VIKYU and hold, continue climb-in-hold to 3200.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

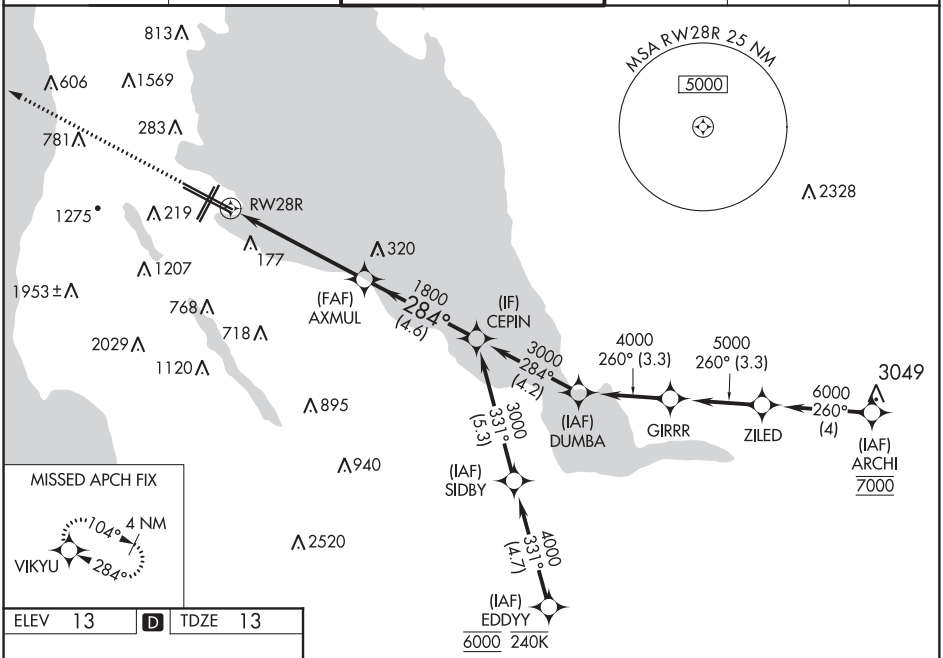

ELEV 13	D	TDZE 13



TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

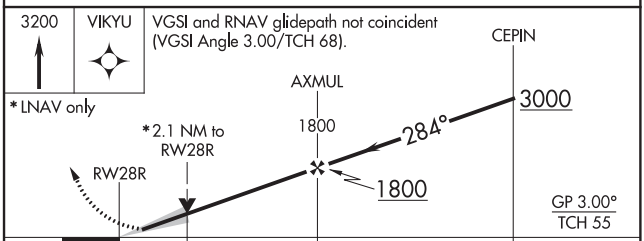

CATEGORY	A	B	C	D
LPV DA	213/18 200 (200-½)			
LNAV/VNAV DA	642-1⅜ 629 (700-1⅜)			
LNAV MDA	760/24 747 (800-½)	760/40 747 (800-¾)	760-1¾ 747 (800-1¾)	
C CIRCLING	760-1 747 (800-1)	960-1¼ 947 (1000-1¼)	1560-3 1547 (1600-3)	NA

SAN FRANCISCO, CALIFORNIA
Amdt 7 13SEP18

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)

RNAV (GPS) Z RWY 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LDA/DME RWY 28R

SAN FRANCISCO INTL (SFO)

LOC/DME I-FNP	APP CRS	Rwy Idg	11236
110.75	281°	TDZE	13
Chan 44(Y)		Apt Elev	13

T NA — Inoperative table does not apply. Runway 28L and 28R separated by 750 feet centerline to centerline. Localizer course 1183' right of Rwy 28R threshold. Procedure NA when glideslope not available.
*If go around executed after passing DARNE, go around requires minimum climb of 380 feet per NM to 1800.

ALSF-2

MISSED APPROACH: Climbing right turn to 3000 on heading 030° then direct OAK VOR/DME and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

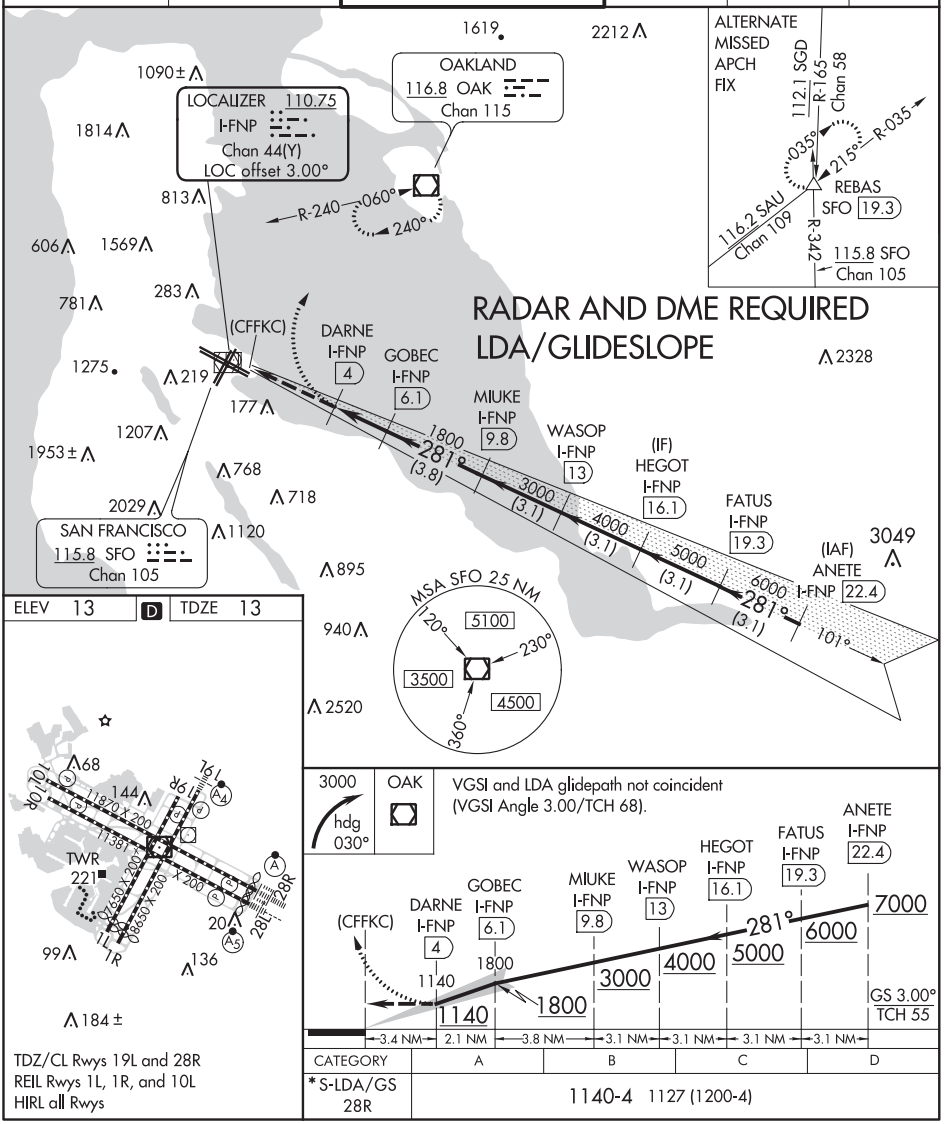

ELEV 13 D TDZE 13

TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R, and 10L
HIRL all Rwys

3000 hdg 030° OAK

VGSI and LDA glidepath not coincident (VGSI Angle 3.00/TCH 68).

CATEGORY	A	B	C	D
* S-LDA/GS 28R	1140-4 1127 (1200-4)			

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

ATTENTION ALL USERS PAGE (AAUP)

Pilots who are unable to participate will be afforded appropriate arrival services as operational conditions permit and must notify the controlling ATC facility as soon as practical, but at least 100 miles from destination.

Simultaneous PRM approaches will only be offered/conducted when the weather is at least 1600 feet (ceiling) and 4 miles (visibility).

ILS PRM Rwy 28L
RNAV (GPS) PRM Rwy 28L
LDA PRM Rwy 28R
RNAV (GPS) PRM X Rwy 28R

General

Review procedure for executing a climbing and descending PRM breakout

Breakout phraseology: "TRAFFIC ALERT (call sign) TURN (left/right) IMMEDIATELY HEADING (degrees) CLIMB/DESCEND AND MAINTAIN (altitude)."

All breakouts: Hand flown, initiate immediately.

Descending on the glideslope/glidepath ensures compliance with any charted crossing restrictions.

Dual VHF Comm.: When assigned or planning a specific PRM approach, tune a second receiver to the PRM monitor frequency or, if silent, another active frequency (i.e. ATIS), set the volume, retune the PRM frequency if necessary, then deselect the audio. When directed by ATC, switch to the appropriate approach control frequency and select the second receiver audio to ON.
Runway 28R: NORCAL approach 120.35
Runway 28L: NORCAL approach 135.65

If later assigned the same runway, non-PRM approach, consider it briefed provided the same minimums are utilized. PRM related chart notes and PRM frequency no longer apply.

TCAS during breakout: Follow TCAS climb/descend if it differs from ATC, while executing the breakout turn.

Runway Specific

ILS PRM Rwy 28L: Straight-in Approach

Briefing Points: (Note: Identify NEPIC WP as 3.3 NM from Rwy 28L WP if not in the FMC approach coding.)

- Inside NEPIC, descending on (not above) the glidepath benefits the trailing 28R aircraft to avoid wake turbulence.
- Other aircraft may be conducting the PRM approach to runway 28R. These aircraft will approach from the right-rear and will re-align with runway 28R after making visual contact with the runway 28L landing traffic.
- Expect to be switched to SFO tower at NEPIC.
- PRM monitor frequency may be de-selected after determining that the aircraft is on the tower frequency.

CONTINUED ON FOLLOWING PAGE

SW-2, 30 JAN 2020 to 26 MAR 2020

ATTENTION ALL USERS PAGE (AAUP) (CON'T)

CONTINUED FROM PREVIOUS PAGE

LDA PRM Rwy 28R: Offset Approach with glideslope

Briefing Points: (Note: Identify DARNE as I-FNP LOC/DME 4 NM if not in the FMC approach coding.)

- If required, develop a wake mitigation strategy as soon as practical. Inside DARNE pilots will be operating visually in close proximity to the 28L aircraft and will be responsible for wake turbulence and collision avoidance.
- Descending on the glideslope ensures compliance with any charted crossing restrictions.
- Continuing past DARNE requires reporting the 28L traffic in sight (ATC need not respond), and seeing the runway.
- Remain on the LDA until passing DARNE so as not to penetrate the NTZ.
- Expect to be switched to SFO tower at DARNE.
- PRM monitor frequency may be de-selected after determining that the aircraft is on the tower frequency.
- After passing DARNE, DO NOT PASS.
- Glideslope valid to the runway threshold.
- If executing a go-around between DARNE and runway 28R threshold, initially establish a climbing right turn heading 030° unless otherwise instructed by ATC. Missed approach leg from airport to OAK VOR/DME, if depicted on a map display, is for reference only. Follow IAP published missed approach procedure unless otherwise instructed by ATC.

RNAV (GPS) PRM Rwy 28L: Straight-in Approach

Briefing Points: (Note: Identify NEPIC WP as 3.3 NM from Rwy 28L WP if not in the FMC approach coding.)

- Monitor descent path to ensure that fix crossing requirements are adhered to.
- VDA is 2.85° between all waypoints on the final approach course.
- Inside NEPIC, descending on (not above) the vertical path benefits the trailing 28R aircraft to avoid wake turbulence.
- Other aircraft may be conducting the PRM approach to runway 28R. These aircraft will approach from the right-rear and will re-align with runway 28R after making visual contact with the runway 28L traffic.
- Expect to be switched to SFO tower at NEPIC.
- PRM monitor frequency may be de-selected after determining that the aircraft is on the tower frequency.

RNAV (GPS) PRM X Rwy 28R: Offset Approach

Briefing Points: (Notes: Non-standard RNAV Missed Approach coding initially requires use of heading mode. Identify DARNE WP as 3.4 NM from CFFKC WP if not in the FMC approach coding.)

- If required, develop a wake mitigation strategy as soon as practical. After passing DARNE WP, pilots will be operating visually in close proximity to the 28L aircraft and will be responsible for wake turbulence and collision avoidance.
- VDA is 3° between all waypoints on the final approach course.
- Continuing past DARNE requires reporting the 28L traffic in sight (ATC need not respond), and seeing the runway.
- Remain on the RNAV track until passing DARNE WP so as not to penetrate the NTZ.
- Expect to be switched to SFO tower at DARNE WP.
- After passing DARNE, DO NOT PASS.
- The VNAV path is valid to the runway threshold.
- PRM monitor frequency may be de-selected after determining that the aircraft is on the tower frequency.
- If executing a missed approach or go-around, initially establish a climbing right turn heading 030°. CAUTION: Missed approach leg from airport to OAK VOR/DME, if depicted on a map display, is for reference only. Follow IAP published missed approach procedure unless otherwise instructed by ATC.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19171

SAN FRANCISCO, CALIFORNIA

AL-375 (FAA)

ILS PRM RWY 28L (SIMULTANEOUS CLOSE PARALLEL)

SAN FRANCISCO INTL (SFO)

LOC/DME I-SFO	APP CRS	Rwy Idg	10275
109.55	284°	TDZE	13
Chan 32 (Y)		Apt Elev	13

T NA

Rwy 28L and 28R separated by 750 feet centerline to centerline. DME required. Missed approach requires minimum climb of 325 feet per NM to 2100; if unable to meet climb gradient, see ILS or LOC RWY 28L. RVR 1800 authorized with the use of FD or AP or HUD to DA. Simultaneous Close Parallel approach authorized with LDA PRM RWY 28R and RNAV (GPS) PRM X RWY 28R. Procedure NA when glide slope not available. Dual VHF comm required. See additional requirements on AAUP.

MALSR (A5)

MISSED APPROACH: Climb to 4000 on SFO VOR/DME R-275 to OLYMM INT/SFO 15.4 DME and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1 PRM 125.15	121.8	118.2	

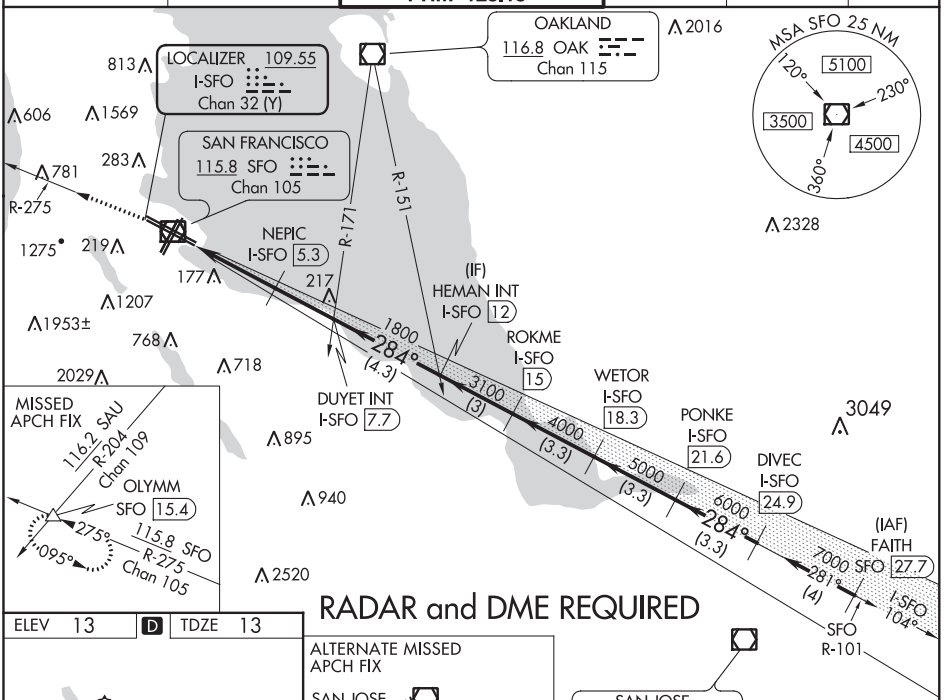

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 13	D	TDZE 13



HIRL All Rwys
TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L

ALTERNATE MISSED APCH FIX

SAN JOSE
SJC
114.1
Chan 88
286°
R-106

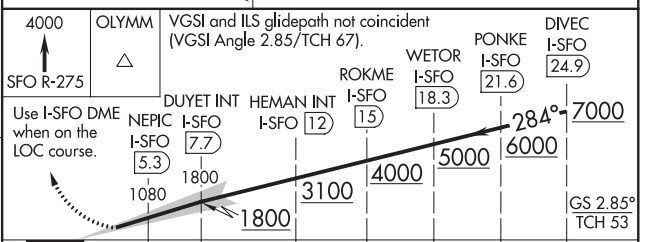

CATEGORY	A	B	C	D
S-ILS 28L	213/24 200 (200-½)			

SAN FRANCISCO, CALIFORNIA
Amdt 3A 26JUN14

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)

ILS PRM RWY 28L (SIMULTANEOUS CLOSE PARALLEL)

WAAS CH 53415 W28B	APP CRS 284°	Rwy Idg 10275 TDZE 13 Apt Elev 13

RNAV (GPS) PRM RWY 28L (CLOSE PARALLEL)

SAN FRANCISCO INTL (SFO)

T DME/DME RNP-0.3 NA. Simultaneous approach authorized with LDA PRM RWY 28R and RNAV (GPS) PRM X RWY 28R. Use of FD or AP required during simultaneous operations. Dual VHF comm required. See additional requirements on AAUP. For inop ALS, increase LNAV/VNAV all Cats visibility to 2 SM. Rwy 28L and 28R separated by 750 feet centerline to centerline. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C (38°F) or above 54°C (130°F).
#RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 4000 direct OLYMM and hold, continue climb-in-hold to 4000.
*Missed approach requires minimum climb of 300 feet per NM to 1500.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1 PRM 125.15	121.8	118.2	

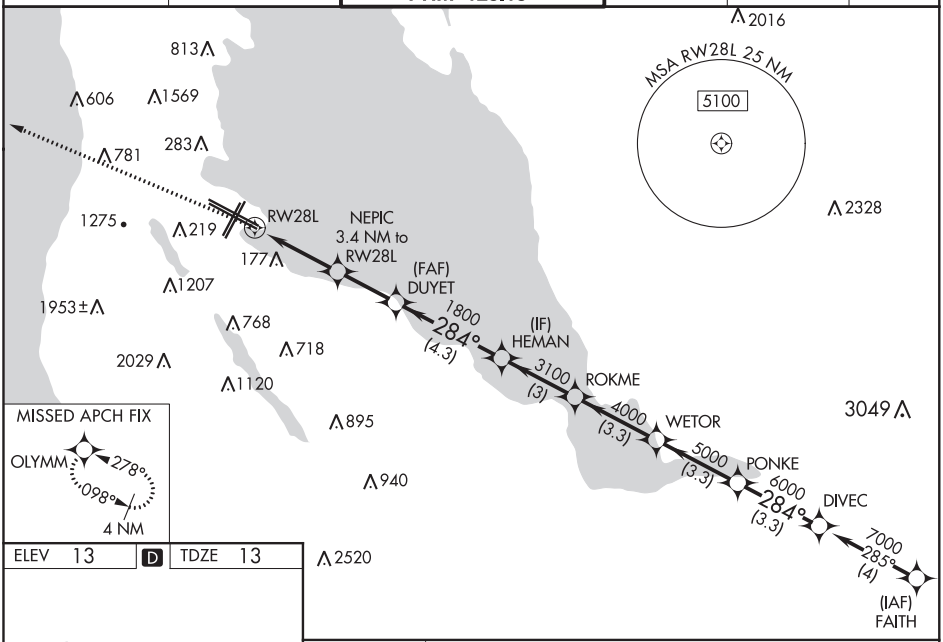



TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

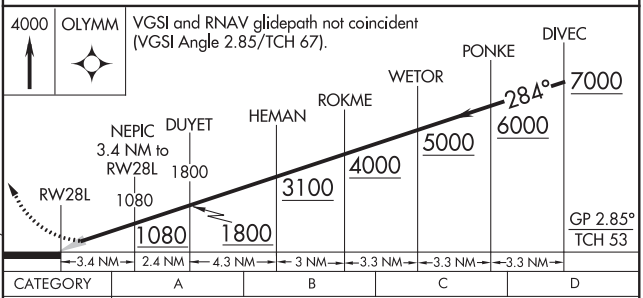

CATEGORY	A	B	C	D
LPV DA*#	213/24 200 (200-½)			
LPV DA	769-1¾ 756 (800-1¾)			
LNAV/VNAV DA	754-1¾ 741 (800-1¾)			

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19171

SAN FRANCISCO, CALIFORNIA

AL-375 (FAA)

RNAV (GPS) PRM X RWY 28R (SIMULTANEOUS CLOSE PARALLEL)

SAN FRANCISCO INTL (SFO)

APP CRS	Rwy Idg	11236
281°	TDZE	13
	Apt Elev	13

T NA

Runway 28L and 28R separated by 750 feet centerline to centerline. DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS PRM RWY 28L and RNAV (GPS) PRM RWY 28L. Dual VHF comm required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. When executing a missed approach or go-around, unless otherwise instructed by ATC, initially turn right to 030° utilizing heading mode. Inoperative table does not apply. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C (36°F) or above 54°C (130°F). See additional requirements on AAUP.

*If a go-around executed after passing DARNE, go-around requires a minimum climb of 380 feet per NM to 1800.

ALSF-2

MISSED APPROACH: Climbing right turn to 3000 on heading 030° then direct OAK VOR/DME and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1 PRM 127.675	121.8	118.2	

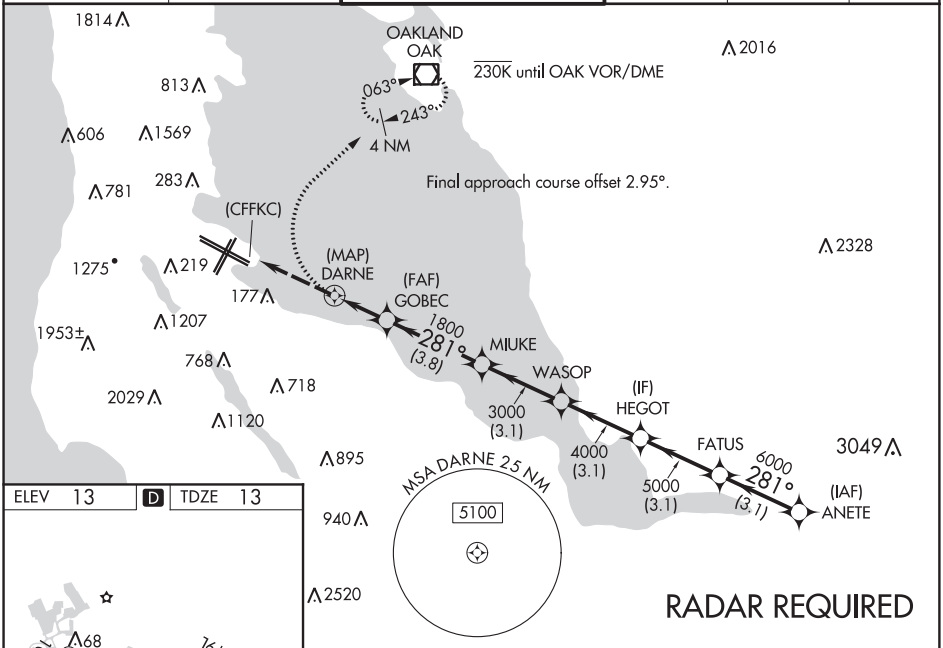

ELEV 13 D TDZE 13



TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R, and 10L
HIRL all Rwys

3000 hdg 030°

OAK

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).

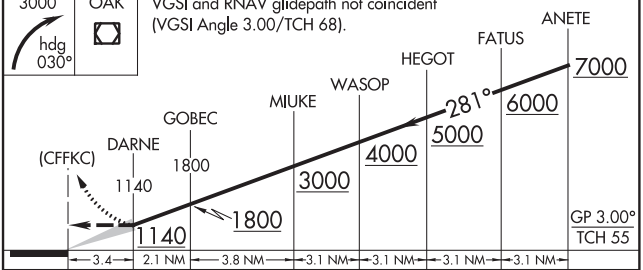

CATEGORY	A	B	C	D
LNAV/VNAV DA*	1140-4 1127 (1200-4)			

SAN FRANCISCO, CALIFORNIA
Amdt 1B 13OCT16

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)

(SIMULTANEOUS CLOSE PARALLEL)
RNAV (GPS) PRM X RWY 28R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

SAN FRANCISCO, CALIFORNIA

AL-375 (FAA)

LDA PRM RWY 28R (SIMULTANEOUS CLOSE PARALLEL)

SAN FRANCISCO INTL (SFO)

LOC/DME I-FNP	APP CRS	Rwy Idg	11236
110.75	281°	TDZE	13
Chan 44(Y)		Apt Elev	13

T
A NA Simultaneous approach authorized with ILS PRM RWY 28L and RNAV (GPS) PRM RWY 28L. Procedure NA when glideslope not available. Dual VHF comm required. See additional requirements on AAUP. Runway 28L and 28R separated by 750 feet centerline to centerline. Inoperative table does not apply. DME required. Localizer course 1183 feet right of Rwy 28R threshold.
*If go around executed after passing DARNE, go around requires minimum climb of 380 feet per NM to 1800.

ALSF-2

MISSED APPROACH: Climbing right turn to 3000 on heading 030° then direct OAK VOR/DME and hold.

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1 PRM 127.675	121.8	118.2	

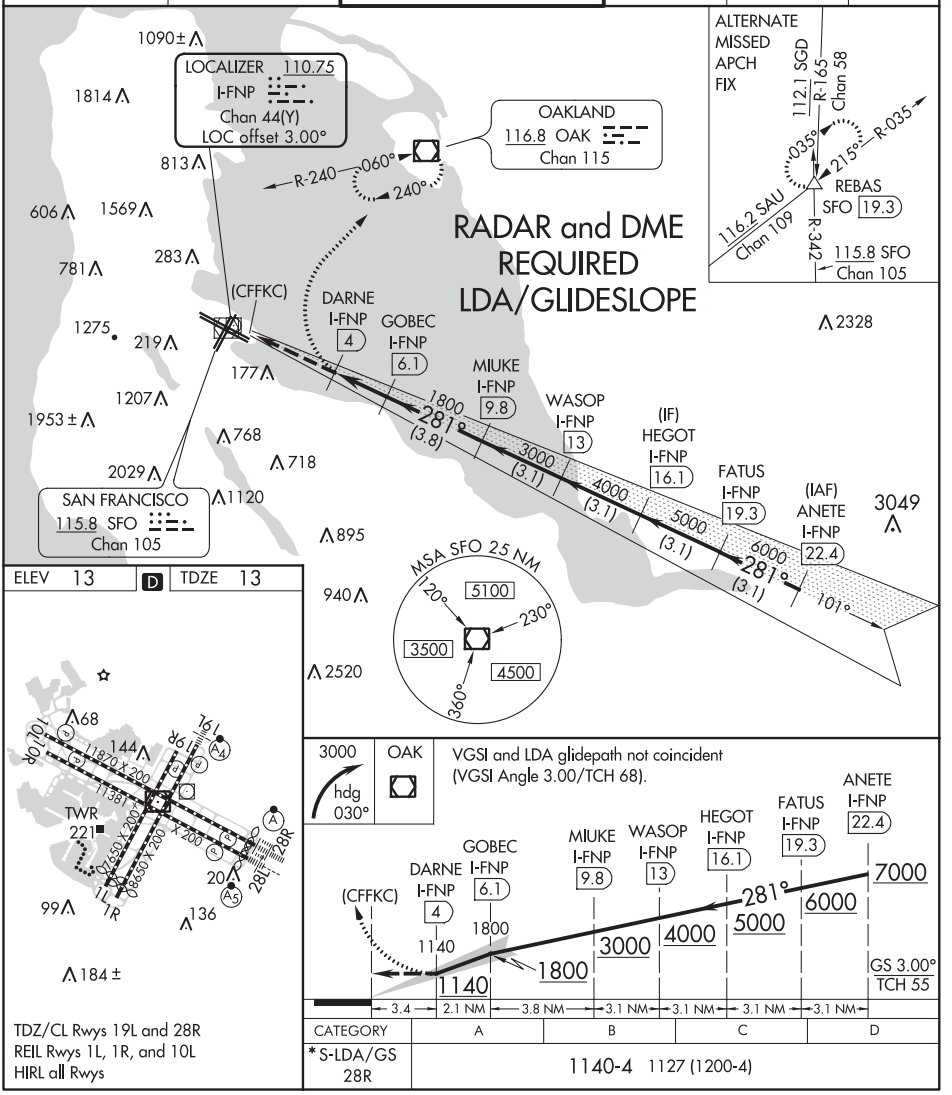

TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R, and 10L
HIRL all Rwys

SAN FRANCISCO, CALIFORNIA

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)

Amdt 2B 13OCT16

LDA PRM RWY 28R (SIMULTANEOUS CLOSE PARALLEL)

SW-2, 30 JAN 2020 to 26 MAR 2020

QUIET BRIDGE VISUAL RWY 28L/R

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

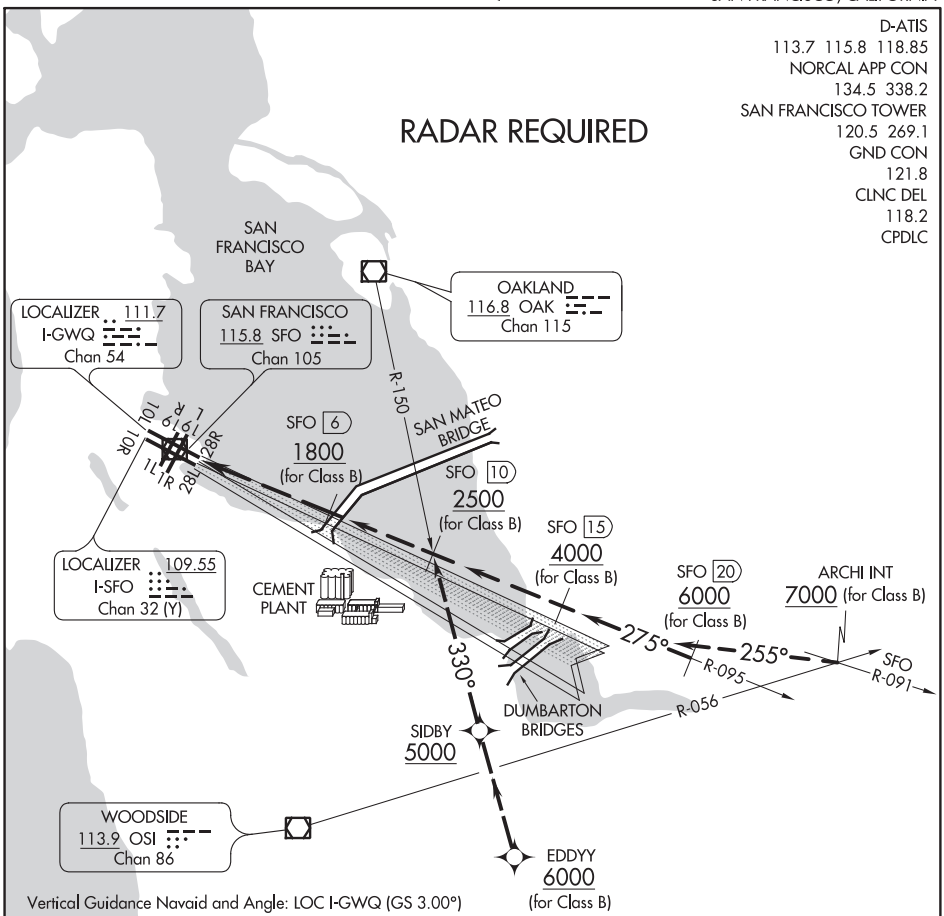

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

QUIET BRIDGE VISUAL APPROACH RUNWAY 28L/R

NOTE: Closely spaced parallel visual approaches may be in progress to Runway 28L utilizing I-SFO. In the event of a go-around on Runway 28L, turn left heading 265° or on Runway 28R, heading 280°, climb and maintain 3000 or as directed by ATC.

TIPP TOE VISUAL RWY 28L/R

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

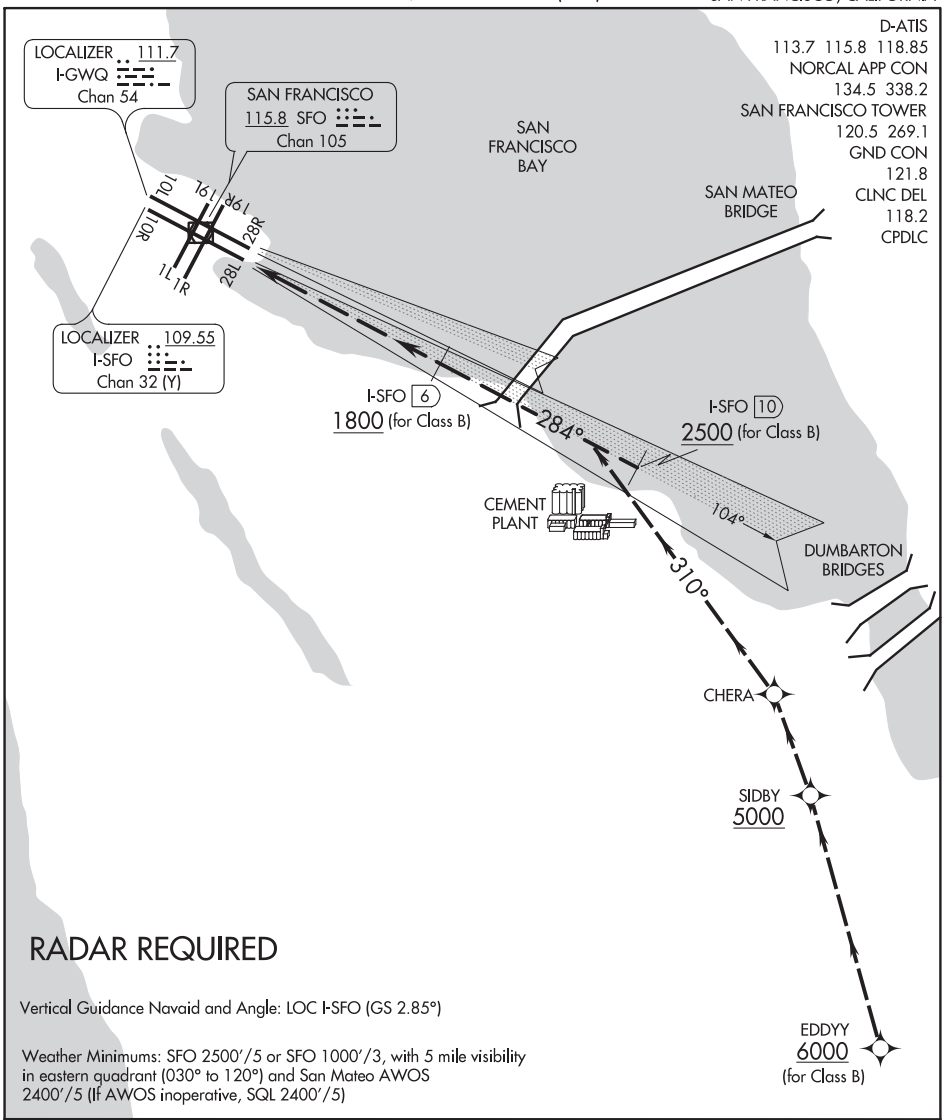

RADAR REQUIRED

Vertical Guidance Navaid and Angle: LOC I-SFO (GS 2.85°)

Weather Minimums: SFO 2500′/5 or SFO 1000′/3, with 5 mile visibility in eastern quadrant (030° to 120°) and San Mateo AWOS 2400′/5 (If AWOS inoperative, SQL 2400′/5)

	1 NM	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

TIPP TOE VISUAL APPROACH RUNWAY 28L/R

NOTE: Closely spaced parallel visual approaches may be in progress. In the event of a go-around on Runway 28L, turn left heading 265° or on Runway 28R, heading 280°, climb and maintain 3000 or as directed by ATC.

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
19171

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

D-ATIS
113.7 115.8 118.85
SAN FRANCISCO TOWER
120.5 269.1
GND CON
121.8
CLNC DEL
118.2
CPDLC
D

ASSC in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces.

Runway Status Lights in Operation.

RWY 01L-19R
PCN 90 F/B/X/T
S-75, D-200, 2D-400, 2D/2D2-877
RWY 01R-19L
PCN 100 F/B/X/T
S-75, D-200, 2D-400, 2D/2D2-877
RWYS 10L-28R, RWY 10R-28L
PCN 80 F/B/X/T
S-75, D-200, 2D-400, 2D/2D2-877

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

122°24'W
122°23'W
122°22'W
37°38'N
37°37'N

USCG
GENERAL AVIATION
FIRE STATION NO. 2
FIRE STATION NO. 1
FIRE STATION NO 3
HS 1
HS 2
HS 3
EMAS
CAT 3 HOLD
CAT 1 HOLD
ELEV 9
ELEV 11
ELEV 13
TERMINAL 1
TERMINAL 2
TERMINAL 3
INTL TERMINAL
US CUSTOMS
TWR 221
RAMP TWR A
RAMP TWR G
11870 X 200
11381 X 200
7650 X 200
8650 X 200
104.1°
194.1°
014.1°
284.1°
VAR 13.7° E
JANUARY 2015
ANNUAL RATE OF CHANGE
0.1° W
FIELD ELEV 13
B/A: BOARDING AREA

NOTE: Several runway hold position signs are on the right rather than the left side of the taxiways

AIRPORT DIAGRAM
19171
SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

CIITY THREE DEPARTURE (RNAV)

(CIITY3.CIITY) 20AUG15

SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 10L: Climb heading 104° to 520, then direct ORYAN, then on track 102° to SAHEY, then on track 101° to cross CIITY at or above 5000. Thence. . . .
TAKEOFF RUNWAY 10R: Climb heading 104° to 520, then direct URRSA, then on track 101° to SAHEY, then on track 101° to cross CIITY at or above 5000. Thence. . . .
TAKEOFF RUNWAYS 19L/19R: Climb heading 194° to 520, then left turn direct to cross CIITY at or above 5000. Thence. . . .

. . . on (transition). Maintain FL190. Expect filed altitude 10 minutes after departure.

DEDHD TRANSITION (CIITY3.DEDHD)
GRTFL TRANSITION (CIITY3.GRTFL)
MOGEE TRANSITION (CIITY3. MOGEE)
ORRCA TRANSITION (CIITY3.ORRCA)
SYRAH TRANSITION (CIITY3.SYRAH)
TIPRE TRANSITION (CIITY3.TIPRE)

TAKEOFF MINIMUMS
Rwys 10L/R: Standard with minimum climb of 500' per NM to 520.
Rwys 19L/R: Standard with minimum climb of 575' per NM to 2000.

TOP ALTITUDE: FL190

D-ATIS 113.7 115.8 118.85
CLNC DEL 118.2
CPDLC
GND CON 121.8
SAN FRANCISCO TOWER 120.5 269.1
NORCAL DEP CON 120.9 323.2

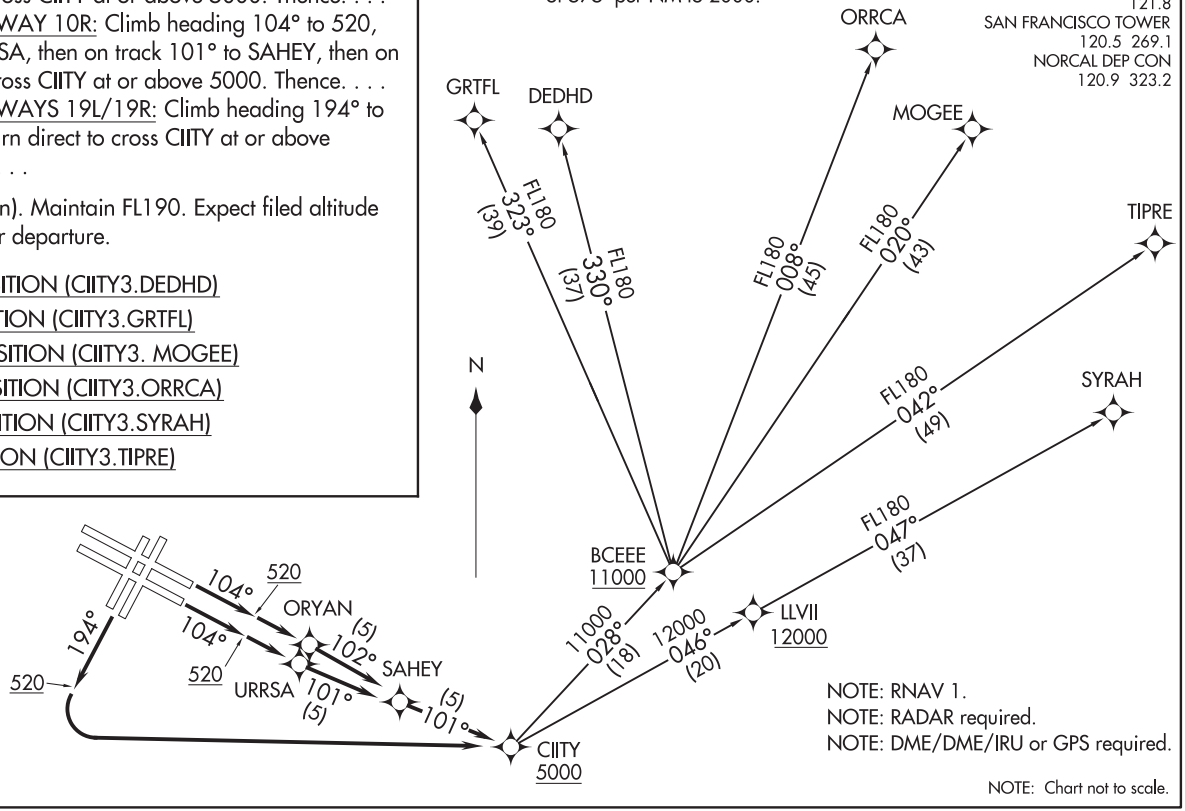

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.

NOTE: Chart not to scale.

(CIITY3.CIITY) 17341

CIITY THREE DEPARTURE (RNAV)

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

329

(GAPP7.GAP) 17341

GAP SEVEN DEPARTURE

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

D-ATIS
113.7 115.8 135.45
CPDLC
GND CON
121.8
SAN FRANCISCO TOWER
120.5 269.1
NORCAL DEP CON
120.9 323.2 (NW-E)
135.1 307.2 (SE-W)

TAKEOFF MINIMUMS

Rwy 19L/R: Standard with minimum climb of 575′ per NM to 2000.
Rwy 28L: Standard with minimum climb of 351′ per NM to 1300.
Rwy 28R: Standard with minimum climb of 351′ per NM to 1300.

NOTE: RADAR required.
NOTE: Rwys 19L/R departures turn left due to steeply rising terrain to 2000′ immediately south of airport.

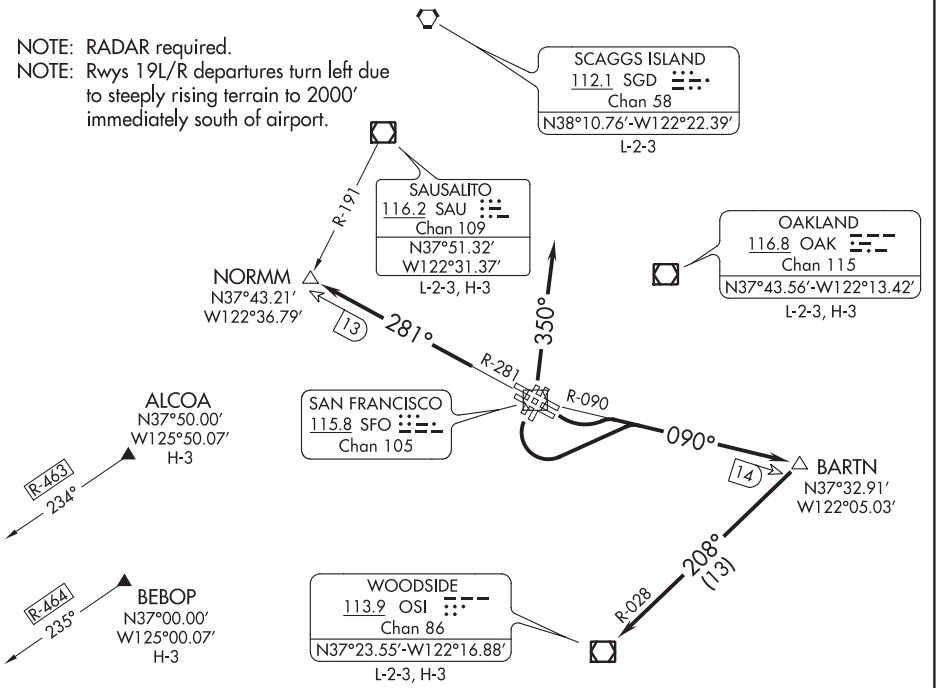

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb on SFO R-350 (or as assigned) for vectors to assigned route/fix. Thence . . . .

TAKEOFF RUNWAYS 10L/R and 19L/R: Turn left and climb on the SFO R-090 and OSI R-028 to OSI VOR/DME; expect vector to assigned route/fix after OSI VOR/DME. Thence . . . .

TAKEOFF RUNWAYS 28L/R: Climb on the SFO VOR/DME R-281 to NORMM INT/ SFO VOR/DME 13 DME; expect vector to assigned route/fix after NORMM INT. Thence . . . .

. . . .expect further clearance to filed altitude 10 minutes after departure.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

GNNRR TWO DEPARTURE (RNAV)

(GNNRR2.GNNRR) 25JUN15

SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

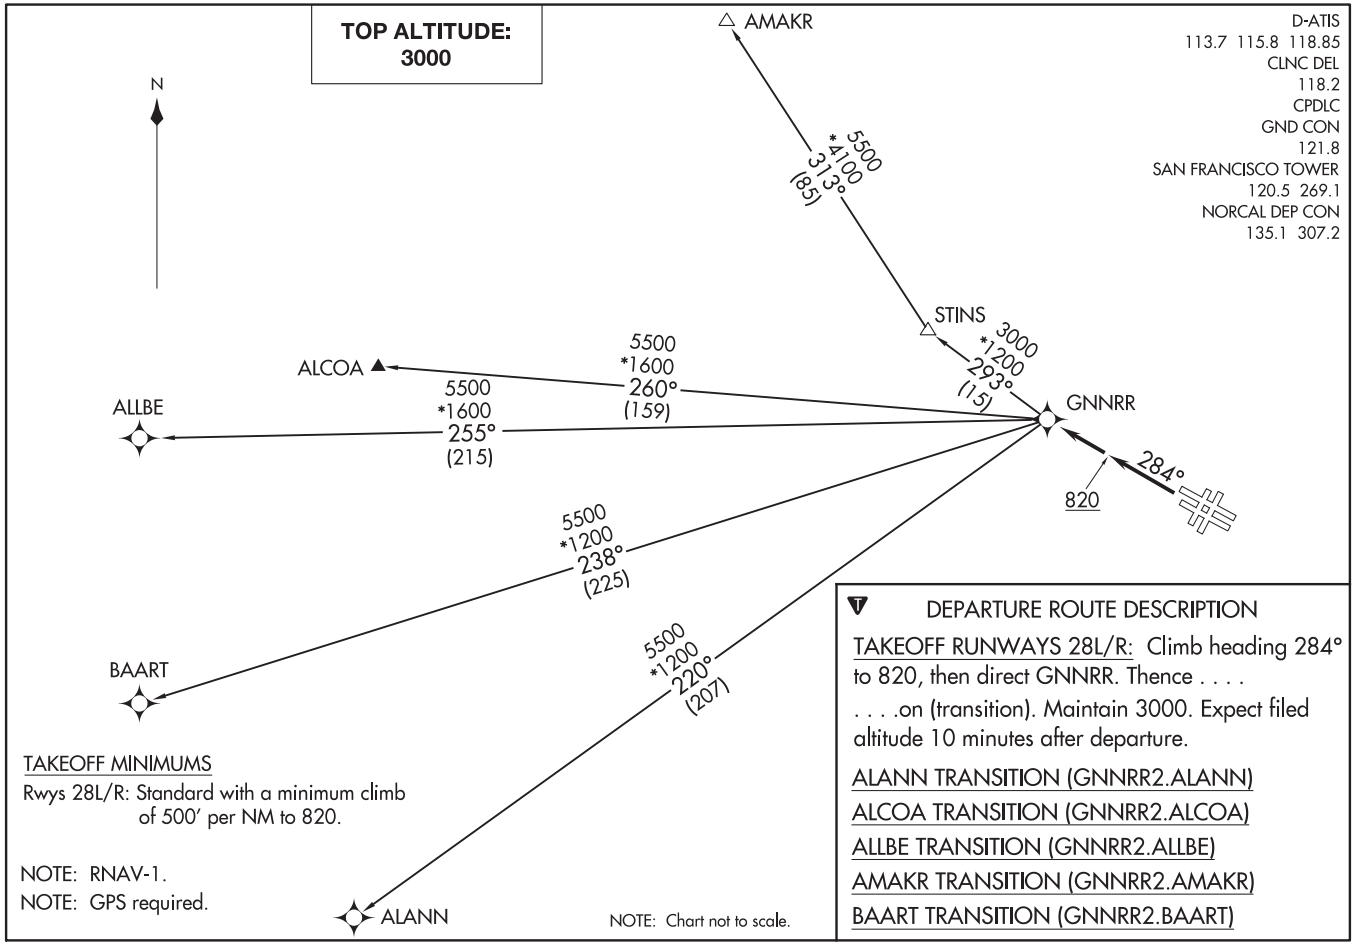

TAKEOFF MINIMUMS

Rwys 28L/R: Standard with a minimum climb of 500′ per NM to 820.

NOTE: RNAV-1.

NOTE: GPS required.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R: Climb heading 284° to 820, then direct GNNRR. Thence . . . .

. . . .on (transition). Maintain 3000. Expect filed altitude 10 minutes after departure.

ALANN TRANSITION (GNNRR2.ALANN)

ALCOA TRANSITION (GNNRR2.ALCOA)

ALLBE TRANSITION (GNNRR2.ALLBE)

AMAKR TRANSITION (GNNRR2.AMAKR)

BAART TRANSITION (GNNRR2.BAART)

(GNNRR2.GNNRR) 17341

GNNRR TWO DEPARTURE (RNAV)

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

(MOLEN8.MOLEN) 17341

MOLEN EIGHT DEPARTURE

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

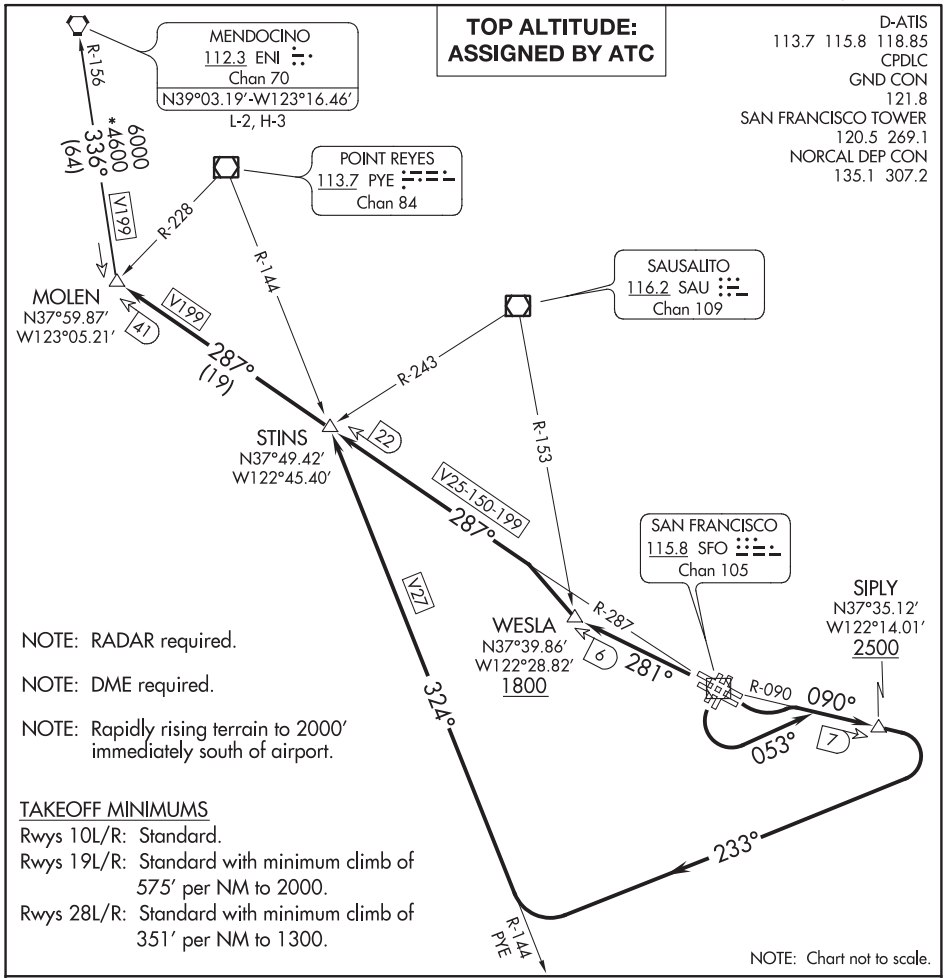

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 10L/R: Climbing left turn to intercept SFO R-090 to cross SIPLY 7 DME FIX at or above 2500, then climbing right turn to 5000 on heading 233° to intercept and proceed on PYE R-144 to STINS INT/SFO 22 DME, then on SFO VOR/DME R-287 to MOLEN INT/SFO 41 DME. Thence . . . .

TAKEOFF RUNWAYS 19L/R: Climbing left turn to heading 053° to intercept SFO R-090 to cross SIPLY 7 DME FIX at or above 2500, then climbing right turn to 5000 heading 233° to intercept and proceed on PYE R-144 to STINS INT/SFO VOR/DME 22 DME, then on SFO VOR/DME R-287 to MOLEN INT/SFO 41 DME. Thence . . . .

TAKEOFF RUNWAYS 28 L/R: Climb on SFO VOR/DME R-281 to cross WESLA INT/SFO VOR/DME 6 DME at or above 1800 then turn right to intercept SFO R-287 to MOLEN INT/SFO 41 DME. Thence . . . .

. . . . (transition). Expect clearance to filed altitude 10 minutes after departure.

MENDOCINO TRANSITION (MOLEN8.ENI): From over MOLEN INT on ENI R-156 to ENI VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020

D-ATIS
113.7 115.8 118.85
CLNC DEL
118.2
CPDLC
GND CON
121.8
SAN FRANCISCO TOWER
120.5 269.1
NORCAL DEP CON
120.9 323.2

TAKEOFF MINIMUMS
Rwys 1L/R: Standard with a minimum climb of 500′ per NM to 520.
Rwy 28L: Standard with minimum climb of 535′ per NM to 2100.
Rwy 28R: Standard with minimum climb of 560′ per NM to 2100.

TOP ALTITUDE: FL190

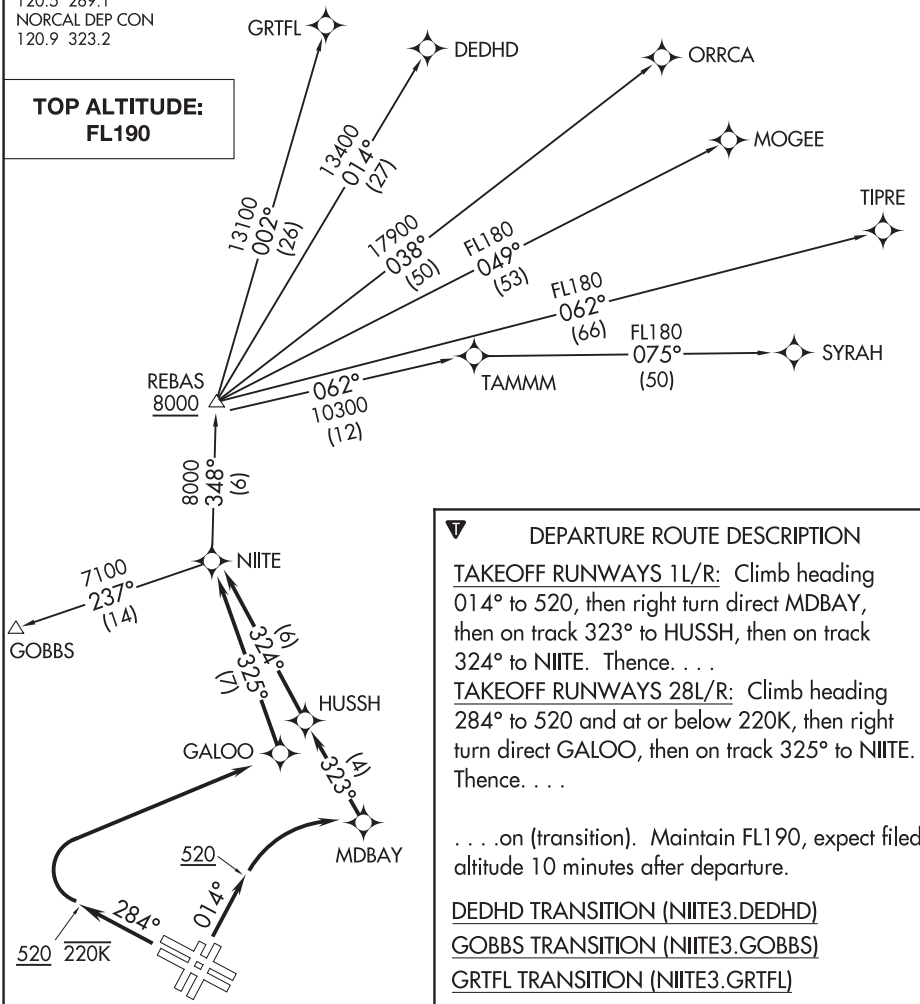

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb heading 014° to 520, then right turn direct MDBAY, then on track 323° to HUSSH, then on track 324° to NIITE. Thence. . . .

TAKEOFF RUNWAYS 28L/R: Climb heading 284° to 520 and at or below 220K, then right turn direct GALOO, then on track 325° to NIITE. Thence. . . .

. . . .on (transition). Maintain FL190, expect filed altitude 10 minutes after departure.

DEDHD TRANSITION (NIITE3.DEDHD)
GOBBS TRANSITION (NIITE3.GOBBS)
GRTFL TRANSITION (NIITE3.GRTFL)
MOGEE TRANSITION (NIITE3.MOGEE)
ORRCA TRANSITION (NIITE3.ORRCA)
SYRAH TRANSITION (NIITE3.SYRAH)
TIPRE TRANSITION (NIITE3.TIPRE)

SW-2, 30 JAN 2020 to 26 MAR 2020

(OFFSH2.MCKEY) 19339

OFFSHORE TWO DEPARTURE

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

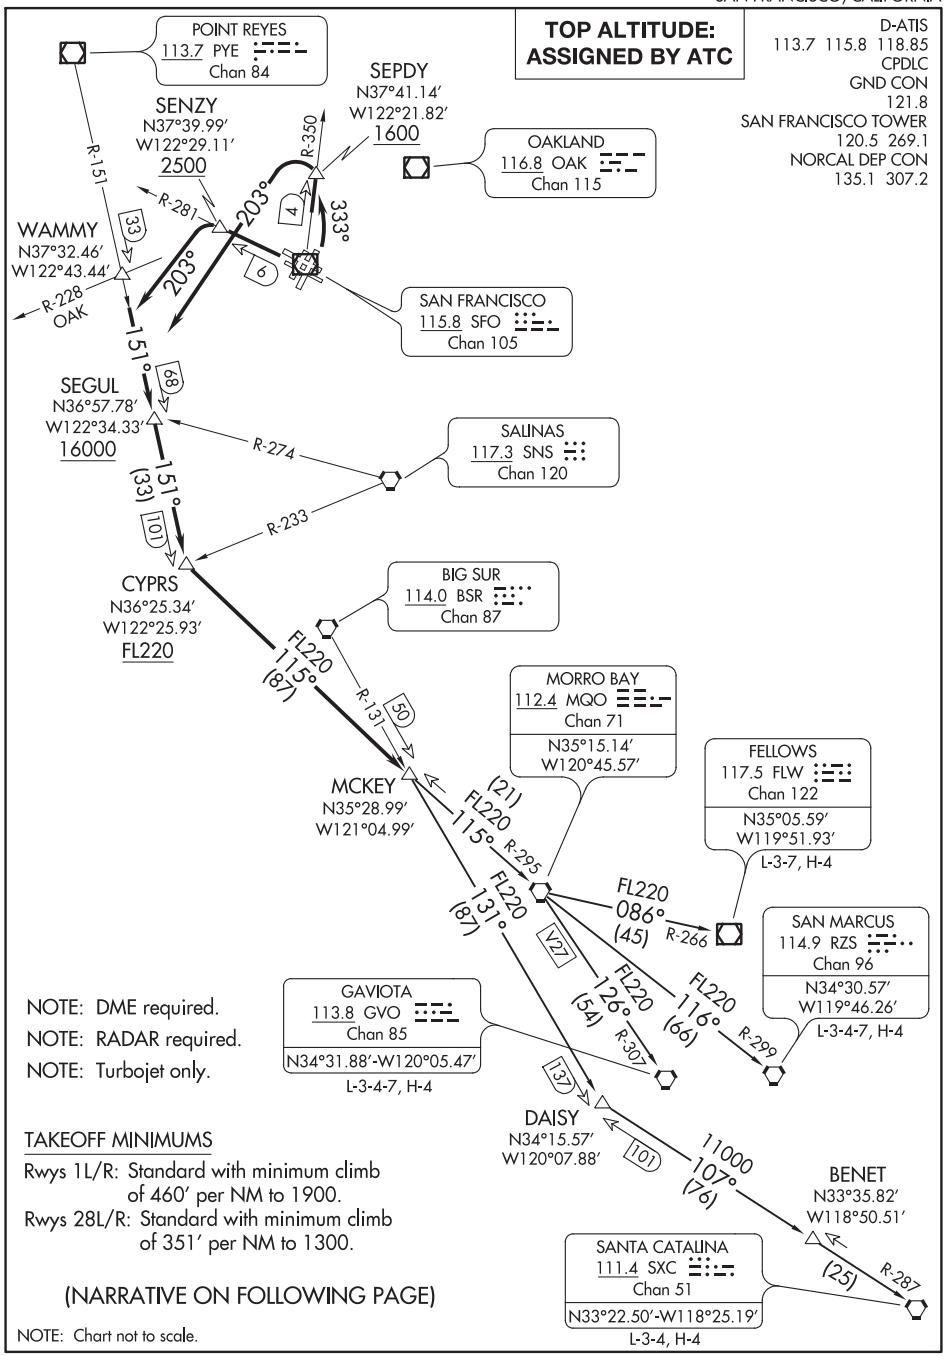

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

OFFSHORE TWO DEPARTURE
(OFFSH2.MCKEY) 25APR19

SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climbing left turn heading 333° to intercept SFO VOR/DME R-350 to cross SEPDY INT/SFO VOR/DME 4 DME at or above 1600. Thence . . . .
TAKEOFF RUNWAYS 28L/R: Climb on SFO VOR/DME R-281 to cross SENZY INT/ SFO VOR/DME 6 DME at or above 2500. Thence . . . .

. . . . climbing left turn heading 203° to intercept PYE R-151 to cross SEGUL INT/PYE 68 DME at or above 16000, then on PYE R-151 to cross CYPRS INT/PYE 101 DME at or above FL220. Then on MQO R-295 to MCKEY INT/MQO 21 DME, then on assigned (transition). Maintain ATC assigned altitude. Expect filed altitiude 10 minutes after departure.

FELLOWS TRANSITION (OFFSH2.FLW): From over MCKEY INT on MQO R-295 to MQO VORTAC, then on MQO R-086 and FLW R-266 to FLW VOR/DME.
GAVIOTA TRANSITION (OFFSH2.GVO): From over MCKEY INT on MQO R-295 to MQO VORTAC, then on MQO R-126 and GVO R-307 to GVO VORTAC.
SAN MARCUS TRANSITION (OFFSH2.RZS): From over MCKEY INT on MQO R-295 to MQO VORTAC, then on MQO R-116 and RZS R-299 to RZS VORTAC.
SANTA CATALINA TRANSITION (OFFSH2.SXC): From over MCKEY INT on BSR R-131 to DAISY INT then on SXC R-287 to SXC VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020

SAHEY THREE DEPARTURE (RNAV)

(SAHEY3.SAHEY) 20AUG15

SAN FRANCISCO, CALIFORNIA

SAN FRANCISCO INTL (SFO)

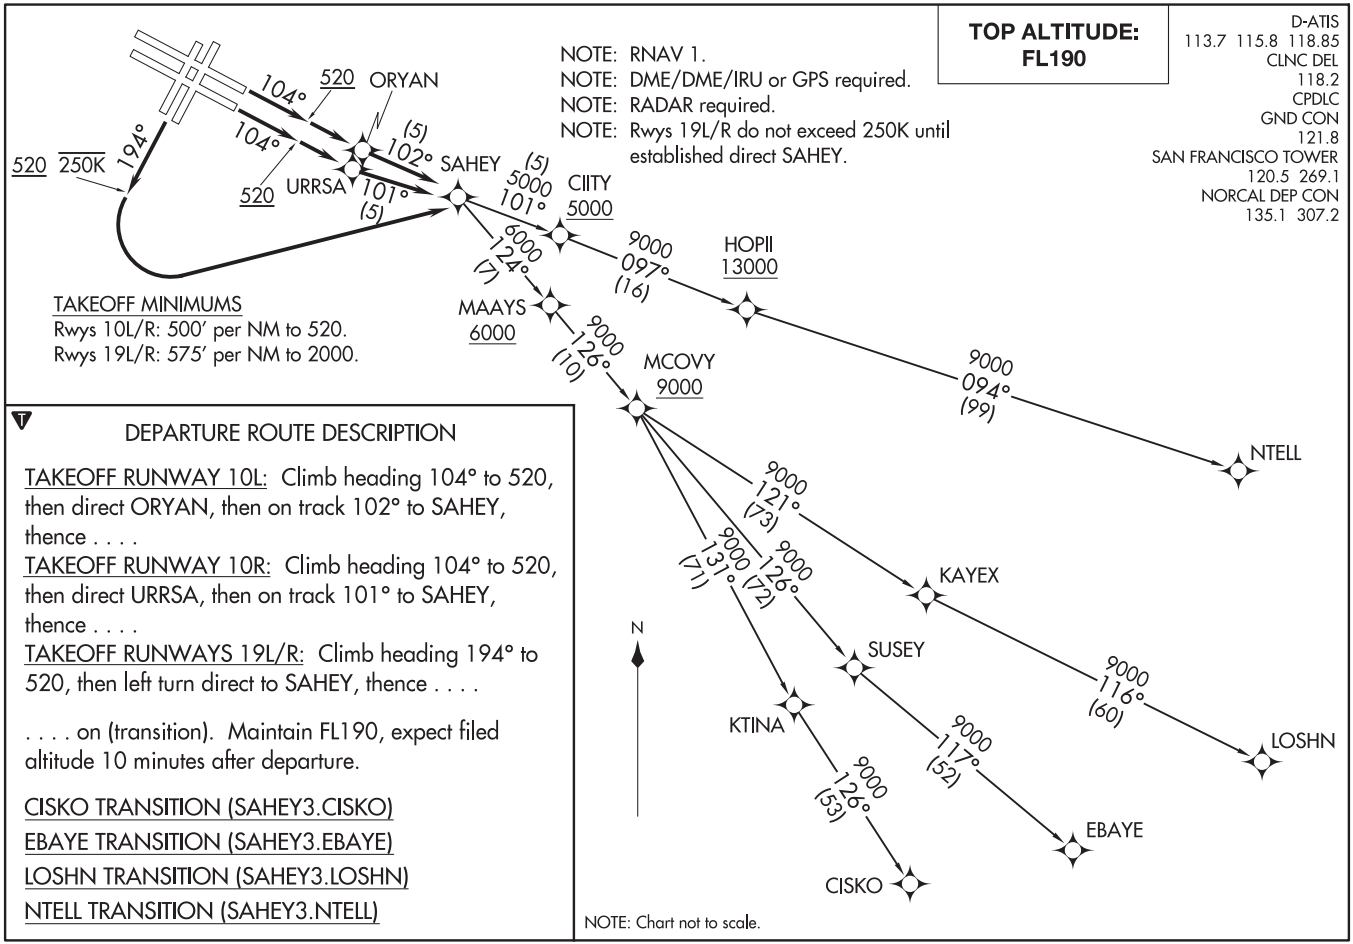

(SAHEY3.SAHEY) 17341

SAHEY THREE DEPARTURE (RNAV)

AL-375 (FAA)

SAN FRANCISCO INTL (SFO)

SAN FRANCISCO, CALIFORNIA

TOP ALTITUDE: ASSIGNED BY ATC

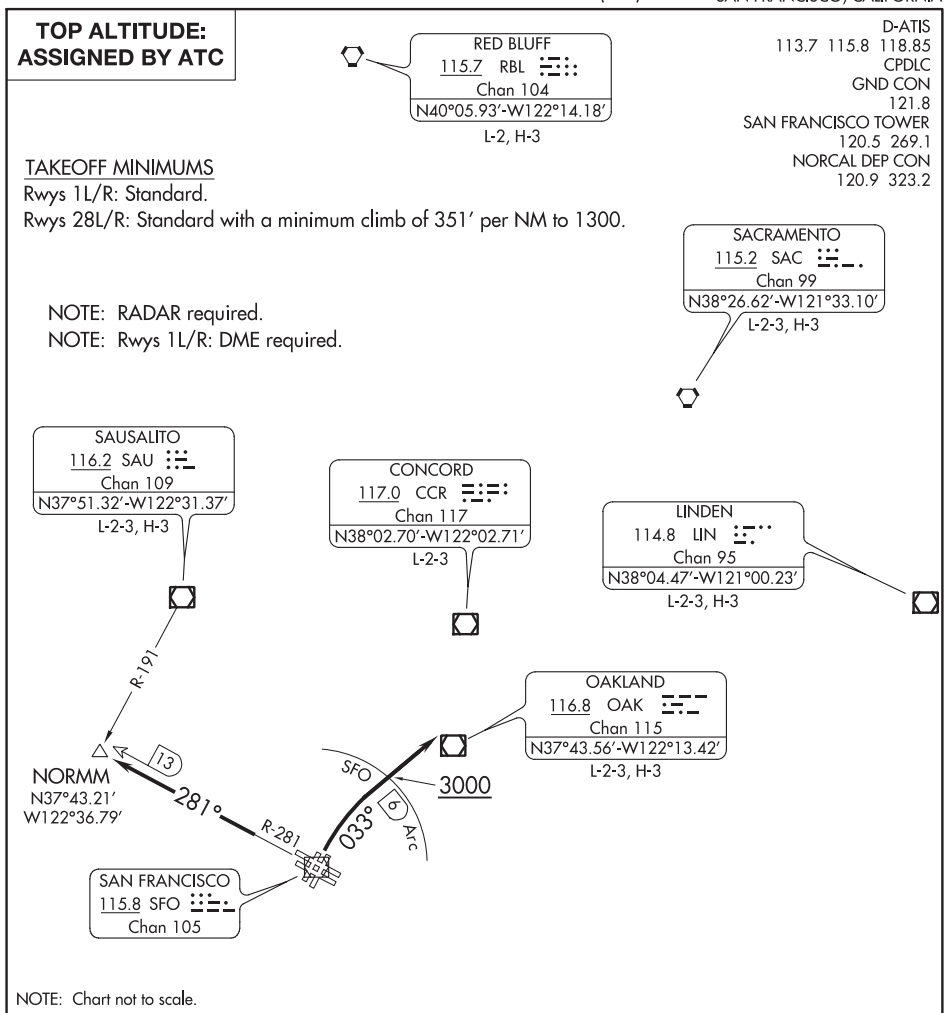

TAKEOFF MINIMUMS
Rwys 1L/R: Standard.
Rwys 28L/R: Standard with a minimum climb of 351′ per NM to 1300.

NOTE: RADAR required.
NOTE: Rwys 1L/R: DME required.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climbing right turn heading 033° or ATC assigned heading to cross SFO 6 DME at or above 3000 for RADAR vectors to assigned route/fix. Expect further clearance to filed altitude 10 minutes after departure.

TAKEOFF RUNWAYS 28L/R: Climb on SFO VOR/DME R-281 to NORMM INT/SFO 13 DME; then expect RADAR vectors to assigned route/fix. Expect further clearance to filed altitude 10 minutes after departure.

LOST COMMUNICATIONS:
If not in contact with departure control after reaching 3000, continue climb to filed altitude and proceed direct to assigned route/fix.

SW-2, 30 JAN 2020 to 26 MAR 2020

(SNTNA2.SNTNA) 17341

SNTNA TWO DEPARTURE (RNAV)

SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

AL-375 (FAA)

SW-2, 30 JAN 2020 to 26 MAR 2020

SNTNA TWO DEPARTURE (RNAV)
SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

(SNTNA2.SNTNA) 25JUN15

SW-2, 30 JAN 2020 to 26 MAR 2020

D-ATIS
113.7 115.8 118.85
CLNC DEL
118.2
CPDLC
GND CON
121.8
SAN FRANCISCO TOWER
120.5 269.1
NORCAL DEP CON
135.1 307.2

TOP ALTITUDE: FL190

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb heading 014° to 520 and at or below 210K, then climbing left turn direct SSTIK, then climbing left turn direct PORTE at or below 10000. Thence. . . .

. . . . on (transition). Maintain FL190, expect filed altitude 10 minutes after departure.

CISKO TRANSITION (SSTIK4.CISKO)
EBAYE TRANSITION (SSTIK4.EBAYE)
LOSHN TRANSITION (SSTIK4.LOSHN)
NTELL TRANSITION (SSTIK4.NTELL)
YYUNG TRANSITION (SSTIK4.YYUNG)

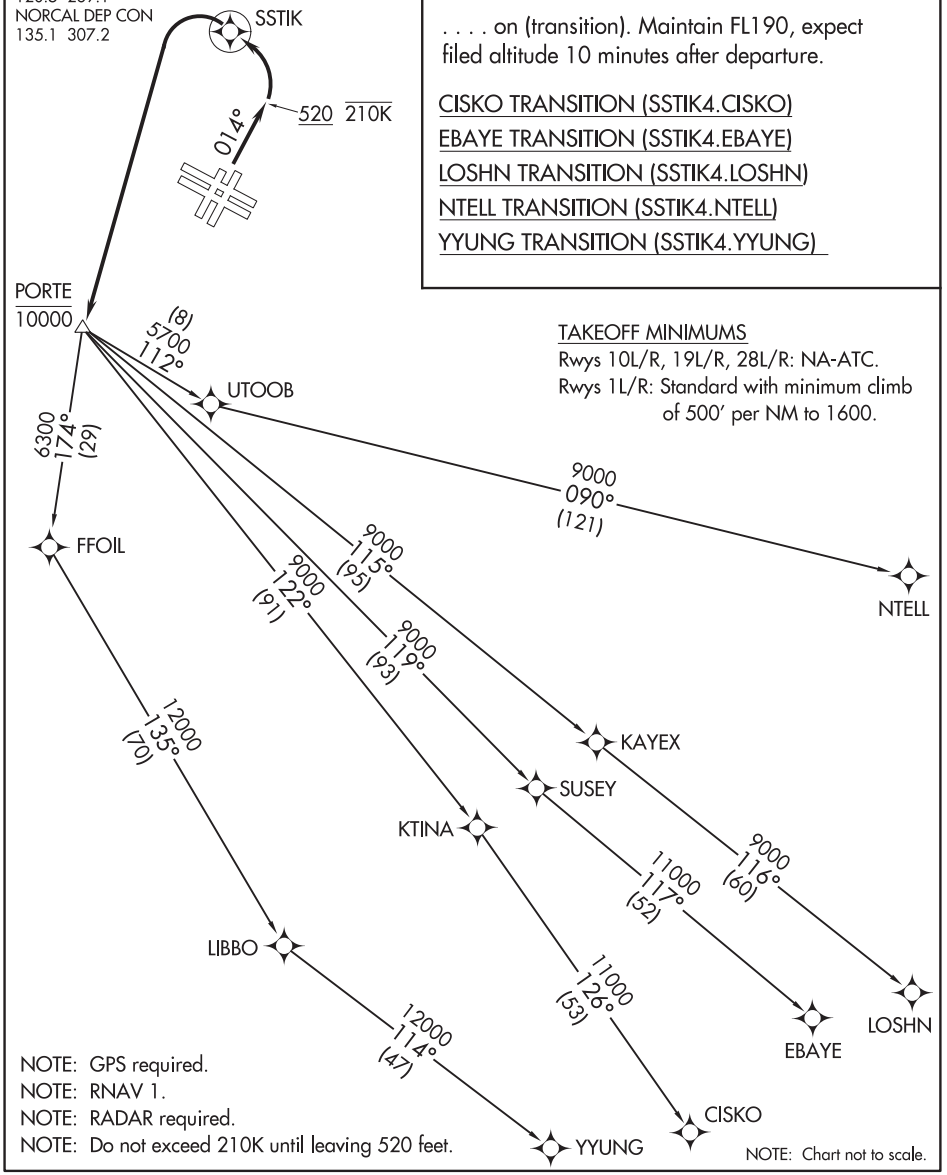

TAKEOFF MINIMUMS
Rwys 10L/R, 19L/R, 28L/R: NA-ATC.
Rwys 1L/R: Standard with minimum climb of 500' per NM to 1600.

NOTE: GPS required.
NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: Do not exceed 210K until leaving 520 feet.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

TRUKN TWO DEPARTURE (RNAV)

(TRUKN2.TRUKN) 25JUN15

SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

(TRUKN2.TRUKN) 17341
TRUKN TWO DEPARTURE (RNAV)
AL-375 (FAA)
SAN FRANCISCO INTL (SFO)
SAN FRANCISCO, CALIFORNIA

D-ATIS
113.7 115.8 118.85
CLNC DEL
118.2
CPDLC
GND CON
121.8
SAN FRANCISCO TOWER
120.5 269.1
NORCAL DEP CON
120.9 323.2

TOP ALTITUDE: FL190

N

GRTFL
DEDHD
ORRCA
MOGEE
TIPRE
SYRAH
HYPEE
COSMC
TRUKN
TYDYE
3000

11100 *4500 345° (38)
11100 *4500 353° (37)
14400 *6000 022° (42)
13500 *6000 035° (42)
15300 *6000 049° (51)
13900 *6000 063° (44)
6100 *4300 022° (12)
5100 *4300 043° (12)
043° (3)

520
014°
284°
520 210K

TAKEOFF MINIMUMS

Rwys 1L/R: Standard with a minimum climb of 500′ per NM to 520.

Rwy 28L: Standard with minimum climb of 535′ per NM to 2100.

Rwy 28R: Standard with minimum climb of 560′ per NM to 2100.

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Rwys 28L/R do not exceed 210K until leaving 520′.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L, 1R: Climb heading 014° to 520, then right turn direct TYDYE, cross TYDYE at or above 3000, then on track 043° to TRUKN. Thence. . . .

TAKEOFF RUNWAYS 28L, 28R: Climb heading 284° to 520 and at or below 210K, then right turn direct TRUKN. Thence. . . .

. . . .on (transition). Maintain FL190. Expect filed altitude 10 minutes after departure.

DEDHD TRANSITION (TRUKN2.DEDHD)
GRTFL TRANSITION (TRUKN2.GRTFL)
MOGEE TRANSITION (TRUKN2.MOGEE)
ORRCA TRANSITION (TRUKN2.ORRCA)
SYRAH TRANSITION (TRUKN2.SYRAH)
TIPRE TRANSITION (TRUKN2.TIPRE)

D-ATIS
113.7 115.8 118.85
CLNC DEL
118.2
CPDLC
GND CON
121.8
SAN FRANCISCO TOWER
120.5 269.1
NORCAL DEP CON
135.1 307.2

TOP ALTITUDE: 3000

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R: Climb heading 284° to 520, then direct WESLA at or above 2000 at or below 230K, then left turn direct PORTE, thence . . . .

. . . . on (transition) maintain 3000, expect filed altitude 10 minutes after departure.

CISKO TRANSITION (WESLA4.CISKO)
EBAYE TRANSITION (WESLA4.EBAYE)
LOSHN TRANSITION (WESLA4.LOSHN)
NTELL TRANSITION (WESLA4.NTELL)
YYUNG TRANSITION (WESLA4.YYUNG)

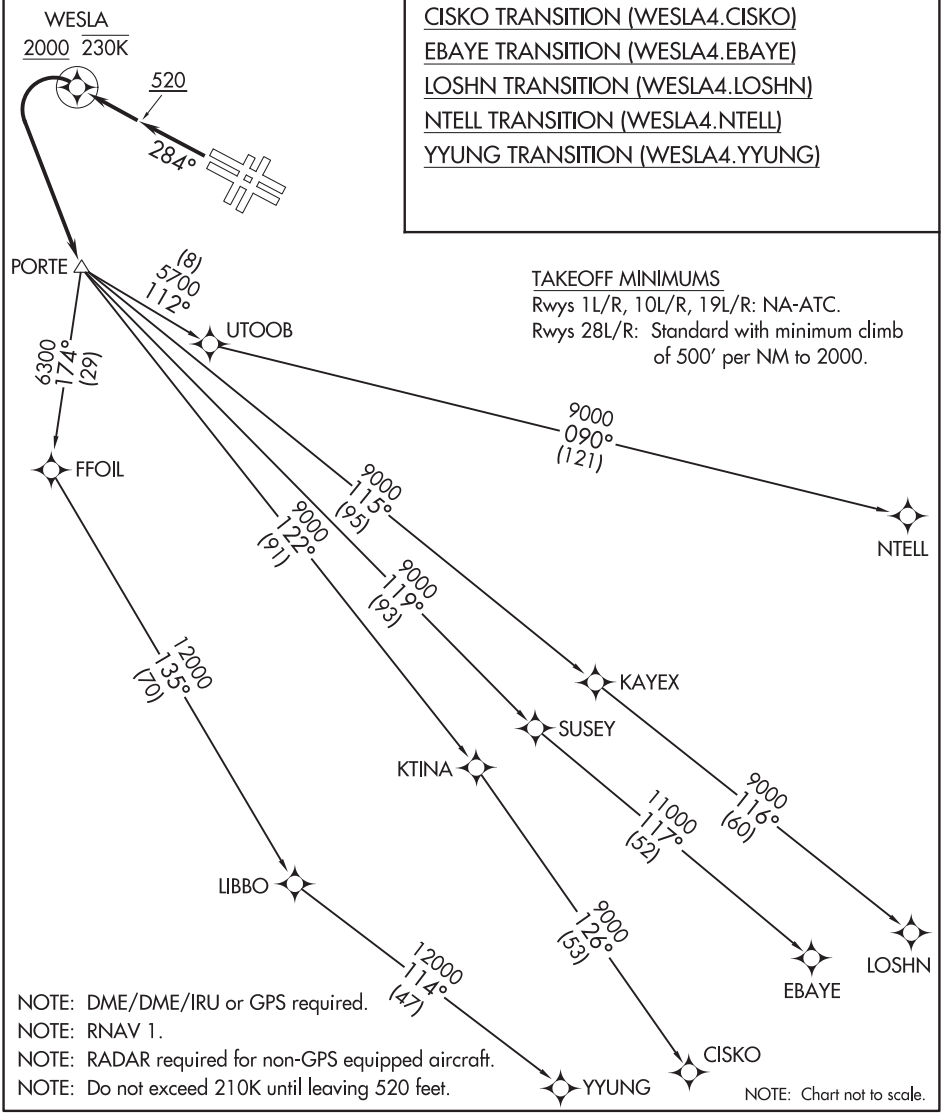

TAKEOFF MINIMUMS
Rwys 1L/R, 10L/R, 19L/R: NA-ATC.
Rwys 28L/R: Standard with minimum climb of 500' per NM to 2000.

NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required for non-GPS equipped aircraft.
NOTE: Do not exceed 210K until leaving 520 feet.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN JOSE, CALIFORNIA AL-693 (FAA) 20030

ILS or LOC RWY 12R

NORMAN Y MINETA SAN JOSE INTL (SJC)

LOC/DME I-SLV	APP CRS		12R	12L
110.9	126°	Rwy Idg	8587	8833
Chan 46		TDZE	46	44
		Apt Elev	62	62

T A DME required.
For inoperative MALSR, increase S-LOC 12R Cat C/D visibility to 1 mile.

MALSR Rwy 12R (A5)

MISSED APPROACH: Climb to 500 then climb to 4000 on SJC VOR/DME R-121 to GILRO/SJC 26.7 DME and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

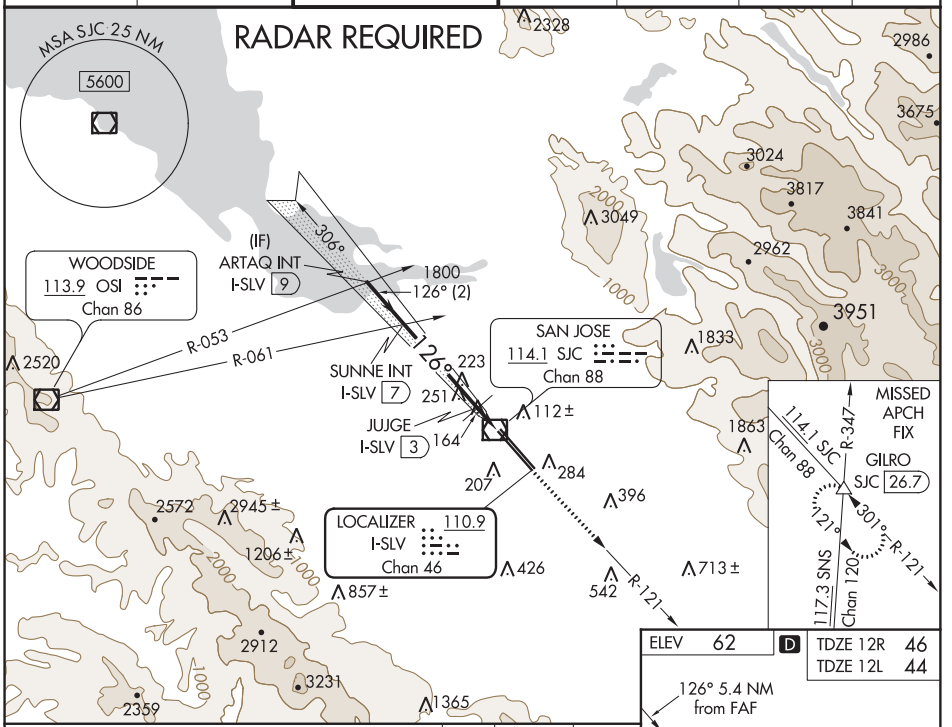

VGSI and ILS glidepath not coincident
(VGSI Angle 3.00/TCH 75).

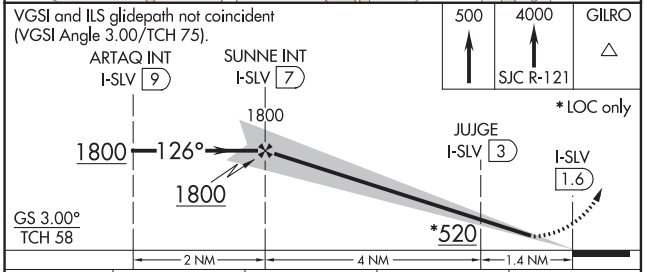

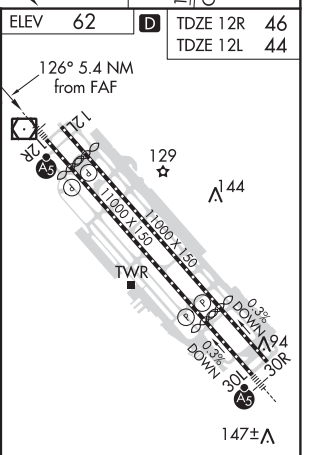

REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

CATEGORY	A	B	C	D
S-ILS 12R	251-½ 205 (200-½)			
S-LOC 12R	420-½ 374 (400-½)		420-⅝ 374 (400-⅝)	
SIDESTEP RWY 12L	600-1 556 (600-1)		600-1½ 556 (600-1½)	600-2 556 (600-2)

SAN JOSE, CALIFORNIA
Amdt 8A 21JUL16

37°22'N-121°56'W

NORMAN Y MINETA SAN JOSE INTL (SJC)

ILS or LOC RWY 12R

SW-2, 30 JAN 2020 to 26 MAR 2020

ILS or LOC RWY 30L

NORMAN Y MINETA SAN JOSE INTL (SJC)

LOC/DME I-SJC	APP CRS		30L	30R
110.9	306°	Rwy Idg	7614	7597
Chan 46		TDZE	57	55
		Apt Elev	62	62

T A DME required.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR Rwy 30L

MISSED APPROACH: Climb to 1900 on SJC VOR/DME R-303 to SUNNE INT/SJC 5 DME and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

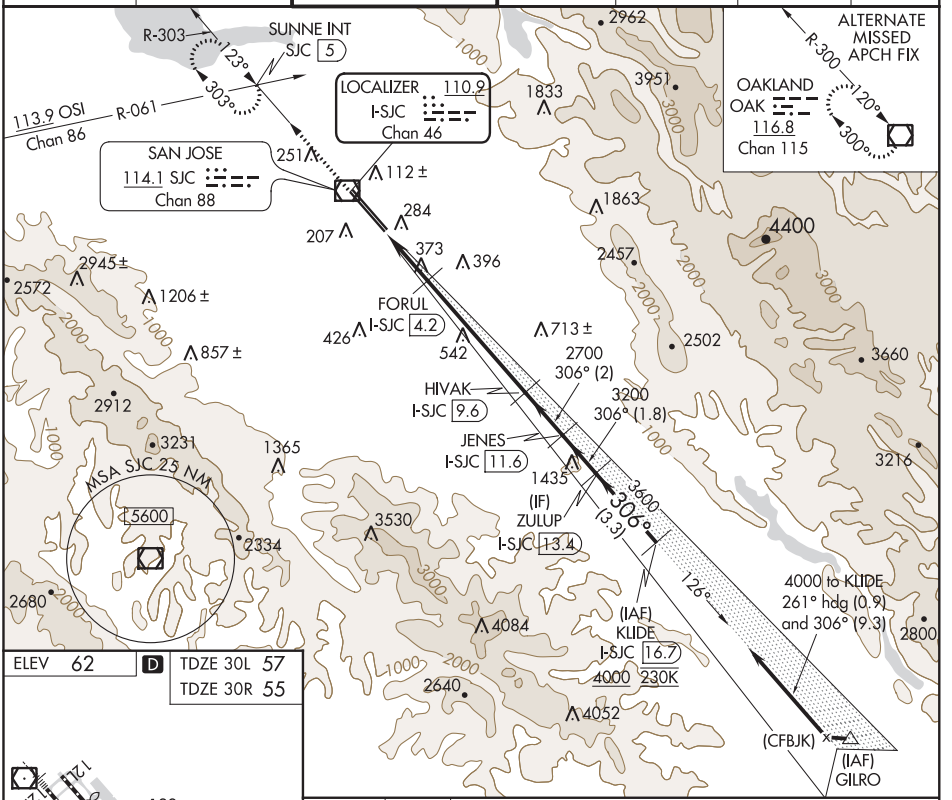

ELEV 62 D TDZE 30L 57 TDZE 30R 55



REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

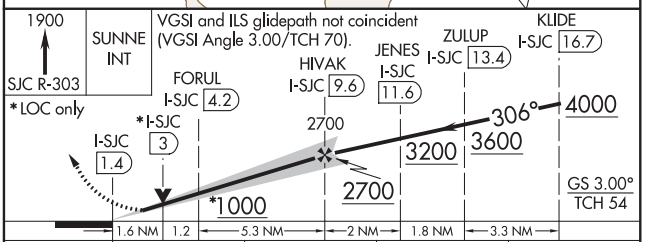

CATEGORY	A	B	C	D
S-ILS 30L #	257/24 200 (200-½)			
S-LOC 30L	640/24 583 (600-½)		640-1¼ 583 (600-1¼)	
SIDESTEP 30R	640-1 585 (600-1)		640-1½ 585 (600-1½)	640-2 585 (600-2)

SW-2, 30 JAN 2020 to 26 MAR 2020

SAN JOSE, CALIFORNIA | AL-693 (FAA) | 20030

LOC/DME I-SJC	APP CRS	Rwy Idg 7614
110.9	306°	TDZE 57
Chan 46		Apt Elev 62

ILS RWY 30L (SA CAT I & II)

NORMAN Y MINETA SAN JOSE INTL (SJC)

T A DME required. SA CAT I: Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DH. SA CAT II: Reduced lighting: requires specific OPSPEC, MSPEC, or LOA approval and use of Autoland or HUD to touchdown. SA CAT I /II: NA when tower closed.

MALSR (A5)

MISSED APPROACH: Climb to 1900 on SJC VOR/DME R-303 to SUNNE INT/SJC 5 DME and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

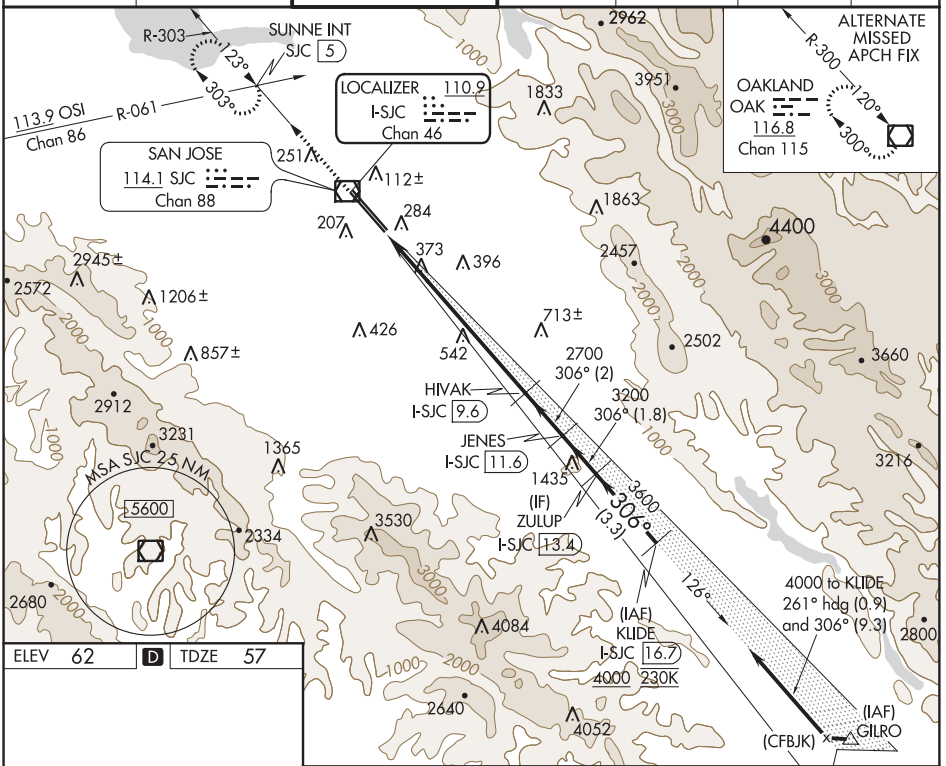

ELEV 62	D	TDZE 57



REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

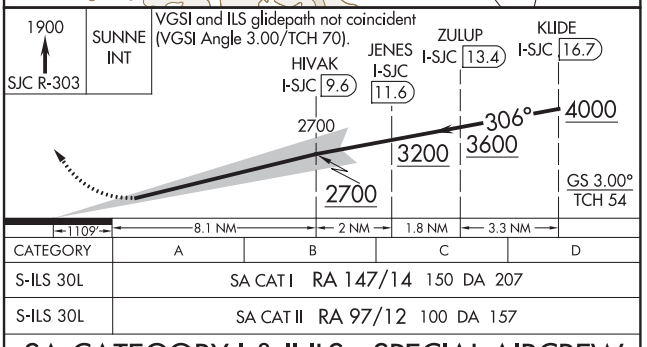

CATEGORY	A	B	C	D
S-ILS 30L	SA CAT I RA 147/14 150 DA 207			
S-ILS 30L	SA CAT II RA 97/12 100 DA 157			

SA CATEGORY I & II ILS - SPECIAL AIRCREW AND AIRCRAFT CERTIFICATION REQUIRED

SAN JOSE, CALIFORNIA
Amdt 25A 15SEP16

37°22'N-121°56'W

NORMAN Y MINETA SAN JOSE INTL (SJC)

ILS RWY 30L (SA CAT I & II)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	8833
126°	TDZE	44
	Apt Elev	62

RNAV (RNP) Z RWY 12L

NORMAN Y MINETA SAN JOSE INTL (SJC)

For uncompensated Baro-VNAV systems, procedure NA below 0°C (32°F) or above 54°C (130°F). GPS required.

MISSED APPROACH: Climb to 4600 on track 126° to COKOR and on track 124° to GILRO and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

RADAR REQUIRED

MSA RW12L 25 NM 5700

(IAF) ARTAQ 1800 123° (2)

(IF) OMSEE 1100 126° (2.2)

NIBUY 210K

(IAF) WADVA 4500 (RF REQD)

(IF) RERAE 1800 061° (5.4)

(FAF) HINIR (3.2) 126° 1100 (2.5) 251

3500 074° (4)

1800 (4.5)

ZORSA 210K 3000 306° (3.1)

(IF) HITIR 4000 (RF REQD)

RW12L

COKOR

126° (7.1)

124° (19.2)

GILRO

MISSED APCH FIX 5 NM 125° 305°

ELEV 62 D TDZE 44

126° to RW12L

TWR

11000 X 150

0.3% DOWN

GP 3.00° TCH 57

HINIR 1100 1100 126° RW12L

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

4600 tr 126° COKOR tr 124° GILRO

See planview for multiple IF locations.

3.2 NM

CATEGORY	A	B	C	D
RNP 0.18 DA	385-1⅛ 341 (400-1⅛)			
RNP 0.30 DA	451-1⅜ 407 (400-1⅜)			

AUTHORIZATION REQUIRED

REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

SW-2, 30 JAN 2020 to 26 MAR 2020

SAN JOSE, CALIFORNIA | AL-693 (FAA) | 20030

RNAV (RNP) Z RWY 12R

NORMAN Y MINETA SAN JOSE INTL (SJC)

APP CRS	Rwy Idg	8587
126°	TDZE	46
	Apt Elev	62

For uncompensated Baro-VNAV systems, procedure NA below 0°C (32°F) or above 54°C (130°F). GPS required.

MALSR

MISSED APPROACH: Climb to 4600 on track 126° to HOSBO and on track 124° to GILRO and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

RADAR REQUIRED

MSA RW12R 25 NM 5700

(IAF) WADVA 4500 (RF REQD)

(IF) RERAE

3500 074° (4)

1800 062° (5.3)

(IAF) ARTAQ

1800 126° (2)

(IF) SUNNE

1100 126° (2.2)

PUAKO 210K

(FAF) FOXAG

1100 (2.4)

126° (3.2)

251

RW12R

ZORSA 210K

3000 306° (3.1)

(IF) HITIR 4000 (RF REQD)

857±

1206±

2945±

2572

2912

207

284

396

426

542

713±

HOSBO

126° (9.1)

124° (17.2)

1435

3530

2502

2328

2986

3675

3024

3817

3841

3049

2962

3951

1833

3460

1863

4400

2457

2000

1000

3000

MISSED APCH FIX 5 NM 305° 125° GILRO

ELEV 62 D TDZE 46

126° to RW12R

TWR

129

144

147±

94

REIL Rwy 12L

HIRL Rwys 12L-30R and 12R-30L L

FOXAG

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

4600 tr 126° | HOSBO | tr 124° | GILRO

1100

126°

RW12R

GP 3.00° TCH 58

See planview for multiple IF locations.

3.2 NM

CATEGORY	A	B	C	D
RNP 0.15 DA	380-⅝ 334 (400-⅝)			
RNP 0.30 DA	486-1 440 (500-1)			

AUTHORIZATION REQUIRED

SAN JOSE, CALIFORNIA
Amdt 3A 21JUL16

37°22'N-121°56'W

NORMAN Y MINETA SAN JOSE INTL (SJC)

RNAV (RNP) Z RWY 12R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	7614
306°	TDZE	57
	Apt Elev	62

RNAV (RNP) Z RWY 30L

NORMAN Y MINETA SAN JOSE INTL (SJC)

For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS required. For inoperative MALSR, increase RNP 0.15 all Cats visibility to RVR 6000 and increase RNP 0.30 all Cats visibility to 1⅝ mile.

MALSR

MISSED APPROACH: Climb to 2300 on track 306° to ARTAQ and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

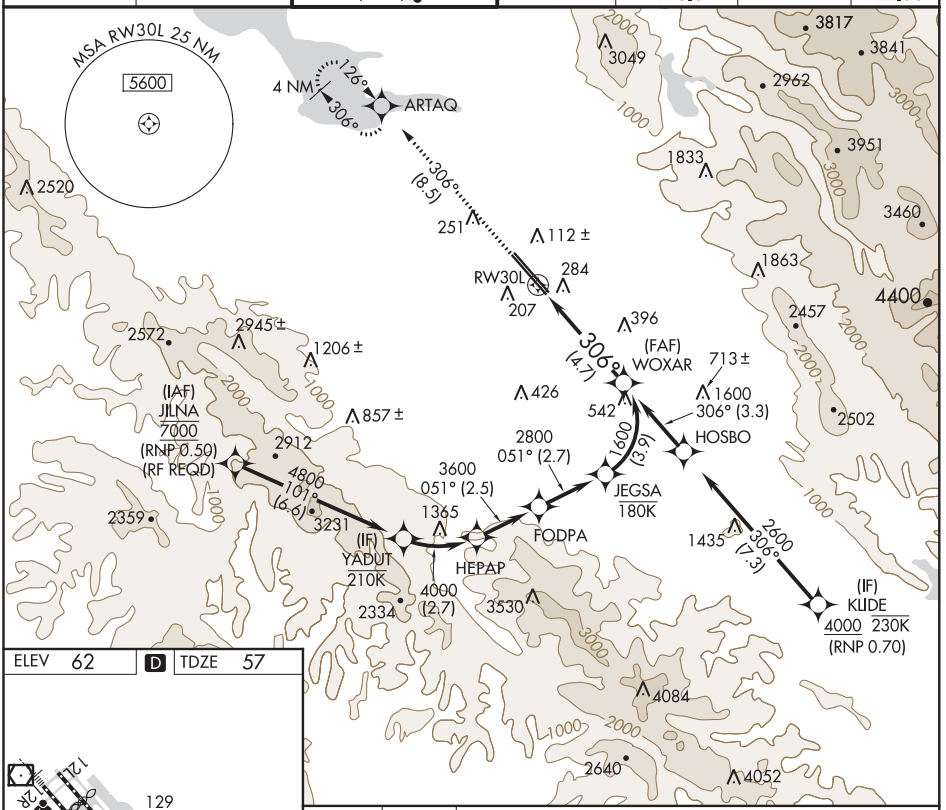

ELEV 62	D	TDZE 57



REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

2300
tr 306°
ARTAQ

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

See planview for multiple IF locations.

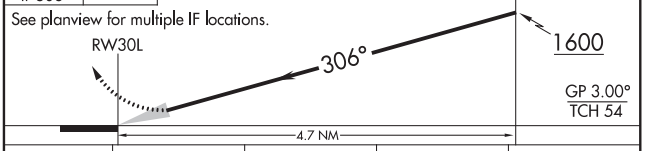

CATEGORY	A	B	C	D
RNP 0.15 DA	421/40 364 (400-¾)			
RNP 0.30 DA	544/60 487 (500-1¼)			

AUTHORIZATION REQUIRED

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN JOSE, CALIFORNIA AL-693 (FAA) 20030

APP CRS	Rwy Idg	7597
306°	TDZE	55
	Apt Elev	62

RNAV (RNP) Z RWY 30R

NORMAN Y MINETA SAN JOSE INTL (SJC)

For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS required.

MISSED APPROACH: Climb to 600 then climb to 2300 direct ARTAQ and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) (L) 257.6	121.7	118.0		122.95

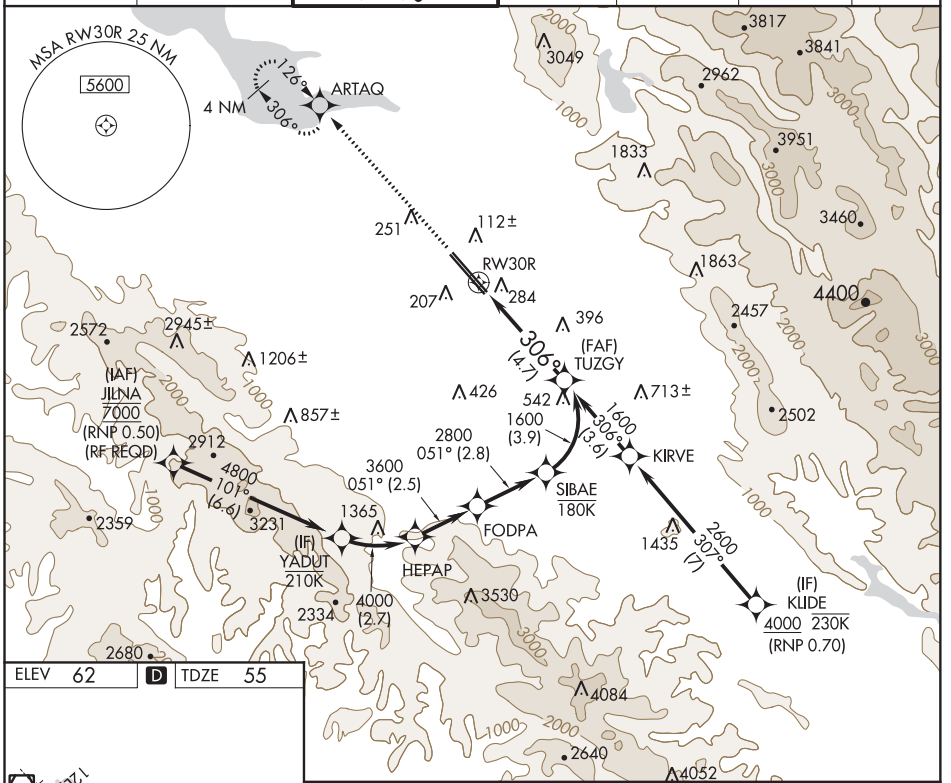

ELEV 62	D	TDZE 55



REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L (L)

600	2300	ARTAQ

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

See planview for multiple IF locations.

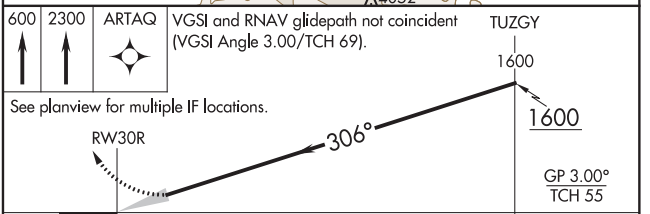

CATEGORY	A	B	C	D
RNP 0.11 DA		404-1⅛	349 (400-1⅛)	
RNP 0.20 DA		475-1⅜	420 (500-1⅜)	
RNP 0.30 DA		541-1⅝	486 (500-1⅝)	

AUTHORIZATION REQUIRED

SAN JOSE, CALIFORNIA
Amdt 1A 21JUL16

NORMAN Y MINETA SAN JOSE INTL (SJC)
37°22'N-121°56'W
RNAV (RNP) Z RWY 30R

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	8833
CH 69501	126°	TDZE	44
W12B		Apt Elev	62

RNAV (GPS) Y RWY 12L

NORMAN Y MINETA SAN JOSE INTL (SJC)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F).
DME/DME RNP- 0.3 NA.

MISSED APPROACH: Climb to 4600 direct COKOR and on track 124° to GILRO and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

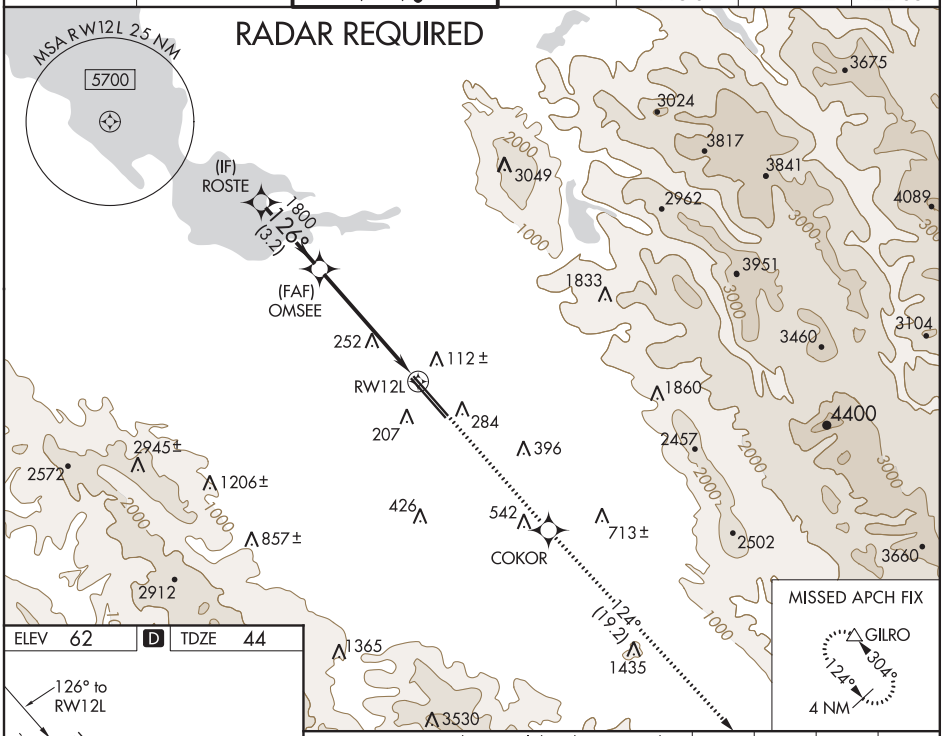

ELEV 62	D	TDZ 44

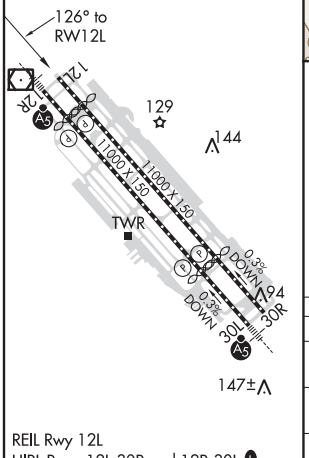

REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

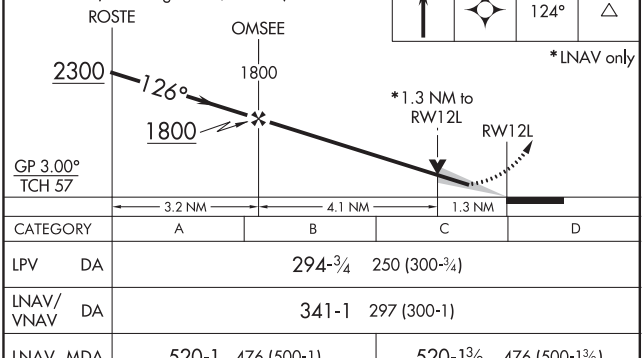

4600	COKOR	tr 124°	GILRO

*LNAV only

CATEGORY	A	B	C	D
LPV DA	294-¾ 250 (300-¾)			
LNAV/VNAV DA	341-1 297 (300-1)			
LNAV MDA	520-1 476 (500-1)		520-1⅜ 476 (500-1⅜)	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN JOSE, CALIFORNIA AL-693 (FAA) 20030

RNAV (GPS) Y RWY 12R

NORMAN Y MINETA SAN JOSE INTL (SJC)

WAAS	APP CRS		12R	12L
CH 90106	126°	Rwy Idg	8587	8833
W12A		TDZE	46	44
		Apt Elev	62	62

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cats C/D visibility to 1⅜ mile.

MALSR Rwy 12R

MISSED APPROACH: Climb to 4600 direct HIVAK and on track 124° to GILRO and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

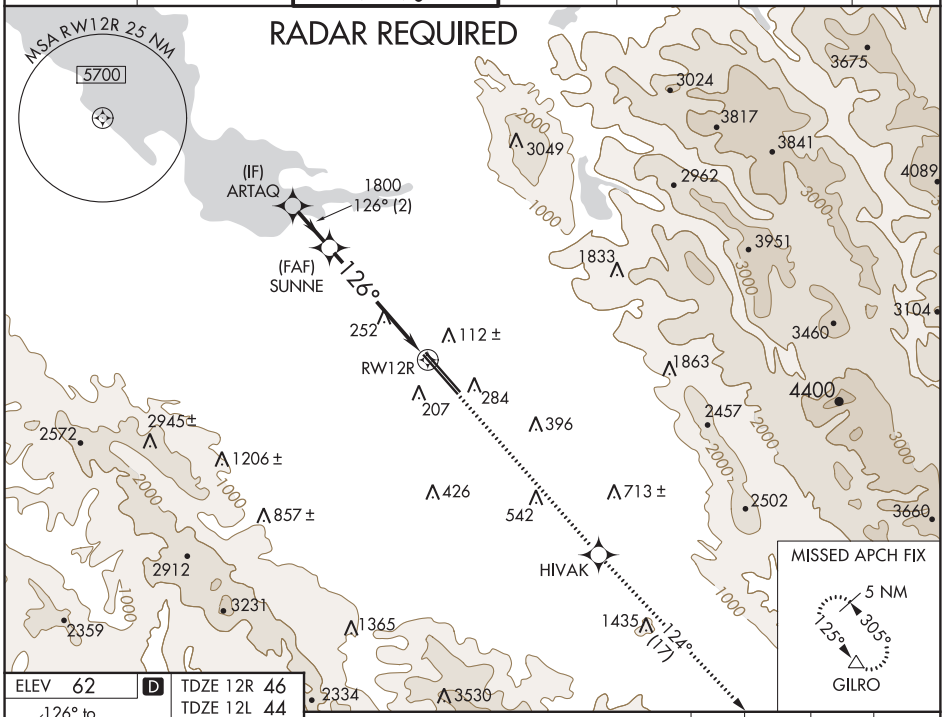

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 62 D TDZE 12R 46 TDZE 12L 44

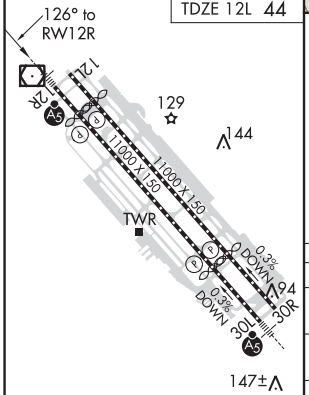

REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

4600 | HIVAK | tr 124° | GILRO

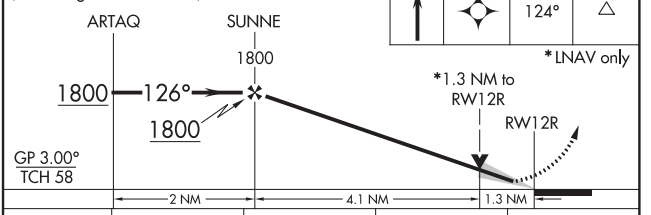

* LNAV only

CATEGORY	A	B	C	D
LPV DA	246-½ 200 (200-½)			
LNAV/VNAV DA	371-⅝ 325 (400-⅝)	371-1 325 (400-1)		
LNAV MDA	520-½ 474 (500-½)		520-1 474 (500-1)	
SIDESTEP 12L	520-1 476 (500-1)		520-1½ 476 (500-1½)	520-2 476 (500-2)

SAN JOSE, CALIFORNIA
Amdt 3A 21JUL16

37°22'N-121°56'W

NORMAN Y MINETA SAN JOSE INTL (SJC)

RNAV (GPS) Y RWY 12R

RNAV (GPS) Y RWY 30L

NORMAN Y MINETA SAN JOSE INTL (SJC)

WAAS CH 97306 W30A	APP CRS 306°		30L	30R
		Rwy Idg	7614	7597
		TDZE	57	55
		Apt Elev	62	62

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR Rwy 30L

MISSED APPROACH: Climb to 2300 direct ARTAQ and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

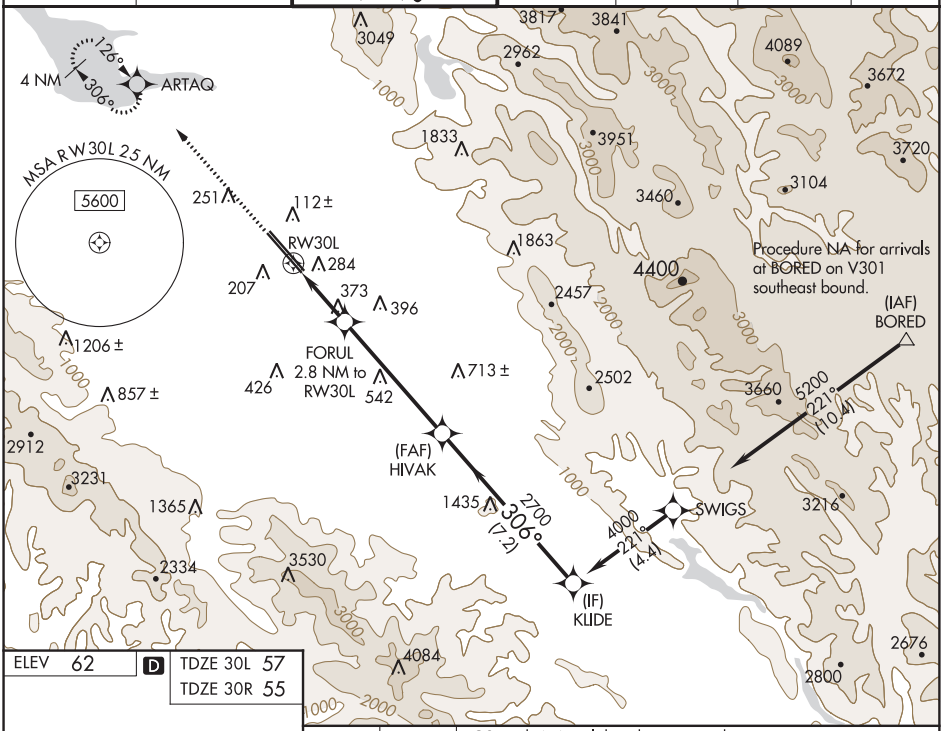

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 62 D TDZE 30L 57 TDZ 30R 55



REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

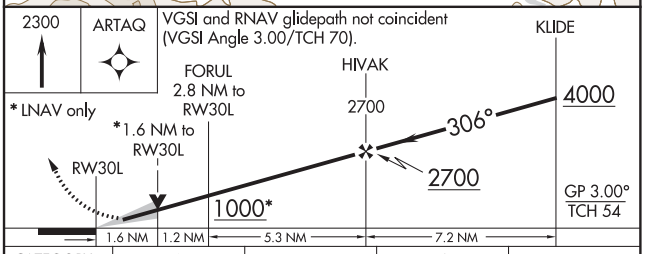

CATEGORY	A	B	C	D
LPV DA #	257/24 200 (200-½)			
LNAV/VNAV DA	540/60 483 (500-1¼)			
LNAV MDA	640/24 583 (600-½)		640-1¼ 583 (600-1¼)	
SIDESTEP 30R	640-1 585 (600-1)			

SAN JOSE, CALIFORNIA | AL-693 (FAA) | 20030

WAAS	APP CRS	Rwy Idg	7597
CH 72901	306°	TDZE	55
W30B		Apt Elev	62

RNAV (GPS) Y RWY 30R

NORMAN Y MINETA SAN JOSE INTL (SJC)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2300 direct ROSTE and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	118.0		122.95

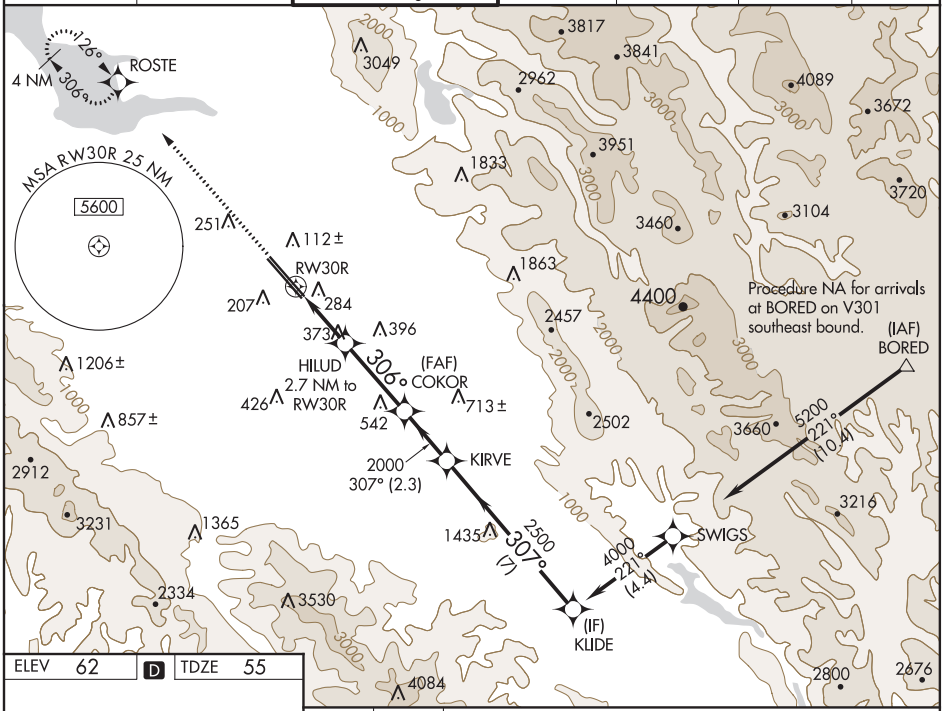

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 62 D TDZE 55

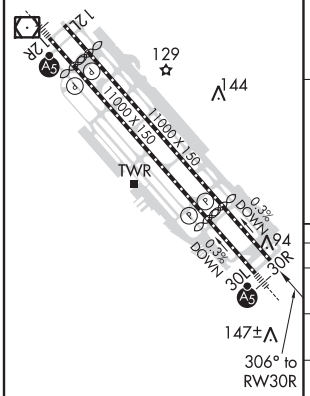

REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

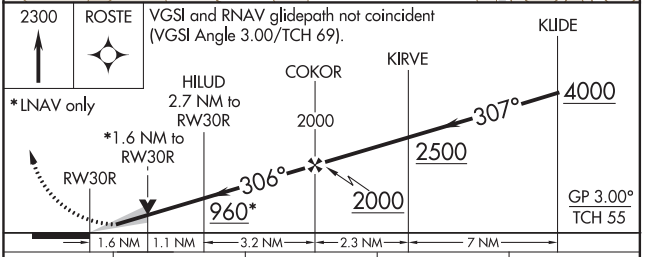

CATEGORY		A	B	C	D
LPV	DA	255-¾ 200 (200-¾)			
LNAV/VNAV	DA	541-1⅝ 486 (500-1⅝)			
LNAV	MDA	640-1 585 (600-1)		640-1¾ 585 (600-1¾)	
C CIRCLING		640-1 578 (600-1)	700-1 638 (700-1)	700-1¾ 638 (700-1¾)	700-2 638 (700-2)

SAN JOSE, CALIFORNIA
Amdt 3A 21JUL16

NORMAN Y MINETA SAN JOSE INTL (SJC)

37°22'N-121°56'W

RNAV (GPS) Y RWY 30R

FAIRGROUNDS VISUAL RWYS 30L/R

SAN JOSE, CALIFORNIA

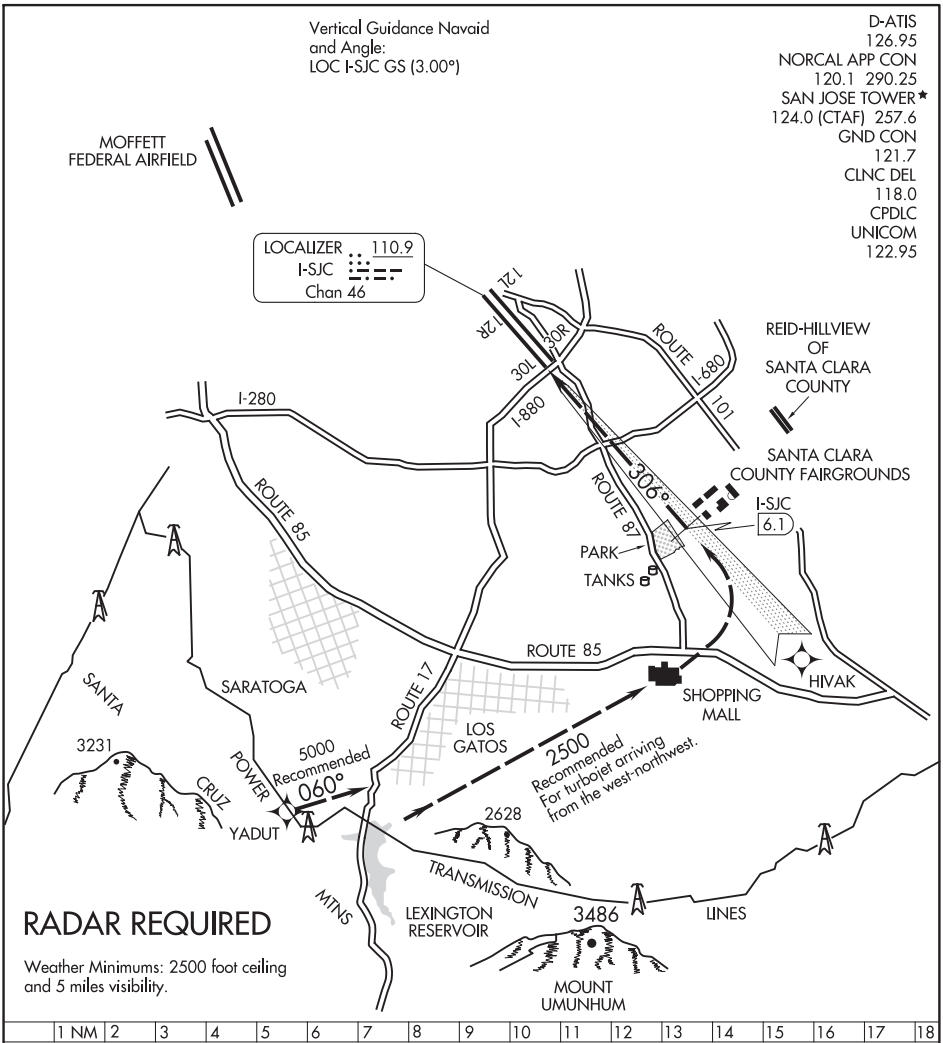

FAIRGROUNDS VISUAL APPROACH RUNWAYS 30L/R

When cleared for Fairgrounds Visual Approach, aircraft should turn final no closer than I-SJC 6.1 DME for noise abatement.

NOTE: Closely spaced parallel visual approaches may be in progress to Runways 30L/R. In the event of a go-around on Runway 30L, proceed straight-ahead heading 300°, or on Runway 30R, turn right heading 120°, climb and maintain 4000, or as directed by ATC.

FAIRGROUNDS VISUAL RWYS 30L/R

SAN JOSE, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

18088

AIRPORT DIAGRAM

NORMAN Y MINETA SAN JOSE INTL (SJC)

AL-693 (FAA) SAN JOSE, CALIFORNIA

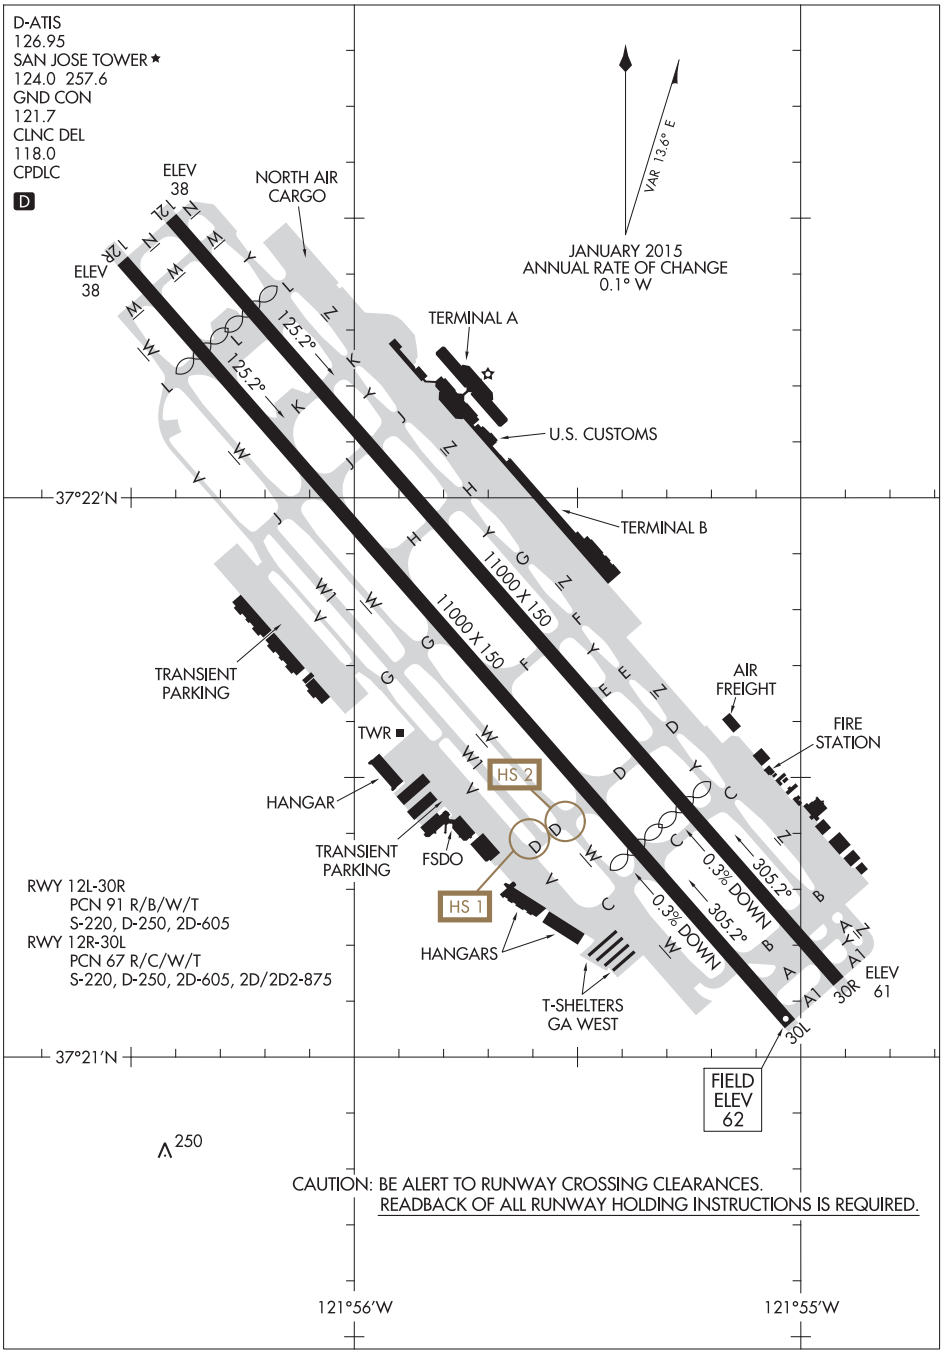

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM

NORMAN Y MINETA SAN JOSE INTL (SJC)

SAN JOSE, CALIFORNIA

18088

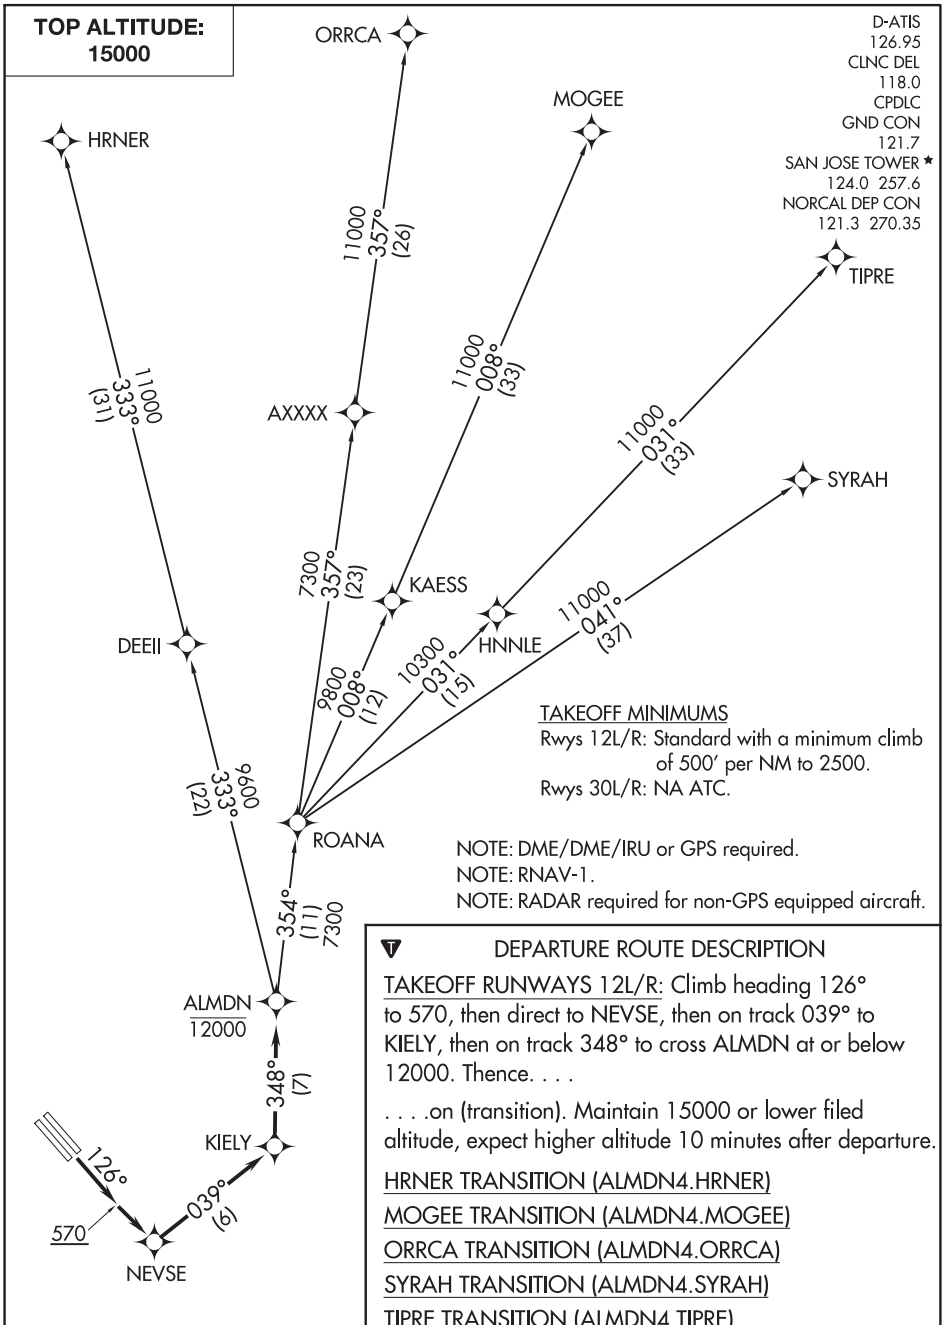

SW-2, 30 JAN 2020 to 26 MAR 2020

(BMRNG4.BMRNG) 17341

BMRNG FOUR DEPARTURE (RNAV)

NORMAN Y MINETA SAN JOSE INTL (SJC)
AL-693 (FAA) SAN JOSE, CALIFORNIA

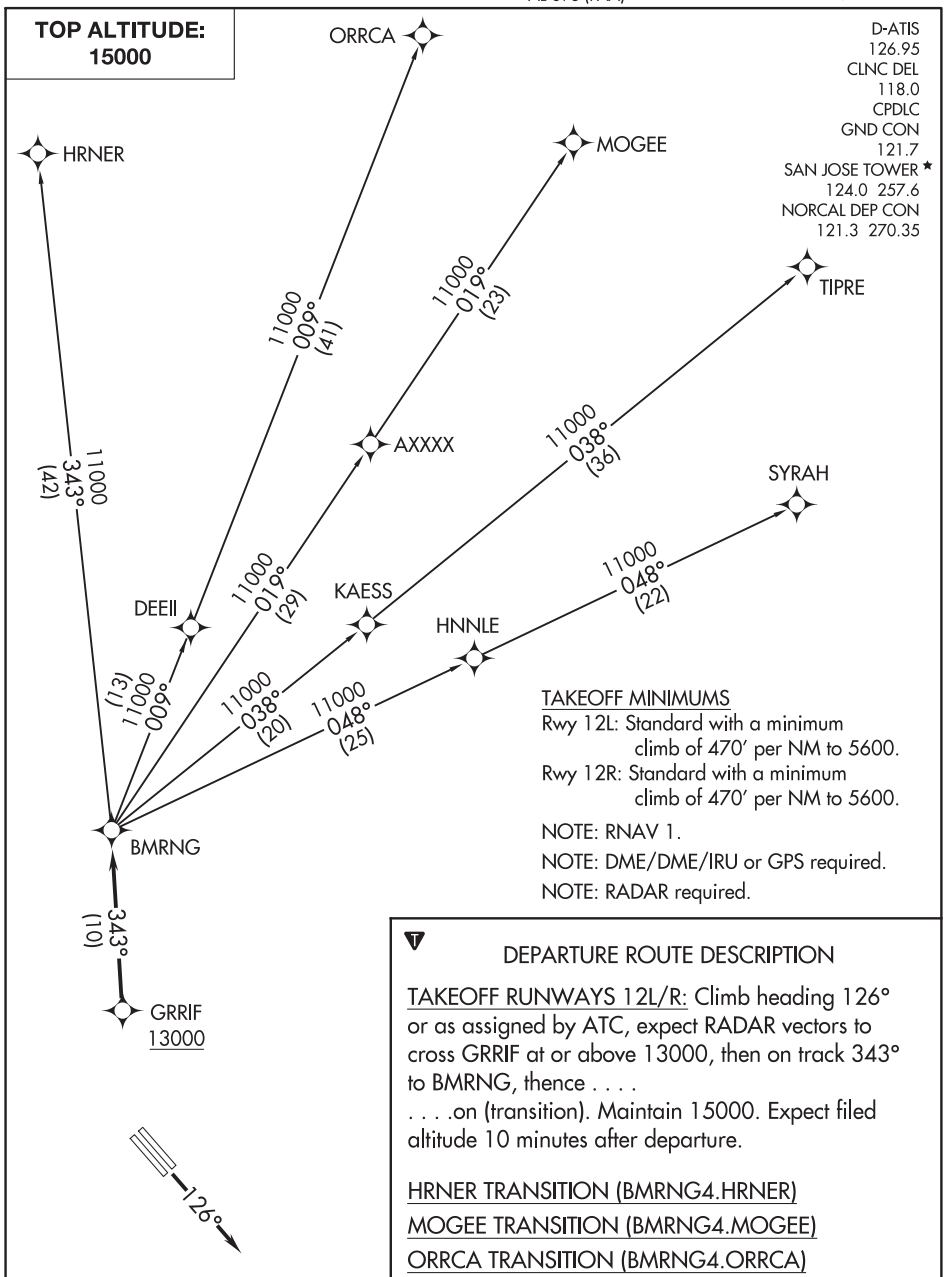

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

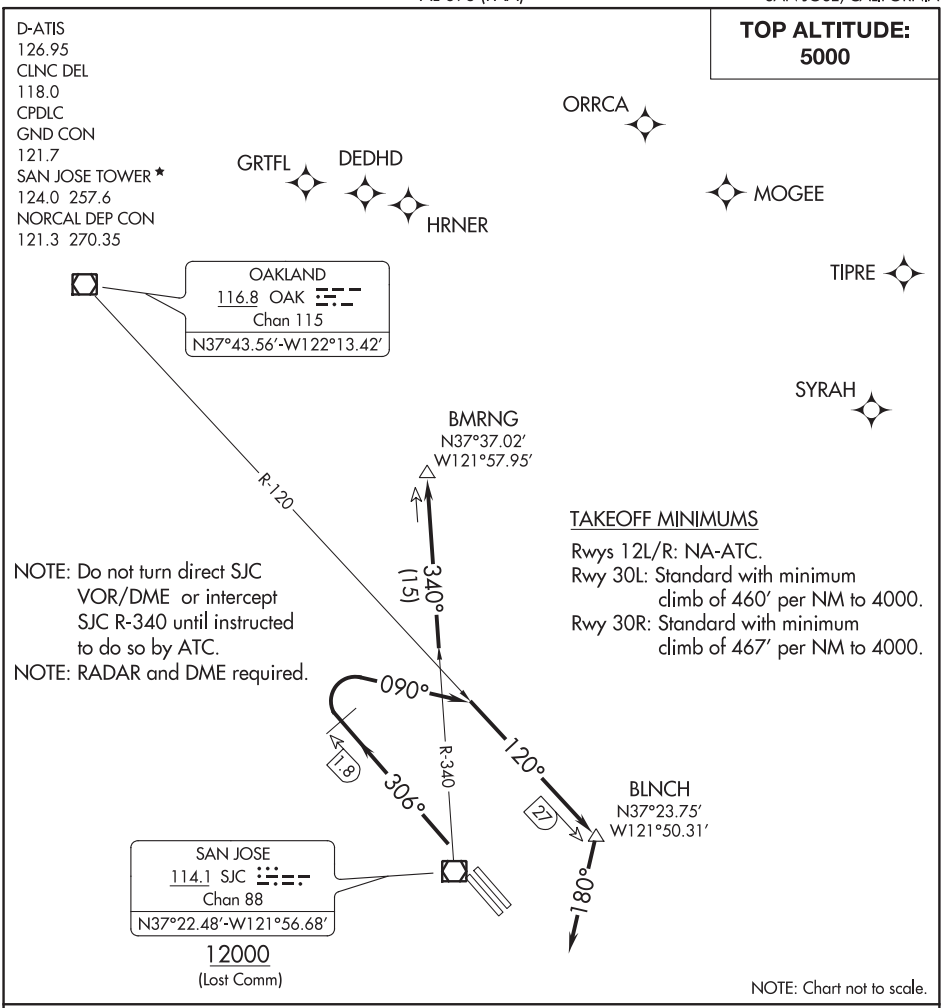

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 30L/R: Climb heading 306°, at SJC VOR/DME 1.8 DME northwest turn right heading 090° to intercept OAK R-120 to BLNCH, then turn right heading 180° for RADAR vectors to SJC VOR/DME, then on SJC R-340 to BMRNG INT. Maintain 5000, expect filed altitude 10 minutes after departure.

LOST COMMUNICATIONS

RUNWAYS 30L/R: If not in contact with departure control upon reaching BLNCH, depart BLNCH heading 180°. When able turn right direct SJC VOR/DME, cross SJC VOR/DME at or above 12000, then on SJC R-340 to BMRNG INT before proceding on course.

(SJC3.MOONY) 19227

SAN JOSE THREE DEPARTURE

AL-693 (FAA)

NORMAN Y MINETA SAN JOSE INTL (SJC)
SAN JOSE, CALIFORNIA

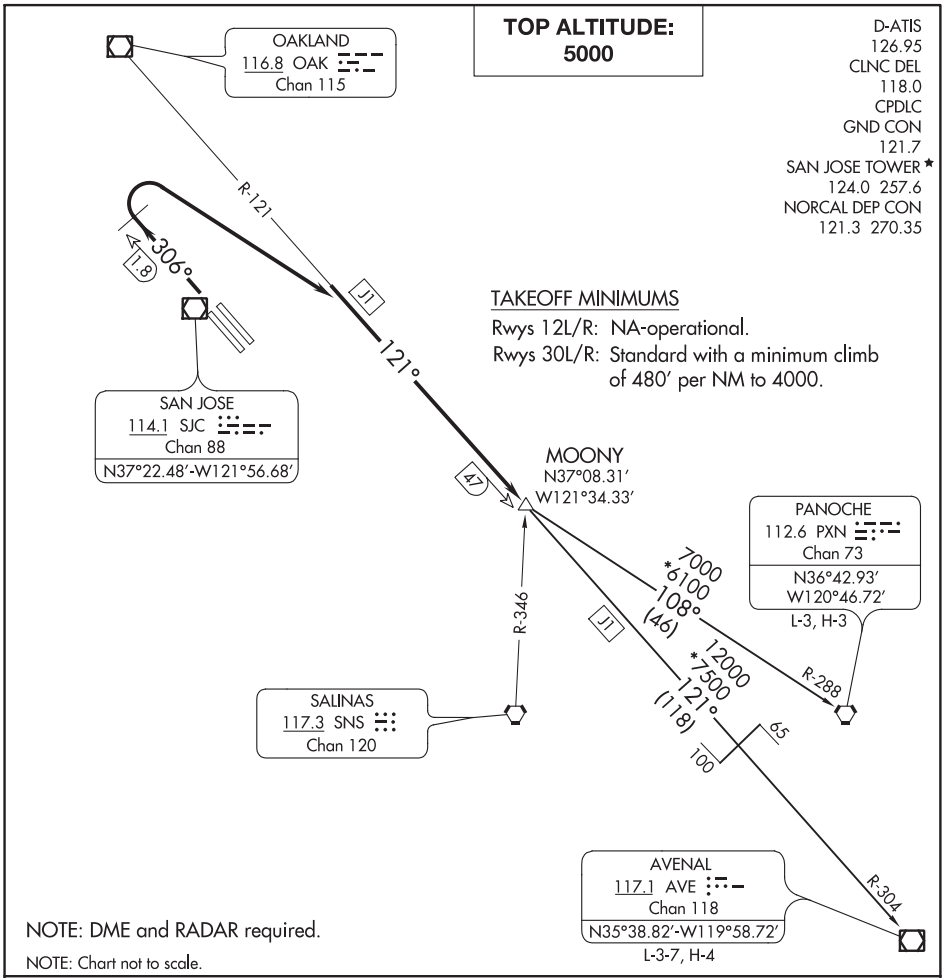

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 30L/R: Climb heading 306° to SJC 1.8 DME NW of SJC VOR/DME, then turn right to intercept and proceed on OAK R-121 to MOONY INT, thence. . . .

. . . .on (transition) or (assigned route). Maintain 5000, expect clearance to filed altitude ten minutes after departure.

AVENAL TRANSITION (SJC3.AVE): From over MOONY INT on OAK R-121 and AVE R-304 to AVE VOR/DME.

PANOCHE TRANSITION (SJC3.PXN): From over MOONY INT on PXN R-288 to PXN VORTAC.

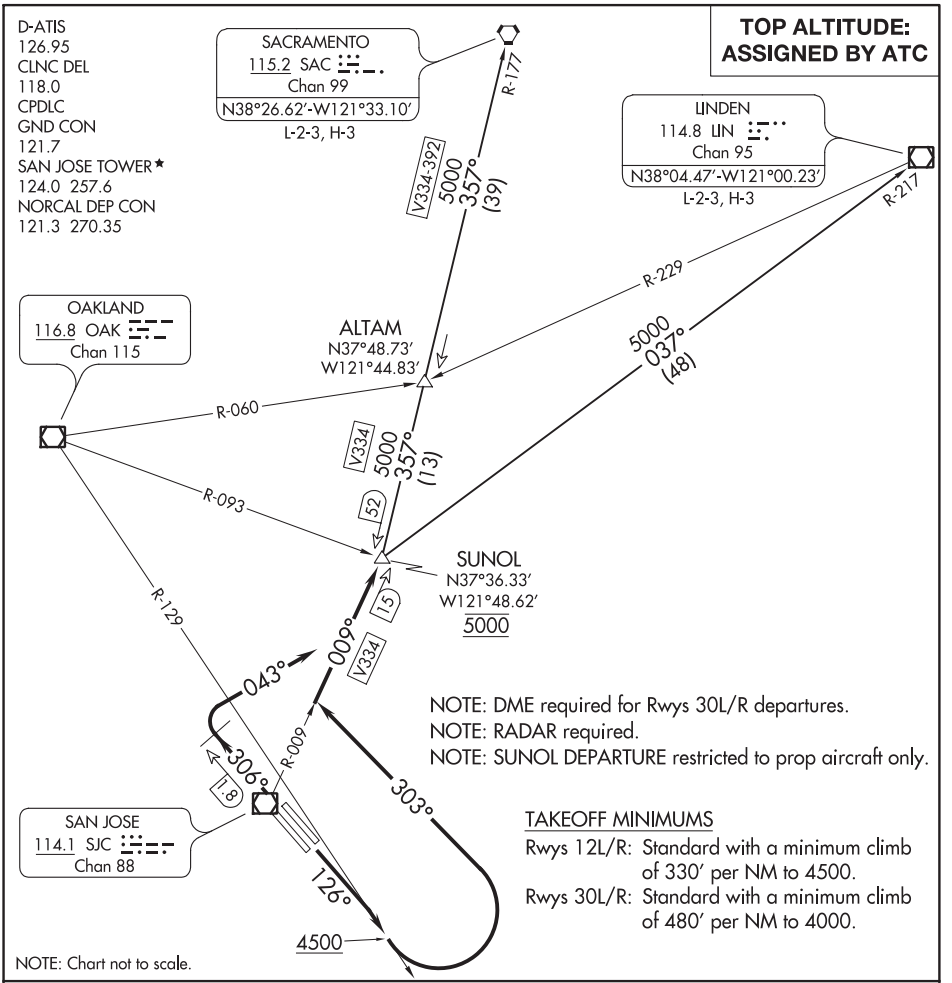

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 12L/R: Climb heading 126° to intercept and proceed on OAK R-129 to 4500, then turn left heading 303° for RADAR vectors to intercept and proceed on SJC R-009 to cross SUNOL at 5000, thence . . . .

TAKEOFF RUNWAYS 30L/R: Climb heading 306° at SJC 1.8 DME northwest of SJC VOR/DME, turn right heading 043° to intercept and proceed on SJC R-009 to cross SUNOL at 5000, thence . . . .

. . . . then on (transition) or (assigned route). Maintain ATC assigned altitude.

LINDEN TRANSITION (SUNOL1.LIN): From over SUNOL on LIN R-217 to LIN VOR/DME.

SACRAMENTO TRANSITION (SUNOL1.SAC): From over SUNOL on SAC R-177 to SAC VORTAC.

SW-2, 30 JAN 2020 to 26 MAR 2020

(TECKY3.TECKY) 17341

TECKY THREE DEPARTURE (RNAV)

NORMAN Y MINETA SAN JOSE INTL (SJC)
AL-693 (FAA)
SAN JOSE, CALIFORNIA

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 12L, 12R: Climb heading 126° to 570, then direct NEVSE, then on track 115° to cross TECKY at or above 13000, thence. . . .

TAKEOFF RUNWAY 30L: Climb heading 306° to 570, then direct to cross STCLR at or above 900 at or below 230K, then right turn direct to cross SPTNS at 5000, then on track 125° to cross TECKY at or above 13000, thence. . . .

TAKEOFF RUNWAY 30R: Climb heading 306° to 570, then direct to cross MLPTS at or above 900 at or below 230K, then right turn direct to cross SPTNS at 5000, then on track 125° to cross TECKY at or above 13000, thence. . . .

. . . .on (transition), maintain FL190. Expect filed altitude 10 minutes after departure.

EBAYE TRANSITION (TECKY3.EBAYE)

LOSHN TRANSITION (TECKY3.LOSHN)

TECKY THREE DEPARTURE (RNAV)
(TECKY3.TECKY) 21JUL16
SAN JOSE, CALIFORNIA
NORMAN Y MINETA SAN JOSE INTL (SJC)
SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	2601
CH 82216	127°	TDZE	133
W13A		Apt Elev	135

RNAV (GPS) RWY 13L

REID-HILLVIEW OF SANTA CLARA COUNTY (RHV)

T NA — DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When control tower closed, use Norman Y Mineta San Jose Intl altimeter setting. Circling east of Rwy 13L-31R NA at night. VDP NA with Norman Y Mineta San Jose Intl altimeter setting.

MISSED APPROACH: Climb to 4600 direct NAZFO and on track 129° to GILRO and hold.

ATIS	NORCAL APP CON	REID-HILLVIEW TOWER ★ (Rwy 13L-31R) (Rwy 13R-31L)	GND CON	UNICOM
125.2	120.1 290.25	119.8 (CTAF) L 126.1	121.65	122.95

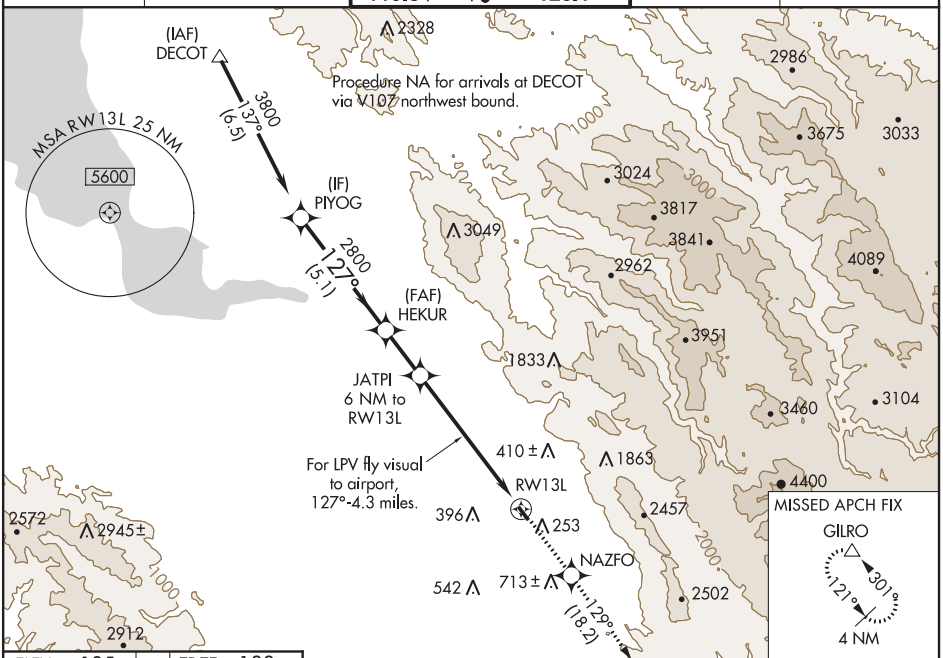

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 135	TDZE 133

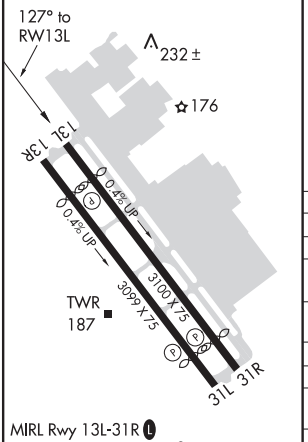

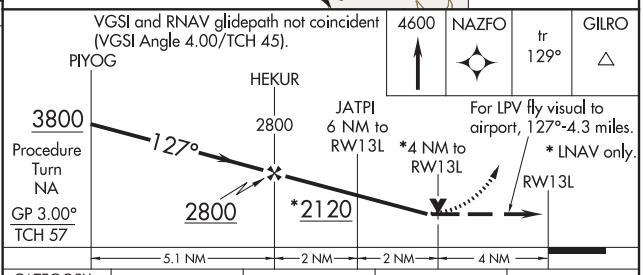

CATEGORY	A	B	C	D
LPV DA	1554-3	1421 (1500-3)	NA	
LNAV MDA	1840-1¼ 1707 (1800-1¼)	1840-1½ 1707 (1800-1½)	NA	
CIRCLING	1840-1¼ 1705 (1800-1¼)	1840-1½ 1705 (1800-1½)	NA	
NORMAN Y MINETA SAN JOSE INTL ALTIMETER SETTING MINIMUMS				
LPV DA	NA			
LNAV MDA	1860-1¼ 1727 (1800-1¼)	1860-1½ 1727 (1800-1½)	NA	
CIRCLING	1860-1¼ 1725 (1800-1¼)	1860-1½ 1725 (1800-1½)	NA	

SAN JOSE, CALIFORNIA AL-5591 (FAA) 18088

APP CRS	Rwy Idg	2690
312°	TDZE	131
	Apt Elev	135

RNAV (GPS) Y RWY 31R

REID-HILLVIEW OF SANTA CLARA COUNTY (RHV)

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling east of Rwy 13L-31R NA at night. When control tower closed, use Norman Y Mineta San Jose Intl altimeter setting.

MISSED APPROACH: Climb to 4000 direct TEBIJ and on track 310° to DECOT and hold.

ATIS	NORCAL APP CON	REID-HILLVIEW TOWER ★ (Rwy 13L-31R) (Rwy 13R-31L)	GND CON	UNICOM
125.2	120.1 290.25	119.8 (CTAF) L 126.1	121.65	122.95

Procedure NA for arrivals at GILRO on V485 southeast bound and for arrivals at CATHE on V107 southeast bound.

4 NM 338° 158° DECOT

MSA RW31R 25 NM 5600

310°

TEBIJ 396 RW31R

SIKEW 4.2 NM to RW31R

312° 1435

301° (6.2)

(FAF) UBIPE

(IF) ECYON

(IAF) ZUXOX

(IAF) GILRO

CATHE

ELEV 135 TDZE 131

TWR 187

13L 13R 0.4% UP 0.4% UP 3100 X 75 3099 X 75 31L 31R

MIRL Rwy 13L-31R L

REIL Rwys 13L and 31R L

312° to RW31R

4000 | TEBIJ | tr 310° | DECOT

VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 45).

SIKEW 4.2 NM to RW31R — 3.56° TCH 59 — UBIPE — ECYON

RW31R 312° 1760 — 2800 — 301° 4300 — Procedure Turn NA

4.2 NM | 2.7 NM | 6.2 NM

CATEGORY	A	B	C	D
LNAV MDA	1340-1¼ 1209 (1300-1¼)	1340-1½ 1209 (1300-1½)	NA	
CIRCLING	1340-1¼ 1205 (1300-1¼)	1340-1½ 1205 (1300-1½)	NA	
NORMAN Y MINETA SAN JOSE INTL ALTIMETER SETTING MINIMUMS				
LNAV MDA	1360-1¼ 1229 (1300-1¼)	1360-1½ 1229 (1300-1½)	NA	
CIRCLING	1360-1¼ 1225 (1300-1¼)	1360-1½ 1225 (1300-1½)	NA	

SAN JOSE, CALIFORNIA

Orig 29JUL10

REID-HILLVIEW OF SANTA CLARA COUNTY (RHV)

37°20'N-121°49'W

RNAV (GPS) Y RWY 31R

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS		
CH 58316	307°	Rwy Idg	2690
W31A		TDZE	131
		Apt Elev	135

RNAV (GPS) Z RWY 31R

REID-HILLVIEW OF SANTA CLARA COUNTY (RHV)

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When control tower closed, use Norman Y Mineta San Jose Intl altimeter setting.

MISSED APPROACH: Climb to 4000 direct CEPEL and on track 313° to DECOT and hold.

ATIS	NORCAL APP CON	REID-HILLVIEW TOWER ★ (Rwy 13L-31R) (Rwy 13R-31L)	GND CON	UNICOM
125.2	120.1 290.25	119.8 (CTAF) L 126.1	121.65	122.95

Procedure NA for arrivals at GILRO on V485 southeast bound and for arrivals at CATHE on V107 southeast bound.

4 NM 158° 338° DECOT

MSA RW31R 25 NM 5600

313° (9.9) CEPEL

(FAF) OZNUM

307° (6.2)

(IF) ECYON

(IAF) ZUXOX

(IAF) GILRO

CATHE 267° (8.5)

267° (8)

313° (7.7)

RW31R

ELEV 135 TDZE 131

TWR 187

MIRL Rwy 13L-31R L

REIL Rwys 13L and 31R L

307° to RW31R

4000	CEPEL	tr 313°	DECOT

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 45).

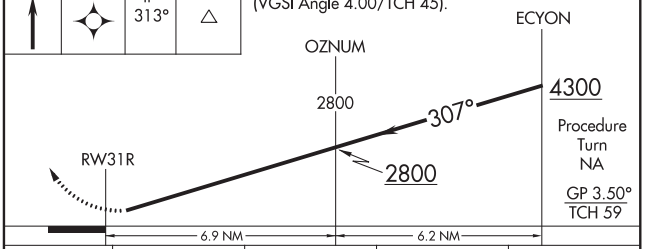

CATEGORY	A	B	C	D
LPV DA	510-1 379 (400-1)		NA	
NORMAN Y MINETA SAN JOSE INTL ALTIMETER SETTING MINIMUMS				
LPV DA	533-1¼ 402 (400-1¼)		NA	

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

18200

AIRPORT DIAGRAM

REID-HILLVIEW OF SANTA CLARA COUNTY (RHV)
SAN JOSE, CALIFORNIA
AL-5591 (FAA)

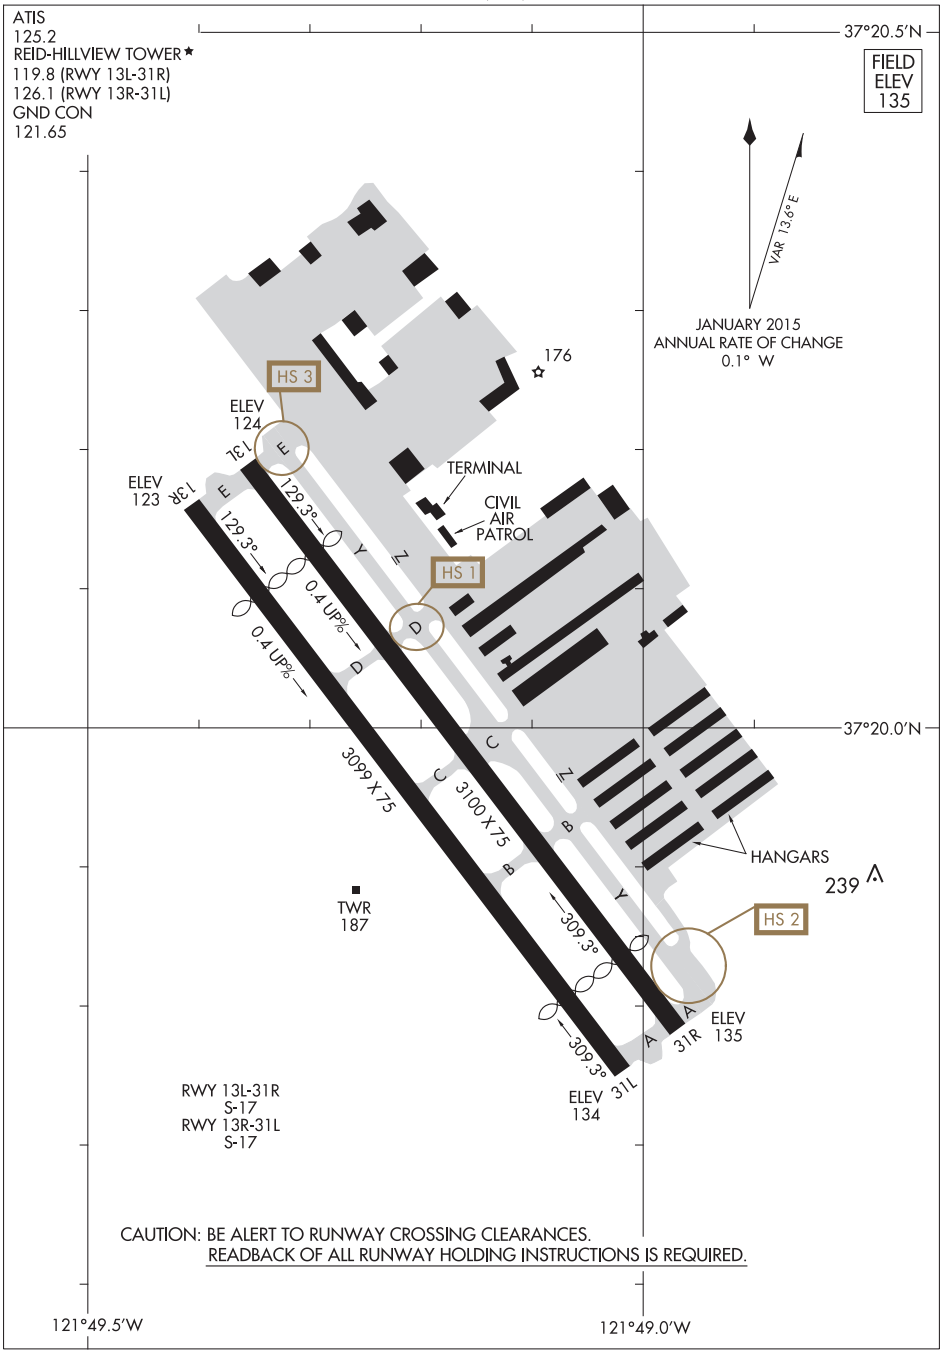

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
18200

SAN JOSE, CALIFORNIA
REID-HILLVIEW OF SANTA CLARA COUNTY (RHV)

DECOT ONE DEPARTURE (OBSTACLE) (RNAV) SL-5591 (FAA)

NORCAL DEP CON
121.3 270.35

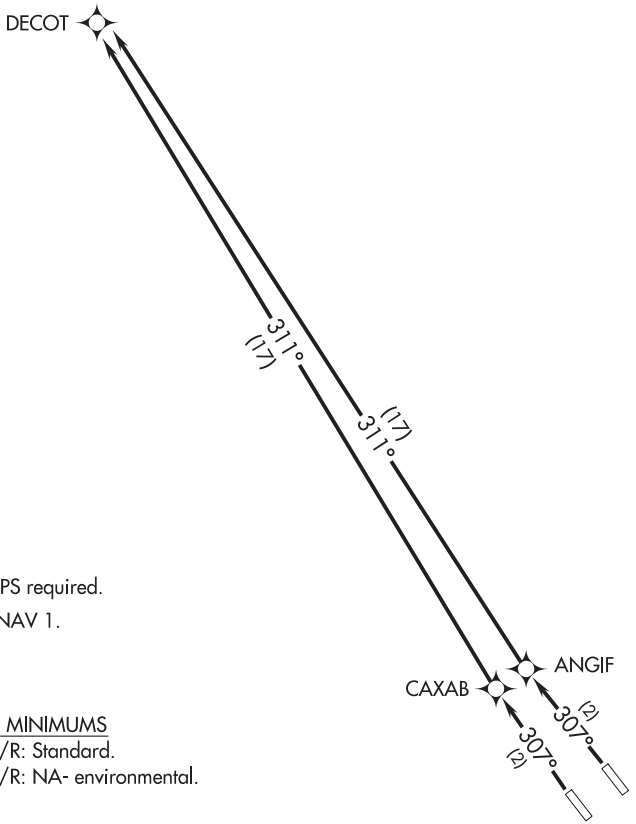

NOTE: GPS required.

NOTE: RNAV 1.

TAKEOFF MINIMUMS
Rwys 31L/R: Standard.
Rwys 13L/R: NA- environmental.

TAKEOFF OBSTACLE NOTES
Rwys 31L/R: Trees 1070′ from DER, 500′ right and left of centerline, 173′ and 169′ MSL.
Rwy 31R: Light 125′ from DER, 370′ right of centerline, 159′ MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 31L: Climb to 4000 via 307° course to CAXAB WP and 311° track to DECOT WP. Then via assigned route.

TAKEOFF RUNWAY 31R: Climb to 4000 via 307° course to ANGIF WP and 311° track to DECOT WP. Then via assigned route.

TAKEOFF RUNWAYS 13L/13R: NA.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SAN MARTIN, CALIFORNIA | AL-9260 (FAA) | 18032

RNAV (GPS) RWY 32

SAN MARTIN (E16)

APP CRS	Rwy Idg	3095
321°	TDZE	284
	Apt Elev	284

Circling NA west of Rwy 14-32. DME/DME RNP-0.3 NA. Procedure NA at night. Rwy 14, 32 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 1700 then climbing left turn to 3500 direct ACETY and hold.

AWOS-3P	NORCAL APP CON	UNICOM
118.35	124.525 348.675	122.7 (CTAF) L

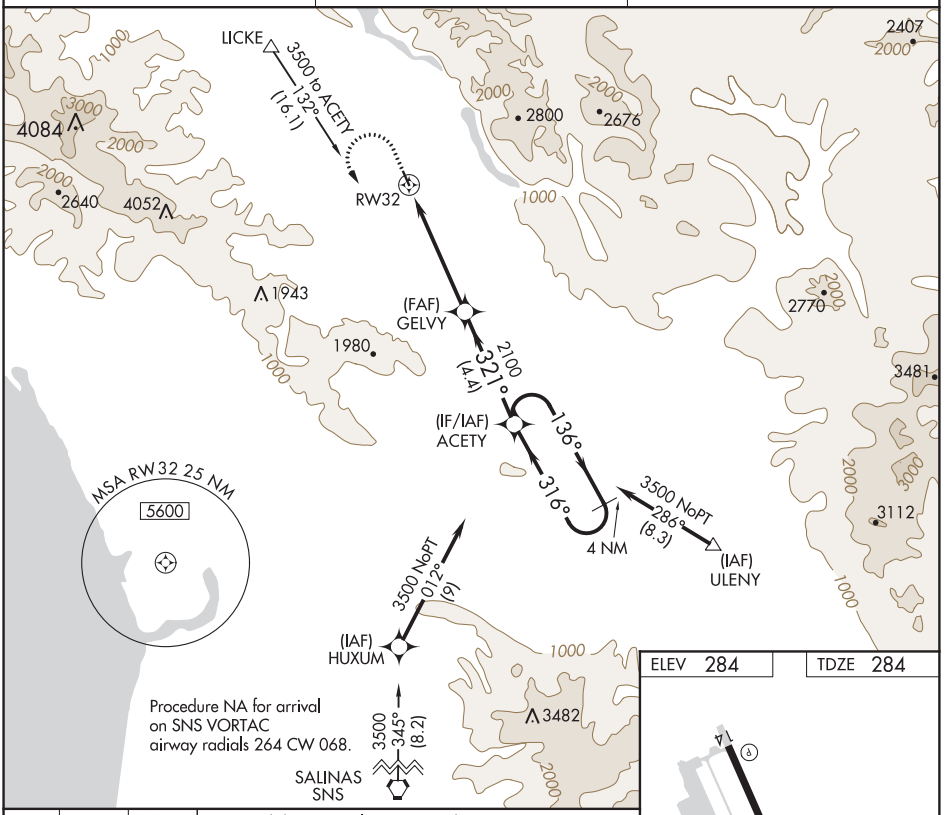

ELEV	284	TDZE	284

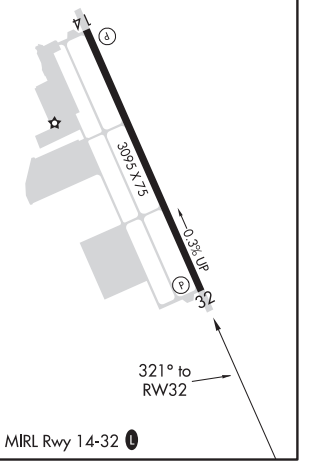

1700 | 3500 | ACETY

VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 42).

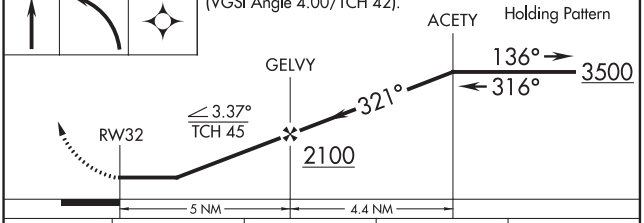

CATEGORY	A	B	C	D
LNAV MDA	1200-1¼	916 (1000-1¼)	NA	
CIRCLING	1200-1¼	916 (1000-1¼)	NA	

SAN MARTIN, CALIFORNIA
Orig-C 01FEB18

37°05'N-121°36'W

SAN MARTIN (E16)

RNAV (GPS) RWY 32

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ILS or LOC/DME RWY 32

CHARLES M SCHULZ-SONOMA COUNTY (STS)

LOC I-STS	APP CRS	Rwy Idg	6000
109.3	321°	TDZE	122
		Apt Elev	129

DME required.

MALSR

MISSED APPROACH: Climb to 1020 on STS VOR/DME R-310 and climbing left turn to 6000 to CABEX/STS 21.3 DME and hold, continue climb-in-hold to 6000.

ATIS	OAKLAND CENTER	SANTA ROSA TOWER ★	GND CON	UNICOM
120.55	127.8 353.5	118.5 (CTAF) L 363.0	121.9	122.95

MISSED APCH FIX
CABEX
STS 21.3
310°
130°
113.0 STS
R-310
Chan 77

LOCALIZER 109.3
I-STS

SANTA ROSA
113.0 STS
Chan 77

MSA STS 25 NM
100°
6000
3900
300°

Santa Rosa Air Center (Abandoned)

EDOVE INT
STS 9.8

PIGPN
STS 6.2

LUSEE INT
STS 12.2
(IF/IAF)

3700 to LUSEE
141° (12.2)

2700
321° (2.4)

3000
281°
(2.5)

ALTERNATE MISSED APCH FIX
112.3 ENI
Chan 70
CABEX
ENI 18
R-131
131°
311°

Procedure NA for arrivals at PYE VOR/DME on V25-27 southeast bound.

IAF
POINT REYES
113.7 PYE
Chan 84

IAF
SCAGGS ISLAND
112.1 SGD
Chan 58

DACER INT
SGD 15.5

3900 NoPT
281°
(15.5)

2800
321° (14.1)

BURDE INT
SAU 15.4
STS 26.2

3000 NoPT
to LUSEE
010° (16.4)

4000 NoPT
330° (15.4)

IAF
SAUSALITO
116.2 SAU
Chan 109

R-310
R-281
R-005
R-010
R-019
R-330
R-230
321°
141°
1 min

ELEV 129 D TDZE 122

TWR
201

520' X 100'
0.3% UP
6000 X 150'

270 ±
157 ±
247 ±
179 ±
146 ±

32
20
2

321° 5.7 NM from FAF

MIRL Rwy 2-20 L
HIRL Rwy 14-32 L

1020	STS R-310	6000	CABEX

LUSEE INT
STS 12.2
One Minute Holding Pattern
EDOVE INT
STS 9.8
PIGPN
STS 6.2
STS
0.4
2000
321°
2700
2000
141°
321°
3000
GS 3.00°
TCH 53
5.7 NM
3.7 NM
2.4 NM

CATEGORY	A	B	C	D
S-ILS 32	377/24 255 (300-½)			
S-LOC 32	580/24 458 (500-½)		580/45 458 (500-⅞)	
C CIRCLING	600-1 471 (500-1)	680-1 551 (600-1)	1080-3 951 (1000-3)	1420-3 1291 (1300-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SANTA ROSA, CALIFORNIA | AL-696 (FAA) | 19087

RNAV (GPS) RWY 2

CHARLES M SCHULZ-SONOMA COUNTY (STS)

WAAS	APP CRS	Rwy Idg	4802
CH 69230	013°	TDZE	129
W02A		Apt Elev	129

RNP APCH.

Rwy 2 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 6000 direct UVNOQ and on track 291° to CABEX and hold, continue climb-in-hold to 6000.

ATIS	OAKLAND CENTER	SANTA ROSA TOWER ★	GND CON	UNICOM
120.55	127.8 353.5	118.5 (CTAF) L 363.0	121.9	122.95

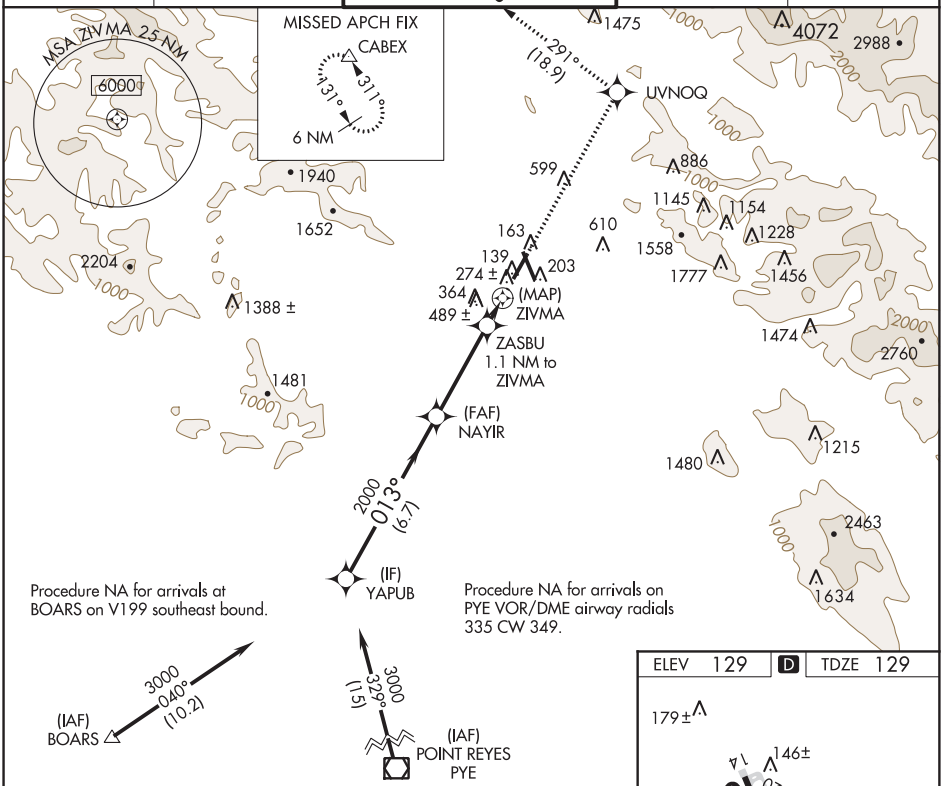

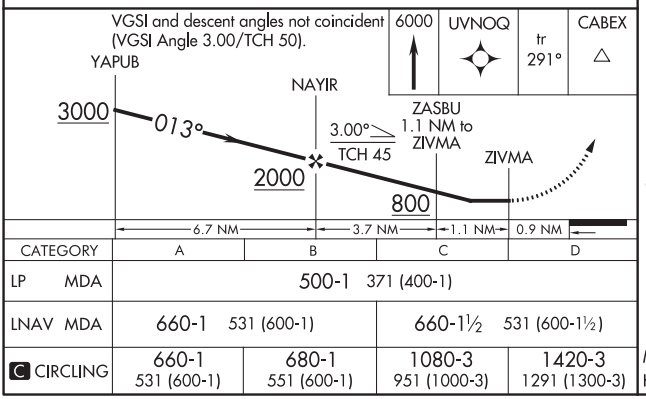

CATEGORY	A	B	C	D
LP MDA	500-1 371 (400-1)			
LNAV MDA	660-1 531 (600-1)		660-1½ 531 (600-1½)	
C CIRCLING	660-1 531 (600-1)	680-1 551 (600-1)	1080-3 951 (1000-3)	1420-3 1291 (1300-3)

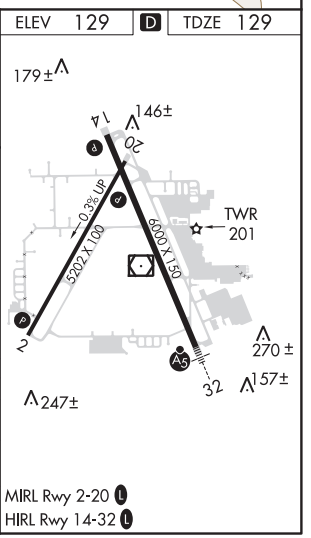

MIRL Rwy 2-20 L
HIRL Rwy 14-32 L

SANTA ROSA, CALIFORNIA
Orig-E 28MAR19

38°31′N-122°49′W

CHARLES M SCHULZ-SONOMA COUNTY (STS)

RNAV (GPS) RWY 2

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	5880
126°	TDZE	122
	Apt Elev	129

RNAV (GPS) RWY 14

CHARLES M SCHULZ-SONOMA COUNTY (STS)

RNP APCH.

Rwy 14 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 5000 direct WDSTC and hold, continue climb-in-hold to 5000.

ATIS	OAKLAND CENTER	SANTA ROSA TOWER★	GND CON	UNICOM
120.55	127.8 353.5	118.5 (CTAF) L 363.0	121.9	122.95

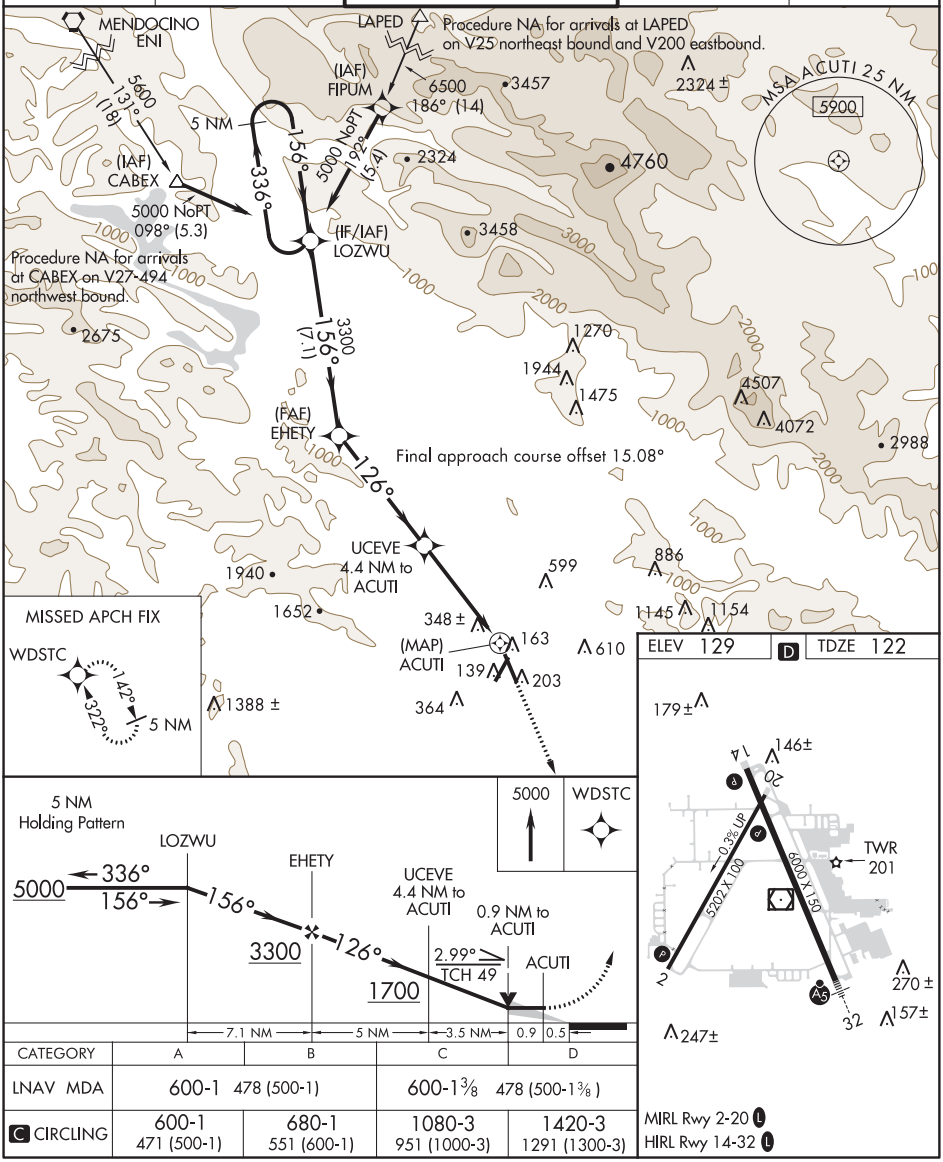

CATEGORY	A	B	C	D
LNAV MDA	600-1 478 (500-1)		600-1⅜ 478 (500-1⅜)	
C CIRCLING	600-1 471 (500-1)	680-1 551 (600-1)	1080-3 951 (1000-3)	1420-3 1291 (1300-3)

MIRL Rwy 2-20 L
HIRL Rwy 14-32 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SANTA ROSA, CALIFORNIA | AL-696 (FAA) | 19087

RNAV (GPS) RWY 32

CHARLES M SCHULZ-SONOMA COUNTY (STS)

WAAS CH 72611 W32A	APP CRS 321°	Rwy Idg 6000 / TDZE 122 / Apt Elev 129

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 6000 direct TUGUC and on track 308° to CABEX and hold, continue climb-in-hold to 6000.

ATIS	OAKLAND CENTER	SANTA ROSA TOWER★	GND CON	UNICOM
120.55	127.8 353.5	118.5 (CTAF) L 363.0	121.9	122.95

MISSED APCH FIX
CABEX
311°
131°
6 NM

308° (18.9) TUGUC

SANTA ROSA STS

3000 to LUSEE
141° (12.2)

Procedure NA for arrivals at STS VOR/DME V494 westbound.

301±

Santa Rosa Air Center (Abandoned)

(FAF) PIGPN

2000 (6) 321°

(IF/IAF) LUSEE

141° 321°

4 NM

3000 NoPT (8.3) 321°

(IAF) WDSTC

5000 041° (12.8)

5000 329° (21.1)

POINT REYES PYE

SAUSALITO SAU

5000 to WDSTC 258° (12.7)

SCAGGS ISLAND SGD

Procedure NA for arrivals at SAU VOR/DME V150 southwest bound.

Procedure NA for arrivals on SGD VORTAC airway radials 297 CW 347.

Procedure NA for arrivals on PYE VOR/DME airway radials 335 CW 108 and T-257.

MSA RW32 25 NM
5900

1942 886 1145 1154 1228 1558 1456 1777 1474 2760 1215 1480 2677 2463 1634 1481 139 163 610 599 364 203 RW32

ELEV 129 D TDZE 122

179±

146±

TWR 201

0.3% UP

5202 X 100

6000 X 150

270±

157±

247±

32

321° to RW32

MIRL Rwy 2-20 L
HIRL Rwy 14-32 L

6000	TUGUC	tr 308°	CABEX

LUSEE 4 NM Holding Pattern 141° 321° 3000

*LNAV only.

PIGPN 2000 321°

*1.2 NM to RW32

RW32 2000

GP 3.00° TCH 53

1.2 4.5 NM 6 NM

CATEGORY	A	B	C	D
LPV DA #	322/24		200 (200-½)	
LNAV/VNAV DA	570/50		448 (500-1)	
LNAV MDA	560/24	438 (500-½)	560/40	438 (500-¾)
C CIRCLING	600-1 471 (500-1)	680-1 551 (600-1)	1080-3 951 (1000-3)	1420-3 1291 (1300-3)

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

SANTA ROSA, CALIFORNIA
Amdt 1E 28MAR19

CHARLES M SCHULZ-SONOMA COUNTY (STS)
38°31′N-122°49′W

RNAV (GPS) RWY 32

VOR/DME STS	APP CRS	Rwy Idg	5880
113.0	146°	TDZE	122
Chan 77		Apt Elev	129

VOR/DME RWY 14

CHARLES M SCHULZ-SONOMA COUNTY (STS)

T Helicopter visibility reduction below ¾ SM NA.
A When local altimeter setting not received, use Petaluma altimeter setting and increase all MDA 60 feet, and increase S-14 Cats C and D visibility ½ mile. Increase Circling Cat A visibility ¼ mile.

MISSED APPROACH: Climbing right turn to 4000 on heading 195° and on PYE VOR/DME R-335 to PYE VOR/DME and hold.

ATIS	OAKLAND CENTER	SANTA ROSA TOWER ★	GND CON	UNICOM
120.55	127.8 353.5	118.5 (CTAF) L 363.0	121.9	122.95

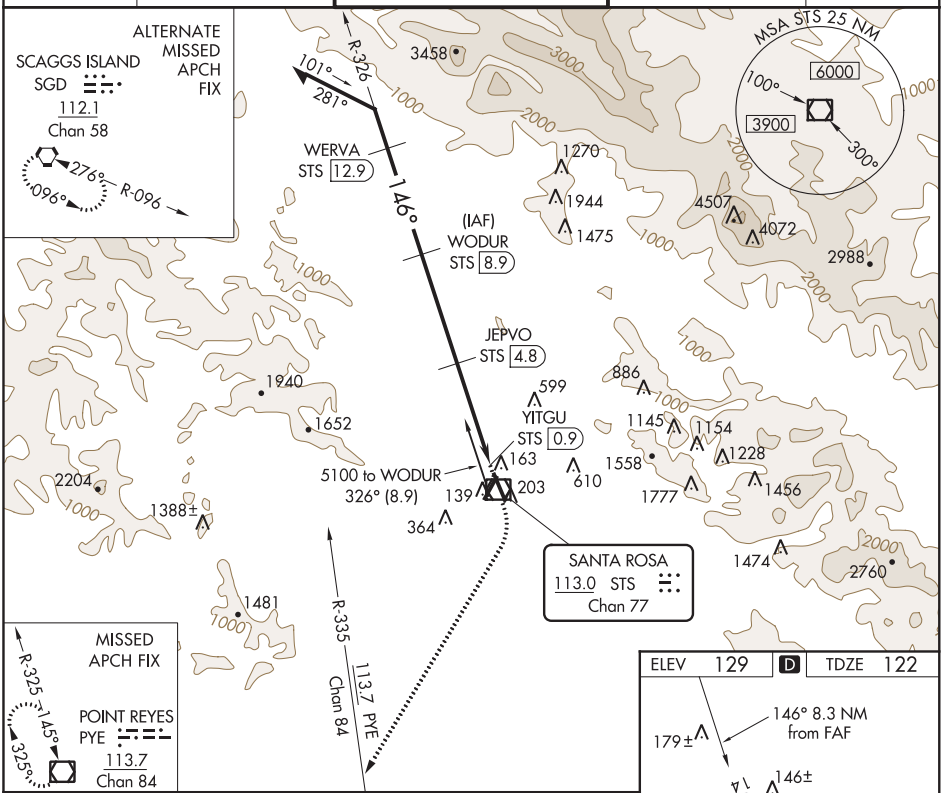

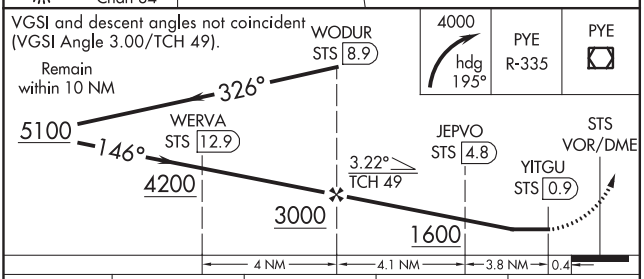

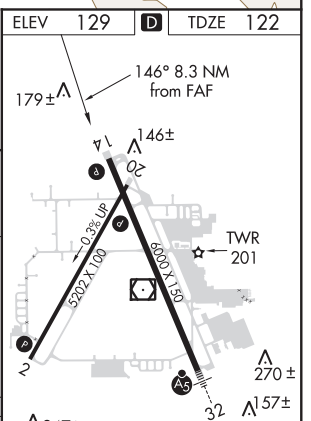

CATEGORY	A	B	C	D
S-14	880-1 758 (800-1)	880-1¼ 758 (800-1¼)	880-2½ 758 (800-2½)	
C CIRCLING	880-1 751 (800-1)	880-1¼ 751 (800-1¼)	1080-3 951 (1000-3)	1420-3 1291 (1300-3)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

18312

AIRPORT DIAGRAM

CHARLES M SCHULZ-SONOMA COUNTY (STS)

AL-696 (FAA) SANTA ROSA, CALIFORNIA

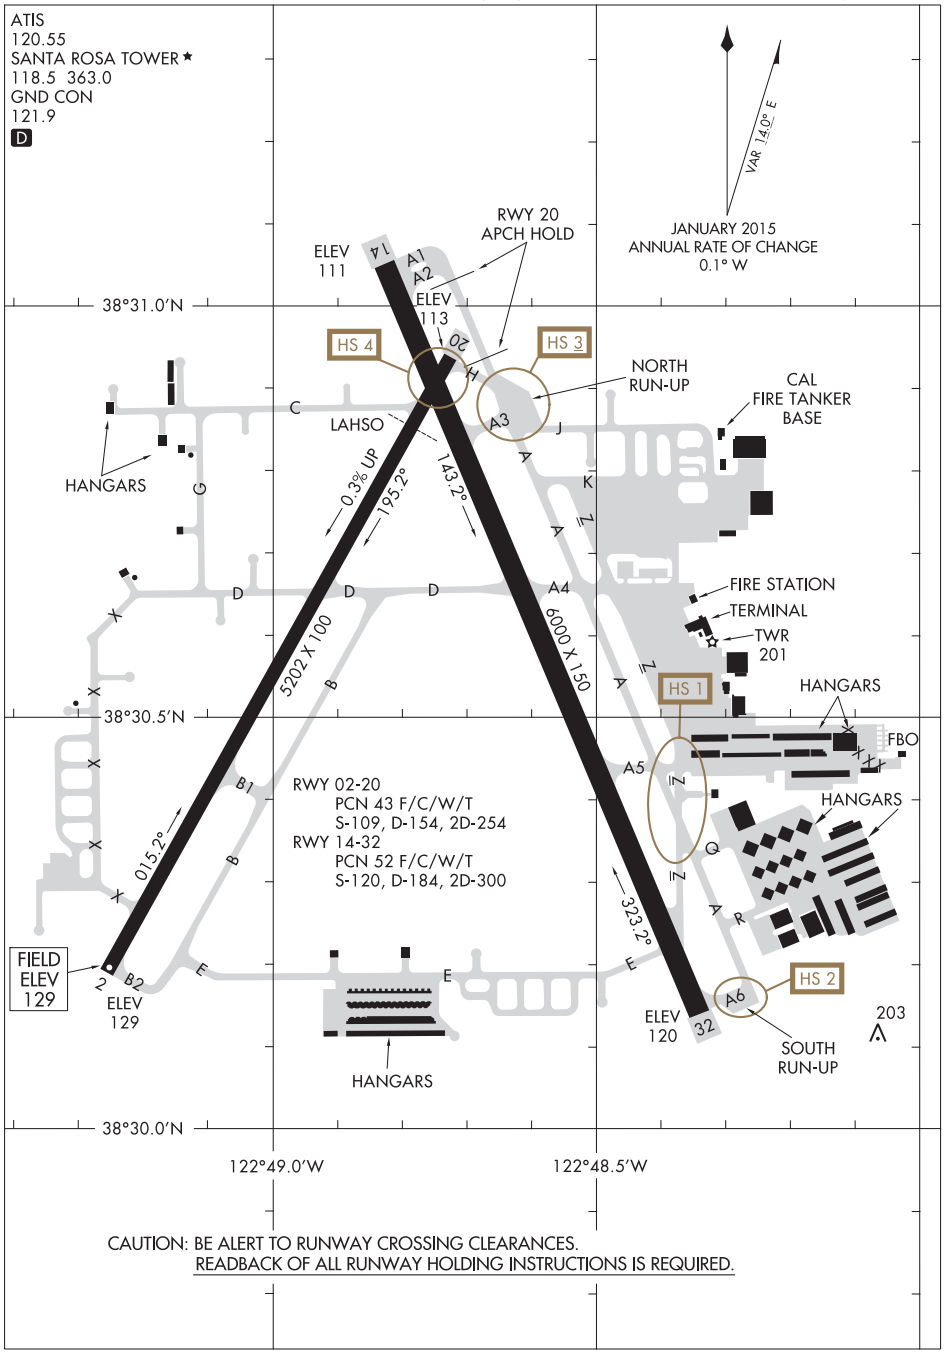

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

AIRPORT DIAGRAM
18312
SANTA ROSA, CALIFORNIA
CHARLES M SCHULZ-SONOMA COUNTY (STS)

SW-2, 30 JAN 2020 to 26 MAR 2020

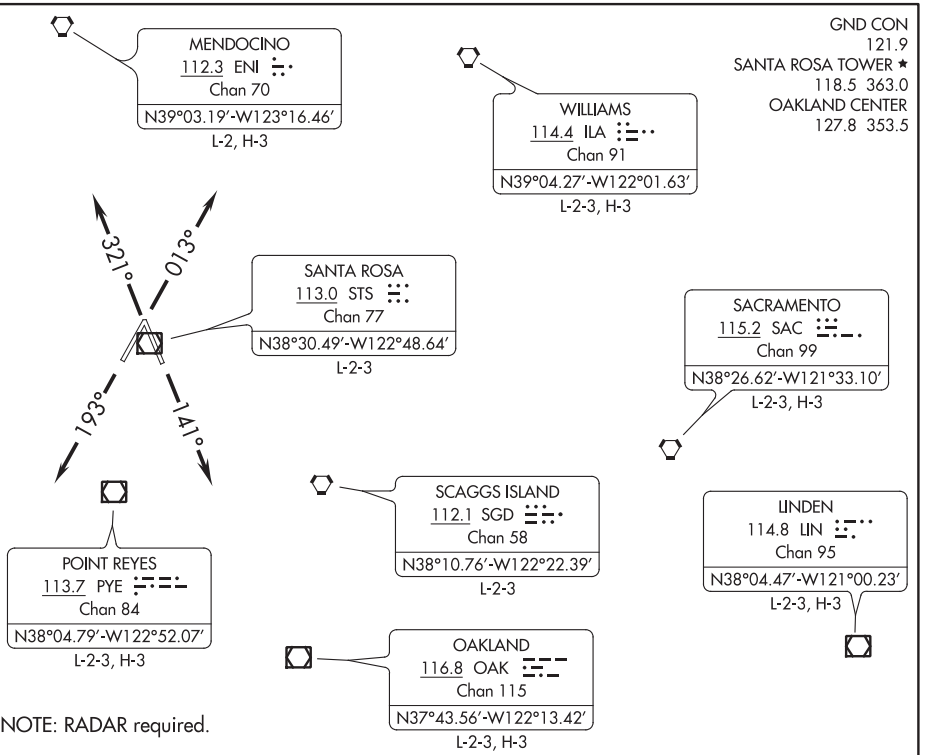

NOTE: RADAR required.

TAKEOFF MINIMUMS

Rwy 2: Standard with minimum climb of 470′ per NM to 6000.
Rwy 14: Standard with minimum climb of 298′ per NM to 5600.
Rwy 20: Standard with minimum climb of 408′ per NM to 5600.
Rwy 32: Standard with minimum climb of 391′ per NM to 7000.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb heading 013° (or assigned heading 295° CW 325° or 130° CW 190°), thence . . . .
TAKEOFF RUNWAY 14: Climb heading 141° (or assigned heading 295° CW 320° or 130° CW 220°), thence . . . .
TAKEOFF RUNWAY 20: Climb heading 193° (or assigned heading 295° CW 325° or 130° CW 220°), thence . . . .
TAKEOFF RUNWAY 32: Climb heading 321° (or assigned heading 295° CW 325° or 141° CW 220°), thence . . . .
. . . . expect RADAR vectors to join assigned route. Maintain assigned altitude; expect filed altitude/flight level ten minutes after departure.

LOST COMMUNICATIONS: If not in contact with Oakland Center after reaching 4000, proceed direct to the PYE VOR/DME. Thence via assigned route.

(FREES9.FREES) 17341

FREES NINE DEPARTURE

CHARLES M SCHULZ-SONOMA COUNTY (STS)
AL-696 (FAA)
SANTA ROSA, CALIFORNIA

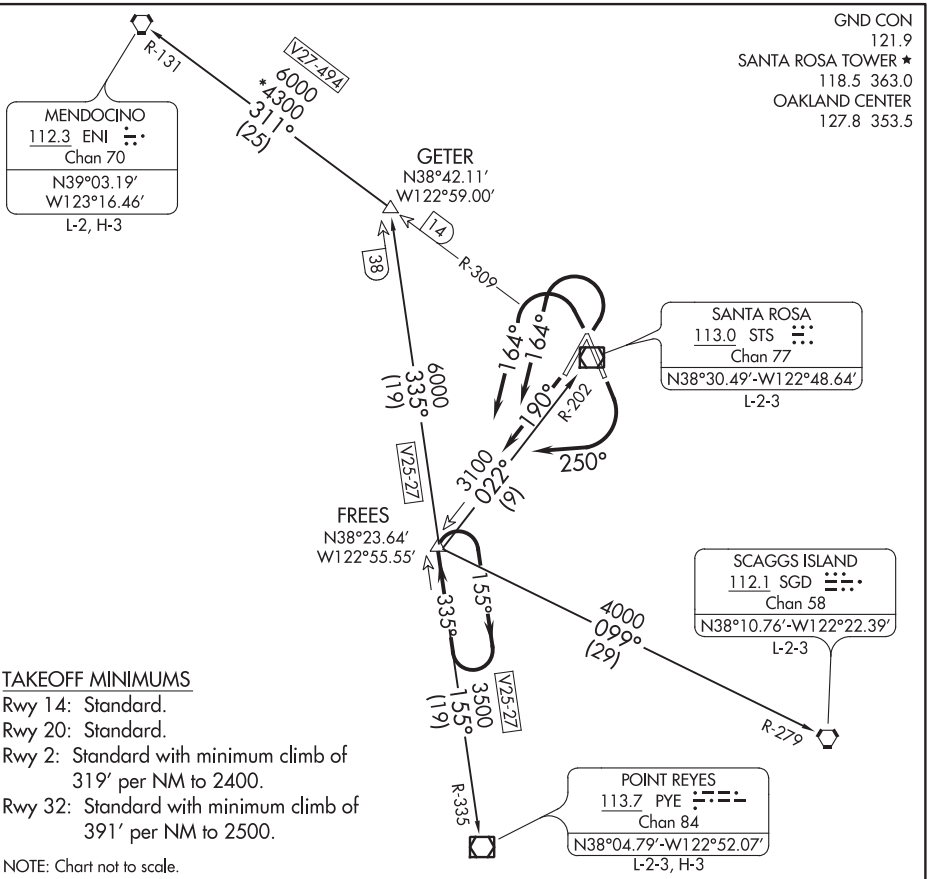

TAKEOFF MINIMUMS
Rwy 14: Standard.
Rwy 20: Standard.
Rwy 2: Standard with minimum climb of 319' per NM to 2400.
Rwy 32: Standard with minimum climb of 391' per NM to 2500.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 2, 32: Climbing left turn heading 164°, thence . . . .
TAKEOFF RUNWAY 14: Climbing right turn heading 250°, thence . . . .
TAKEOFF RUNWAY 20: Climb on heading 190°, thence . . . .

. . . . intercept and climb on STS R-202 to cross FREES INT at or above MEA for route of flight, or continue climb in FREES holding pattern to MEA for route of flight then on (transition).

MENDOCINO TRANSITION (FREES9.ENI): From over FREES INT on PYE R-335 to GETER INT, then on ENI R-131 to ENI VORTAC.
POINT REYES TRANSITION (FREES9.PYE): From over FREES INT on PYE R-335 to PYE VOR/DME.
SANTA ROSA TRANSITION (FREES9.STS): From over FREES INT on STS R-202 to STS VOR/DME.
SCAGGS ISLAND TRANSITION (FREES9.SGD): From over FREES INT on SGD R-279 to SGD VORTAC.

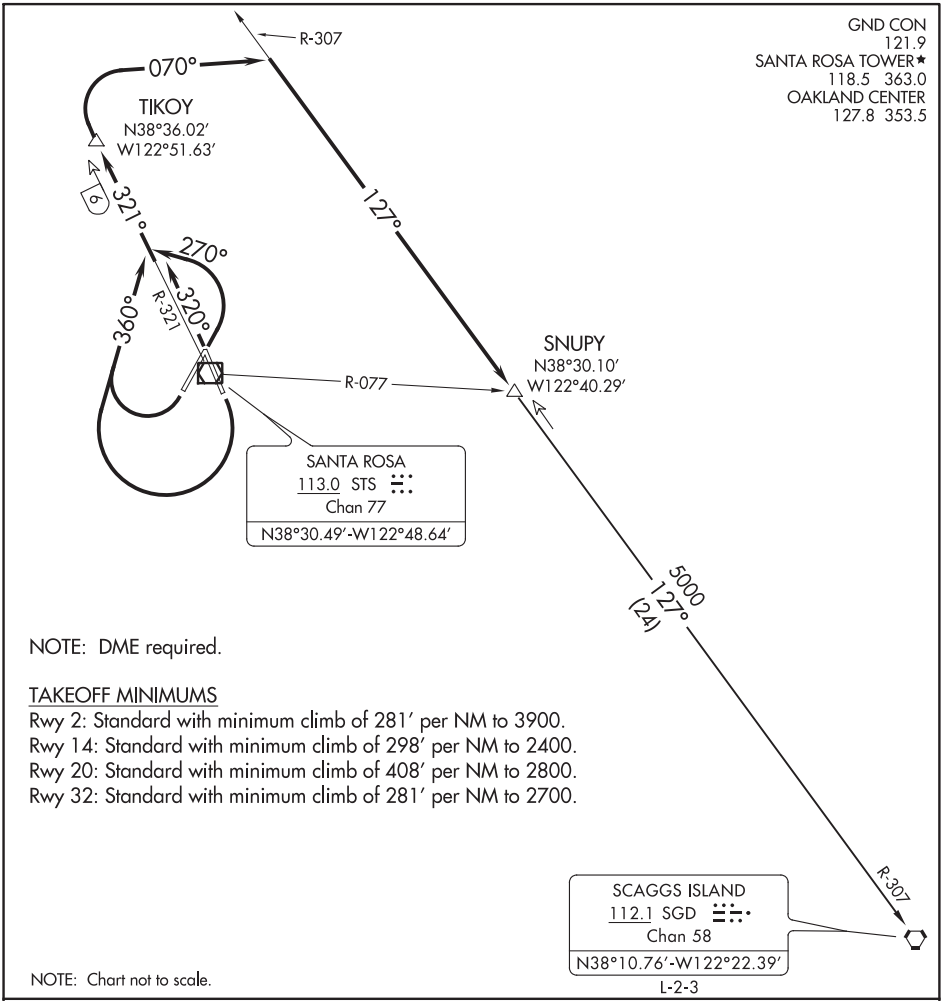

NOTE: DME required.

TAKEOFF MINIMUMS
Rwy 2: Standard with minimum climb of 281′ per NM to 3900.
Rwy 14: Standard with minimum climb of 298′ per NM to 2400.
Rwy 20: Standard with minimum climb of 408′ per NM to 2800.
Rwy 32: Standard with minimum climb of 281′ per NM to 2700.

NOTE: Chart not to scale.

L-2-3

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climbing left turn heading 270°, thence . . . .
TAKEOFF RUNWAYS 14 and 20: Climbing right turn heading 360°, thence . . . .
TAKEOFF RUNWAY 32: Climb on heading 320°, thence . . . .

. . . . intercept and climb on STS R-321 to TIKOY/6 DME, then turn right heading 070° to intercept SGD R-307 to SNUPY INT/SGD 24 DME, then on (transition).

SCAGGS ISLAND TRANSITION (STS8.SGD): From over SNUPY INT/SGD 24 DME on SGD R-307 to SGD VORTAC.

SOUTH LAKE TAHOE, CALIFORNIA | AL-5416 (FAA) | 19227

RNAV (GPS) RWY 18

LAKE TAHOE (TVL)

WAAS	APP CRS	Rwy Idg	7017
CH 57943	172°	TDZE	6259
W18A		Apt Elev	6268

RNP APCH.

T A NA — Circling NA at night. Rwy 18 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, procedure NA. Circling NA east of Rwy 18-36.

MALSF

MISSED APPROACH: (Do not exceed 185K until KATFR). Climbing right turn to 10000 direct KATFR then on track 320° to HETRY and hold, continue climb-in-hold to 12000. * Missed approach requires minimum climb of 425 feet per NM to 10000.

ASOS	OAKLAND CENTER	CLNC DEL	CTAF
124.725	127.95 316.1	134.3	122.85 L

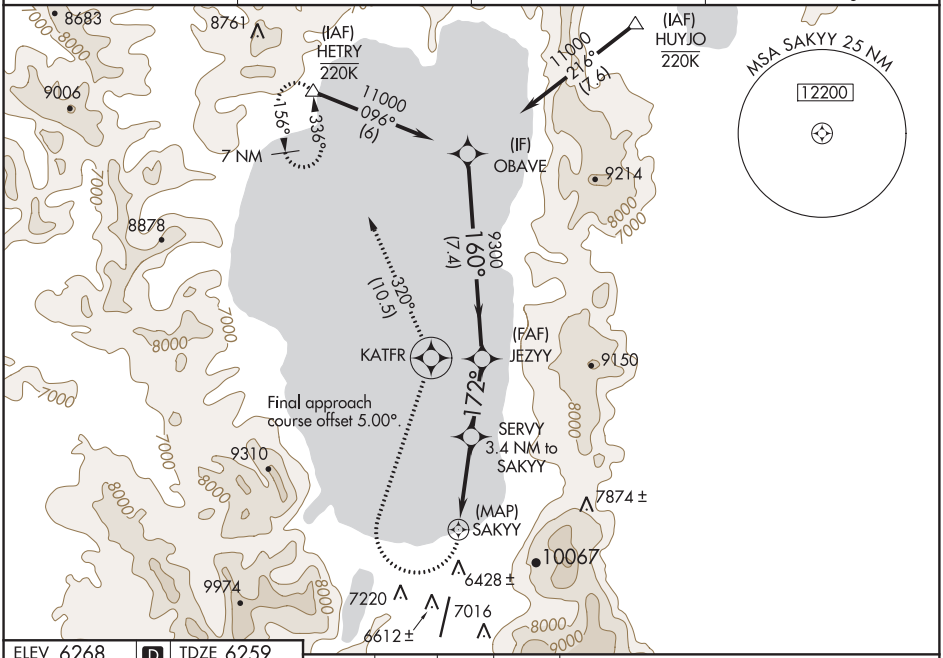

ELEV 6268 | D | TDZE 6259



REIL Rwy 36
MIRL Rwy 18-36 L

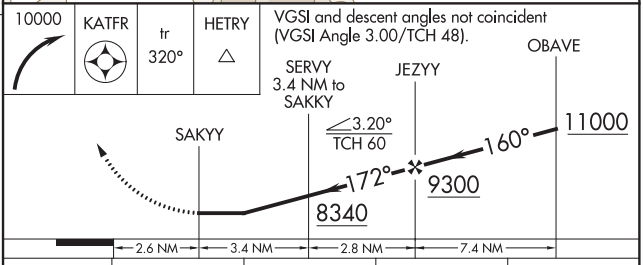

CATEGORY	A	B	C	D
LP MDA *	6680-3 421 (500-3)			
LP MDA	7120-3 861 (900-3)		7140-3 881 (900-3)	7320-3 1061 (1100-3)
LNAV MDA *	6980-3 721 (800-3)			7560-3 1301 (1300-3)
LNAV MDA	7280-3 1021 (1100-3)	7620-3 1361 (1400-3)	8160-3 1901 (1900-3)	NA
C CIRCLING	7420-3 1152 (1200-3)	7680-3 1412 (1500-3)	8160-3 1892 (1900-3)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

LOC/DME I-TVL	APP CRS	Rwy Idg	7017
108.9	171°	TDZE	6259
Chan 26		Apt Elev	6268

LDA RWY 18
LAKE TAHOE (TVL)

DME required.

T A NA — Rwy 18 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, procedure NA.

MALSF

MISSED APPROACH: Climbing right turn to 11000 on heading 329° and SWR VOR/DME R-102 to SWR VOR/DME and hold.

ASOS	OAKLAND CENTER	CLNC DEL	CTAF
124.725	127.95 316.1	134.3	122.85 L

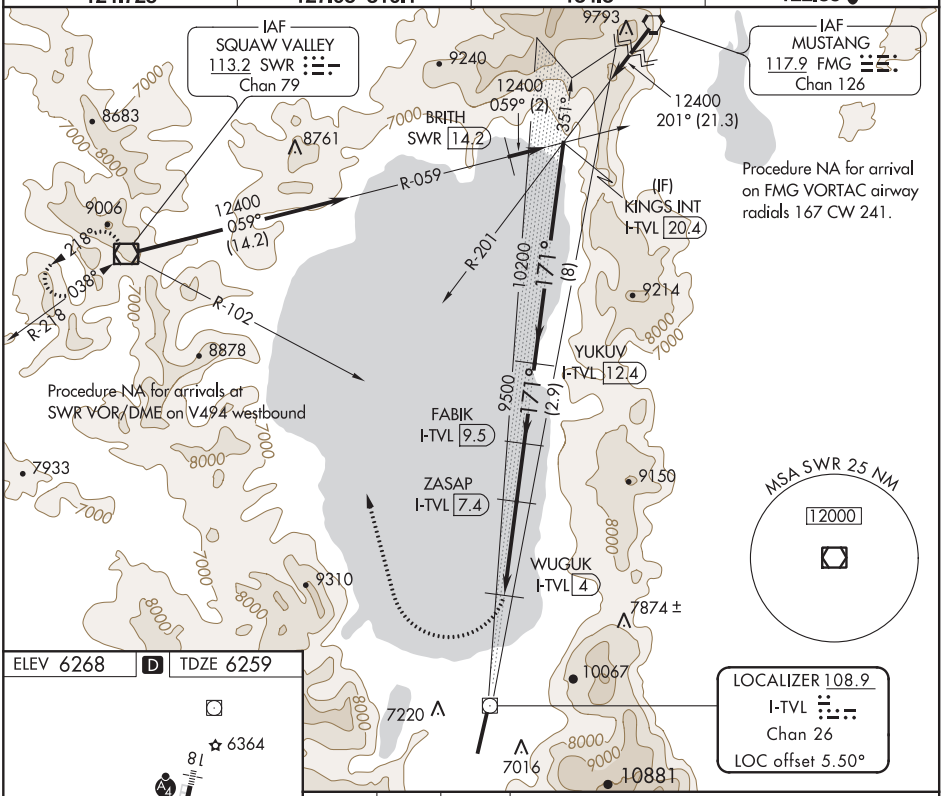

ELEV 6268 D TDZE 6259

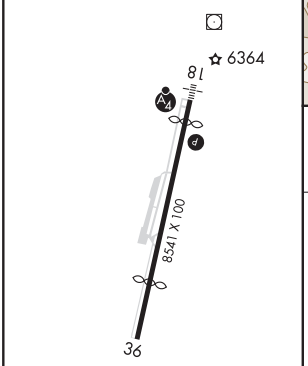

REIL Rwy 36
MIRL Rwy 18-36 L

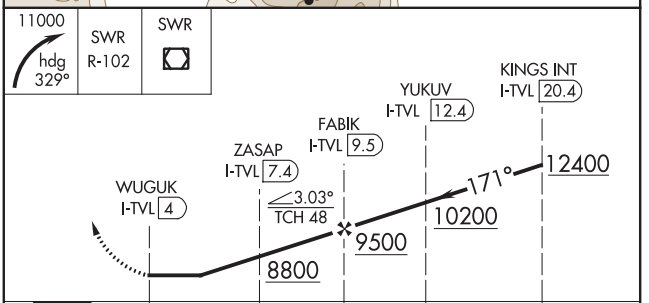

CATEGORY	A	B	C	D
S-18	7160-5	901 (900-5)		8520-5 2261 (2300-5)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

17341

AIRPORT DIAGRAM

AL-5416 (FAA)

LAKE TAHOE (TVL)
SOUTH LAKE TAHOE, CALIFORNIA

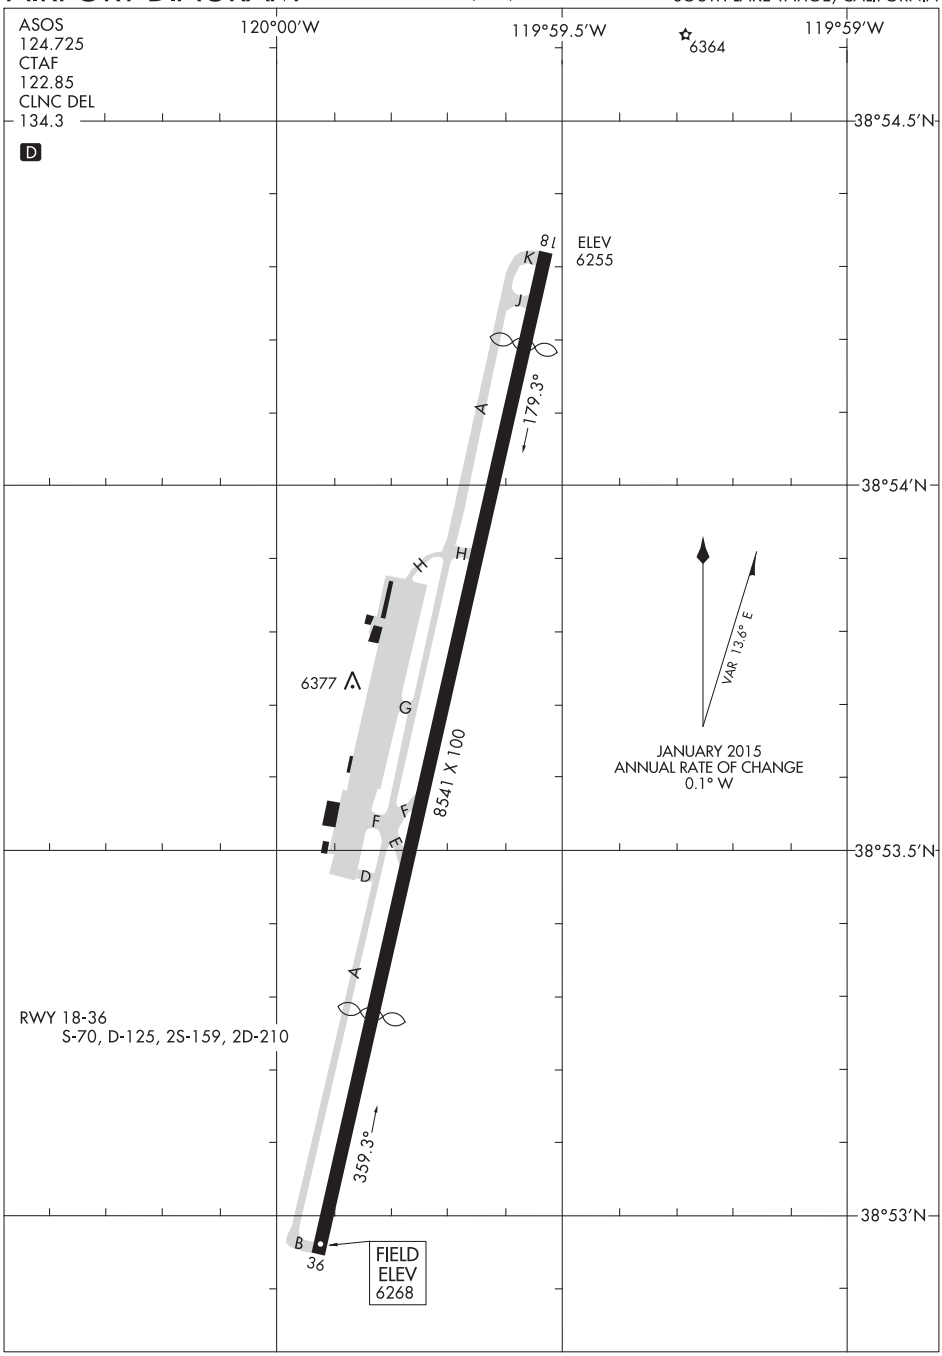

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM
17341

SOUTH LAKE TAHOE, CALIFORNIA
LAKE TAHOE (TVL)

RICHY SIX DEPARTURE

SL-5416 (FAA)

SOUTH LAKE TAHOE, CALIFORNIA

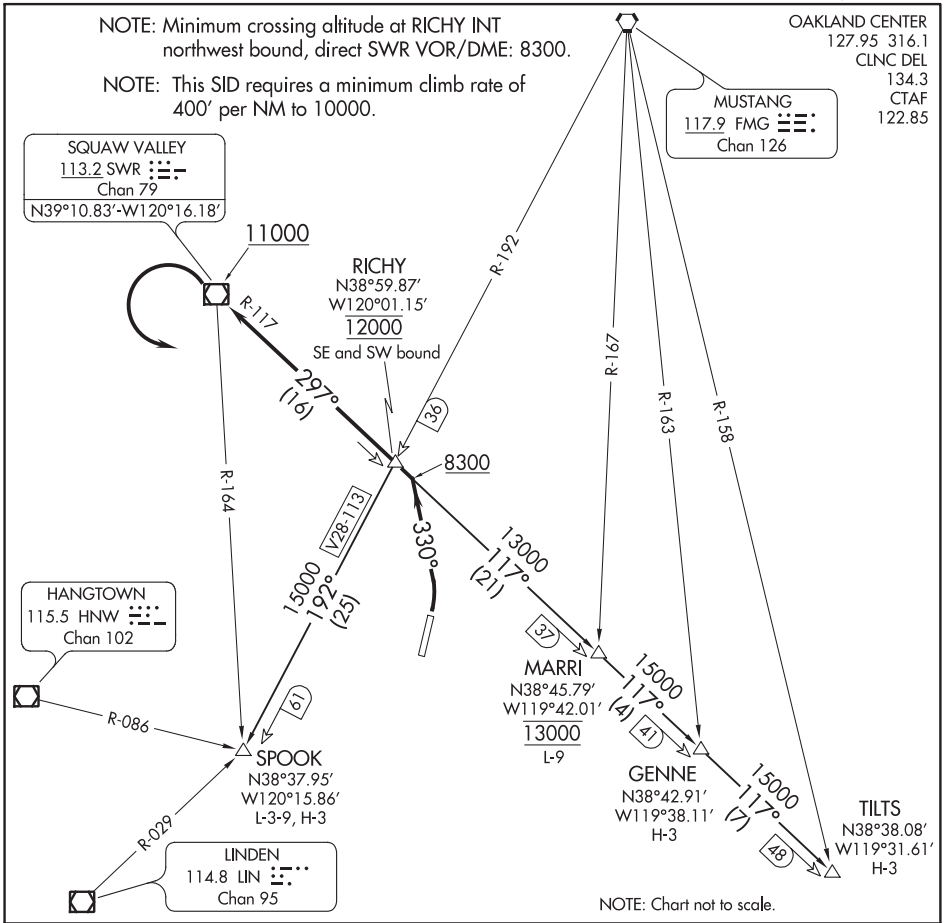

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 36: Turn left heading 330° thence. . . .

. . . .intercept SWR R-117 at or above 8300 continue climb northwest bound on SWR R-117 to SWR VOR/DME. Cross SWR VOR/DME at or above 11000. Aircraft cleared via a transition, reverse course to the left after crossing the SWR VOR/DME, and proceed to RICHY INT via SWR R-117. Cross RICHY INT at 12000 southeast and southwest bound, thence via (transition).

GENNE TRANSITION (RICHY6.GENNE): From over RICHY INT on SWR R-117 to GENNE INT.

MARRI TRANSITION (RICHY6.MARRI): From over RICHY INT on SWR R-117 to MARRI INT.

SPOOK TRANSITION (RICHY6.SPOOK): From over RICHY INT on FMG R-192 to SPOOK INT.

TILTS TRANSITION (RICHY6.TILTS): From over RICHY INT on SWR R-117 to TILTS INT.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

STOCKTON, CALIFORNIA | AL-407 (FAA) | 19339

ILS or LOC RWY 29R

STOCKTON METROPOLITAN (SCK)

LOC/DME I-SCK	APP CRS	Rwy Idg	8650
109.1	294°	TDZE	32
Chan 28		Apt Elev	33

T A For inop ALS, increase S-LOC 29R Cat C/D visibility to 1⅜ SM.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 010° and MOD VOR/DME R-309 to ORANG INT/MOD 25.8 DME and hold.

ATIS	NORCAL APP CON	STOCKTON TOWER ★	GND CON	UNICOM
118.25	(SE-NW) 123.85 278.3 (N-SE) 125.1 363.2	120.3 (CTAF) L 239.0	121.9	122.95

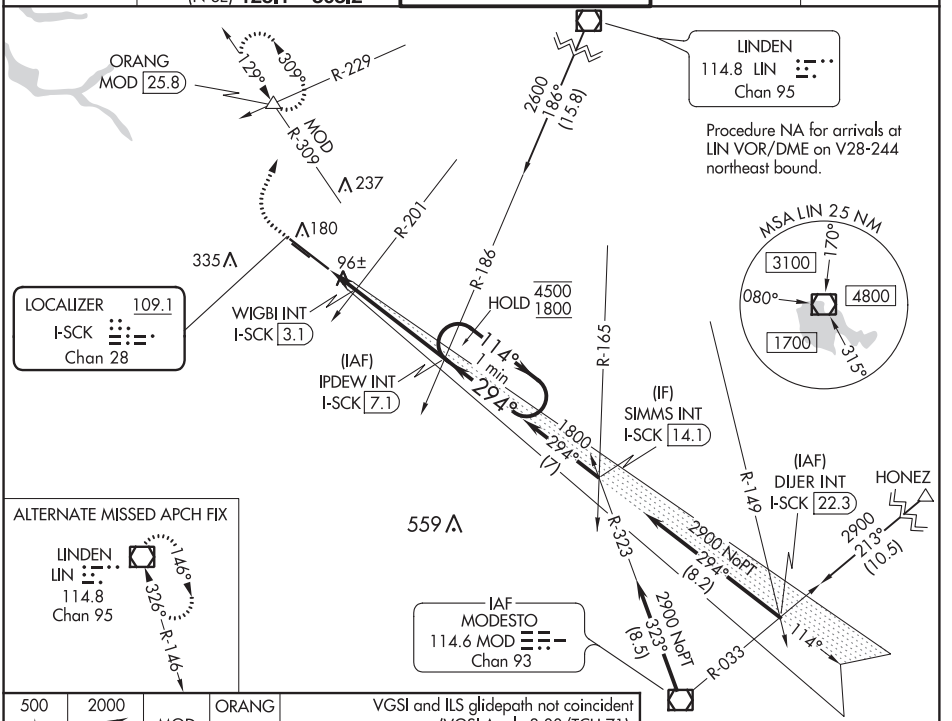

500	2000	MOD	ORANG
	hdg 010°	R-309	△

* LOC only.

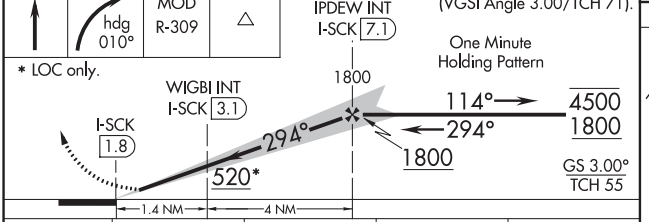

ELEV 33 | D | TDZE 32



HIRL Rwy 11L-29R L

CATEGORY	A	B	C	D
S-ILS 29R #	232/24 200 (200-½)			
S-LOC 29R	520/24 488 (500-½)		520/50 488 (500-1)	
C CIRCLING	520-1 487 (500-1)	540-1 507 (600-1)	640-1¾ 607 (700-1¾)	640-2 607 (700-2)
WIGBI FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)				
S-LOC 29R	360/24 328 (400-½)		360/26 328 (400-½)	
C CIRCLING	500-1 467 (500-1)	540-1 507 (600-1)	640-1¾ 607 (700-1¾)	640-2 607 (700-2)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

STOCKTON, CALIFORNIA
Amdt 22A 05DEC19

37°54'N-121°14'W

STOCKTON METROPOLITAN (SCK)
ILS or LOC RWY 29R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ILS RWY 29R (SA CAT II)

STOCKTON METROPOLITAN (SCK)

LOC/DME I-SCK	APP CRS	Rwy Idg	8650
109.1	294°	TDZE	32
Chan 28		Apt Elev	33

T A Reduced lighting: requires specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown. Procedure NA when tower closed.

MALSR (A5)

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 010° and MOD VOR/DME R-309 to ORANG INT/MOD 25.8 DME and hold.

ATIS	NORCAL APP CON	STOCKTON TOWER ★	GND CON	UNICOM
118.25	(SE-NW) 123.85 278.3 (N-SE) 125.1 363.2	120.3 (CTAF) L 239.0	121.9	122.95

LINDEN
114.8 LIN
Chan 95

Procedure NA for arrivals at LIN VOR/DME on V28-244 northeast bound.

ORANG
MOD 25.8

129° 309° R-229 2600 186° (15.8) MOD R-309 237 180 335 96± R-186 R-165 R-149

HOLD 4500 1800
114° 1 min 294°

MSA LIN 25 NM
170° 3100 080° 4800 1700 315°

LOCALIZER 109.1
I-SCK
Chan 28

(IAF)
IPDEW INT
I-SCK 7.1

(IF)
SIMMS INT
I-SCK 14.1

1800 294° (7)

(IAF)
DIJER INT
I-SCK 22.3

HONEZ

2900 213° (10.5)

2900 NoPT 294° (8.2)

R-323 2900 NoPT 323° (8.5) R-033 114°

559

ALTERNATE MISSED APCH FIX
LINDEN
LIN
114.8
Chan 95
146° 326° R-146

IAF
MODESTO
114.6 MOD
Chan 93

ELEV 33 D TDZ 32

11L 11R 10249 X 150 4448 X 75 29L 29R TWR 126

500	2000 hdg 010°	MOD R-309	ORANG

IPDEW INT
I-SCK 7.1

One Minute Holding Pattern

1800 294° 114° 4500 1800 GS 3.00° TCH 55

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

1065' 5.4 NM

CATEGORY	A	B	C	D
S-ILS 29R	RA 105/12 100 DA 132			

SA CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

HIRL Rwy 11L-29R L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

STOCKTON, CALIFORNIA | AL-407 (FAA) | 19171

RNAV (GPS) RWY 11L

STOCKTON METROPOLITAN (SCK)

WAAS	APP CRS	Rwy Idg	8650
CH 72910	114°	TDZE	29
W11A		Apt Elev	33

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2000 direct OXJEF and hold.

ATIS	NORCAL APP CON	STOCKTON TOWER★	GND CON	UNICOM
118.25	(SE-NW) 123.85 278.3 (N-SE) 125.1 363.2	120.3 (CTAF) L 239.0	121.9	122.95

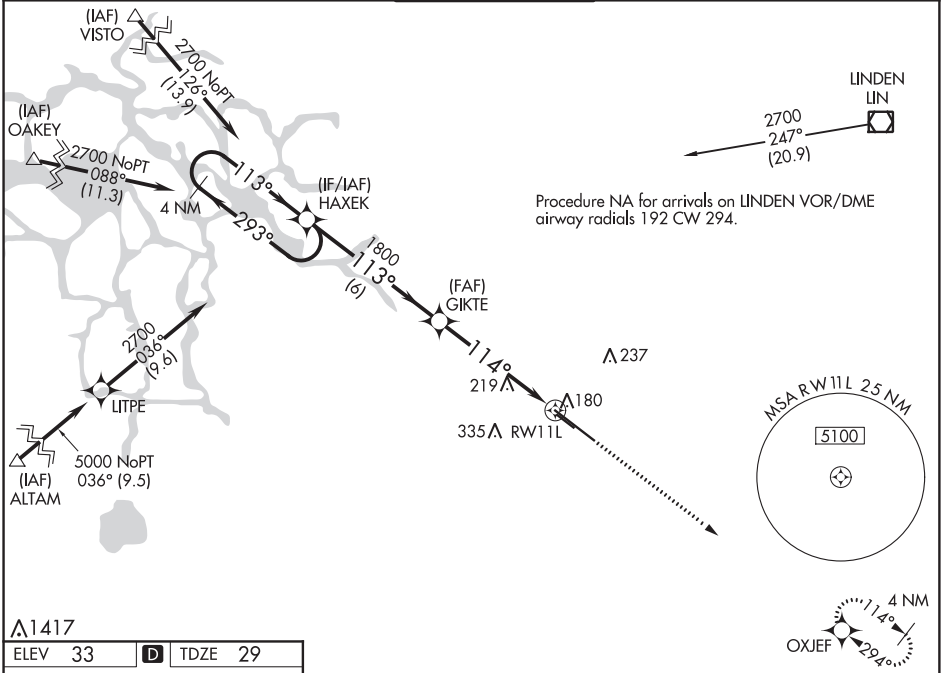

1417

ELEV 33 | D | TDZE 29



HIRL Rwy 11L-29R L

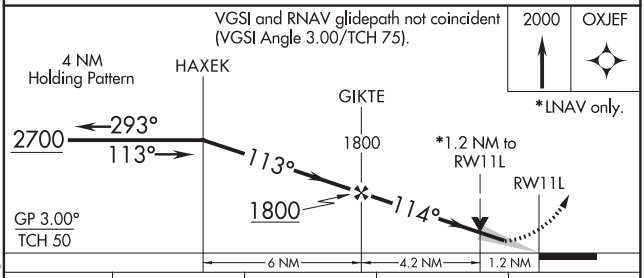

CATEGORY	A	B	C	D
LPV DA	229-¾ 200 (200-¾)			
LNAV/VNAV DA	471-1½ 442 (500-1½)			
LNAV MDA	480-1 451 (500-1)		480-1⅜ 451 (500-1⅜)	
C CIRCLING	500-1 467 (500-1)	540-1 507 (600-1)	640-1¾ 607 (700-1¾)	640-2 607 (700-2)

STOCKTON, CALIFORNIA
Amdt 1A 01FEB18

37°54′N-121°14′W

STOCKTON METROPOLITAN (SCK)
RNAV (GPS) RWY 11L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) RWY 29R

STOCKTON METROPOLITAN (SCK)

WAAS CH 87010 W29A	APP CRS 294°	Rwy Idg 8650 TDZE 32 Apt Elev 33

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 4500.
#RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2700 direct HAXEK and hold.

ATIS	NORCAL APP CON	STOCKTON TOWER★	GND CON	UNICOM
118.25	(SE-NW) 123.85 278.3 (N-SE) 125.1 363.2	120.3 (CTAF) L 239.0	121.9	122.95

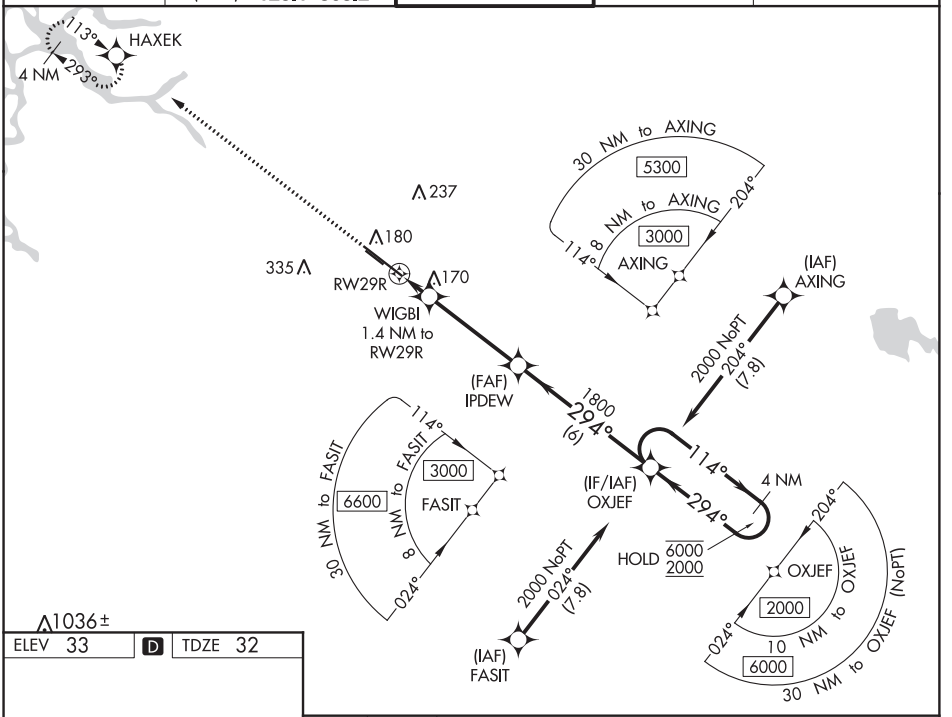

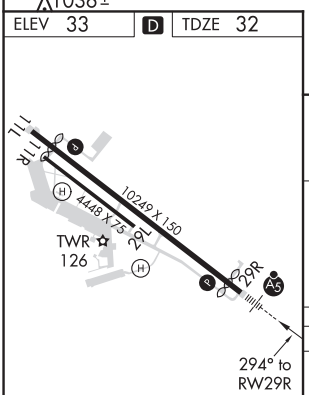

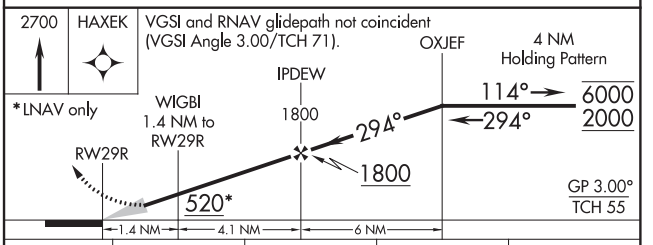

CATEGORY	A	B	C	D
LPV DA#	232/24 200 (200-½)			
LNAV/VNAV DA	320/24 288 (300-½)			
LNAV MDA	420/24 388 (400-½)		420/35 388 (400-⅝)	
C CIRCLING	500-1 467 (500-1)	540-1 507 (600-1)	640-1¾ 607 (700-1¾)	640-2 607 (700-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

19115

AIRPORT DIAGRAM

AL-407 (FAA)

STOCKTON METROPOLITAN (SCK)

STOCKTON, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM

19115

STOCKTON, CALIFORNIA

STOCKTON METROPOLITAN (SCK)

RNAV (GPS) RWY 29

SUSANVILLE MUNI (SVE)

APP CRS	Rwy Idg	4051
297°	TDZE	4146
	Apt Elev	4149

-22°C

DME/DME RNP- 0.3 NA. When local altimeter setting not received, use Reno/Stead altimeter setting and increase all MDA 720 feet. Circling to Rwy 7/25 NA. Rwy 29 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing right turn to 14000 direct AHC VOR/DME and hold, continue climb-in-hold to 14000.

AWOS-3	OAKLAND CENTER	UNICOM
133.8	128.8 285.5	122.8 (CTAF) L

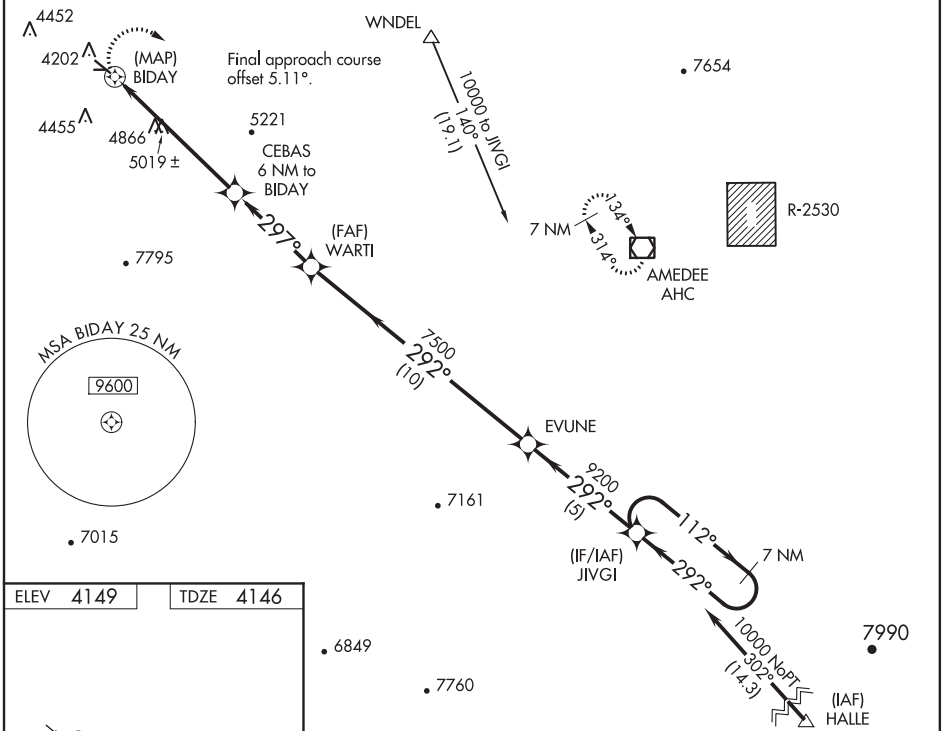

ELEV 4149 TDZ 4146



MIRL Rwy 11-29 L

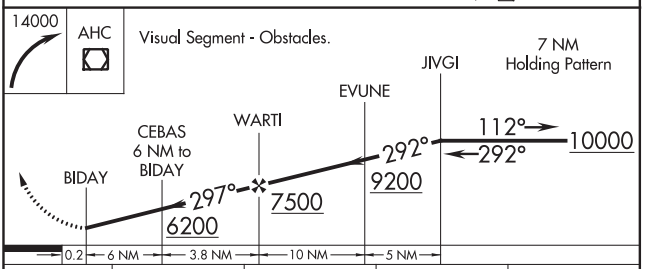

CATEGORY	A	B	C	D
LNAV MDA	5760-1¼ 1614 (1700-1¼)	5760-1½ 1614 (1700-1½)	5760-3 1614 (1700-3)	
CIRCLING	5760-1¼ 1611 (1700-1¼)	5760-1½ 1611 (1700-1½)	5760-3 1611 (1700-3)	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

SUSANVILLE, CALIFORNIA | AL-9479 (FAA) | 18200

APP CRS	Rwy Idg	N/A
142°	TDZE	N/A
	Apt Elev	4149

RNAV (GPS)-A
SUSANVILLE MUNI (SVE)

RNP APCH.

Circling NA for Cat D southwest of Rwy 11-29.
NA When local altimeter setting not received, procedure NA.
-22°C Circling NA to Rwy 7/25.

MISSED APPROACH: Climbing left turn to 14000 direct AHC VOR/DME and hold, continue climb-in-hold to 14000.

AWOS-3	OAKLAND CENTER	UNICOM
133.8	128.8 285.5	122.8 (CTAF) L

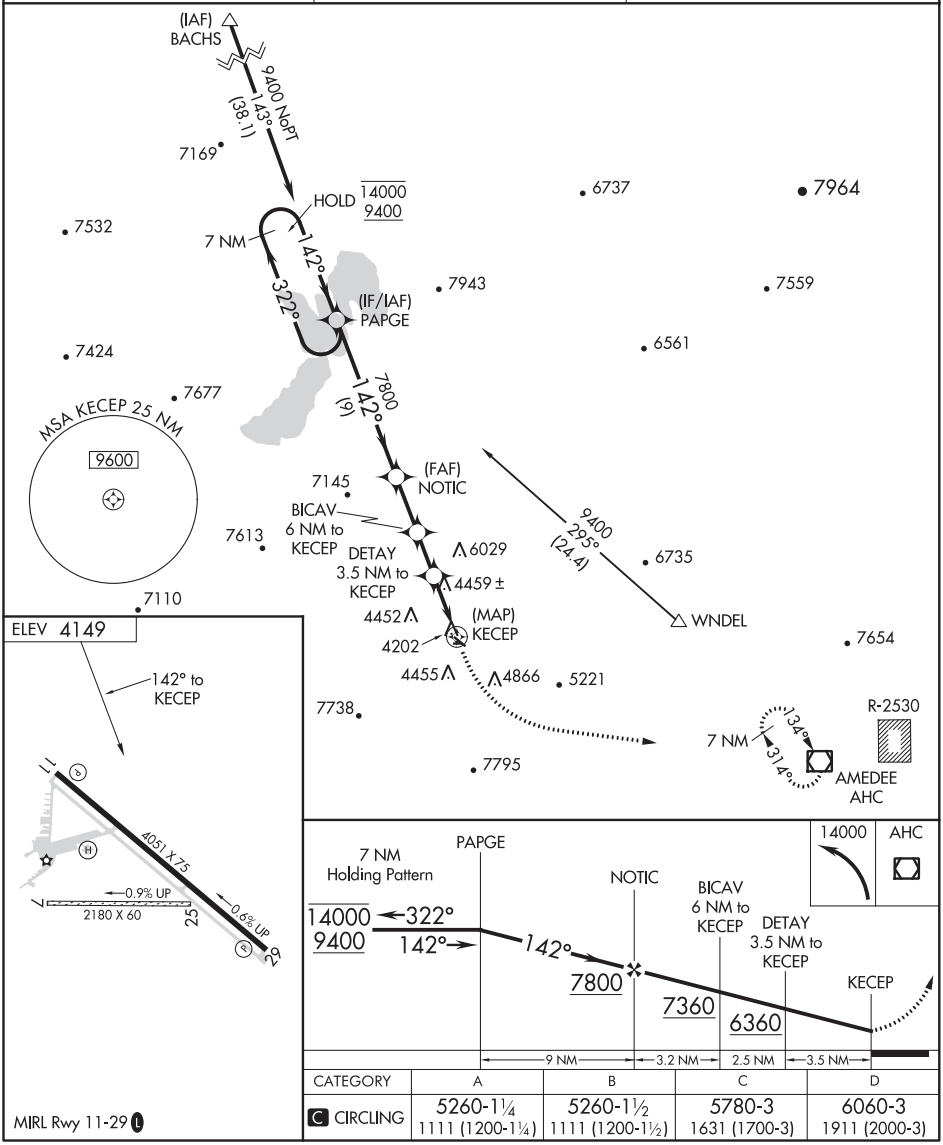

CATEGORY	A	B	C	D
C CIRCLING	5260-1¼ 1111 (1200-1¼)	5260-1½ 1111 (1200-1½)	5780-3 1631 (1700-3)	6060-3 1911 (2000-3)

MIRL Rwy 11-29 L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND CENTER
128.8 285.5
CTAF
122.8

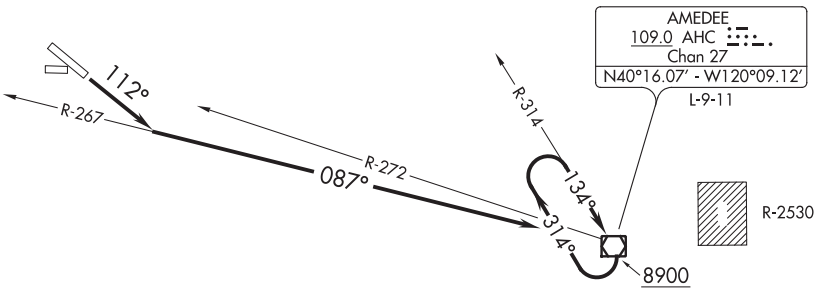

TAKEOFF MINIMUMS

Rwys 7, 25, 29: NA- obstacles.

Rwy 11: Standard with minimum climb of 410' per NM to 6000 or 1900-2½ for climb in visual conditions.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 11: Climb via 112° heading and AHC R-267 to AHC VOR/DME, Thence. . . .
Or climb in visual conditions to cross Susanville Muni Airport eastbound at or above 6000, then via AHC R-272 to AHC VOR/DME, Thence. . . .

. . . .cross AHC VOR/DME at or above 8900'. Climb in AHC holding pattern to depart AHC VOR/DME at or above 14000 before proceeding on course.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

TRACY, CALIFORNIA | AL-5815 (FAA) | 19339

WAAS	APP CRS		
CH **49200**	**116°**	Rwy Idg	**4001**
W12A		TDZE	**193**
		Apt Elev	**193**

RNAV (GPS) RWY 12

TRACY MUNI (TCY)

RNP APCH

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
Circling NA southwest of Rwy 12-30. Baro-VNAV and VDP NA when using Stockton altimeter setting.
Circling Rwy 30 NA at night. Rwy 12 helicopter visibility reduction below ¾ SM NA.
When local altimeter setting not received, use Stockton altimeter setting: increase all DAs to 507 feet; increase all MDAs 60 feet and visibilities LNAV Cat C ⅛ SM.

MISSED APPROACH: Climb to 700 then climbing left turn to 3200 direct HAIRE and hold.

AWOS-3	NORCAL APP CON	UNICOM
118.375	**123.85 278.3**	**123.075** (CTAF) L

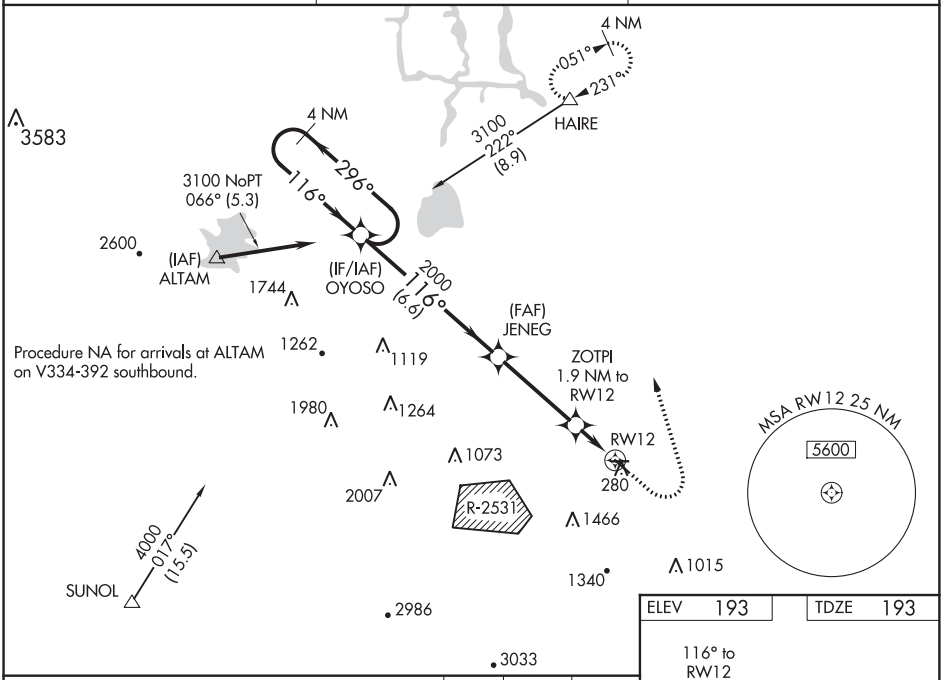

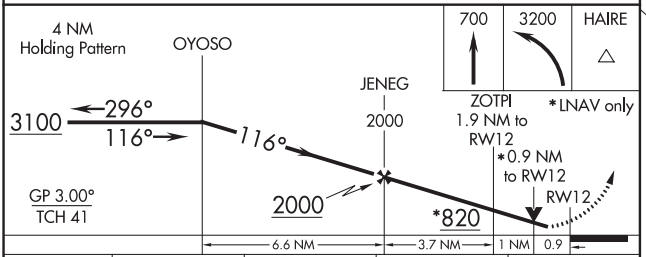

CATEGORY	A	B	C	D
LPV DA	443-⅞	250 (300-⅞)		NA
LNAV/VNAV DA	447-⅞	254 (300-⅞)		NA
LNAV MDA	520-1	327 (400-1)		NA
C CIRCLING	580-1 387 (400-1)	660-1 467 (500-1)	660-1½ 467 (500-1½)	NA

ELEV 193 | TDZE 193



MIRL Rwys 8-26 and 12-30 L
REIL Rwys 8, 12, 26 and 30 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	3438
CH 49040	255°	TDZE	186
W26A		Apt Elev	193

RNAV (GPS) RWY 26
TRACY MUNI (TCY)

RNP APCH.

T Baro-VNAV NA when using Stockton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling NA southwest of Rwy 12-30. Circling Rwy 30 NA at night. Rwy 26 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Stockton altimeter setting: increase LPV DA to 496 feet, increase LNAV/VNAV DA to 553 feet; increase all MDAs 60 feet and visibility LNAV Cat C ⅛ SM.

MISSED APPROACH: (Do not exceed 210K until OMWAP) Climb to 640 then climbing right turn to 3000 direct OMWAP and hold.

AWOS-3	NORCAL APP CON	UNICOM
118.375	123.85 278.3	123.075 (CTAF) L

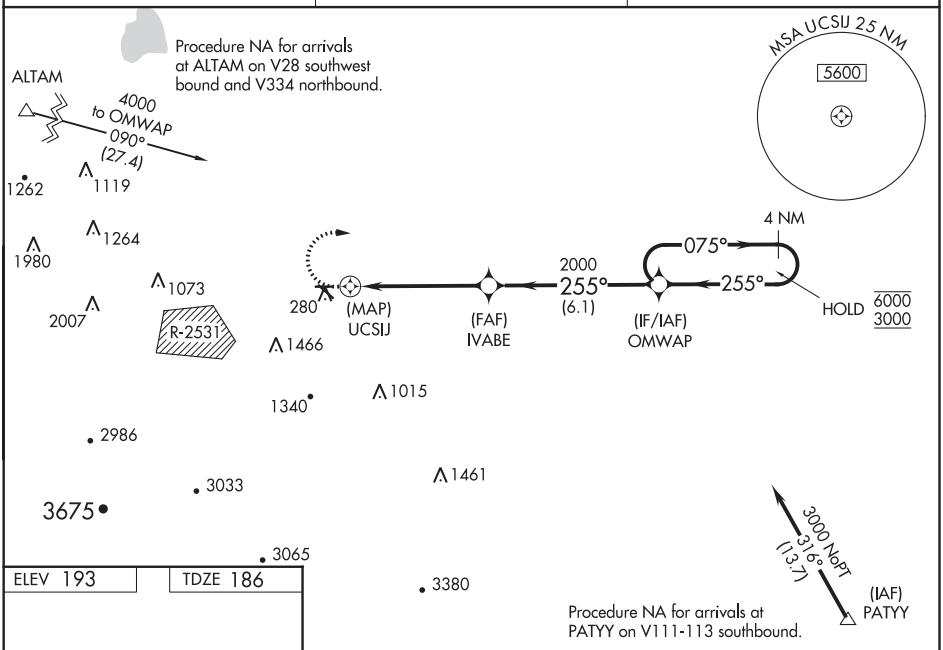

ELEV 193 TDZE 186



MIRL Rwys 8-26 and 12-30 L
REIL Rwys 8, 12, 26 and 30 L

640 3000 OMWAP

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).

4 NM Holding Pattern

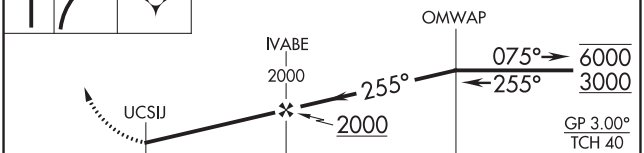

CATEGORY	A	B	C	D
LPV DA	436-⅞ 250 (300-⅞)			NA
LNAV/VNAV DA	493-1⅛ 307 (300-1⅛)			NA
LNAV MDA	540-1 354 (400-1)			NA
C CIRCLING	580-1 387 (400-1)	660-1 467 (500-1)	660-1½ 467 (500-1½)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

TRACY, CALIFORNIA | AL-5815 (FAA) | 19339

WAAS	APP CRS	Rwy Idg	3740
CH 69201	297°	TDZE	193
W30A		Apt Elev	193

RNAV (GPS) RWY 30

TRACY MUNI (TCY)

RNP APCH

Baro-VNAV NA when using Stockton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling NA southwest of Rwy 12-30. Straight-In Rwy 30 NA at night, Circling Rwy 30 NA at night. Rwy 30 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Stockton altimeter setting; increase all DAs to 507 feet; increase all MDAs 60 feet and visibility LNAV Cat C 1⅛ SM.

MISSED APPROACH: Climb to 700 then climbing right turn to 3200 direct HAIRE and hold, continue climb-in-hold to 3200.

AWOS-3	NORCAL APP CON	UNICOM
118.375	123.85 278.3	123.075 (CTAF) L

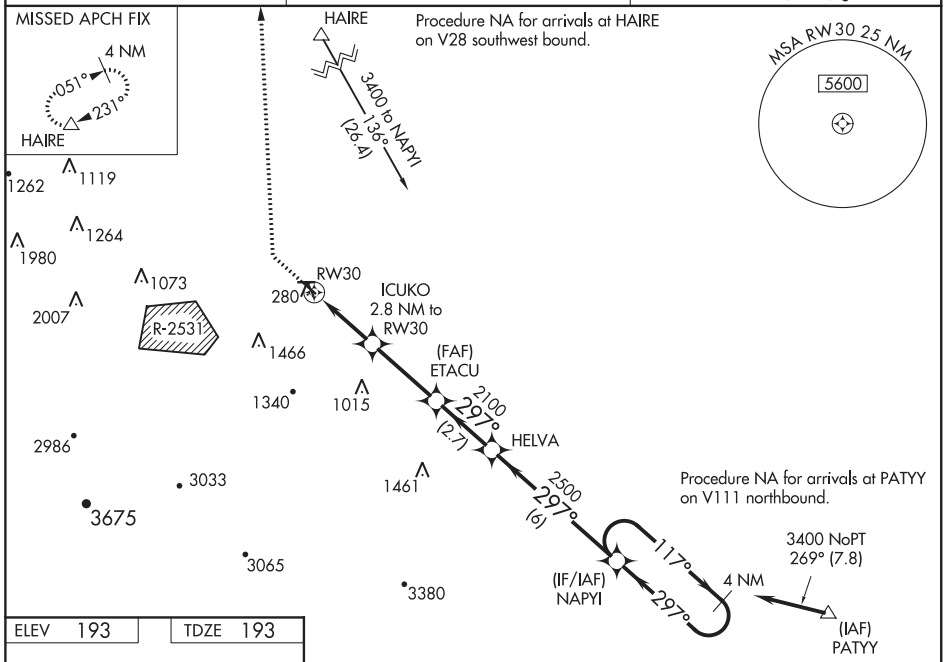

ELEV 193 | TDZE 193



MIRL Rwys 8-26 and 12-30 L

REIL Rwys 8, 12, 26 and 30 L

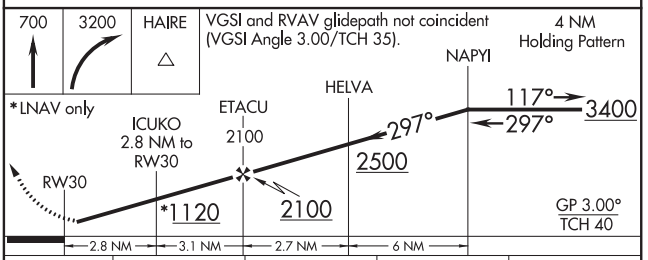

CATEGORY	A	B	C	D
LPV DA	447-1 254 (300-1)			NA
LNAV/VNAV DA	443-1 250 (300-1)			NA
LNAV MDA	540-1 347 (400-1)			NA
C CIRCLING	580-1 387 (400-1)	660-1 467 (500-1)	660-1½ 467 (500-1½)	NA

TRACY, CALIFORNIA
Amdt 1B 07NOV19

37°41'N-121°26'W

TRACY MUNI (TCY)

RNAV (GPS) RWY 30

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VOR RWY 26

TRACY MUNI (TCY)

VOR/DME MOD	APP CRS	Rwy Idg	3438
114.6	263°	TDZE	186
Chan 93		Apt Elev	193

DME Required.

Circling NA southwest of Rwy 12-30. Circling Rwy 30 NA at night. Rwy 26 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Stockton altimeter setting: increase all MDAs 60 feet and visibility Cat C ⅛ SM.

MISSED APPROACH: Climbing right turn to 3000 direct LIN VOR/DME and hold.

AWOS-3	NORCAL APP CON	UNICOM
118.375	123.85 278.3	123.075 (CTAF) L

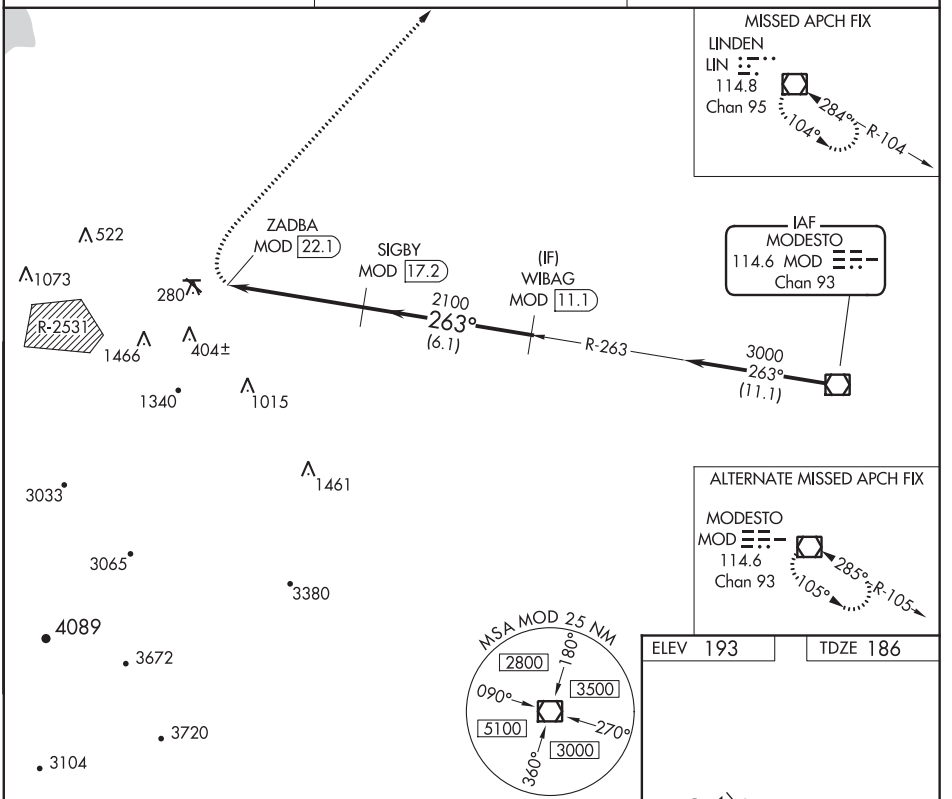

ELEV 193 TDZE 186

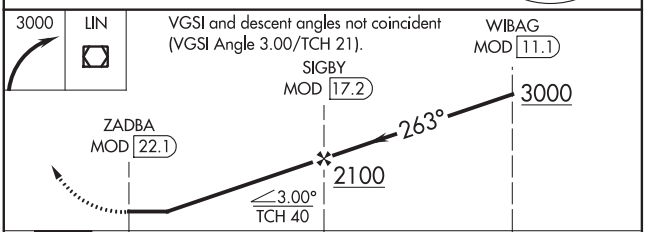



CATEGORY	A	B	C	D
S-26	760-1¼	574 (600-1¼)	760-1⅝ 574 (600-1⅝)	NA
C CIRCLING	760-1¼	567 (600-1¼)	760-1⅝ 567 (600-1⅝)	NA

MIRL Rwys 8-26 and 12-30 L

REIL Rwys 8, 12, 26 and 30 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

FAIRFIELD, CALIFORNIA

ILS or LOC RWY 3L

LOC I-TXV	APCH CRS	Rwy ldg 11,001
108.35	035°	TDZE 34
		Arpt Elev 63

AL-488 [USAF]

TRAVIS AFB (KSUU)

T *When Rwy 3R VGSI inop, circling to Rwy 3R not authorized at night. Circling not authorized NW of Rwy 3L-21R.

†MISSED APPROACH: Climb to 5000 on SUU R-028 to JOTKU. Then climbing left turn heading 290°, intercept SUU R-339 to SEATO and hold, continue climb and hold to 5000.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 (S) 126.6 (N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

RADAR REQUIRED
(When holding above 6000' at SEATO)

† Missed approach requires use of RNAV or ATC radar monitoring.

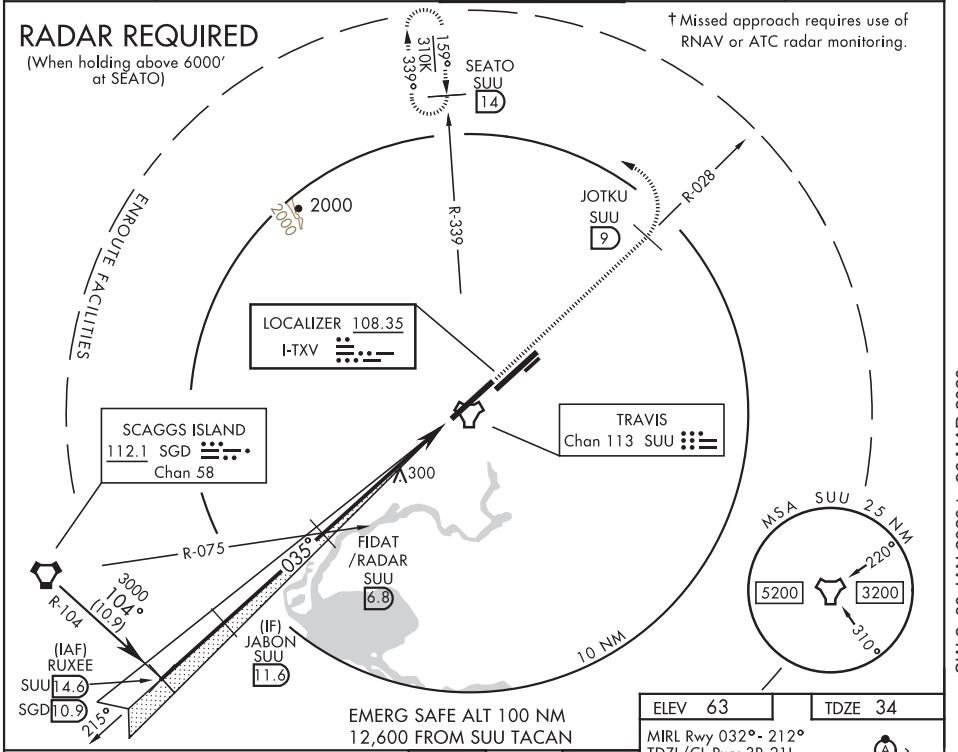

EMERG SAFE ALT 100 NM
12,600 FROM SUU TACAN

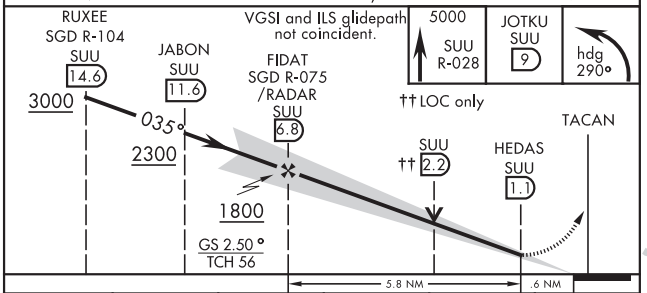

CATEGORY	A	B	C	D	E
S-ILS 3L	234/40		200	(200-¾)	
S-LOC 3L	560/55 526 (500-1)		560-1½	526	(500-1½)
C CIRCLING*	560-1 497 (500-1)	580-1 517 (600-1)	1100-3 1037(1100-3)	1200-3 1137	(1200-3)

ELEV 63 | TDZE 34

MIRL Rwy 032°- 212°
TDZL/CL Rwy 3R-21L
HIRL Rwy 3L-21R, 3R-21L

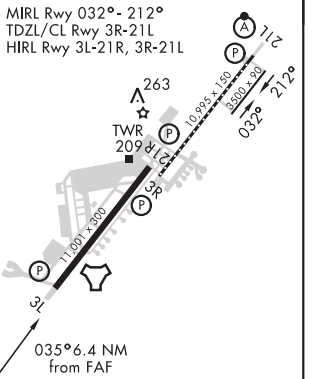

FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

FAIRFIELD, CALIFORNIA
Amdt 3 19JUL18

38°16'N-121°56'W

TRAVIS AFB (KSUU)

ILS or LOC RWY 3L

SW-2, 30 JAN 2020 to 26 MAR 2020

FAIRFIELD, CALIFORNIA

ILS or LOC RWY 21L

TRAVIS AFB (KSUU)

LOC I-SUU	APCH CRS	Rwy ldg 10,995
110.1	215°	TDZE 58
		Arpt Elev 63

AL-488 [USAF]

* When ALS inop, increase all CATs RVR to 40, vis to ¾ miles.
When TDZL/CL inop, increase all CATs RVR to 24.

ALSF-2

MISSED APPROACH: Climb straight ahead to SUU TACAN then turn right direct SGD VORTAC climbing to 4400. Expect further clearance prior to SGD.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 (S) 126.6 (N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1⅜ mile.
*** When Rwy 3R VGSI inop, circling to Rwy 3R not authorized at night. Circling not authorized NW of Rwy 3L-21R.

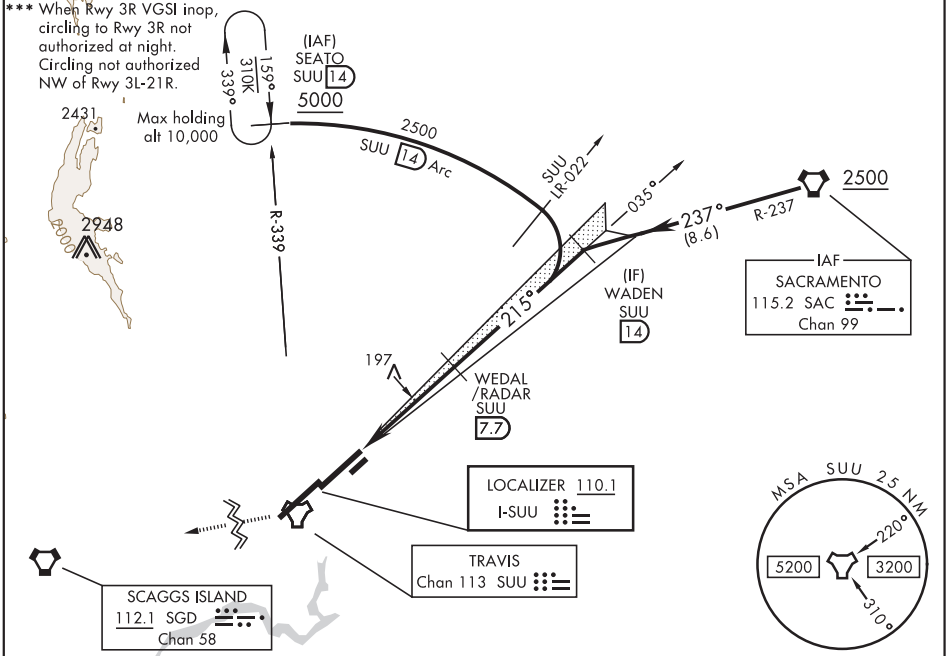

ATC RADAR REQUIRED

(Except for full approach from SAC)

EMERG SAFE ALT 100 NM 12,600 FROM "SUU" TACAN

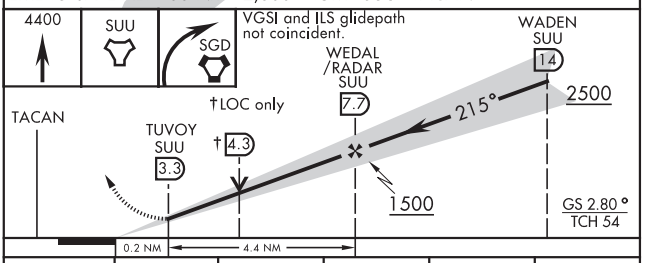

CATEGORY	A	B	C	D	E
S-ILS 21L *	258/18		200	(200-½)	
S-LOC 21L **	500/24	442 (500-½)	500/45	442 (500-⅞)	
C CIRCLING ***	540-1 477 (500-1)	580-1 517 (600-1)	1100-3 1037(1100-3)	1200-3 1137 (1200-3)	

ELEV 63 TDZE 58

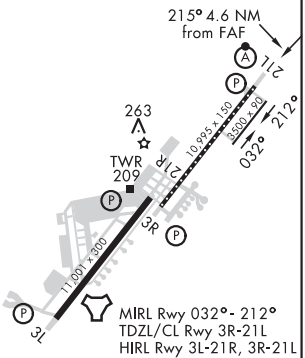

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

FAIRFIELD, CALIFORNIA 38°16'N-121°56'W TRAVIS AFB (KSUU)

Amdt 2 19JUL18

ILS or LOC RWY 21L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

FAIRFIELD, CALIFORNIA

ILS RWY 21L (CAT II)

TRAVIS AFB (KSUU)

LOC I-SUU	APCH CRS	Rwy ldg 10,995
110.1	215°	TDZE 58
		Arpt Elev 63

AL-488 [USAF]

ALSF-2

† MISSED APPROACH: Climb to 5000 on SUU R-205 to SETSE. Then climbing right turn 020°, intercept SUU R-339 to SEATO and hold, continue climb and hold to 5000.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 (S) 126.6 (N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

CATEGORY II ILS SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

† CAUTION: Missed Approach Minimum Climb Rate to 3800

Knots	60	120	180	240	300	360
V/V(fpm)	211	422	633	844	1055	1266

Controlling Obstacle 2861

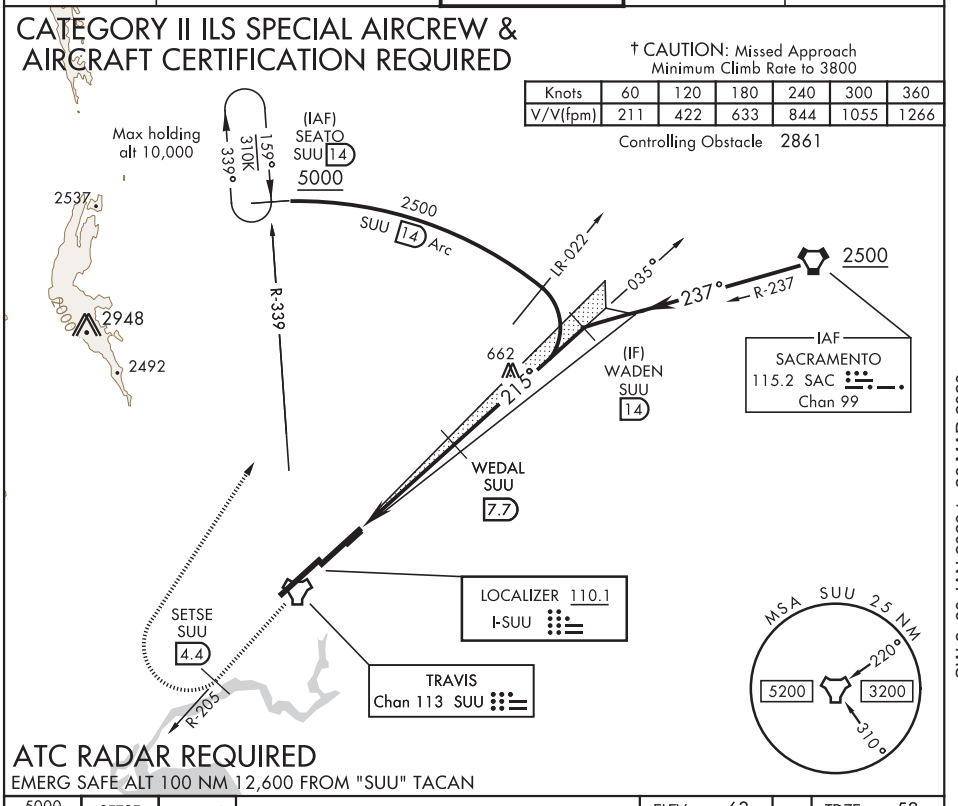

ATC RADAR REQUIRED

EMERG SAFE ALT 100 NM 12,600 FROM "SUU" TACAN

5000 SUU R-205	SETSE SUU 4.4	hdg 020°

VGSI and ILS Glidepath not coincident (VGSI Angle 2.80/TCH 75).

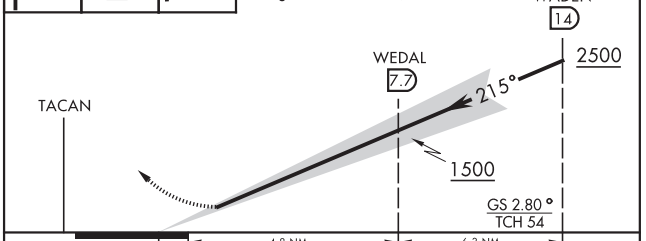

CATEGORY	A	B	C	D	E
S-ILS 21L	RA 83/12		100	DA 158	

ELEV 63 TDZE 58



FAIRFIELD, CALIFORNIA

38°16'N-121°56'W

TRAVIS AFB (KSUU)

Amdt 1 05DEC19

ILS RWY 21L (CAT II)

SW-2, 30 JAN 2020 to 26 MAR 2020

FAIRFIELD, CALIFORNIA

RNAV (GPS) RWY 3L

WAAS	APCH CRS	Rwy ldg 11,001
CH 71275 W03A	035°	TDZE 34
		Arpt Elev 63

AL-488 [USAF]

TRAVIS AFB (KSUU)

* When Rwy 3R VGSI inop, circling to Rwy 3R not authorized at night. Circling not authorized NW of Rwy 3L-21R.

MISSED APPROACH: Climb to 4400 direct WUNSU, track 316° to SEATO and hold, continue climb-in-hold to 4400.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 (S) 126.6 (N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

Circling visibility reduction by helicopters not authorized.

DME/DME RNP-0.3 NA

5 NM 163° 343° SEATO

For uncompensated Baro-VNAV systems, procedure NA below 15°C (59°F) or above 54°C (130°F).

2948 2392 2000

WUNSU

RW03L 121 105 118 384 306 427

(FAF) WELBA

RADAR REQUIRED

1129

1159 1800 035° (6.9)

HABAL 3000

MSA RW03L 25 NM 5000

EMERG SAFE ALT 100 NM 12,600 FROM RW03L

† LNAV only 4400 WUNSU tr 316°

HABAL 3000 035° WELBA †1.8 NM to RW03L RW03L 1800 GP 2.50° TCH 56 6.4 NM

ELEV 63 TDZE 34

263 TWR 209 7L 7R 3R 3L 11,001 x 150 10,995 x 150 9,500 x 100 211 212° 032° 132 74

CATEGORY	A	B	C	D	E
LPV DA	234/40		200	(200-¾)	
LNAV/VNAV DA	522-2		488	(500-2)	
LNAV MDA	600/55 566 (600-1)		600-1⅝	566	(600-1⅝)
C CIRCLING*	600-1 537 (600-1)		1100-3 1037(1100-3)	1200-3 1137 (1200-3)	

035° to RW03L

MIRL Rwy 032°- 212°
TDZL/CL Rwy 3R-21L
HIRL Rwy 3L-21R, 3R-21L

FAIRFIELD, CALIFORNIA

38°16'N-121°56'W

TRAVIS AFB (KSUU)

Amdt 2 19JUL18

RNAV (GPS) RWY 3L

SW-2, 30 JAN 2020 to 26 MAR 2020

FAIRFIELD, CALIFORNIA

RNAV (GPS) RWY 21L

WAAS	APCH CRS	Rwy ldg 10,995
CH 71274	215°	TDZE 58
W21A		Arpt Elev 63

AL-488 [USAF]

TRAVIS AFB (KSUU)

▼ * When ALS inop increase all CAT RVR to 40, vis to ¾ mile.
** When ALS inop increase all CAT vis to 1⅞ mile.
*** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1⅜ miles.

ALSF-2

MISSED APPROACH: Climb to 2200 then climbing right turn to 4400 direct SEATO and hold, continue climb-in-hold to 4400.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 (S) 126.6 (N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

**** When Rwy 3R VGSI inop, circling to Rwy 3R not authorized at night, Circling not authorized NW of Rwy 3L-21R, Circling visibility reduction by helicopters not authorized.

For uncompensated Baro-VNAV systems, procedure NA below -7°C (20°F) or above 54°C (130°F).

DME/DME RNP-0.3 NA

5 NM
343°
163°
SEATO
2000
2948
2000
1650
2379
1060
(IAF)
IGGEY
2000
144°
(7)
(IAF/IF)
HILLT
662
1500
215°
(5.9)
(FAF)
SOPEE
197
163
195
242
RW21L
455
427

MSA RW21L 25 NM
5200

EMERG SAFE ALT 100 NM
12,700 FROM RW21L

ELEV 63 | TDZE 58

215° to RW21L

263
TWR
209
10995 x 150
8500 x 300
7CV
212°
032°
21R
3R
11,001 x 300
132
74
3L

MIRL Rwy 032°- 212°
TDZL/CL Rwy 3R-21L
HIRL Rwy 3L-21R, 3R-21L

2200 | 4400 | SEATO

†LNAV only

HILLT
2000
SOPEE
215°
1500
†1.3 NM to RW21L
RW21L
GP 2.80°
TCH 54
4.6 NM

CATEGORY	A	B	C	D	E
LPV DA *	258/18		200	(200-½)	
LNAV/VNAV DA **	502/60		444	(500-1¼)	
LNAV MDA ***	500/24 442 (500-½)		500/45	442	(500-⅞)
C CIRCLING ****	540-1 477 (500-1)	580-1 517 (600-1)	1100-3 1037(1100-3)	1200-3 1137 (1200-3)	

FAIRFIELD, CALIFORNIA

38° 16'N-121° 56'W

TRAVIS AFB (KSUU)

Amdt 3 06DEC18

RNAV (GPS) RWY 21L

SW-2, 30 JAN 2020 to 26 MAR 2020

FAIRFIELD, CALIFORNIA

RNAV (GPS) RWY 21R

WAAS	APCH CRS	Rwy ldg 11,001
CH 71276 W21B	215°	TDZE 51
		Arpt Elev 63

AL-488 [USAF]

TRAVIS AFB (KSUU)

* When Rwy 3R VGSI inop, circling to Rwy 3R not authorized at night. Circling not authorized NW of Rwy 3L-21R.

MISSED APPROACH: Climb to 2100 then climbing right turn to 4400 direct SEATO and hold, continue climb-in-hold to 4400.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 (S) 126.6 (N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

Circling visibility reduction by helicopters not authorized.

For uncompensated Baro-VNAV systems, procedure NA below 2°C (36°F) or above 54°C (130°F).

DME/DME RNP-0.3 NA

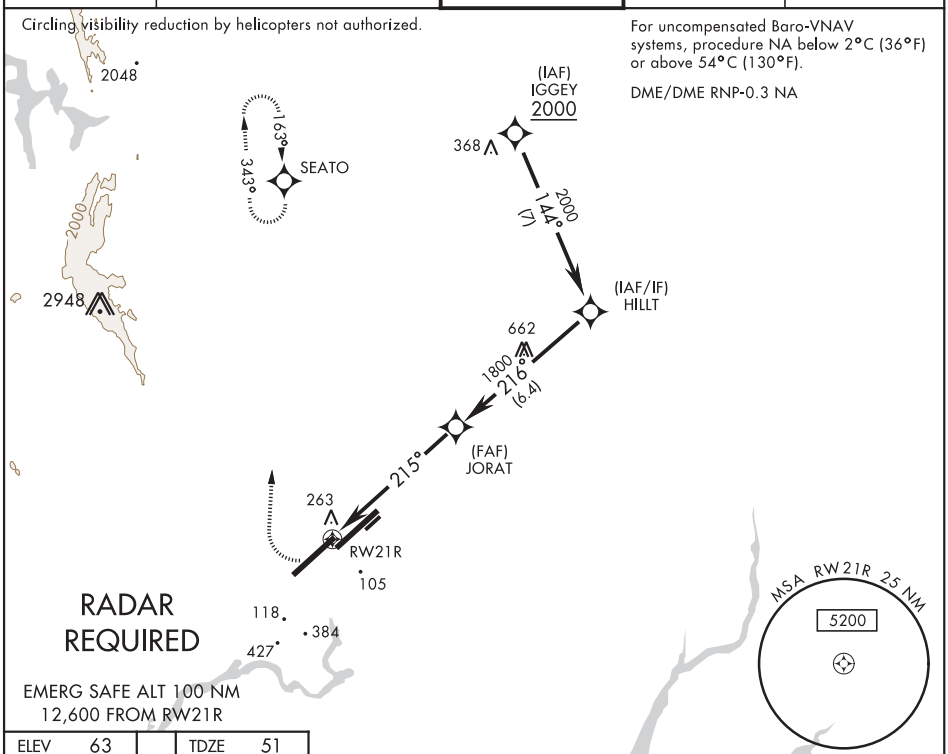

ELEV	TDZE
63	51

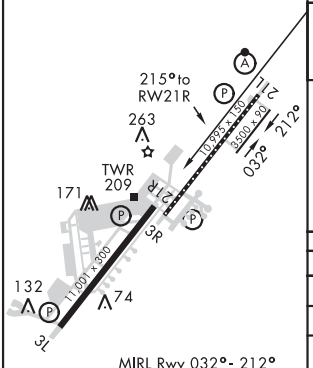

2100	4400	SEATO

VGSI and RNAV glidepath not coincident (VGSI angle 2.80°/TCH 75)

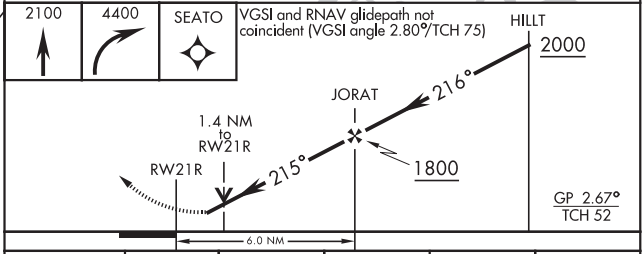

CATEGORY	A	B	C	D	E
LPV DA	301-1		250 (300-1)		
LNAV/VNAV DA	475-1 5/8		424 (500-1 5/8)		
LNAV MDA	540-1 489 (500-1)		540-1 3/8 489 (500-1 3/8)		
C CIRCLING*	540-1 477 (500-1)	580-1 517 (600-1)	1100-3 1037(1100-3)	1200-3 1137 (1200-3)	

FAIRFIELD, CALIFORNIA

38°16'N-121°56'W

TRAVIS AFB (KSUU)

Amdt 3 06DEC18

RNAV (GPS) RWY 21R

SW-2, 30 JAN 2020 to 26 MAR 2020

FAIRFIELD, CALIFORNIA

TACAN RWY 3L

TACAN	APCH CRS	Rwy ldg	11,001
SUU Chan 113	042°	THRE	33
		Arpt Elev	63

AL-488 [USAF]

TRAVIS AFB (KSUU)

* Circling not authorized NW of Rwy 3L-21R.

MISSED APPROACH: Climb to 5000 via SUU TACAN R-042 to LAVNE, then turn left via 295° course to intercept SUU R-339 to SEATO and hold, continue climb in hold to 5000.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9(S) 126.6(N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

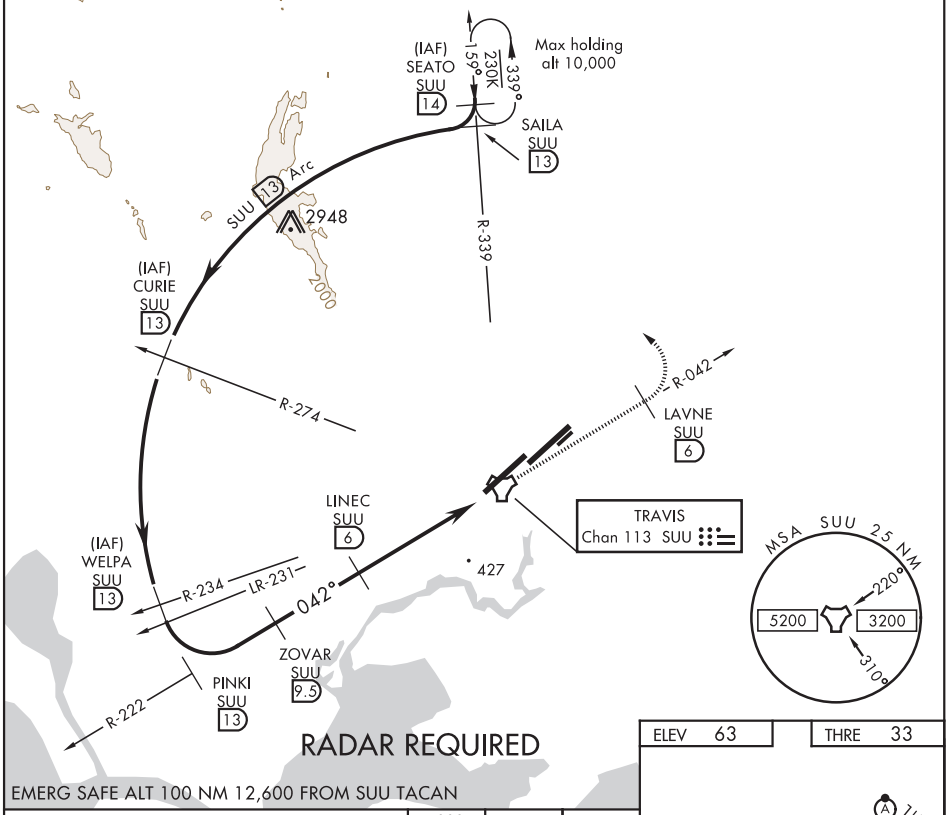

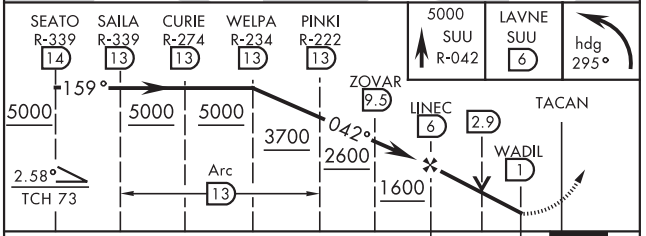

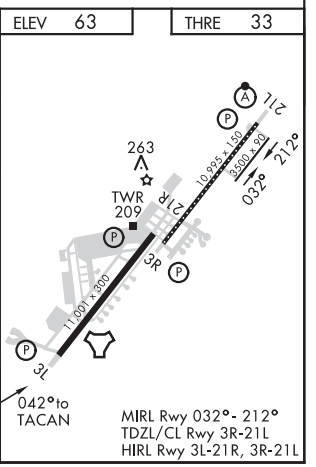

CATEGORY	A	B	C	D	E
S-3L	740/55 707 (700-1)		740-2	707	(700-2)
C CIRCLING*	740-1 677 (700-1)		740-2 677 (700-2)	1200-3 1137 (1200-3)	

MIRL Rwy 032°- 212°
TDZL/CL Rwy 3R-21L
HIRL Rwy 3L-21R, 3R-21L

FAIRFIELD, CALIFORNIA

38°16'N-121°56'W

TRAVIS AFB (KSUU)

Amdt 4 19JUL18

TACAN RWY 3L

SW-2, 30 JAN 2020 to 26 MAR 2020

FAIRFIELD, CALIFORNIA

TACAN RWY 21L

TACAN SUU Chan 113	APCH CRS 209°	Rwy ldg 10,995 THRE 53 Arpt Elev 63

AL-488 [USAF]

TRAVIS AFB (KSUU)

▼ * When ALS inop, increase CAT A RVR to 55 and vis to 1 mile, CAT B RVR to 60 and vis to 1¼ miles, CAT CDE vis to 2 miles.

ALSF-2

MISSED APPROACH: Climb to 5000 via SUU TACAN R-209 to WABGA, then turn right hdg 015° to intercept SUU R-339 to SEATO and hold, continue climb in hold to 5000.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 (S) 126.6 (N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

** Circling not authorized NW of Rwy 3L-21R.

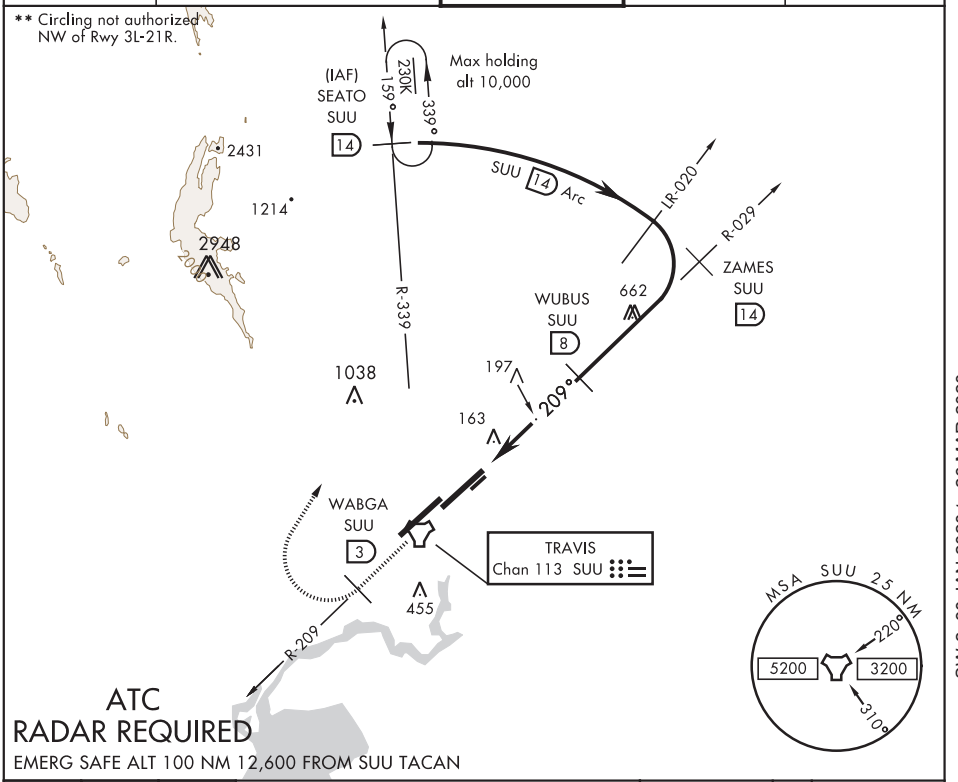

ATC
RADAR REQUIRED

EMERG SAFE ALT 100 NM 12,600 FROM SUU TACAN

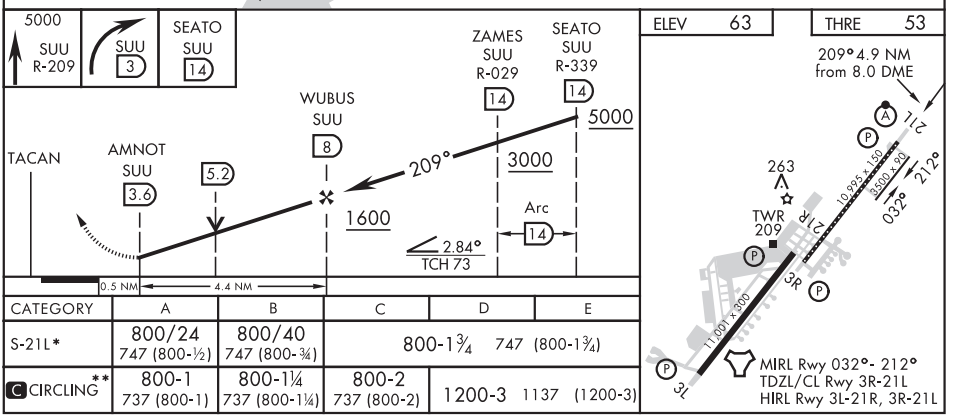

CATEGORY	A	B	C	D	E
S-21L*	800/24 747 (800-½)	800/40 747 (800-¾)	800-1¾ 747 (800-1¾)		
C CIRCLING**	800-1 737 (800-1)	800-1¼ 737 (800-1¼)	800-2 737 (800-2)	1200-3 1137 (1200-3)	

FAIRFIELD, CALIFORNIA

38°16'N-121°56'W

TRAVIS AFB (KSUU)

Amdt 2 19JUL18

TACAN RWY 21L

SW-2, 30 JAN 2020 to 26 MAR 2020

19283

FAIRFIELD, CALIFORNIA

TACAN RWY 21R

TACAN	APCH CRS	Rwy Idg	11,001
SUU Chan 113	202°	THRE	50
		Arpt Elev	63

AL-488 [USAF]

TRAVIS AFB (KSUU)

T * Circling not authorized NW of Rwy 3L-21R.

†MISSED APPROACH: Climb to 5000 via SUU TACAN R-205 to ZAGET, then turn right heading 010° to intercept SUU R-339 to SEATO and hold, continue climb in hold to 5000.

ATIS	TRAVIS APP CON	TRAVIS TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 (S) 126.6 (N) 281.45	120.75 254.4	121.8 289.4	127.55 335.8

Knots	60	120	180	240	300	360
V/V(fpm)	208	416	624	832	1040	1248

†CAUTION: Missed Approach Climb Rate to 4100' Controlling Obstacle 2948'

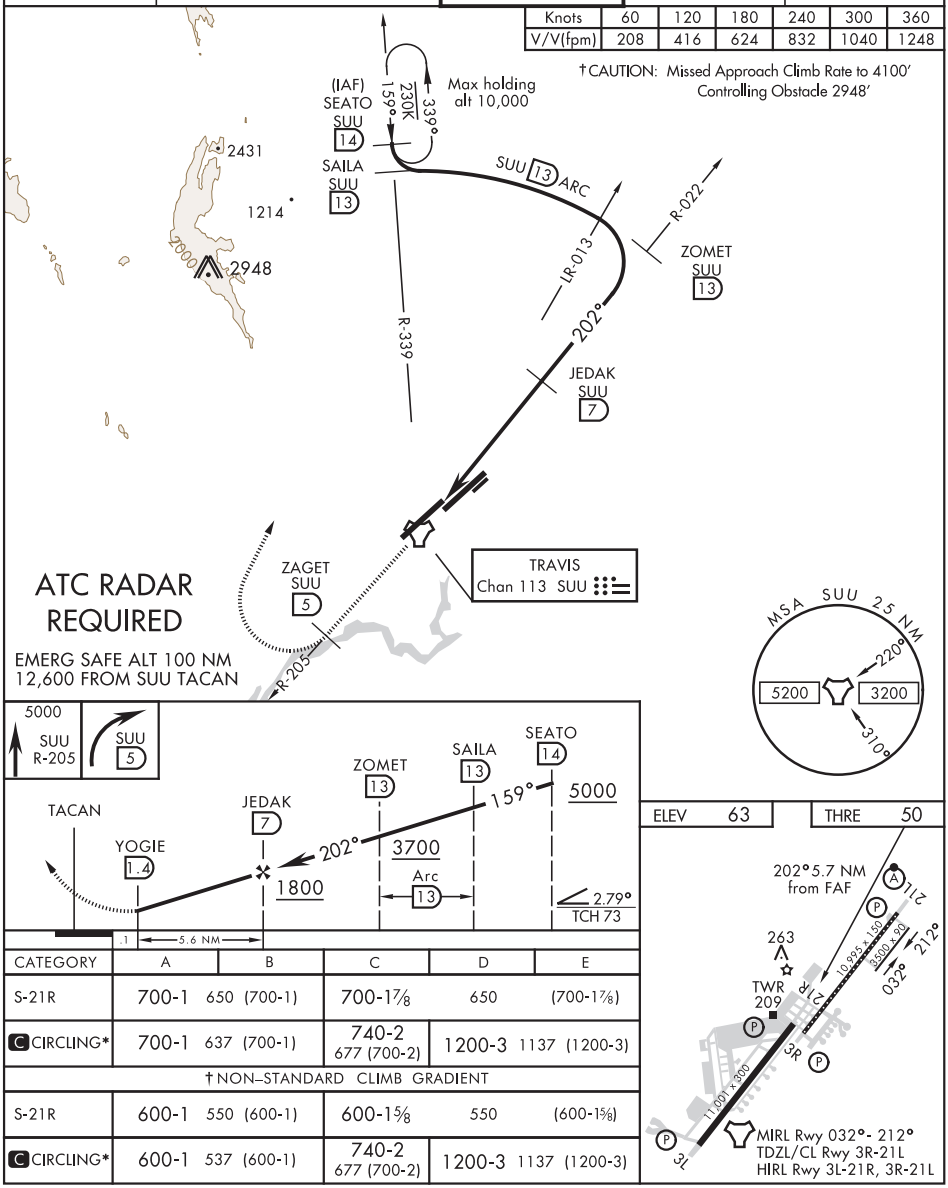

CATEGORY	A	B	C	D	E
S-21R	700-1 650 (700-1)		700-1⅞	650	(700-1⅞)
C CIRCLING*	700-1 637 (700-1)		740-2 677 (700-2)	1200-3 1137 (1200-3)	
†NON–STANDARD CLIMB GRADIENT					
S-21R	600-1 550 (600-1)		600-1⅝	550	(600-1⅜)
C CIRCLING*	600-1 537 (600-1)		740-2 677 (700-2)	1200-3 1137 (1200-3)	

FAIRFIELD, CALIFORNIA

38°16'N-121°56'W

TRAVIS AFB (KSUU)

Amdt 5 19JUL18

TACAN RWY 21R

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

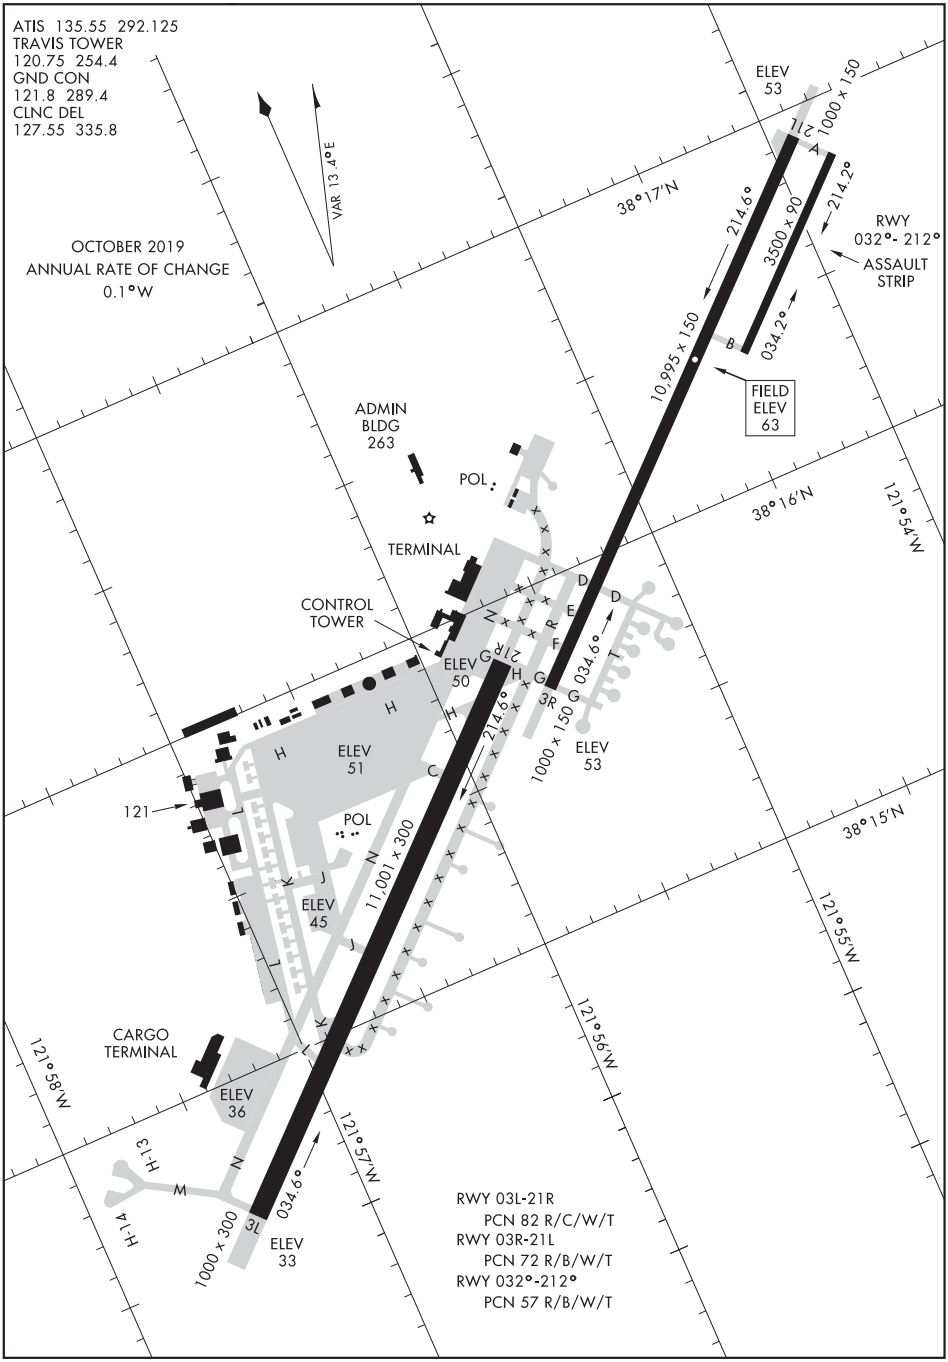

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

17341

MENTO TWO DEPARTURE (RWY 3L/R) (MENTO2• MENTO)

TRAVIS AFB (KSUU)
FAIRFIELD, CALIFORNIA

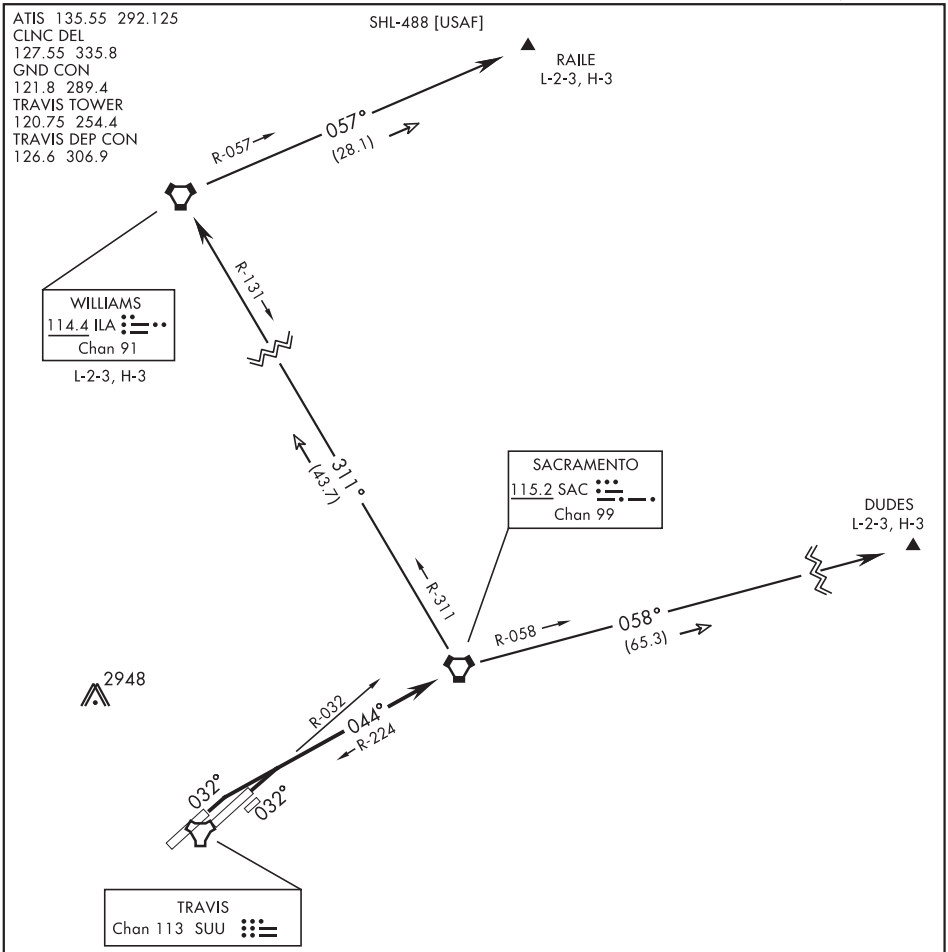

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 3L/R: Climb via heading 032° to intercept and fly SAC VORTAC R-224 to SAC. Then via assigned transition.

DUDES TRANSITION (MENTO2• DUDES): Turn right intercept and fly SAC R-058 to 65.3 DME (DUDES).

RAILE TRANSITION (MENTO2• RAILE): Turn left intercept and fly SAC R-311 to ILA VORTAC R-131 to ILA then turn right intercept and fly ILA R-057 to 28.1 DME (RAILE).

WILLIAMS TRANSITION (MENTO2• ILA): Turn left intercept and fly SAC R-311 to ILA VORTAC R-131 to ILA.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WAPEX-ONE DEPARTURE (WAPEX 1 • WAPEX)

SHL-488 [USAF]

FAIRFIELD, CALIFORNIA

ATIS 135.55 292.125
CLNC DEL
127.55 335.8
GND CON
121.8 289.4
TRAVIS TOWER
120.75 254.4
TRAVIS DEP CON
126.6 306.9

Rwy	Knots	60	120	180	240	300	360
21L ⓐ	V/V(fpm)	230	460	690	920	1150	1380
21L ⓑ	V/V(fpm)	250	500	750	1000	1250	1500
21R ⓐ	V/V(fpm)	250	500	750	1000	1250	1500
21R ⓑ	V/V(fpm)	270	540	810	1080	1350	1620

Minimum Climb Rate to 4100
ⓐ With SUU TACAN
ⓑ Without SUU TACAN

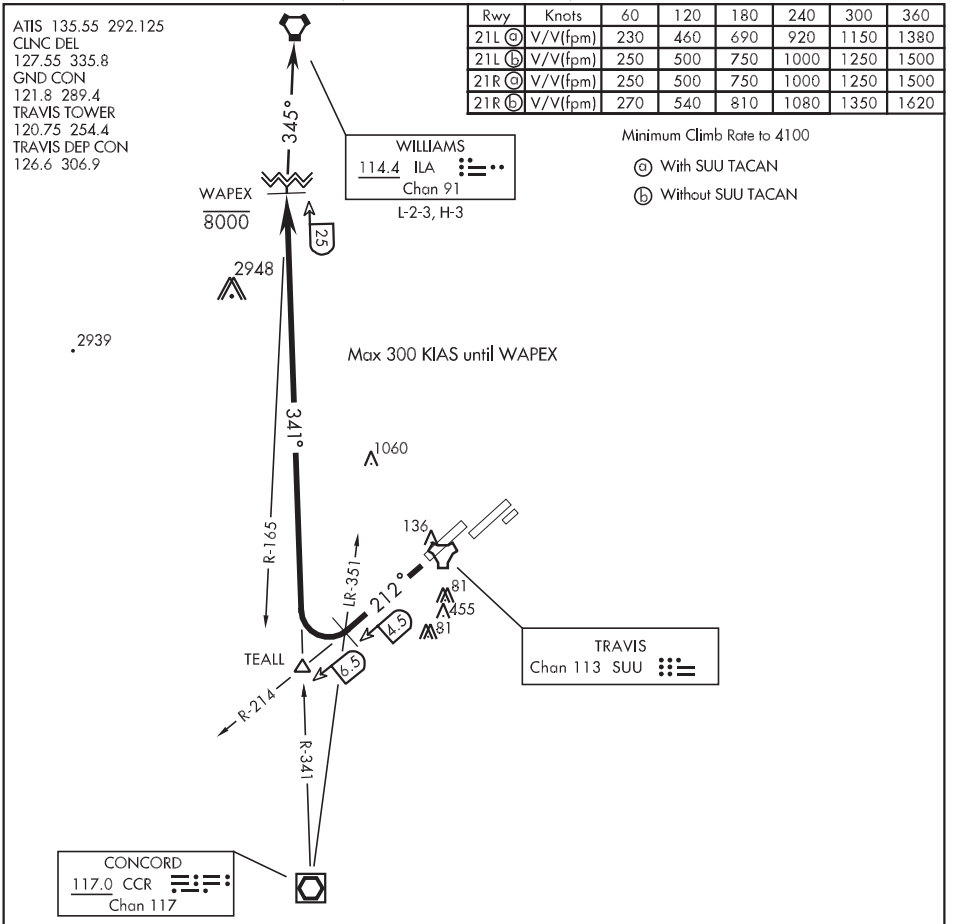

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 21 L/R:

With SUU TACAN: Climb via heading 212° to intercept SUU R-214, turn right intercept CCR VOR/DME R-341 to WAPEX, then via assigned transition or filed flight plan.

Without SUU TACAN: Climb via heading 212°, turn right intercept CCR VOR/DME R-341 to WAPEX, then via assigned transition or filed flight plan.

WILLIAMS TRANSITION (WAPEX 1 • ILA): Turn right intercept ILA VORTAC R-165 to ILA.

RNAV (GPS) RWY 11

TRUCKEE-TAHOE (TRK)

APP CRS	Rwy Idg	TDZE	Apt Elev
126°	7001	5904	5904

RNP APCH.

T A -13°C Circling NA for Cat C south of Rwy 29 and east of Rwy 2. Procedure NA at night. Rwy 11 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, procedure NA.

MISSED APPROACH: (Do not exceed 220K until KEBTE) Climbing left turn to 12000 direct KEBTE and track 282° to LEKYI and hold, continue climb-in-hold 12000.

AWOS-3PT	OAKLAND CENTER	TRUCKEE TOWER ★	GND CON	UNICOM
118.0	127.95 316.1	120.575 (CTAF) L	118.3	122.95

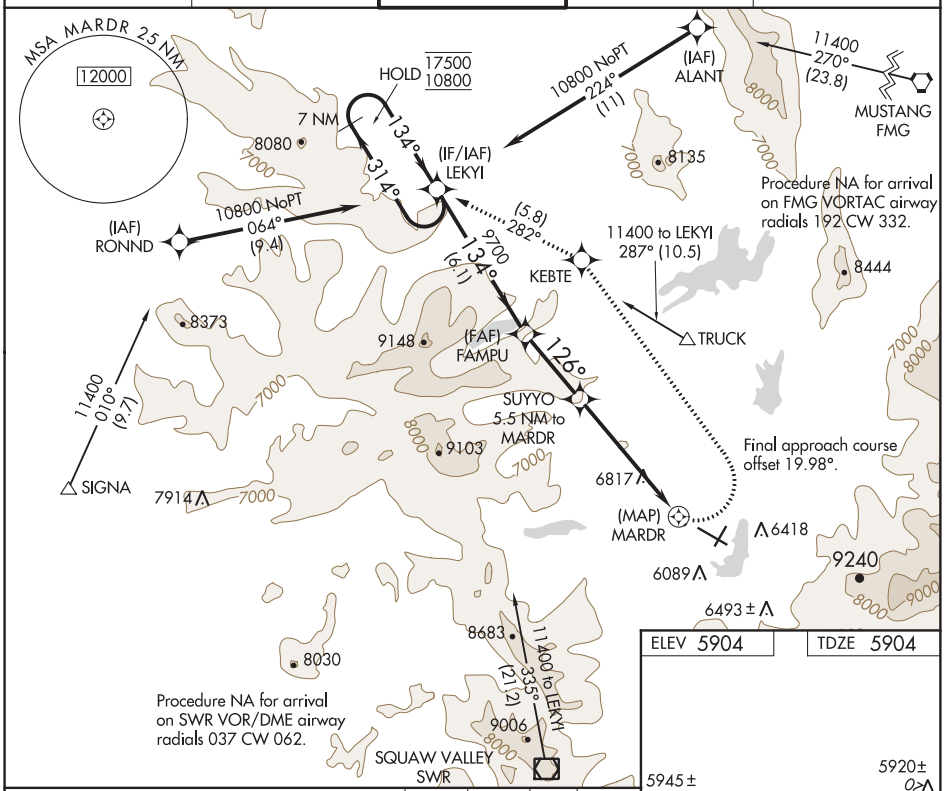

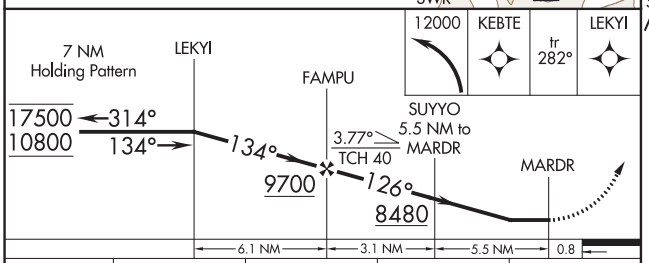

CATEGORY	A	B	C	D
LNAV MDA	7720-1¼ 1816 (1900-1¼)	7720-1½ 1816 (1900-1½)	7720-3 1816 (1900-3)	NA
C CIRCLING	7720-1¼ 1816 (1900-1¼)	7720-1½ 1816 (1900-1½)	7720-3 1816 (1900-3)	NA

REIL Rwy 11 L
MIRL Rwys 11-29 and 2-20 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Y RWY 20

TRUCKEE-TAHOE (TRK)

WAAS	APP CRS	Rwy Idg	4539
CH 50535	182°	TDZE	5894
W20A		Apt Elev	5901

DME/DME RNP-0.3 NA. When local altimeter setting not received, procedure NA. Helicopter visibility reduction below ¾ SM NA.

NA

-13°C

MISSED APPROACH: Climbing right turn to 11500 direct AWEGA and on track 050°to WIKEX and hold.

AWOS-3PT	OAKLAND CENTER	TRUCKEE TOWER★	GND CON	UNICOM
118.0	127.95 316.1	120.575 (CTAF) L	118.3	122.95

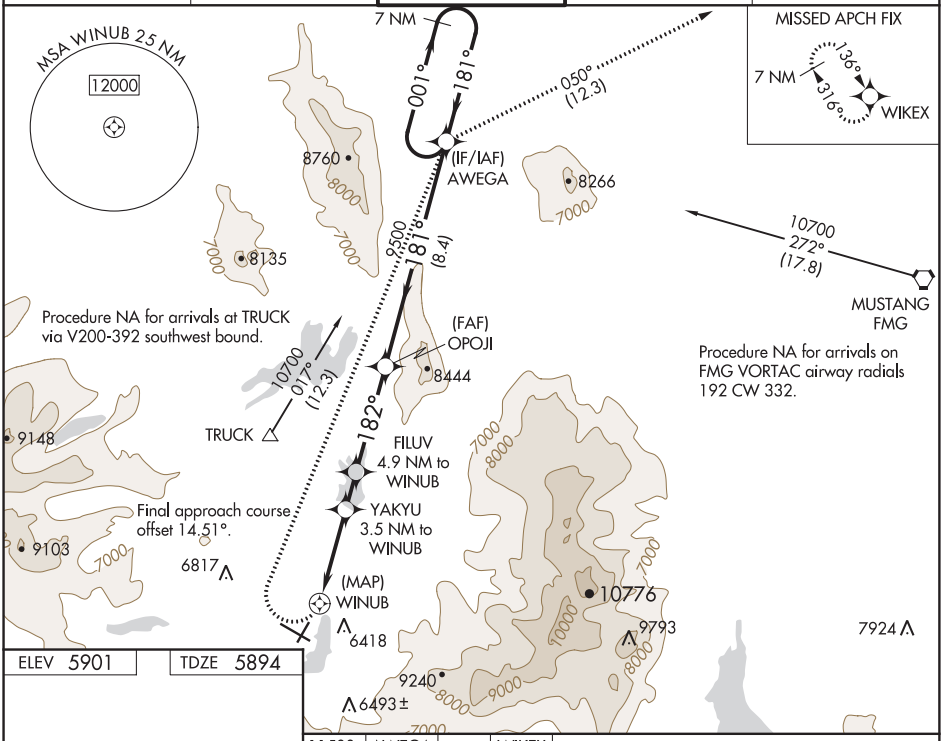

ELEV 5901	TDZE 5894



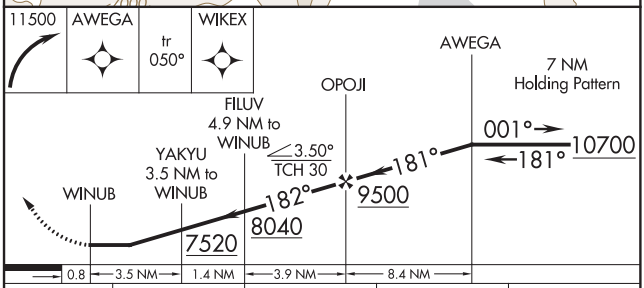

CATEGORY	A	B	C	D
LP MDA	7400-1¼ 1506 (1500-1¼)	7400-1½ 1506 (1500-1½)	7400-3 1506 (1500-3)	NA
LNAV MDA	7460-1¼ 1566 (1600-1¼)	7460-1½ 1566 (1600-1½)	7460-3 1566 (1600-3)	NA
C CIRCLING	7460-1¼ 1559 (1600-1¼)	7460-1½ 1559 (1600-1½)	8480-3 2579 (2600-3)	NA

REIL Rwy 11 L

MIRL Rwys 11-29 and 2-20 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

RNAV (GPS) Z RWY 20

TRUCKEE-TAHOE (TRK)

WAAS	APP CRS	Rwy Idg	4539
CH 87135	182°	TDZE	5894
W20B		Apt Elev	5901

T
NA
-13°C

DME/DME RNP-0.3 NA. When local altimeter setting not received, procedure NA. Missed approach requires minimum climb of 310 feet per NM to 9200; if unable, see RNAV (GPS) Y RWY 20.

MISSED APPROACH: Climbing right turn to 11500 direct AWEGA and on track 050° to WIKEX and hold.

AWOS-3PT	OAKLAND CENTER	TRUCKEE TOWER ★	GND CON	UNICOM
118.0	127.95 316.1	120.575 (CTAF) L	118.3	122.95

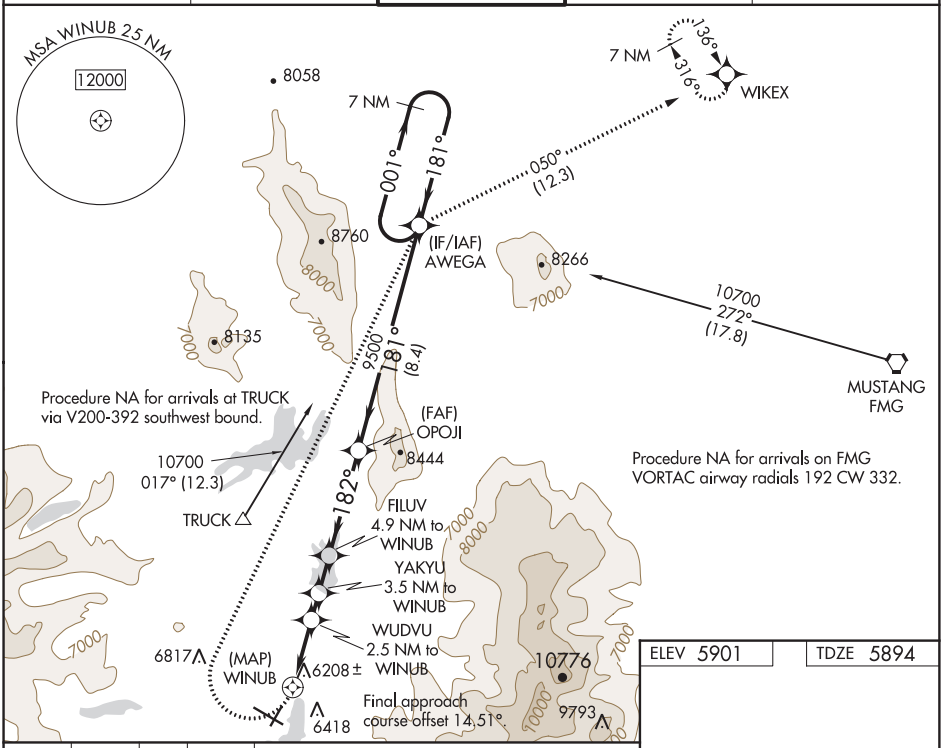

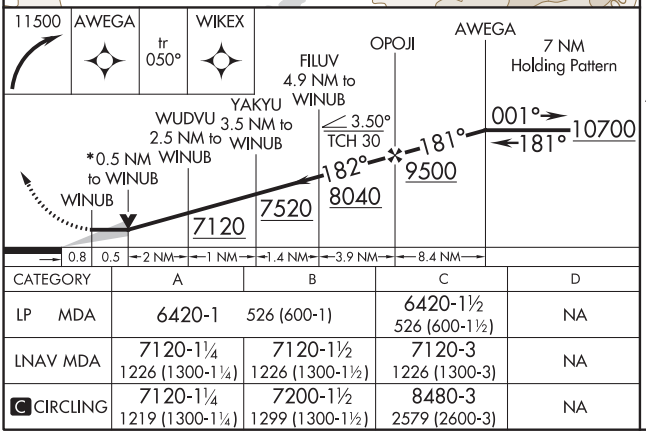

CATEGORY	A	B	C	D
LP MDA	6420-1 526 (600-1)		6420-1½ 526 (600-1½)	NA
LNAV MDA	7120-1¼ 1226 (1300-1¼)	7120-1½ 1226 (1300-1½)	7120-3 1226 (1300-3)	NA
C CIRCLING	7120-1¼ 1219 (1300-1¼)	7200-1½ 1299 (1300-1½)	8480-3 2579 (2600-3)	NA

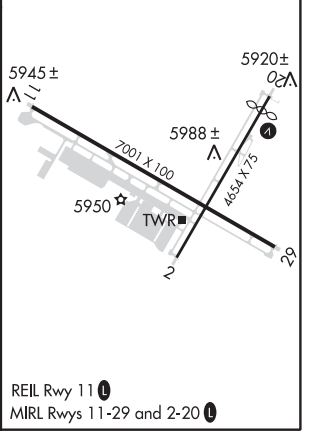

REIL Rwy 11 L
MIRL Rwys 11-29 and 2-20 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	N/A
058°	TDZE	N/A
	Apt Elev	5904

RNAV (GPS)-A
TRUCKEE-TAHOE (TRK)

RNP APCH.

Circling NA for Cat C south of Rwy 29 and east of Rwy 2. Procedure NA at night. When local altimeter setting not received, procedure NA. -13°C

MISSED APPROACH: (Do not exceed 200K until KEBTE) Climb to 7800 then climbing left turn to 12000 direct KEBTE and track 282° to LEKYI and hold, continue climb-in-hold 12000.

AWOS-3PT	OAKLAND CENTER	TRUCKEE TOWER ★	GND CON	UNICOM
118.0	127.95 316.1	120.575 (CTAF) L	118.3	122.95

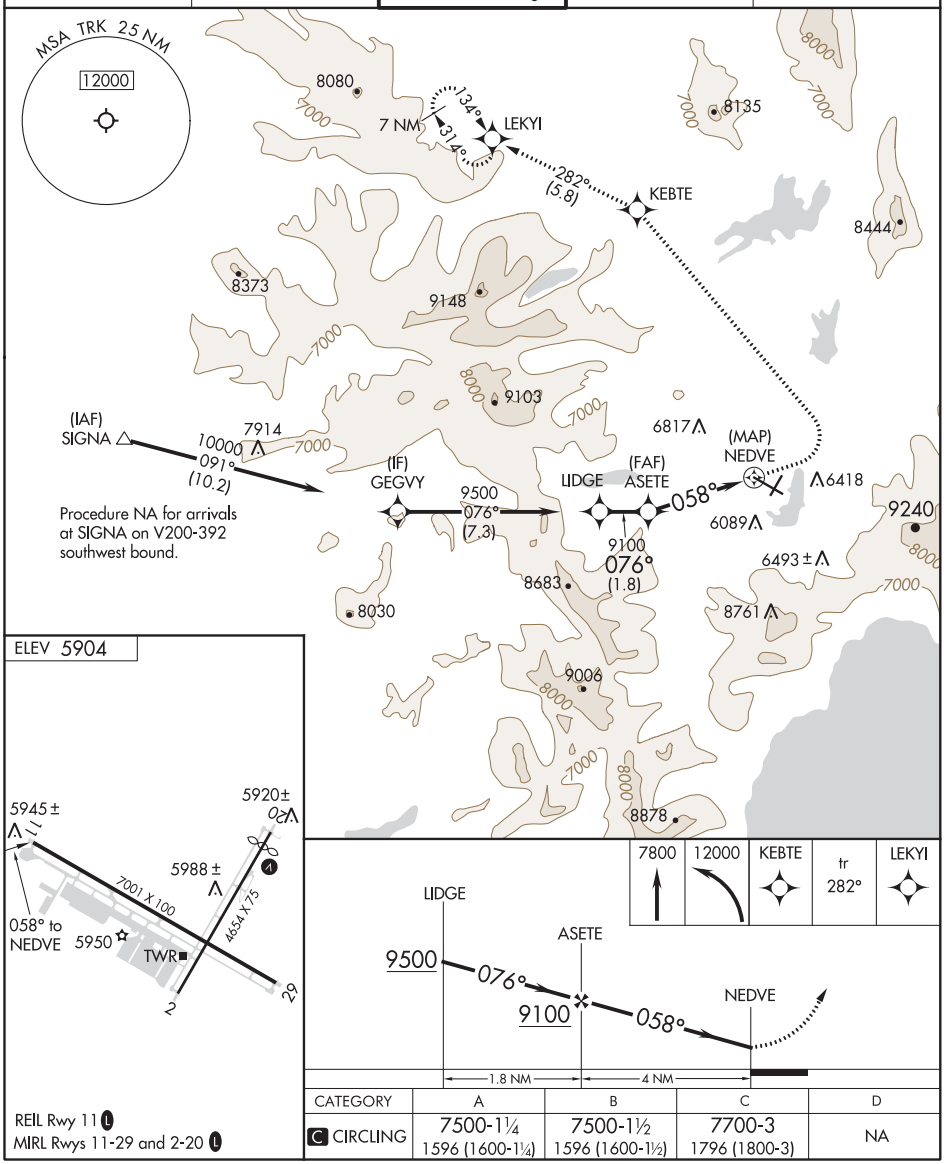

CATEGORY	A	B	C	D
C CIRCLING	7500-1¼ 1596 (1600-1¼)	7500-1½ 1596 (1600-1½)	7700-3 1796 (1800-3)	NA

REIL Rwy 11 L
MIRL Rwys 11-29 and 2-20 L

SW-2, 30 JAN 2020 to 26 MAR 2020

19003

AIRPORT DIAGRAM

AL-6021 (FAA)

TRUCKEE - TAHOE (TRK)

TRUCKEE, CALIFORNIA

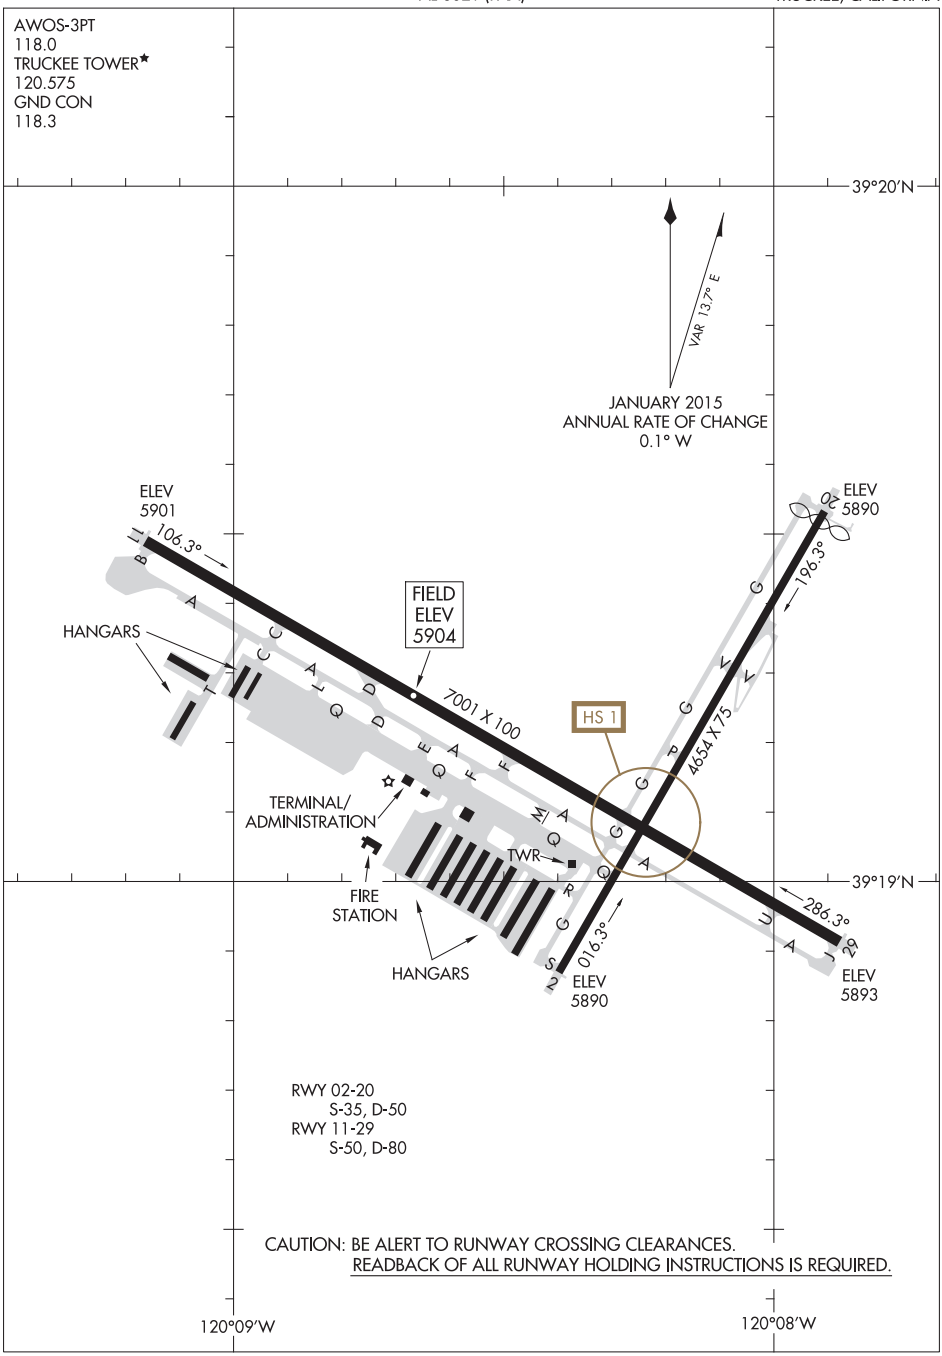

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM

19003

TRUCKEE, CALIFORNIA

TRUCKEE - TAHOE (TRK)

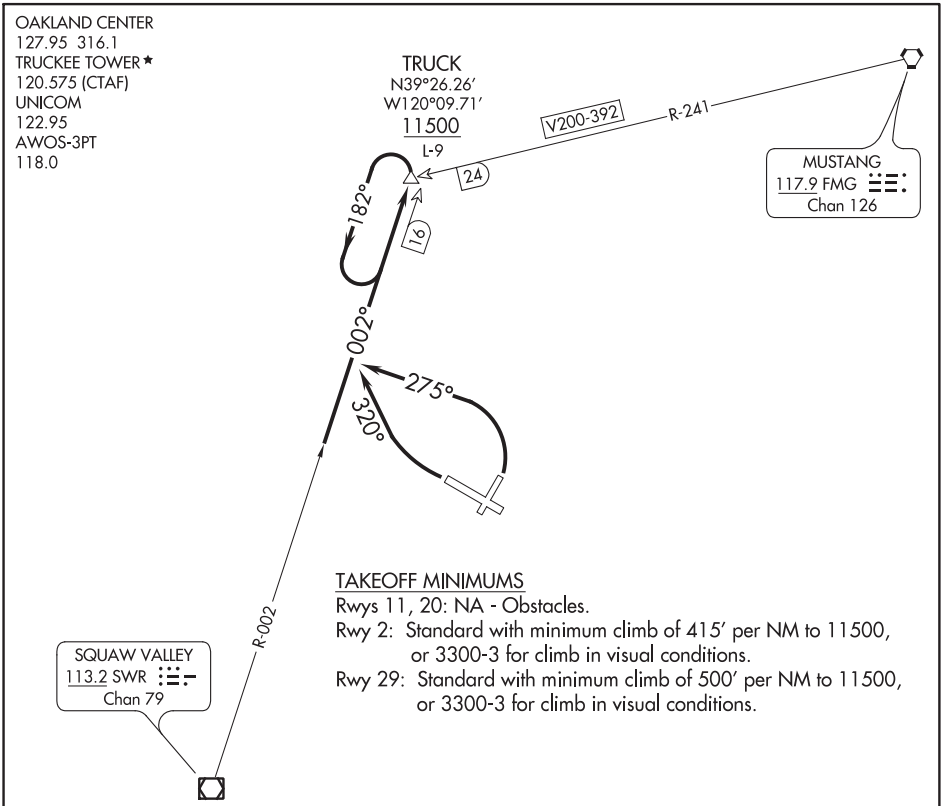

TAKEOFF MINIMUMS
Rwys 11, 20: NA - Obstacles.
Rwy 2: Standard with minimum climb of 415' per NM to 11500, or 3300-3 for climb in visual conditions.
Rwy 29: Standard with minimum climb of 500' per NM to 11500, or 3300-3 for climb in visual conditions.

TAKEOFF OBSTACLE NOTES
Rwy 2: Trees beginning 2' from DER, 288' left of centerline, up to 60' AGL/5939' MSL.
Trees beginning 420' from DER, 312' right of centerline, up to 60' AGL/5939' MSL.
Rwy 29: Trees beginning 679' from DER, 507' left of centerline, up to 60' AGL/5997' MSL.
Trees beginning 116' from DER, 412' right of centerline, up to 60' AGL/5971' MSL.

NOTE: Chart not to scale.

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climbing left turn to 11500 on heading 275° and SWR R-002 to TRUCK INT, thence. . . . , or for climb in visual conditions cross Truckee-Tahoe Airport heading 290° at or above 9100, then proceed on SWR R-002 to TRUCK INT. When executing VCOA, notify ATC prior to departure. Thence. . . .

TAKEOFF RUNWAY 29: Climbing right turn to 11500 on heading 320° and SWR R-002 to TRUCK INT, thence. . . . , or for climb in visual conditions cross Truckee-Tahoe Airport heading 290° at or above 9100, then proceed on SWR R-002 to TRUCK INT. When executing VCOA, notify ATC prior to departure. thence. . . .

. . . .continue climb in TRUCK INT holding pattern to cross TRUCK INT at or above 11500 before proceeding on course.

TAHOE ONE DEPARTURE (RNAV)

(TAHOE1.TAHOE) 04FEB16

(TAHOE1.TAHOE) 18032

TAHOE ONE DEPARTURE (RNAV)

AL-6021 (FAA)

TRUCKEE-TAHOE (TRK)

TRUCKEE, CALIFORNIA

TRUCKEE-TAHOE (TRK)

TRUCKEE, CALIFORNIA

OAKLAND CENTER
127.95 316.1
TRUCKEE TOWER★
120.575 (CTAF)
UNICOM
122.95
AWOS-3PT
118.0

TOP ALTITUDE: 13000

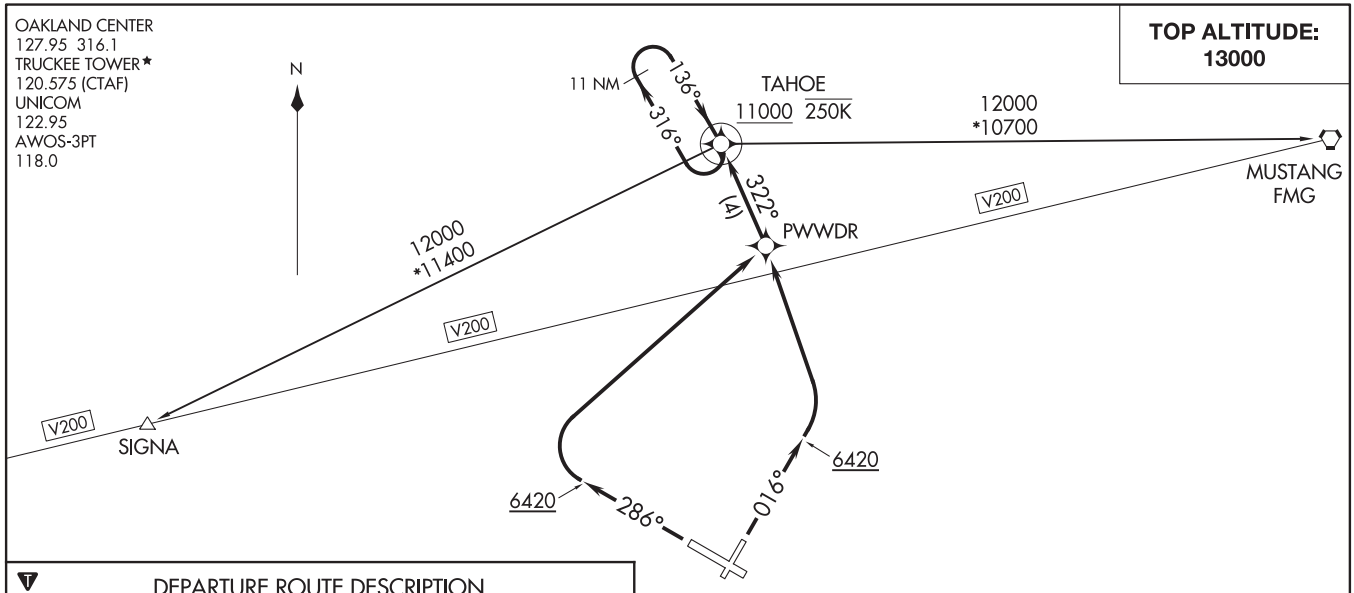

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb heading 016° to 6420, then climbing left turn direct PWWDR. Thence . . . .

TAKEOFF RUNWAY 29: Climb heading 286° to 6420, then climbing right turn direct PWWDR. Thence . . . .

. . . . on track 322° to TAHOE, cross TAHOE at or above 11000. Continue climb in hold to 12000 before proceeding on assigned transition.

MUSTANG TRANSITION (TAHOE1.FMG)

SIGNA TRANSITION (TAHOE1.SIGNA)

TAKEOFF MINIMUMS

Rwys 11, 20: NA - Obstacles.

Rwy 2: Standard with minimum climb of 500′ per NM to 6420 then minimum climb of 425′ per NM to 11000.

Rwy 29: Standard with minimum climb of 500′ per NM to 10200.

NOTE: GPS required.

NOTE: RNAV 1.

NOTE: Chart not to scale.

RNAV (GPS) RWY 13

MEFFORD FIELD (TLR)

APP CRS	Rwy Idg	3901
135°	TDZE	265
	Apt Elev	265

RNP APCH.

T ANA Circling Rwy 31 NA at night. Rwy 13 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Visalia altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climbing right turn to 3000 direct JIRTA and hold, Continue climb-in-hold to 3000.

AWOS-3PT	FRESNO APP CON	UNICOM
120.0	118.5 268.7	122.7 (CTAF) L

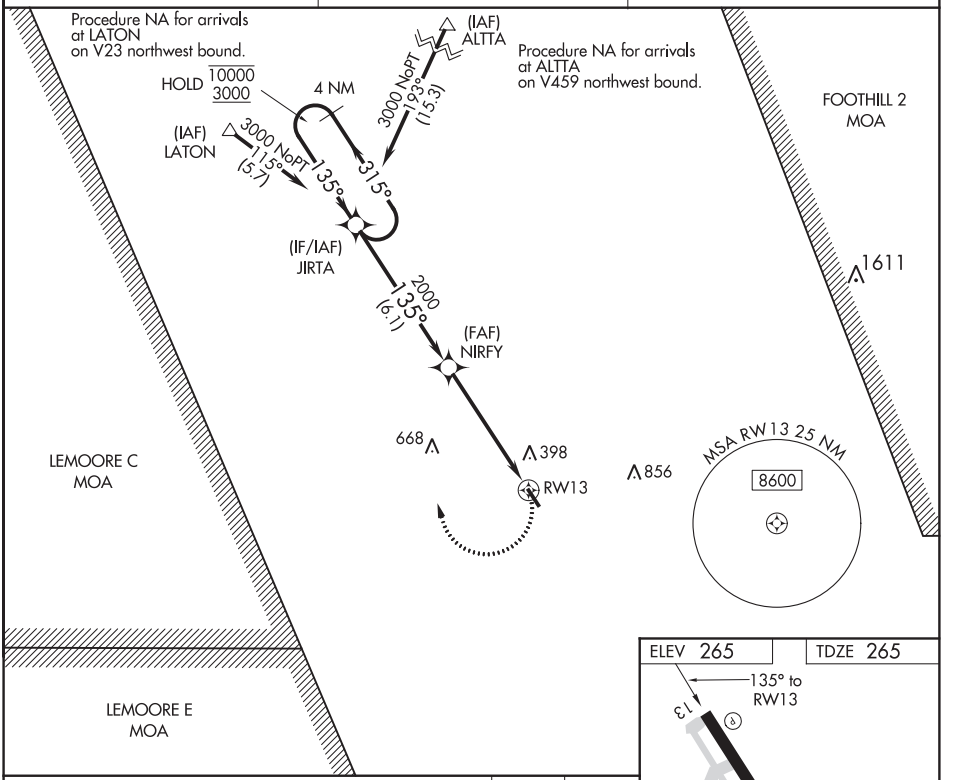

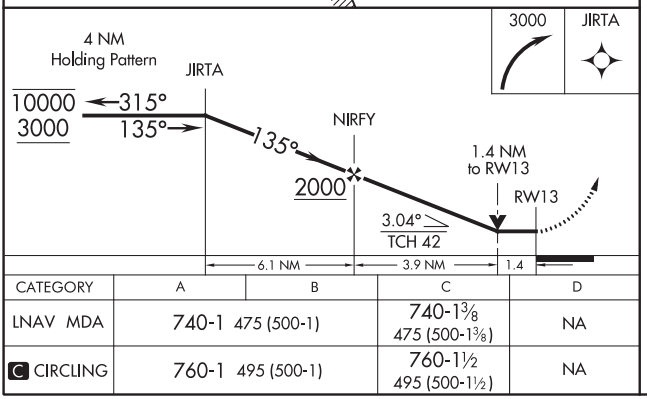

CATEGORY	A	B	C	D
LNAV MDA	740-1 475 (500-1)		740-1⅜ 475 (500-1⅜)	NA
C CIRCLING	760-1 495 (500-1)		760-1½ 495 (500-1½)	NA

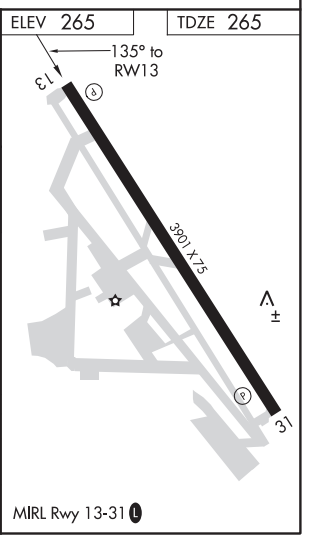

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

TULARE, CALIFORNIA | AL-9107 (FAA) | 19115

VOR/DME VIS	APP CRS	Rwy Idg	3901
109.4	133°	TDZE	265
Chan 31		Apt Elev	265

VOR RWY 13

MEFFORD FIELD (TLR)

DME required.

Circling Rwy 31 NA at night. Rwy 13 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Visalia altimeter setting and increase all MDA 40 feet and increase Cat C visibilities ⅛ SM. VDP NA with Visalia altimeter setting.

NA

MISSED APPROACH: Climbing right turn to 2000 direct VIS VOR/DME and hold.

AWOS-3PT	FRESNO APP CON	UNICOM
120.0	118.5 268.7	122.7 (CTAF) L

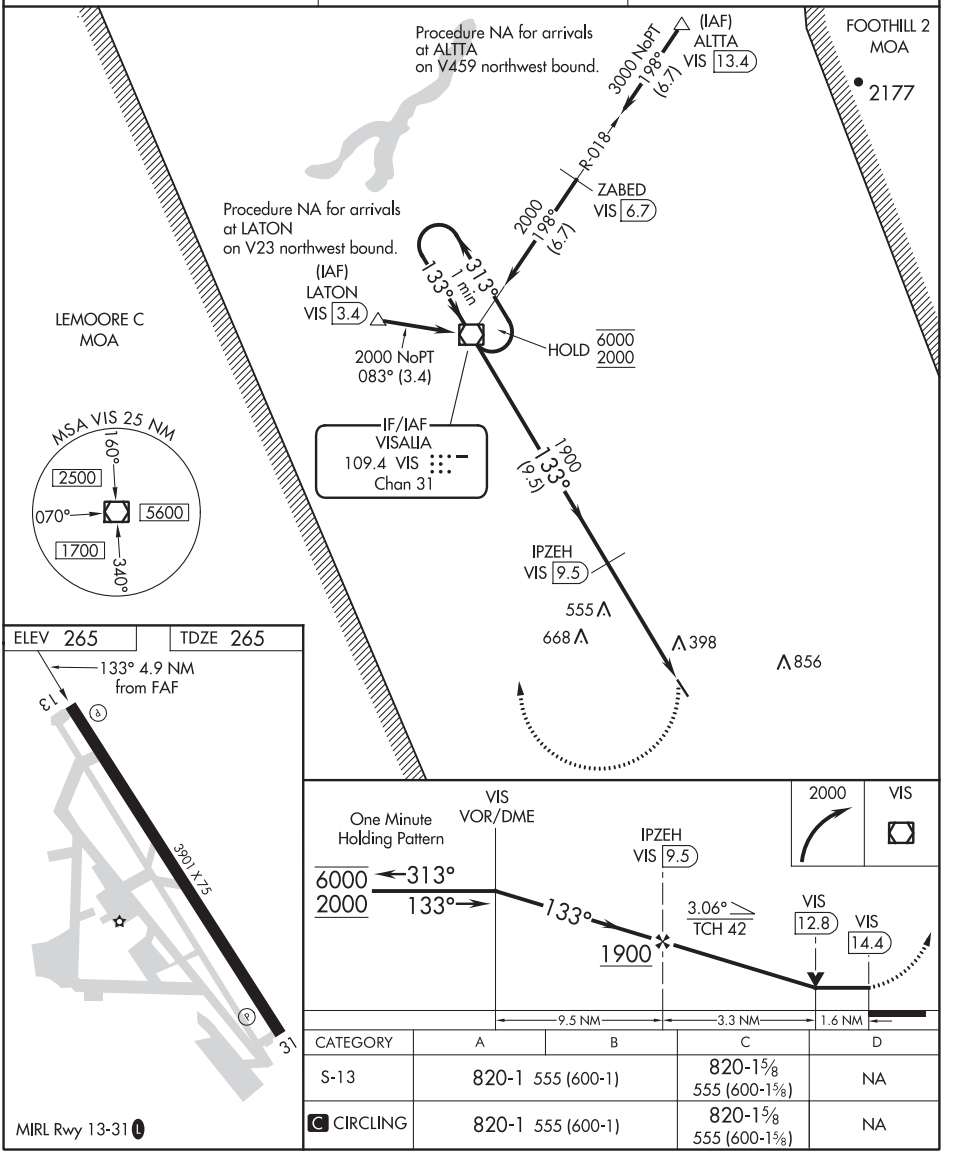

CATEGORY	A	B	C	D
S-13	820-1 555 (600-1)		820-1⅝ 555 (600-1⅝)	NA
C CIRCLING	820-1 555 (600-1)		820-1⅝ 555 (600-1⅝)	NA

TULARE, CALIFORNIA
Amdt 2A 25APR19

36°09′N-119°20′W

MEFFORD FIELD (TLR)
VOR RWY 13

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	N/A
331°	TDZE	N/A
	Apt Elev	614

RNAV (GPS)-B

UKIAH MUNI (UKI)

Circling NA west of Rwy 15-33. DME/DME RNP- 0.3 NA. When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 6700 direct AKGIC and via track 289° to MERRI and hold, continue climb-in-hold to 6700.

ASOS	OAKLAND CENTER	UNICOM
119.275	127.8 353.5	123.0 (CTAF)

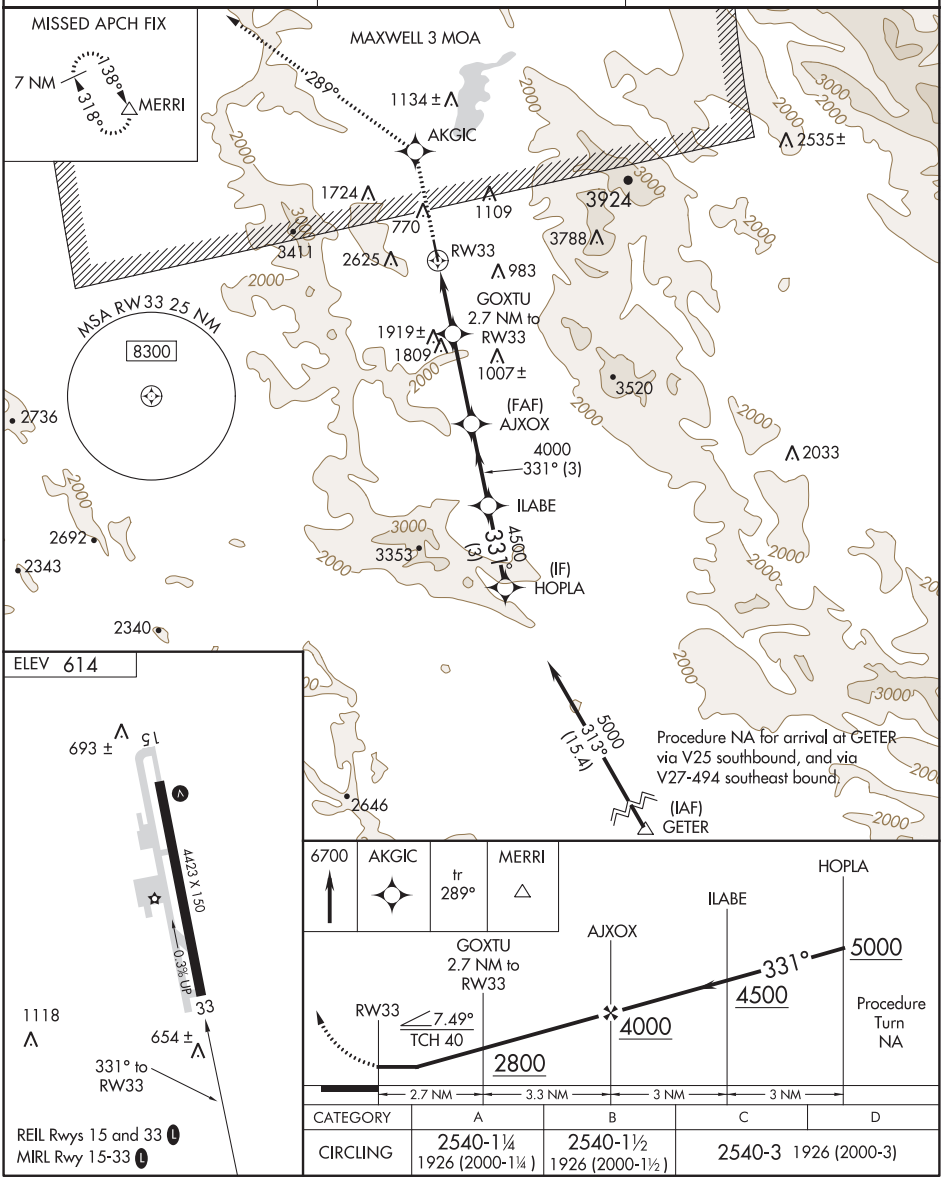

CATEGORY	A	B	C	D
CIRCLING	2540-1¼ 1926 (2000-1¼)	2540-1½ 1926 (2000-1½)	2540-3 1926 (2000-3)	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

UKIAH, CALIFORNIA | AL-698 (FAA) | 19115

LOC/DME I-UKI	APP CRS	Rwy Idg	4415
109.1	151°	TDZE	614
Chan 28		Apt Elev	614

LOC RWY 15

UKIAH MUNI (UKI)

T
A NA — Circling NA west of Rwy 15-33. When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climbing left turn to 4000 via heading 140°, then climbing right turn to 6000 direct ENI VORTAC.

ASOS	OAKLAND CENTER	UNICOM
119.275	127.8 353.5	123.0 (CTAF) L

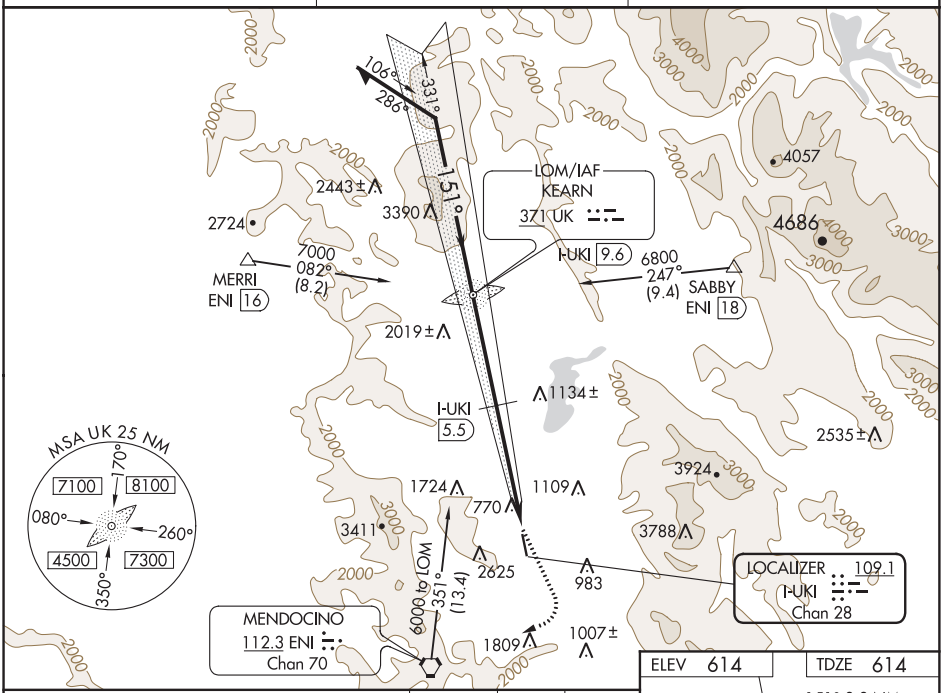

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

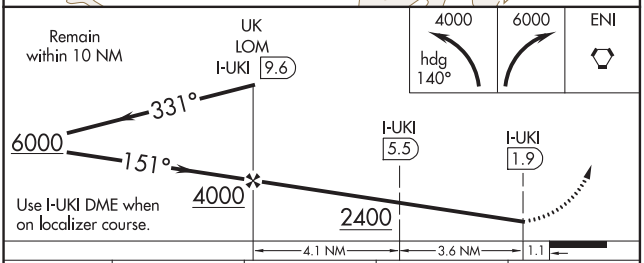

CATEGORY	A	B	C	D
S-15	2400-1¼ 1786 (1800-1¼)	2400-1½ 1786 (1800-1½)	2400-3 1786 (1800-3)	
CIRCLING	2400-1¼ 1786 (1800-1¼)	2400-1½ 1786 (1800-1½)	2400-3 1786 (1800-3)	
DME MINIMUMS				
S-15	1720-1¼ 1106 (1200-1¼)	1720-1½ 1106 (1200-1½)	1720-3 1106 (1200-3)	
CIRCLING	1720-1¼ 1106 (1200-1¼)	1720-1½ 1106 (1200-1½)	1720-3 1106 (1200-3)	

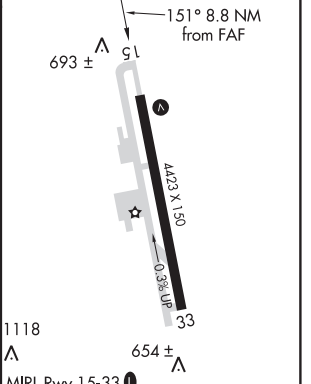

FAF to MAP 7.7 NM

Knots	60	90	120	150	180
Min:Sec	7:42	5:08	3:51	3:05	2:34

VORTAC ENI	APP CRS	Rwy Idg	N/A
112.3	022°	TDZE	N/A
Chan 70		Apt Elev	614

VOR-A

UKIAH MUNI (UKI)

Circling NA west of Rwy 15-33.
When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climbing left turn to 6000 direct ENI VORTAC and hold, continue climb-in-hold to 6000.

ASOS	OAKLAND CENTER	UNICOM
119.275	127.8 353.5	123.0 (CTAF) L

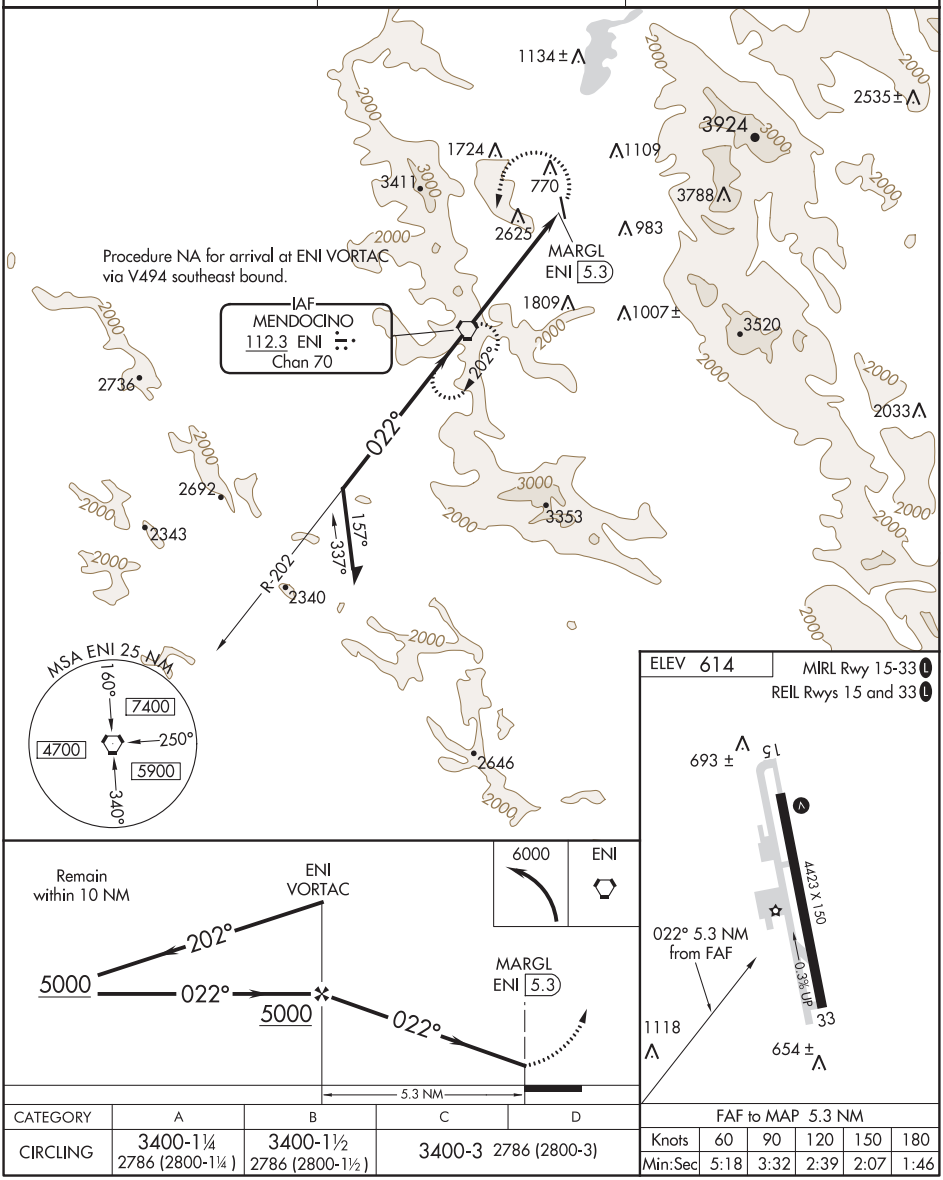

CATEGORY	A	B	C	D
CIRCLING	3400-1¼ 2786 (2800-1¼)	3400-1½ 2786 (2800-1½)	3400-3 2786 (2800-3)	

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(RONHU1.RONHU) 17341

RONHU ONE DEPARTURE (RNAV)

AL-698 (FAA)

UKIAH MUNI (UKI)
UKIAH, CALIFORNIA

OAKLAND CENTER
127.8 353.5
CTAF
123.0

TAKEOFF MINIMUMS

Rwy 33: MENSE TRANSITION, minimum climb of 500′ per NM to 1120′, then minimum climb of 316′ per NM to 8200.
LAPED TRANSITION, minimum climb of 500′ per NM to 1120′, then minimum climb of 316′ per NM to 6000.
FLUEN/MENDOCINO TRANSITION, minimum climb of 500′ per NM to 1120′, then minimum climb of 316′ per NM to 5800.

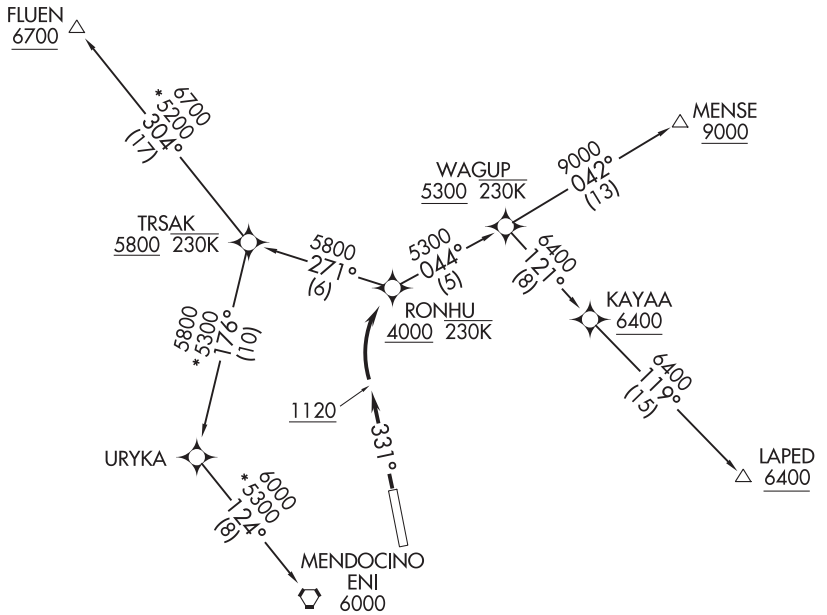

NOTE: Do not exceed 230K until passing WAGUP.
NOTE: Do not exceed 230K until passing TRSAK.
NOTE: GPS required.
NOTE: RNAV-1.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 33: Climb heading 331° to 1120, then right turn direct to cross RONHU at or above 4000, thence . . . .
. . . . on assigned transition, maintain assigned altitude, expect filed altitude/flight level ten minutes after departure.

FLUEN TRANSITION (RONHU1.FLUEN)
LAPED TRANSITION (RONHU1.LAPED)
MENDOCINO TRANSITION (RONHU1.ENI)
MENSE TRANSITION (RONHU1.MENSE)

SW-2, 30 JAN 2020 to 26 MAR 2020

RYPAX ONE DEPARTURE (RNAV)

AL-698 (FAA)

UKIAH, CALIFORNIA

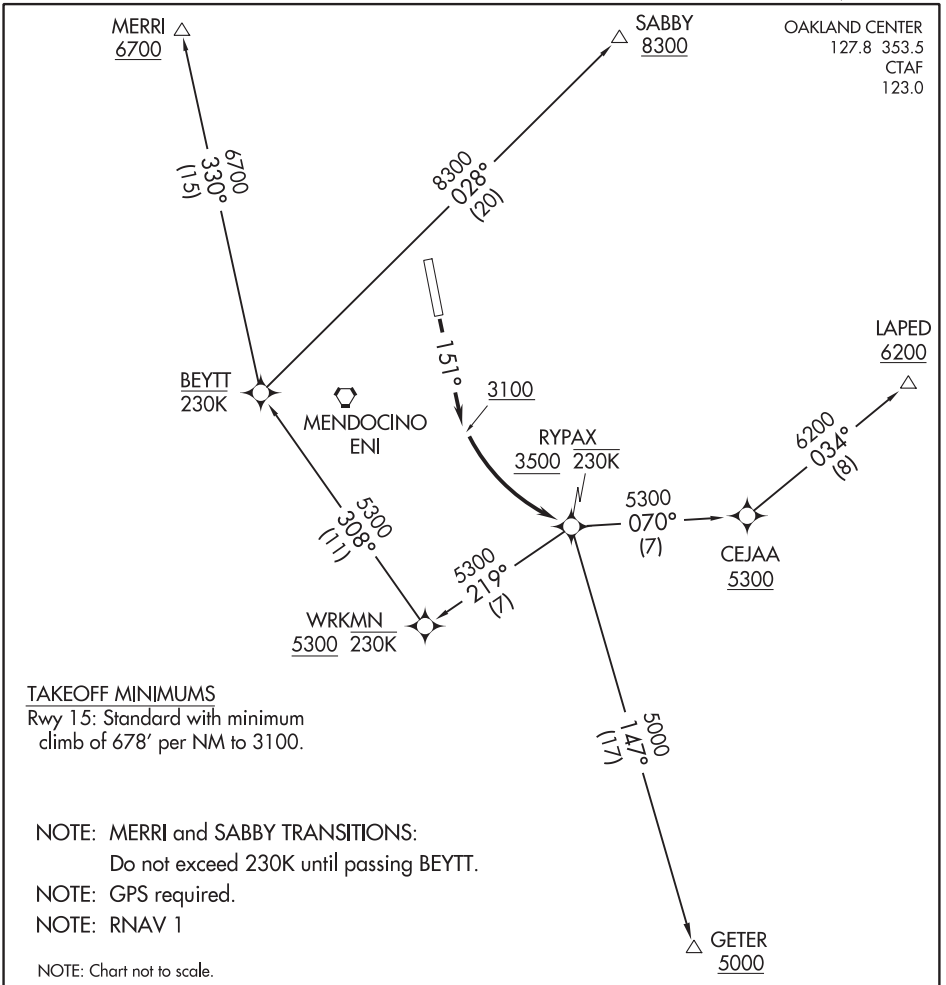

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 15: Climb heading 151° to 3100', then left turn direct to cross RYPAX at or above 3500', thence. . . .

. . . . on assigned transition, maintain assigned altitude, expect filed altitude/flight level ten minutes after departure.

GETER TRANSITION (RYPAX1.GETER)
LAPED TRANSITION (RYPAX1.LAPED)
MERRI TRANSITION (RYPAX1.MERRI)
SABBY TRANSITION (RYPAX1.SABBY)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VACAVILLE, CALIFORNIA | AL-6094 (FAA) | 19227

WAAS	APP CRS	Rwy Idg	4700
CH 53740	201°	TDZE	117
W20A		Apt Elev	117

RNAV (GPS) RWY 20

NUT TREE (VCB)

Circling Rwy 2 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA west of Rwy 2-20.

MISSED APPROACH: Climb to 520 then climbing left turn to 2100 direct IPENE and hold. # Missed approach requires minimum climb of 229 feet per NM to 1300.

ASOS	TRAVIS APP CON	(CTAF)
134.75	128.4 281.45	122.85 L

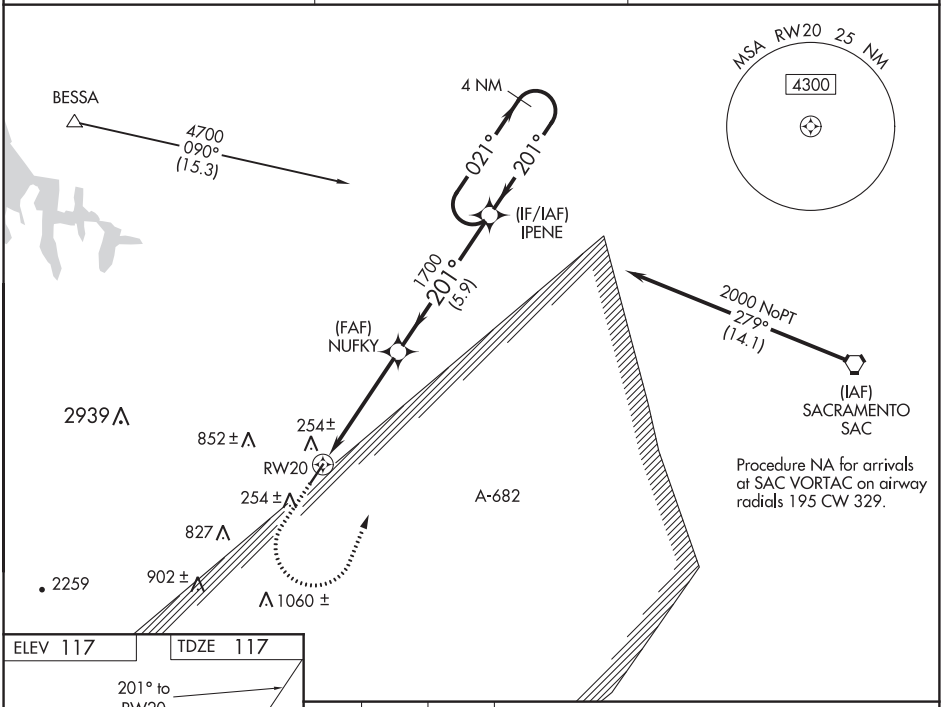

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

ELEV 117 | TDZE 117

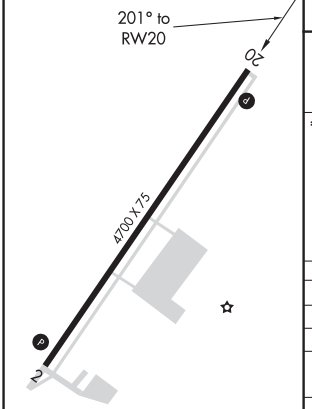

MIRL Rwy 2-20 L
REIL Rwys 2 and 20 L

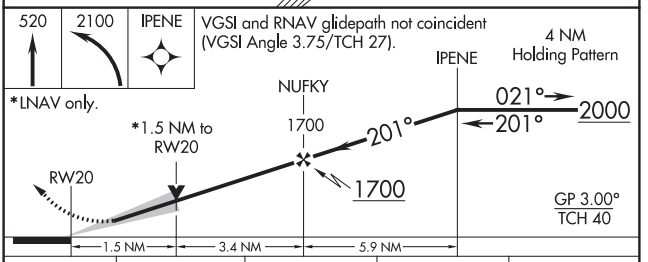

CATEGORY	A	B	C	D
LPV DA#		367-⅞	250 (300-⅞)	
LPV DA		384-⅞	267 (300-⅞)	
LNAV/VNAV DA		614-1¾	497 (500-1¾)	
LNAV MDA	720-1 603 (700- 1)		720-1¾ 603 (700-1¾)	
C CIRCLING	720-1 603 (700-1)		960-2½ 843 (900-2½)	1360-3 1243 (1300-3)

VACAVILLE, CALIFORNIA
Amdt 1A 01FEB18

38°23'N-121°58'W

NUT TREE (VCB)
RNAV (GPS) RWY 20

VORTAC SAC	APP CRS	Rwy Idg	N/A
115.2	241°	TDZE	N/A
Chan 99		Apt Elev	117

VOR-A
NUT TREE (VCB)

Rwy 2 helicopter visibility reduction below 1 SM NA.
DME required.
Circling Rwy 2 NA at night.
Circling NA west of Rwy 2-20.

MISSED APPROACH: Climbing right turn to 2200 on heading 100° and SAC R-241 to DOLCE/14 DME and hold.

ASOS	TRAVIS APP CON	(CTAF)
134.75	128.4 281.45	122.85 L

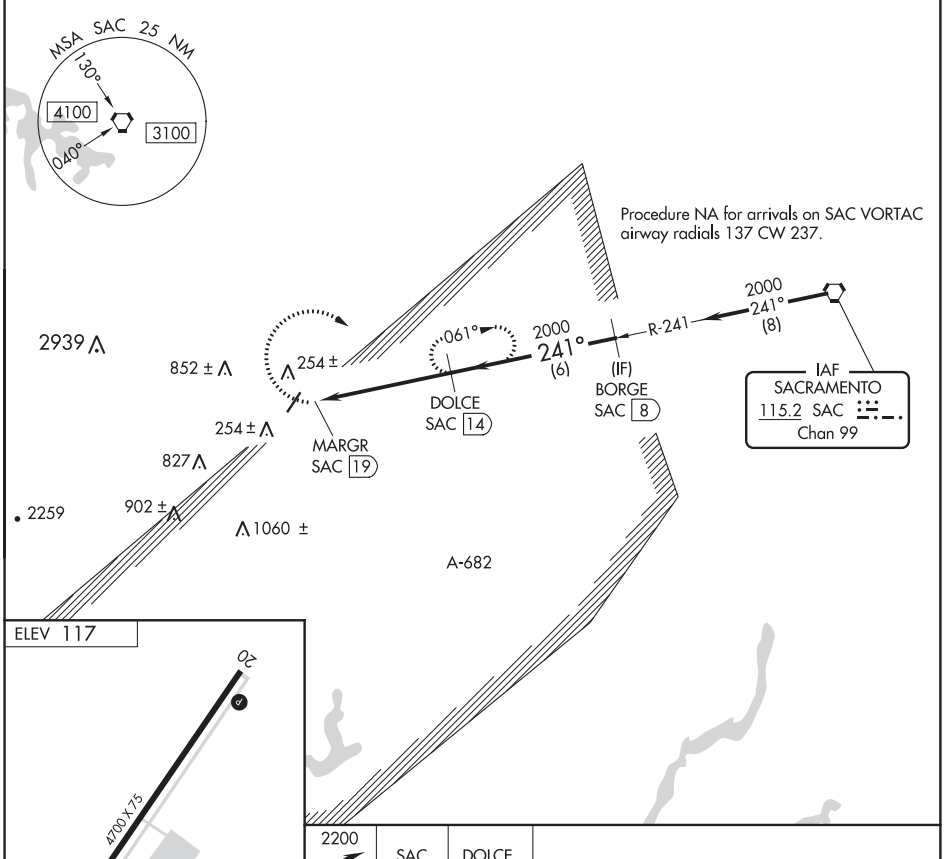

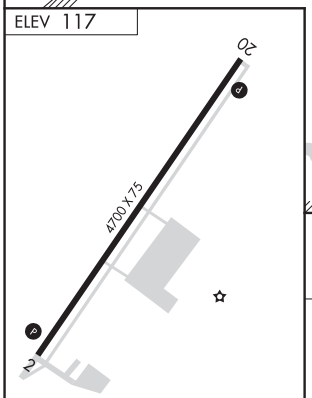

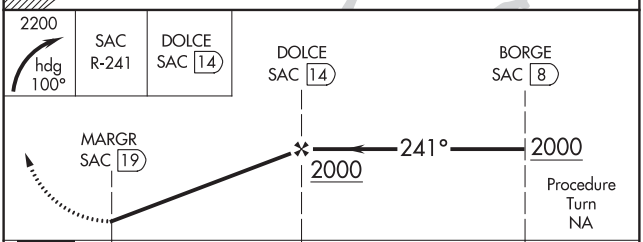

CATEGORY	A	B	C	D
C CIRCLING	920-1	803 (900-1)	960-2½ 843 (900-2½)	1360-3 1243 (1300-3)

MIRL Rwy 2-20 L
REIL Rwys 2 and 20 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(SOKOY3.SOKOY) 17229
SOKOY THREE DEPARTURE

AL-6094 (FAA)

NUT TREE (VCB)
VACAVILLE, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

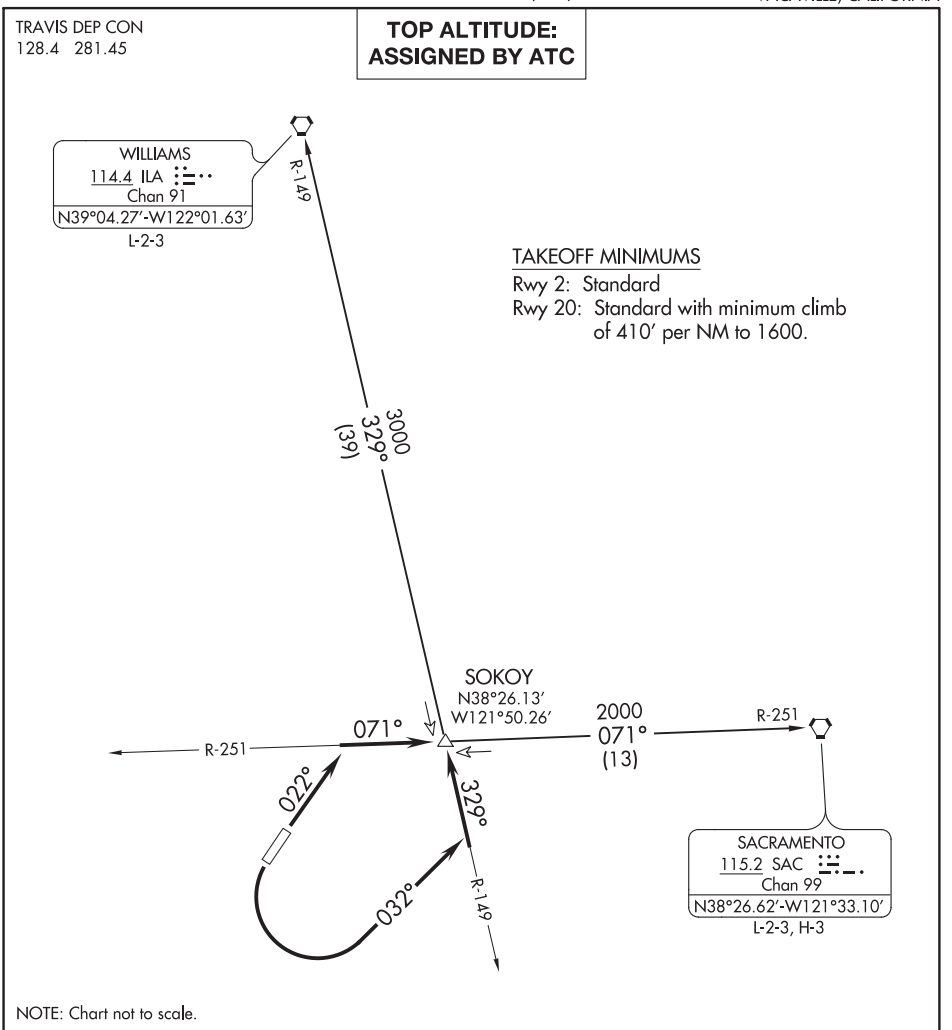

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb via heading 022°, intercept SAC R-251 to SOKOY/ SAC 13 DME.

TAKEOFF RUNWAY 20: Turn left heading 032°, intercept ILA R-149 to SOKOY/ ILA 39 DME.

SACRAMENTO TRANSITION (SOKOY3.SAC): From over SOKOY on SAC R-251 to SAC VORTAC.

WILLIAMS TRANSITION (SOKOY3.ILA): From over SOKOY on ILA R-149 to ILA VORTAC.

LOC I-VIS	APP CRS	Rwy Idg	5635
108.5	301°	TDZE	295
		Apt Elev	295

ILS or LOC RWY 30
VISALIA MUNI (VIS)

DME required.

T A DME from VIS VOR/DME.
Simultaneous reception of I-VIS and VIS DME required.
For inop ALS, increase S-LOC 30 Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct VIS VOR/DME and hold, continue climb-in-hold to 3000.

AWOS-3PT	FRESNO APP CON	CLNC DEL	UNICOM
119.925	118.5	118.5	123.05 (CTAF) L

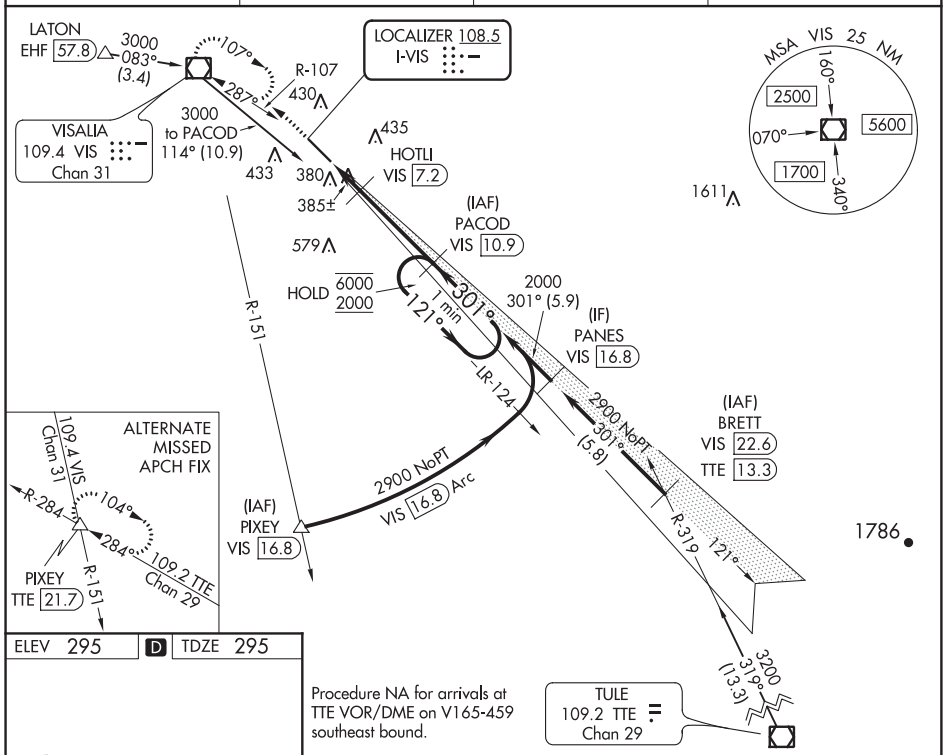

ELEV 295 D TDZE 295



REIL Rwy 12 L
HIRL Rwy 12-30 L

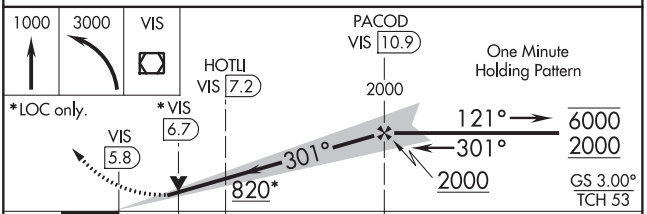

CATEGORY	A	B	C	D
S-ILS 30	502-½ 207 (300-½)			
S-LOC 30	640-½ 345 (400-½)		640-⅝ 345 (400-⅝)	
C CIRCLING	720-1 425 (500-1)	760-1 465 (500-1)	760-1½ 465 (500-1½)	940-2 645 (700-2)

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VISALIA, CALIFORNIA | AL-558 (FAA) | 19227

RNAV (GPS) RWY 12
VISALIA MUNI (VIS)

WAAS	APP CRS	Rwy Idg	5635
CH 82423	121°	TDZE	293
W12A		Apt Elev	295

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 2900 direct PANES and hold.

AWOS-3PT	FRESNO APP CON	CLNC DEL	UNICOM
119.925	118.5	118.5	123.05 (CTAF) L

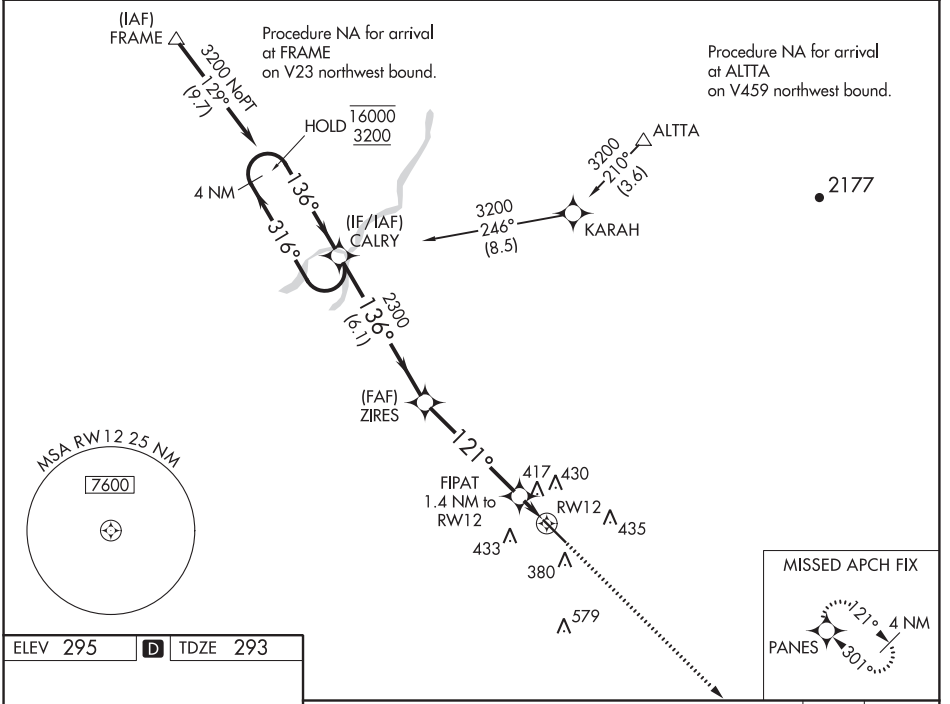

ELEV 295 | D | TDZE 293



REIL Rwy 12 L
HIRL Rwy 12-30 L

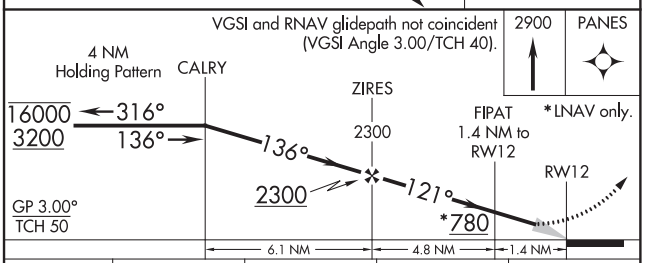

CATEGORY	A	B	C	D
LPV DA	543-¾ 250 (300-¾)			
LNAV/VNAV DA	697-1⅛ 404 (500-1⅛)			
LNAV MDA	680-1 387 (400-1)		680-1⅛ 387 (400-1⅛)	
C CIRCLING	720-1 425 (500-1)	760-1 465 (500-1)	760-1½ 465 (500-1½)	940-2 645 (700-2)

WAAS CH 77623 W30A	APP CRS 301°	Rwy Idg 5635 / TDZE 295 / Apt Elev 295

RNAV (GPS) RWY 30
VISALIA MUNI (VIS)

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, LNAV Cats C/D to 1 SM.

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct INOCI and on track 267° to LATON and hold, continue climb-in-hold to 3000.

AWOS-3PT	FRESNO APP CON	CLNC DEL	UNICOM
119.925	118.5	118.5	123.05 (CTAF) L

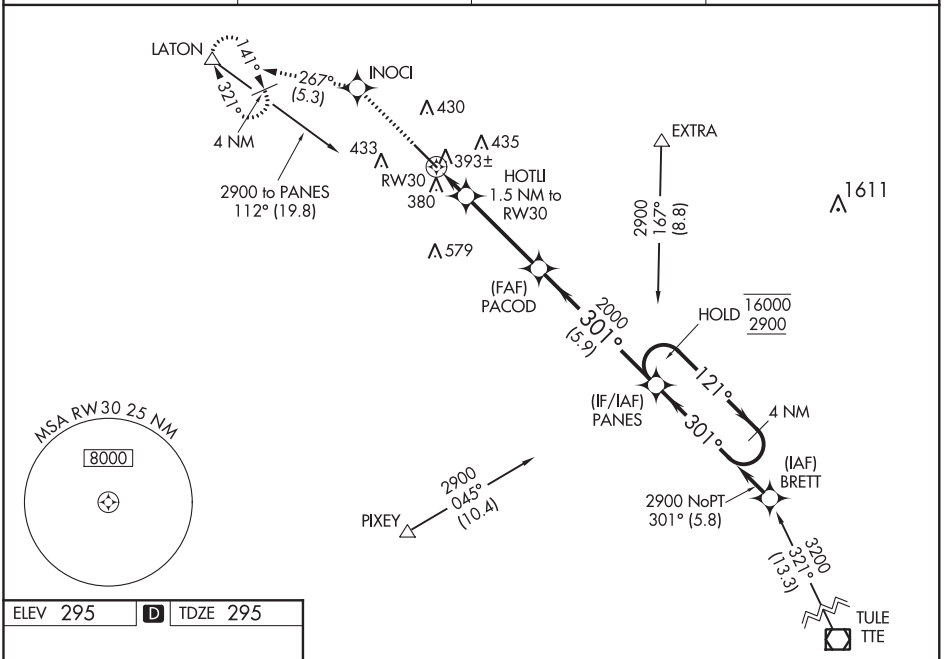



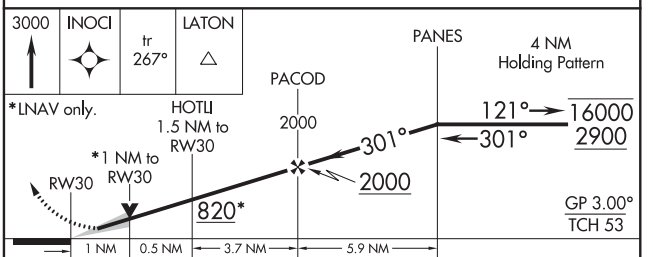

CATEGORY	A	B	C	D
LPV DA	502-½ 207 (300-½)			
LNAV/VNAV DA	554-½ 259 (300-½)			
LNAV MDA	660-½ 365 (400-½)		660-⅝ 365 (400-⅝)	
C CIRCLING	720-1 425 (500-1)	760-1 465 (500-1)	760-1½ 465 (500-1½)	940-2 645 (700-2)

REIL Rwy 12 L
HIRL Rwy 12-30 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

VISALIA, CALIFORNIA | AL-558 (FAA) | 19227

VOR/DME VIS	APP CRS	Rwy Idg	5635
109.4	107°	TDZE	293
Chan 31		Apt Elev	295

VOR RWY 12

VISALIA MUNI (VIS)

T A Rwy 12 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing right turn to 1900 direct VIS VOR/DME and hold.

AWOS-3PT	FRESNO APP CON	CLNC DEL	UNICOM
119.925	118.5	118.5	123.05 (CTAF) L

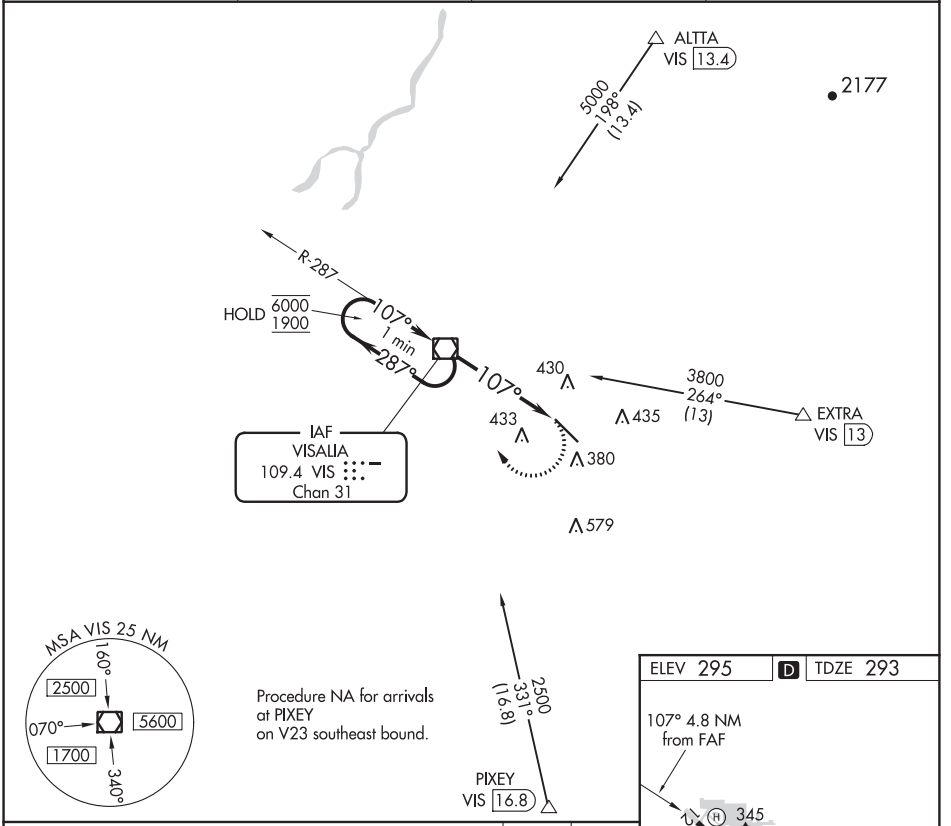

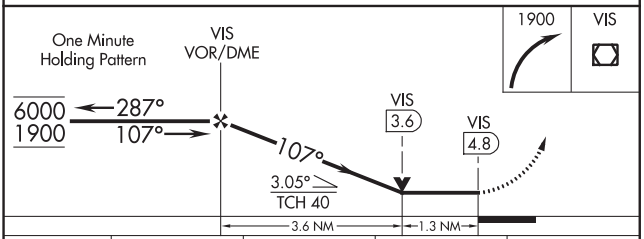

CATEGORY	A	B	C	D
S-12	740-1 447 (500-1)		740-1⅜ 447 (500-1⅜)	
C CIRCLING	740-1 445 (500-1)	760-1 465 (500-1)	760-1½ 465 (500-1½)	940-2 645 (700-2)

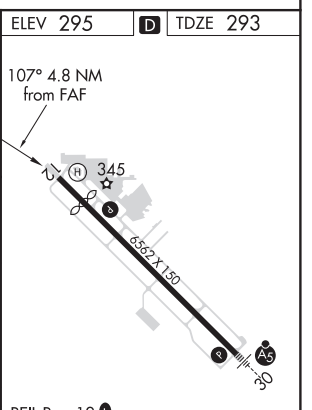

REIL Rwy 12 L
HIRL Rwy 12-30 L

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

VISALIA, CALIFORNIA
Amdt 7 15AUG19

36°19′N-119°24′W

VISALIA MUNI (VIS)
VOR RWY 12

SW-2, 30 JAN 2020 to 26 MAR 2020

WAAS	APP CRS	Rwy Idg	4501
CH 50144	018°	TDZE	152
W02A		Apt Elev	163

RNAV (GPS) RWY 2
WATSONVILLE MUNI (WVI)

RNP APCH.

Circling Rwy 27 NA at night. Rwy 2 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C . Circling NA west of Rwy 2-20.

MISSED APPROACH: (Do not exceed 185K until SHOEY) Climb to 700 then climbing left turn to 6000 direct SHOEY and hold, continue climb-in-hold to 6000.

ASOS	NORCAL APP CON	UNICOM
132.275	127.15 307.125	122.8 (CTAF) L

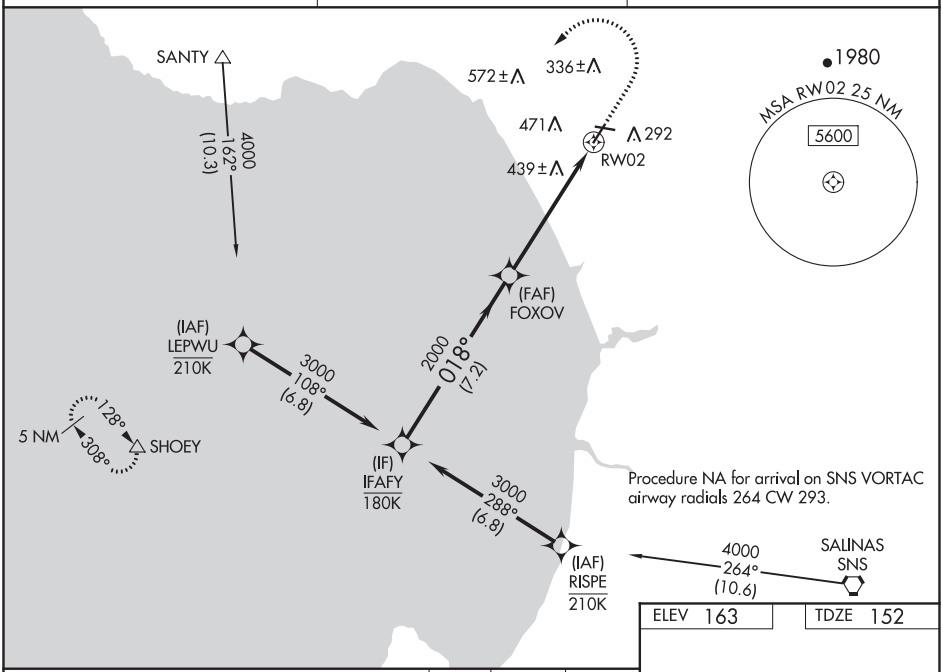

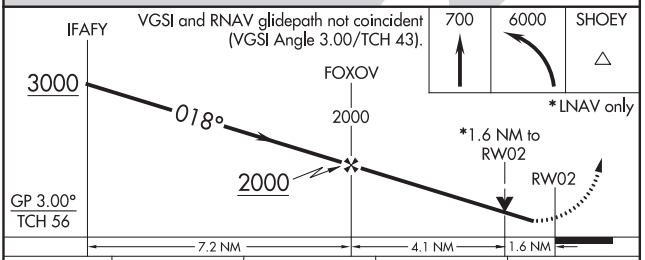

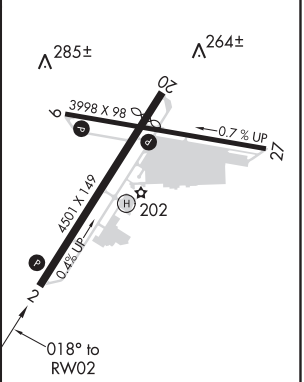

CATEGORY	A	B	C	D
LPV DA	448-⅞ 296 (300-⅞)			
LNAV/VNAV DA	772-1¾ 620 (700-1¾)			
LNAV MDA	700-1 548 (600-1)		700-1⅝ 548 (600-1⅝)	
C CIRCLING	700-1 537 (600-1)		700-1⅝ 537 (600-1⅝)	1100-3 937 (1000-3)

REIL Rwy 2 L
MIRL Rwy 2-20 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WATSONVILLE, CALIFORNIA | AL-805 (FAA) | 20030

LOC I-AYN	APP CRS	Rwy Idg	4501
108.3	018°	TDZE	152
		Apt Elev	163

LOC RWY 2

WATSONVILLE MUNI (WVI)

T ANA Circling Rwy 27 NA at night. When local altimeter setting not received, use Monterey altimeter setting and increase all MDAs 80 feet and visibility Cat C 1⅛ SM and S-2 Cat D 1⅛ SM. Circling NA west of Rwy 2-20. Rwy 2 helicopter visibility below ¾ SM NA.

MISSED APPROACH: Climbing right turn to 5000 direct SNS VORTAC and hold, continue climb-in-hold to 5000.

ASOS	NORCAL APP CON	UNICOM
132.275	127.15 307.125	122.8 (CTAF) L

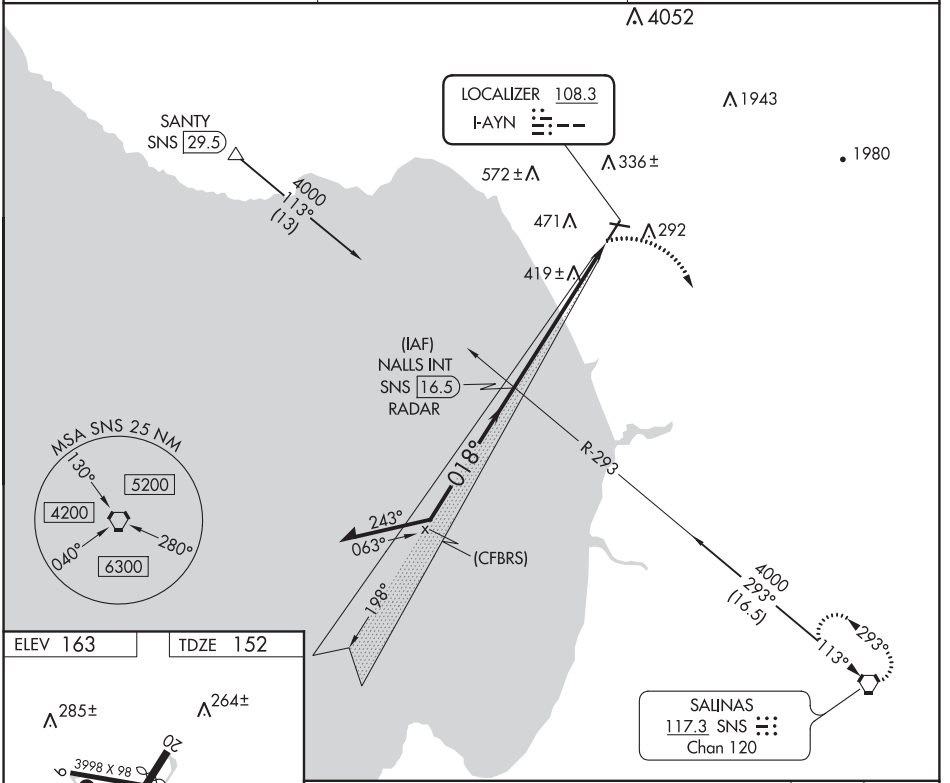

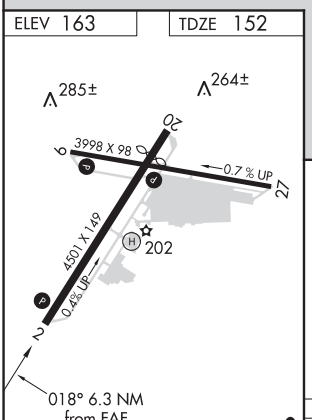

REIL Rwy 2 L
MIRL Rwy 2-20 L

FAF to MAP 6.3 NM					
Knots	60	90	120	150	180
Min:Sec	6:18	4:12	3:09	2:31	2:06

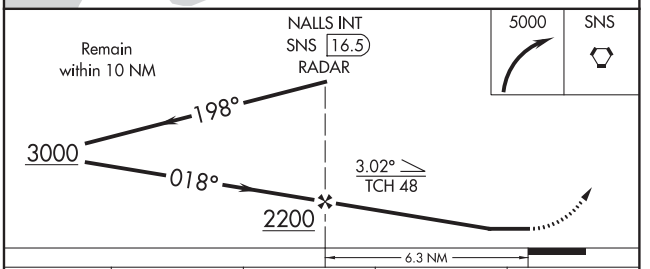

CATEGORY	A	B	C	D
S-2	700-1 548 (600-1)		700-1⅝ 548 (600-1⅝)	
CIRCLING	700-1 537 (600-1)		700-1⅝ 537 (600-1⅝)	720-2 557 (600-2)

WATSONVILLE, CALIFORNIA
Amdt 4C 30JAN20

36°56′N-121°47′W

WATSONVILLE MUNI (WVI)
LOC RWY 2

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

VORTAC SNS	APP CRS	Rwy Idg	N/A
117.3	314°	TDZE	N/A
Chan 120		Apt Elev	163

VOR-A

WATSONVILLE MUNI (WVI)

Circling NA west of Rwy 2-20. When local altimeter setting not received, use Monterey altimeter setting and increase all MDAs 80 feet. DME required. Circling Rwy 27 NA at night.

MISSED APPROACH: Climbing left turn to 5000 direct SNS VORTAC and hold, continue climb-in-hold to 5000.

ASOS	NORCAL APP CON	UNICOM
132.275	127.15 307.125	122.8 (CTAF) L

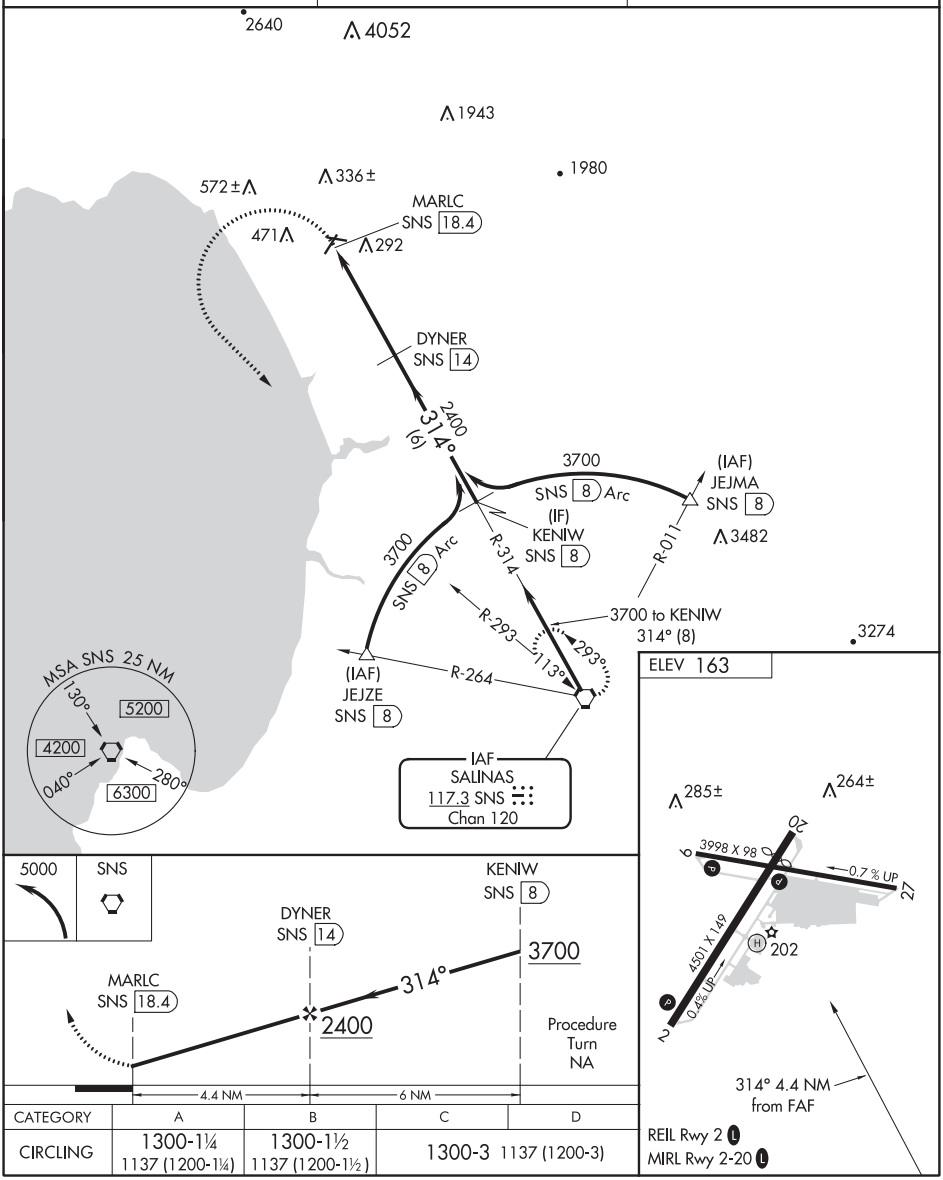

CATEGORY	A	B	C	D
CIRCLING	1300-1¼ 1137 (1200-1¼)	1300-1½ 1137 (1200-1½)	1300-3 1137 (1200-3)	

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

15064

AIRPORT DIAGRAM

WATSONVILLE MUNI (WVI)

WATSONVILLE, CALIFORNIA

AL-805 (FAA)

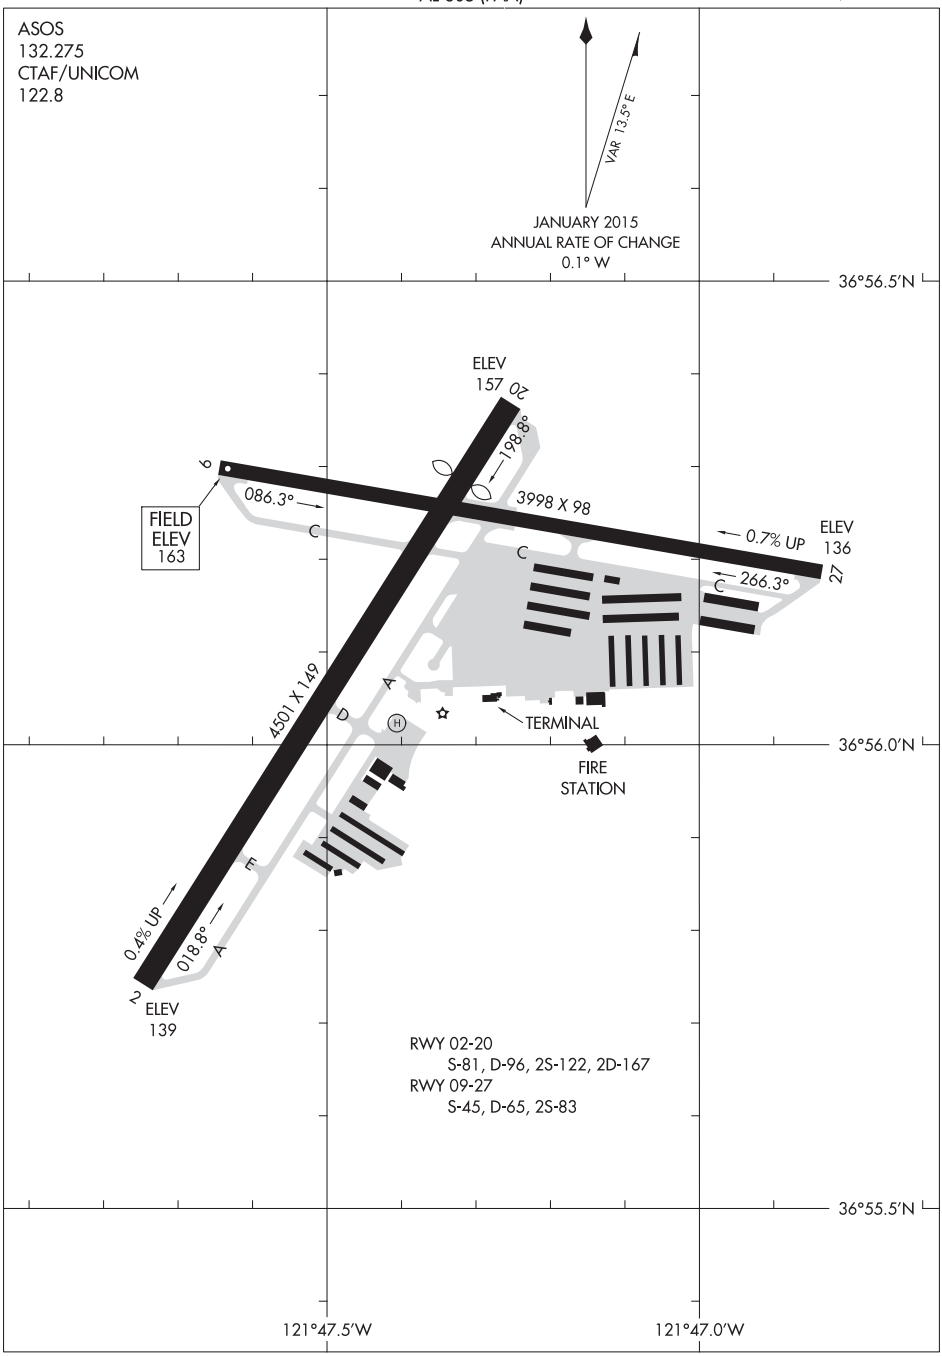

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

AIRPORT DIAGRAM

WATSONVILLE, CALIFORNIA

WATSONVILLE MUNI (WVI)

15064

WATSONVILLE FOUR DEPARTURE (OBSTACLE)

ASOS
132.275
NORCAL DEP CON
127.15 307.125
CTAF
122.8

NOTE: Chart not to scale.

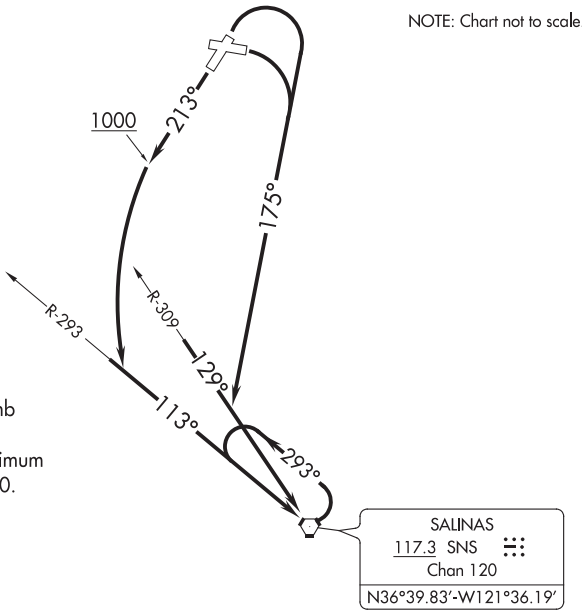

TAKEOFF MINIMUMS

Rwy 27: NA - Airport Obstacles.
Rwy 20: Standard.
Rwy 2: Standard with minimum climb of 500' per NM to 2600.
Rwy 9: 300-1 or standard with minimum climb of 270' per NM to 400.

TAKEOFF OBSTACLE NOTES

Rwy 2: Lighting 8' from DER, 84' left of centerline, 1' AGL/159' MSL. Lighting 9' from DER, 84' right of centerline, 158' MSL. Pole 14' from DER, 349' left of centerline, 205' MSL. Pole, building, vehicles on road, tree and fence beginning 15' from DER, 322' left of centerline, up to 50' AGL/213' MSL. Trees beginning 278' from DER, 414' right of centerline, up to 188' MSL. Pole, vehicles on road, stack, tree and building beginning 429' from DER, 157' left of centerline, up to 58' AGL/220' MSL. Pole, building and tree beginning 808' from DER, 22' right of centerline, up to 40' AGL/198' MSL. Tree and transmission line beginning 1021' from DER, 137' right of centerline, up to 222' MSL. Pole 1174' from DER, 328' right of centerline, 57' AGL/224' MSL. Trees beginning 1275' from DER, 298' right of centerline, up to 242' MSL. Tree 1345' from DER, 320' left of centerline, 236' MSL. Tree 2249' from DER, 371' left of centerline, 264' MSL.

Rwy 9: Tree and pole beginning 1' from DER, 152' left of centerline, up to 157' MSL. Pole 65' from DER, 301' right of centerline, 31' AGL/148' MSL. Tree, fence, building, vehicles on road and pole beginning 74' from DER, 251' left of centerline, up to 160' MSL. Pole, tree, building, tank and stack beginning 210' from DER, 139' left of centerline, up to 177' MSL. Pole 231' from DER, 250' right of centerline, 32' AGL/153' MSL. Trees beginning 312' from DER, 560' right of centerline, up to 173' MSL. Tower, pole and tree beginning 828' from DER, 136' left of centerline, up to 52' AGL/181' MSL. Trees beginning 915' from DER, 146' right of centerline, up to 197' MSL. Tree 1815' from DER, 365' left of centerline, 215' MSL. Tower 4697' from DER, 1365' right of centerline, 189' AGL/292' MSL.

Rwy 20: Tree 57' from DER, 500' left of centerline, 153' MSL. Fence 57' from DER, 268' right of centerline, 7' AGL/143' MSL. Pole 95' from DER, 467' left of centerline, 175' MSL. Pole, vehicles on road and tree beginning 96' from DER, 377' left of centerline, up to 50' AGL/183' MSL. Transmission line 848' from DER, 505' left of centerline, 44' AGL/184' MSL. Tree and transmission line beginning 919' from DER, 520' left of centerline, up to 190' MSL. Tree 1153' from DER, 286' right of centerline, 169' MSL. Tree 1207' from DER, 615' left of centerline, 197' MSL. Tree, building and transmission line beginning 1267' from DER, 318' left of centerline, up to 203' MSL. Tree 1336' from DER, 7' right of centerline, 177' MSL. Tree 1337' from DER, 46' right of centerline, 192' MSL. Tree 2201' from DER, 776' right of centerline, 240' MSL.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 2 and 9: Climbing right turn on heading 175° to intercept SNS VORTAC R-309 to SNS VORTAC, thence . . . .

TAKEOFF RUNWAY 20: Climb heading 213° to 1000, then climbing left turn to intercept SNS VORTAC R-293 to SNS VORTAC, thence . . . .

. . . . continue climb in SNS holding pattern to cross SNS VORTAC at or above MEA/MCA for route of flight.

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(GARLK1.GARLK) 18256

GARLK ONE DEPARTURE (RNAV)

AL-805 (FAA)

WATSONVILLE MUNI (WVI)
WATSONVILLE, CALIFORNIA

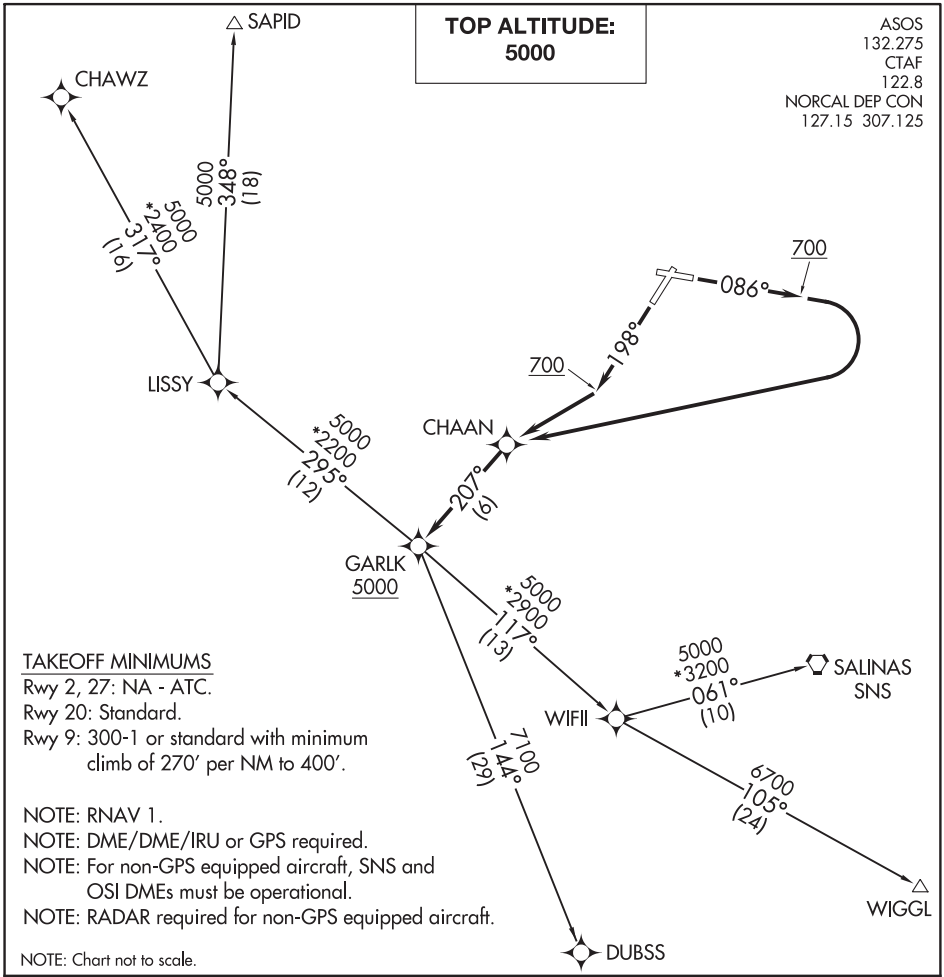

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9: Climb heading 086° to 700, then right turn direct CHAAN, thence. . . .

TAKEOFF RUNWAY 20: Climb heading 198° to 700, then direct CHAAN, thence. . . .

. . . . on track 207° to cross GARLK at or above 5000, then on (transition).

CHAWZ TRANSITION (GARLK1.CHAWZ)
DUBSS TRANSITION (GARLK1.DUBSS)
SALINAS TRANSITION (GARLK1.SNS)
SAPID TRANSITION (GARLK1.SAPID)
WIGGL TRANSITION (GARLK1.WIGGL)

RNAV (GPS) RWY 14

WEED (O46)

APP CRS	Rwy Idg	5000
150°	TDZE	2934
	Apt Elev	2943

T NA Circling NA southwest of Rwy 14-32. DME/DME RNP-0.3 NA. Use Siskiyou County altimeter setting.

MISSED APPROACH: (Do not exceed 185K until GRENA) Climbing left turn 9100 direct GRENA then right turn on track 001° to ISAVE then left turn on track 307° direct KLAMA and hold. *Missed approach requires a minimum climb of 325 feet per NM to 4000.

SYI ASOS	SEATTLE CENTER	UNICOM
121.125	124.85 306.3	122.7 (CTAF) L

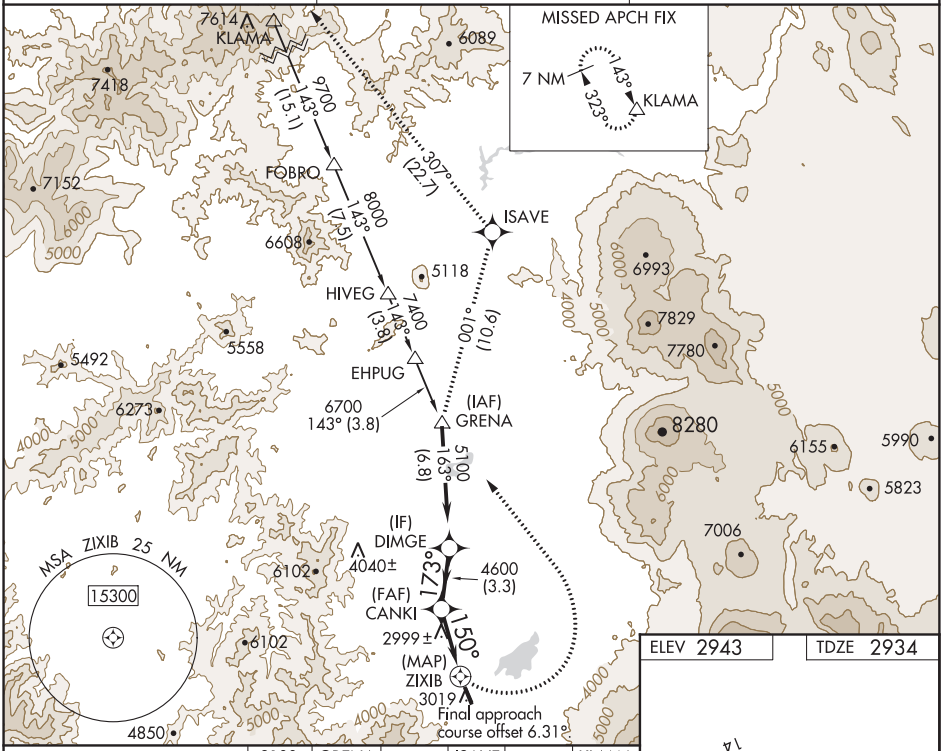

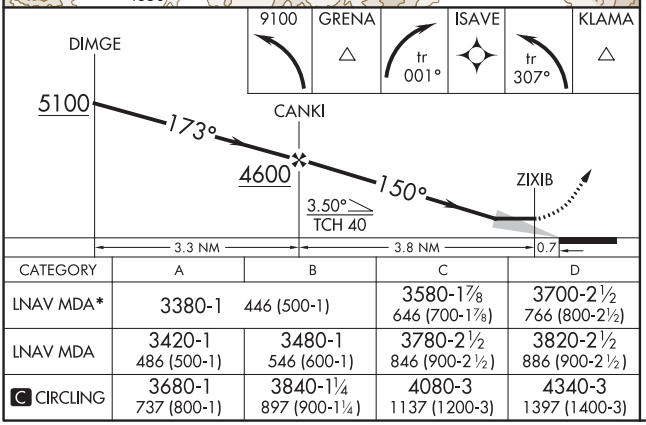

CATEGORY	A	B	C	D
LNAV MDA*	3380-1	446 (500-1)	3580-1⅞ 646 (700-1⅞)	3700-2½ 766 (800-2½)
LNAV MDA	3420-1 486 (500-1)	3480-1 546 (600-1)	3780-2½ 846 (900-2½)	3820-2½ 886 (900-2½)
C CIRCLING	3680-1 737 (800-1)	3840-1¼ 897 (900-1¼)	4080-3 1137 (1200-3)	4340-3 1397 (1400-3)



MIRL Rwy 14-32 L

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

(FOBRO1.FOBRO) 17229

FOBRO ONE DEPARTURE (OBSTACLE) (RNAV)

AL-10021 (FAA)

WEED (O46)
WEED, CALIFORNIA

SEATTLE CENTER
124.85 306.3
UNICOM
122.7

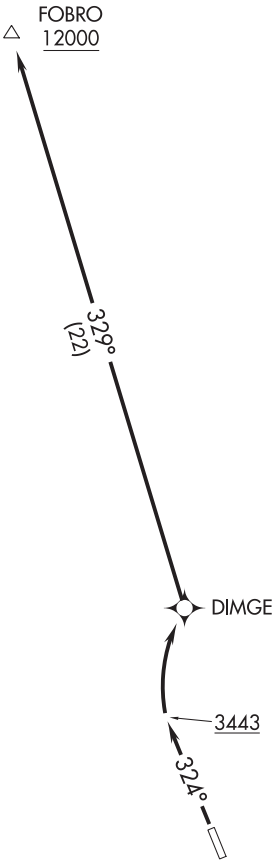

NOTE: RNAV 1.
NOTE: GPS required.

TAKEOFF MINIMUMS
Rwy 14: NA-obstacles.
Rwy 32: Standard with minimum climb of 325′ per NM to 12000.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 32: Climb heading 324° to 3443, then right turn direct DIMGE, then on track 329° to cross FOBRO at or above 12000 or as assigned by ATC.

SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	2995
145°	TDZE	2063
	Apt Elev	2063

RNAV (GPS) RWY 16

ELLS FIELD-WILLITS MUNI (O28)

NA

DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Circling NA west of Rwy 16/34. Procedure NA at night. Use Ukiah altimeter setting.

MISSED APPROACH: Climb to 6000 direct HULDI and on track 154° to ENI VORTAC and hold.

UKI ASOS	OAKLAND CENTER	UNICOM
119.275	132.2 350.3	122.8 (CTAF) L

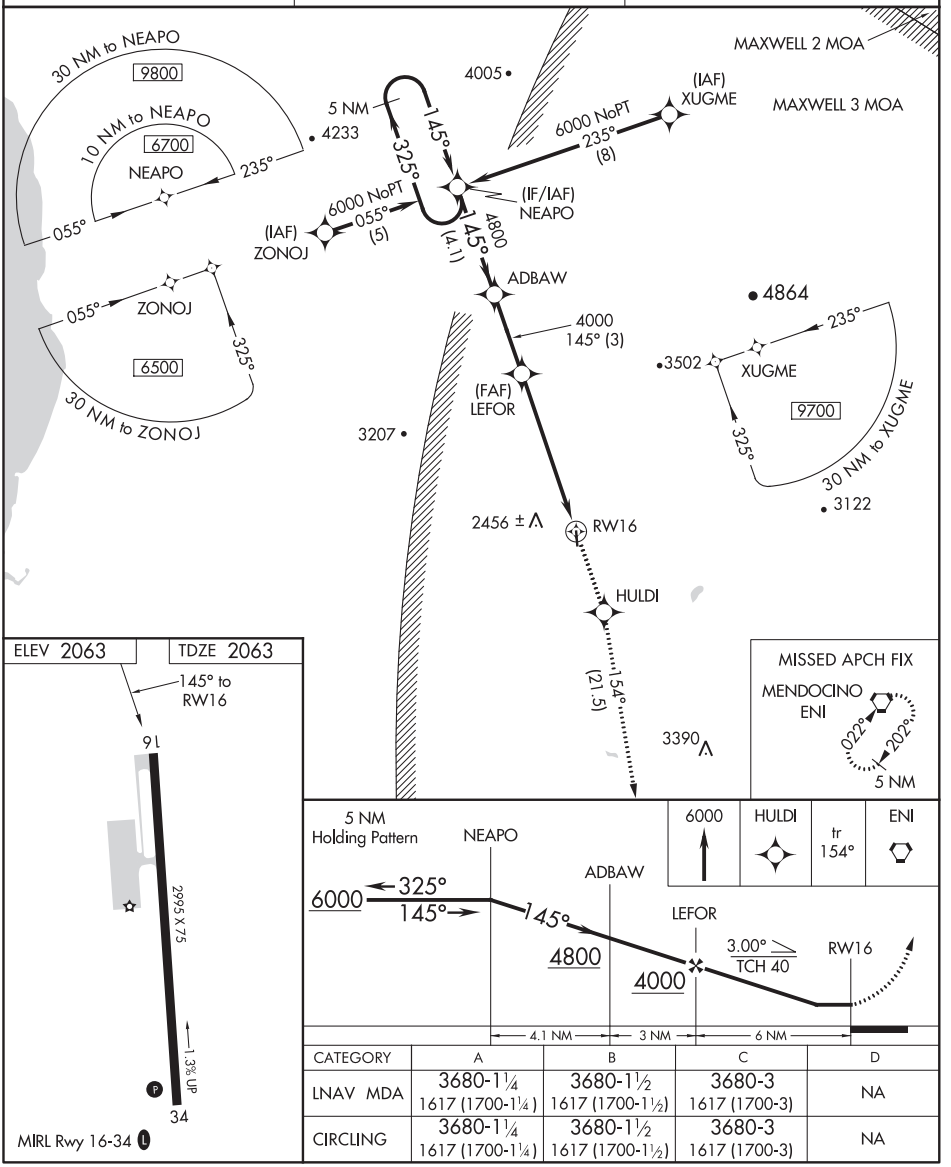

CATEGORY	A	B	C	D
LNAV MDA	3680-1¼ 1617 (1700-1¼)	3680-1½ 1617 (1700-1½)	3680-3 1617 (1700-3)	NA
CIRCLING	3680-1¼ 1617 (1700-1¼)	3680-1½ 1617 (1700-1½)	3680-3 1617 (1700-3)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WILLITS, CALIFORNIA | AL-9480 (FAA) | 19283

APP CRS	Rwy Idg	2995
339°	TDZE	2066
	Apt Elev	2066

RNAV (GPS) RWY 34

ELLS FIELD-WILLITS MUNI (O28)

RNP APCH.

Circling NA west of Rwy 16-34. Rwy 34 helicopter visibility reduction below 1 SM NA. Procedure NA at night. Use Ukiah altimeter setting; when not received, procedure NA.

MISSED APPROACH: Climbing right turn to 6000 direct ENI VORTAC and hold.

UKI ASOS	OAKLAND CENTER	UNICOM
119.275	132.2 350.3	122.8 (CTAF)

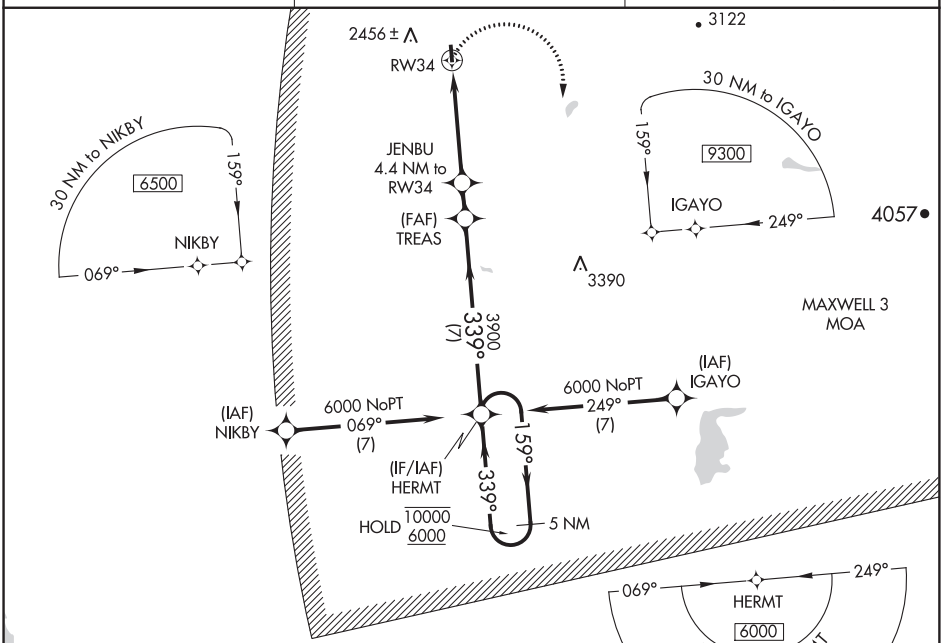

ELEV 2066 | TDZE 2066

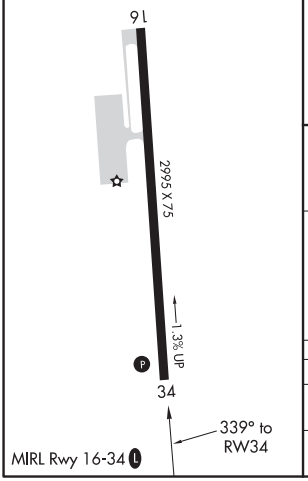

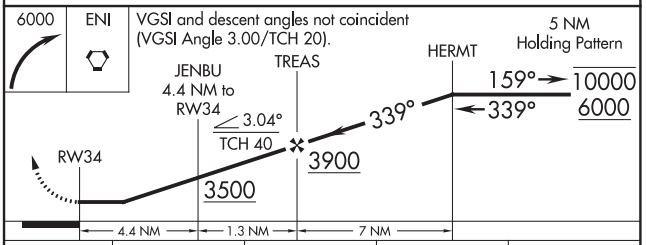

CATEGORY	A	B	C	D
LNAV MDA	3300-1¼ 1234 (1300-1¼)	3300-1½ 1234 (1300-1½)	3300-3 1234 (1300-3)	NA
CIRCLING	3300-1¼ 1234 (1300-1¼)	3300-1½ 1234 (1300-1½)	3300-3 1234 (1300-3)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

FLUEN TWO DEPARTURE (OBSTACLE) (RNAV)

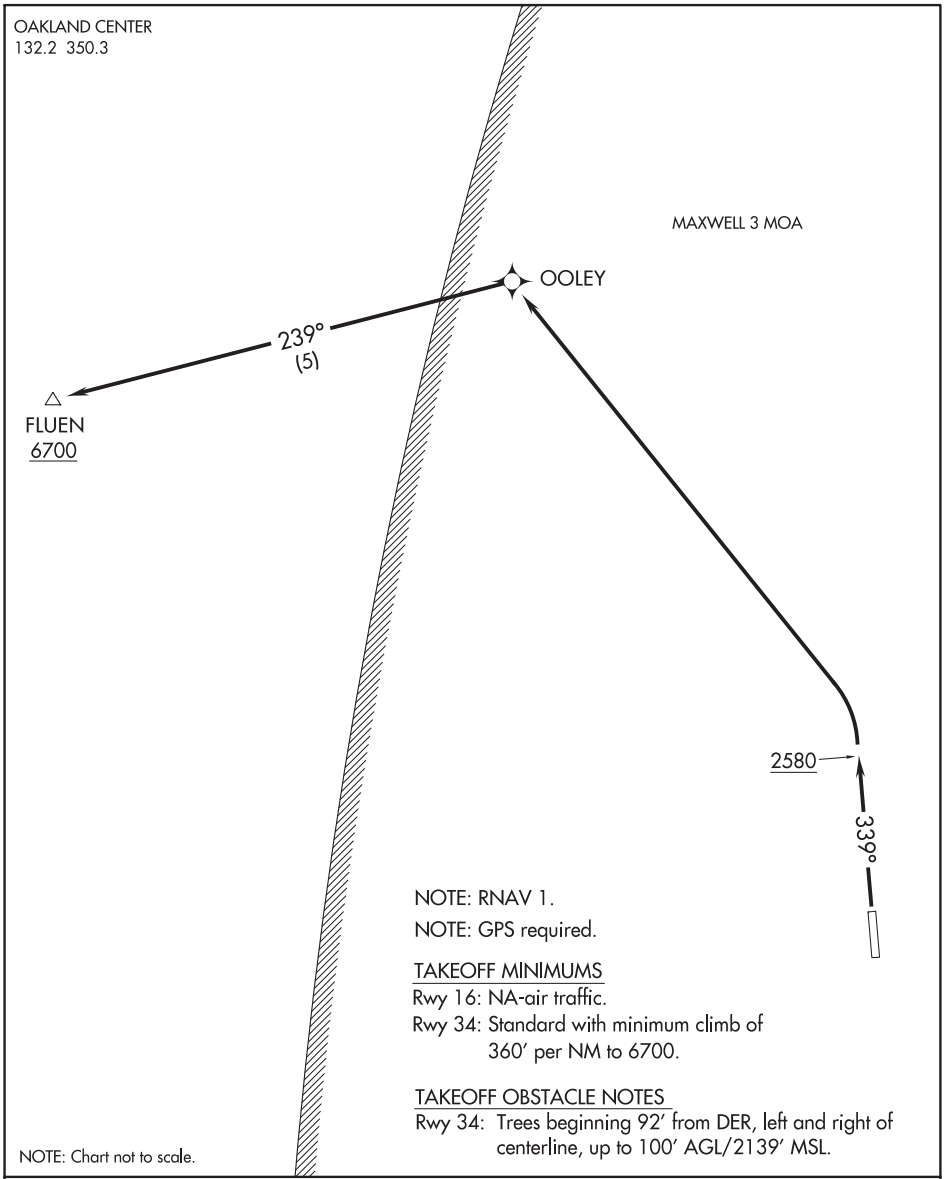

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 34: Climb heading 339° to 2580, then left turn direct OOLEY, and on track 239° to cross FLUEN at or above 6700.

(ENI1.ENI) 16091 SL-9480 (FAA) ELLS FIELD-WILLITS MUNI (O28)

MENDOCINO ONE DEPARTURE (OBSTACLE) (RNAV)

WILLITS, CALIFORNIA

SW-2, 30 JAN 2020 to 26 MAR 2020

OAKLAND CENTER
132.2 350.3
UNICOM 122.8 (CTAF)

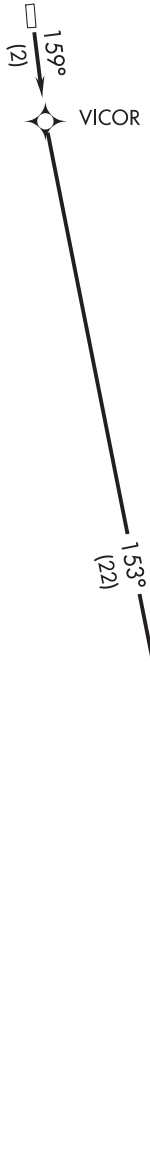

TAKEOFF MINIMUMS
Rwy 16: Standard
Rwy 34: N/A Obstacles

TAKEOFF OBSTACLE NOTES
Rwy 16: Trees 1812′ from DER, 844′ left of centerline, 100′ AGL/2139′ MSL.

NOTE: GPS Required.
NOTE: RNAV 1

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 16: Climb to 6000 direct VICOR WP, then via 153° track to ENI VORTAC, thence proceed on course.

MENDOCINO ONE DEPARTURE (OBSTACLE) (RNAV)

WILLITS, CALIFORNIA

(ENI1.ENI) 05AUG04 ELLS FIELD-WILLITS MUNI (O28)

RNAV (GPS) RWY 34

WILLOWS-GLENN COUNTY (WLW)

WAAS CH 78422 W34A	APP CRS 344°	Rwy Idg 4125 / TDZE 138 / Apt Elev 141

T NA — When Oroville Muni altimeter setting not received, procedure NA. Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Oroville altimeter setting.

MISSED APPROACH: Climb to 3000 direct ZOKOP and hold.

OVE ASOS	OAKLAND CENTER	UNICOM
121.425	132.2 350.3	122.8 (CTAF) L

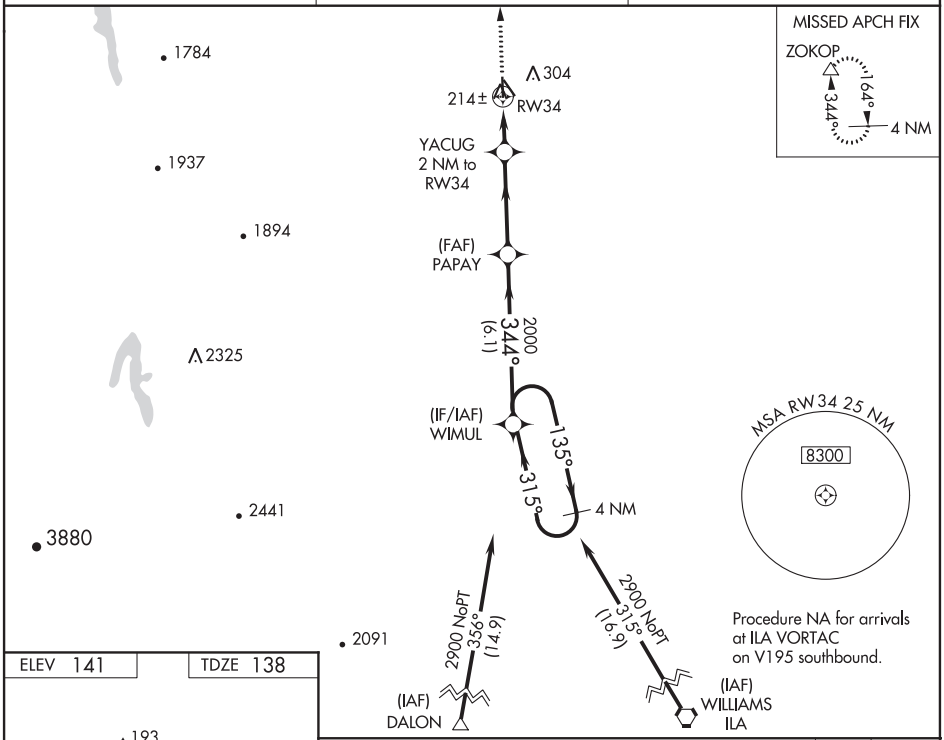

ELEV 141 TDZE 138

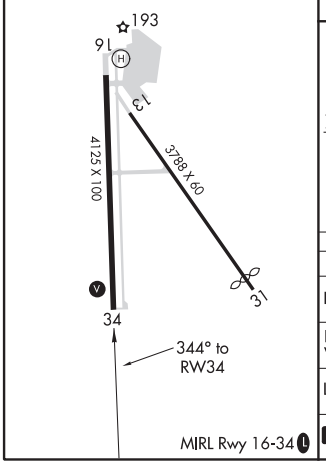

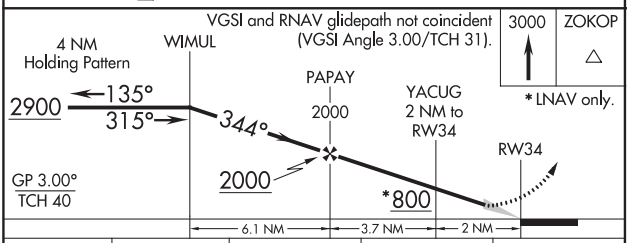

CATEGORY	A	B	C	D
LPV DA	460-1⅛ 322 (400-1⅛)			NA
LNAV/VNAV DA	460-1⅛ 322 (400-1⅛)			NA
LNAV MDA	540-1 402 (400-1)		540-1⅛ 402 (400-1⅛)	NA
C CIRCLING	680-1 539 (600-1)		680-1½ 539 (600-1½)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

WILLOWS, CALIFORNIA | AL-5296 (FAA) | 19283

VOR RWY 34

WILLOWS-GLENN COUNTY (WLW)

VORTAC ILA	APP CRS	Rwy Idg	4125
114.4	323°	TDZE	138
Chan 91		Apt Elev	141

T NA — When Oroville Muni altimeter setting not received, procedure NA. DME required. Use Oroville Muni altimeter setting.

MISSED APPROACH: Climbing right turn to 3000 on heading 200° and on ILA VORTAC R-323 to WUNIP/ILA 15.3 DME and hold.

OVE ASOS	OAKLAND CENTER	UNICOM
121.425	132.2 350.3	122.8 (CTAF) L

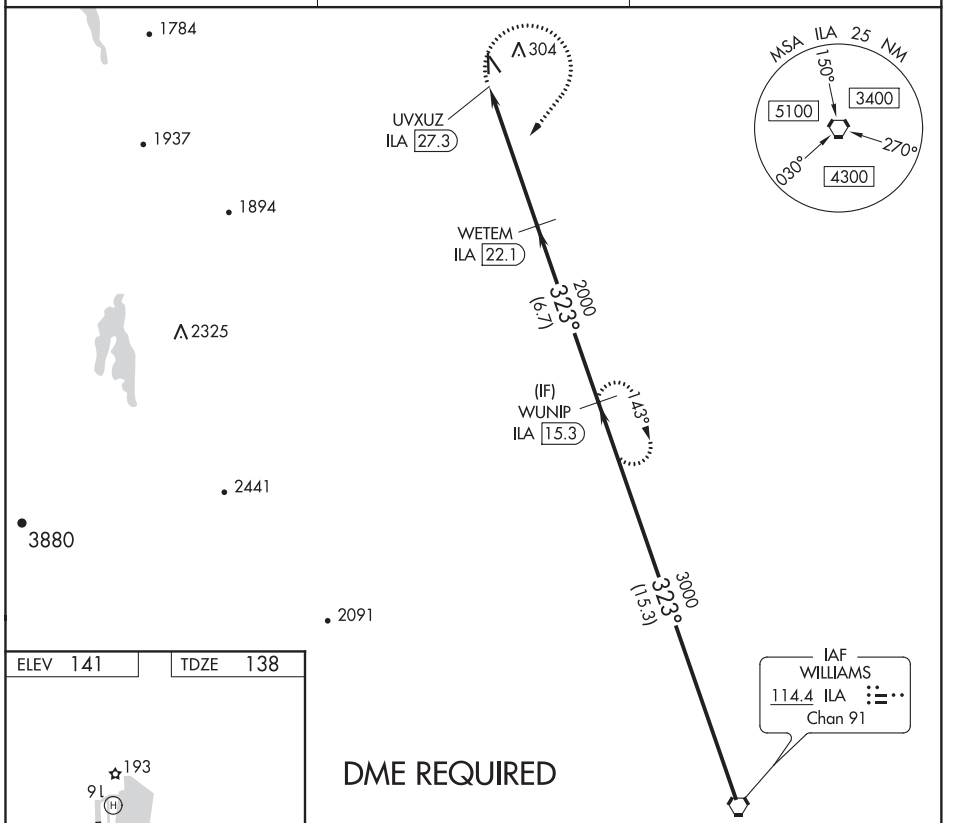

ELEV 141 | TDZE 138



MIRL Rwy 16-34 L

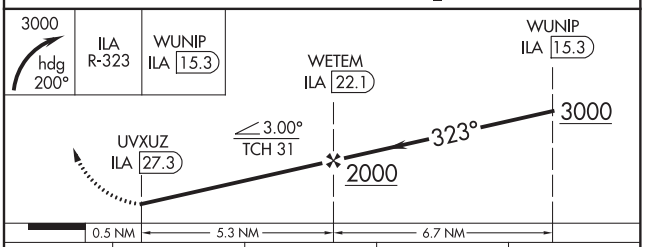

CATEGORY	A	B	C	D
S-34	1000-1 862 (900-1)	1000-1¼ 862 (900-1¼)	1000-2½ 862 (900-2½)	NA
C CIRCLING	1000-1¼ 859 (900-1¼)		1000-2½ 859 (900-2½)	NA

SW-2, 30 JAN 2020 to 26 MAR 2020
SW-2, 30 JAN 2020 to 26 MAR 2020

APP CRS	Rwy Idg	3244
004°	TDZE	125
	Apt Elev	125

RNAV (GPS) RWY 36

WATTS-WOODLAND (O41)

DME/DME RNP- 0.3 NA.
NA Procedure NA at night.
Use Sacramento Intl altimeter setting; when not received, use Sacramento Executive altimeter setting and increase all MDA 20 feet.

MISSED APPROACH: Climbing left turn to 3000 direct CEVIT and hold.

TRAVIS APP CON	UNICOM
126.6 281.45	122.8 (CTAF) L

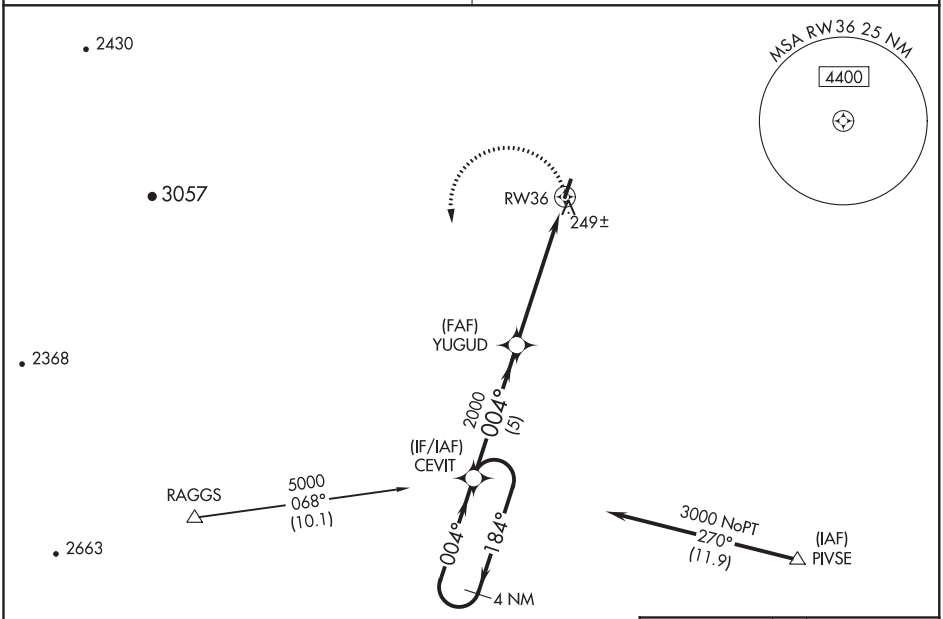

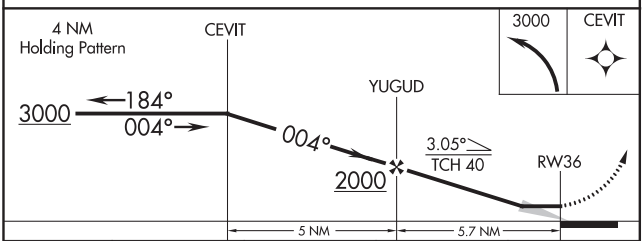

CATEGORY	A	B	C	D
LNAV MDA	560-1	435 (500-1)	NA	
CIRCLING	620-1	495 (500-1)	NA	

ELEV 125 D TDZE 125

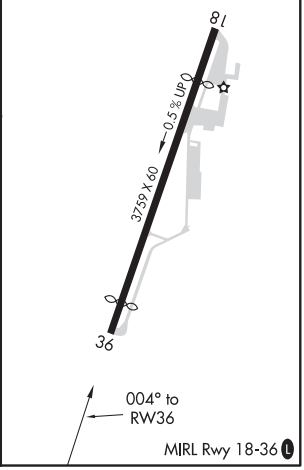

MIRL Rwy 18-36 L

SW-2, 30 JAN 2020 to 26 MAR 2020

WOODLAND, CALIFORNIA

AL-6353 (FAA)

15008

VOR/DME-A

WATTS-WOODLAND (O41)

VORTAC SAC	APP CRS	Rwy Idg	N/A
115.2	296°	TDZE	N/A
Chan 99		Apt Elev	125

T NA Procedure NA at night. Use Sacramento Intl altimeter setting; when not received, use Sacramento Executive altimeter setting and increase all MDA 20 feet.

MISSED APPROACH: Climbing left turn to 2000 via SAC VORTAC R-296 to MERET/14.5 DME and hold.

TRAVIS APP CON	UNICOM
126.6 281.45	122.8 (CTAF) L

1940

1996±

MSA SAC 25 NM
110° 2700
4100
020° 290°
3100

259±
MARLK
SAC 20.3

MERET
SAC 14.5

116°
2000
296°
(5.5)

(IF)
SPERS
SAC 9

R-296

2600
296°
(9)

IAF
SACRAMENTO
115.2 SAC
Chan 99

Procedure NA for arrival on SAC VORTAC airway radials 257 CW 329.

ELEV 125 D

18
0.5% UP
3759 X 60
36
296° 5.8 NM from FAF

2000
SAC R-296
MERET
SAC 14.5

MARLK
SAC 20.3

MERET
SAC 14.5

SPERS
SAC 9

296°
2000
2600

Procedure Turn NA

5.8 NM
5.5 NM

CATEGORY	A	B	C	D
CIRCLING	620-1 495 (500-1)	620-1¼ 495 (500-1¼)	NA	

MIRL Rwy 18-36 L

SW-2, 30 JAN 2020 to 26 MAR 2020

SW-2, 30 JAN 2020 to 26 MAR 2020

CLIMB/DESCENT TABLE 10042

INSTRUMENT TAKEOFF OR APPROACH PROCEDURE CHARTS
RATE OF CLIMB/DESCENT TABLE

(ft. per min)

A rate of climb/descent table is provided for use in planning and executing climbs or descents under known or approximate ground speed conditions. It will be especially useful for approaches when the localizer only is used for course guidance. A best speed, power, altitude combination can be programmed which will result in a stable glide rate and altitude favorable for executing a landing if minimums exist upon breakout. Care should always be exercised so that minimum descent altitude and missed approach point are not exceeded.

CLIMB/ DESCENT ANGLE (degrees and tenths)	ft/NM	GROUND SPEED (knots)										
		60	90	120	150	180	210	240	270	300	330	360
2.0	210	210	320	425	530	635	743	850	955	1060	1165	1275
2.5	265	265	400	530	665	795	930	1060	1195	1325	1460	1590
VERTICAL PATH ANGLE 2.7	287	287	430	574	717	860	1003	1147	1290	1433	1576	1720
2.8	297	297	446	595	743	892	1041	1189	1338	1486	1635	1783
2.9	308	308	462	616	770	924	1078	1232	1386	1539	1693	1847
3.0	318	318	478	637	797	956	1115	1274	1433	1593	1752	1911
3.1	329	329	494	659	823	988	1152	1317	1481	1646	1810	1975
3.2	340	340	510	680	850	1020	1189	1359	1529	1699	1869	2039
3.3	350	350	526	701	876	1052	1227	1402	1577	1752	1927	2103
3.4	361	361	542	722	903	1083	1264	1444	1625	1805	1986	2166
3.5	370	370	555	745	930	1115	1300	1485	1670	1860	2045	2230
4.0	425	425	640	850	1065	1275	1490	1700	1915	2125	2340	2550
4.5	480	480	715	955	1195	1435	1675	1915	2150	2390	2630	2870
5.0	530	530	795	1065	1330	1595	1860	2125	2390	2660	2925	3190
5.5	585	585	880	1170	1465	1755	2050	2340	2635	2925	3220	3510
6.0	640	640	960	1275	1595	1915	2235	2555	2875	3195	3510	3830
6.5	690	690	1040	1385	1730	2075	2425	2770	3115	3460	3805	4155
7.0	745	745	1120	1490	1865	2240	2610	2985	3355	3730	4105	4475
7.5	800	800	1200	1600	2000	2400	2800	3200	3600	4000	4400	4800
8.0	855	855	1280	1710	2135	2560	2990	3415	3845	4270	4695	5125
8.5	910	910	1360	1815	2270	2725	3180	3630	4085	4540	4995	5450
9.0	960	960	1445	1925	2405	2885	3370	3850	4330	4810	5295	5775
9.5	1015	1015	1525	2035	2540	3050	3560	4065	4575	5085	5590	6100
10.0	1070	1070	1605	2145	2680	3215	3750	4285	4820	5355	5890	6430

CLIMB/DESCENT TABLE 10042

FAA Product ID: BTPPSW2

NSN 7641015059598

NGA REF. NO. OK-10-2859 TERMXFAABTPPSW2

EFF. DATE 20030