

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>65923</b><br><b>W23A</b> | APP CRS<br><b>227°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5001</b><br><b>1218</b><br><b>1219</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 23

CHEROKEE COUNTY (CNI)



**⚠** DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Marietta altimeter setting and increase all MDA 80 feet; increase LNAV and Circling Cat C visibility 1/8 mile, increase LP Cat C visibility 1/4 mile. Straight-in/Circling Rwy 23 procedure NA at night.

**MISSED APPROACH:** Climb to 4000 direct MOMEY and hold, continue climb-in-hold to 4000.

|                          |                                       |                               |
|--------------------------|---------------------------------------|-------------------------------|
| AWOS-3<br><b>119.825</b> | ATLANTA APP CON<br><b>121.0 268.7</b> | UNICOM<br><b>123.0 (CTAF)</b> |
|--------------------------|---------------------------------------|-------------------------------|

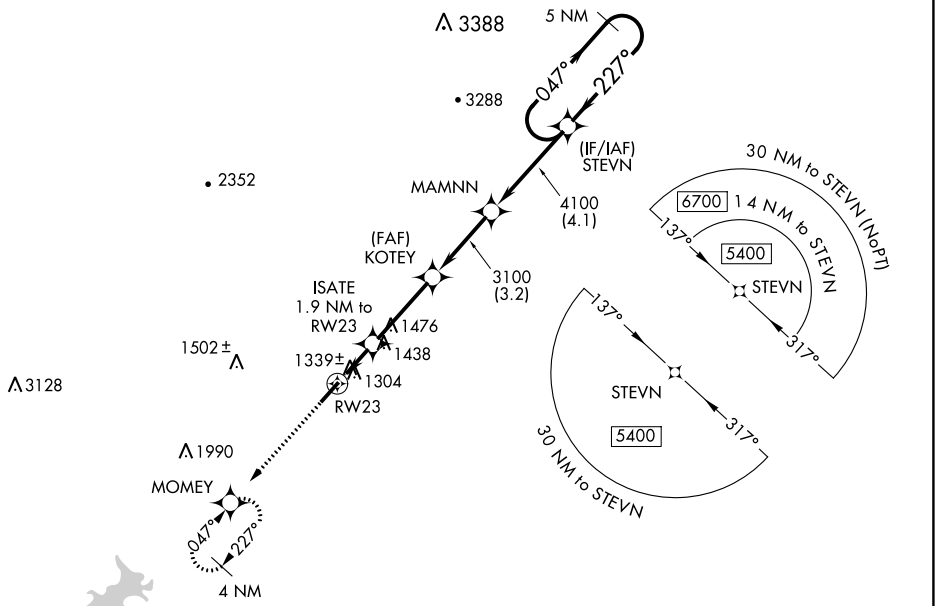

|           |           |
|-----------|-----------|
| ELEV 1219 | TDZE 1218 |
|-----------|-----------|

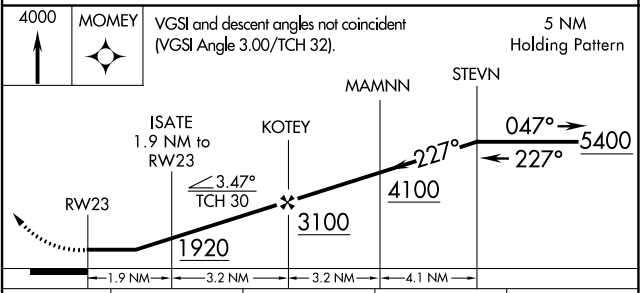

| CATEGORY | A      | B           | C                             | D  |
|----------|--------|-------------|-------------------------------|----|
| LP MDA   | 1600-1 | 382 (400-1) | 1600-1 1/8<br>382 (400-1 1/8) | NA |
| LNAV MDA | 1740-1 | 522 (600-1) | 1740-1 1/8<br>522 (600-1 1/8) | NA |
| CIRCLING | 1740-1 | 521 (600-1) | 1740-1 1/8<br>521 (600-1 1/8) | NA |