RNAV (GPS) RWY 7

FORT SMITH RGNL (FSM)

WAAS CH 77917 W07A	APP CRS 076°	Rwy Idg 8000 / TDZE 469 / Apt Elev 469

Circling to Rwy 1 NA at night. For inoperative MALSR, increase LPV Cat E visibility to ¾, LNAV/VNAV Cat E visibility to 2¼ and LNAV Cat E visibilty to 2½. Circling NA for Cat E NW of Rwy 7 and 19. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Circling Cat E NA when R-2401B active.

ASR

MALSR

MISSED APPROACH: Climb to 3000 direct UCAXE and hold.

ATIS	RAZORBACK APP CON ★	FORT SMITH TOWER ★	GND CON	CLNC DEL	UNICOM
126.3	120.9 343.75	118.3 (CTAF) L 323.175	121.9 275.8	133.85 278.3	122.95

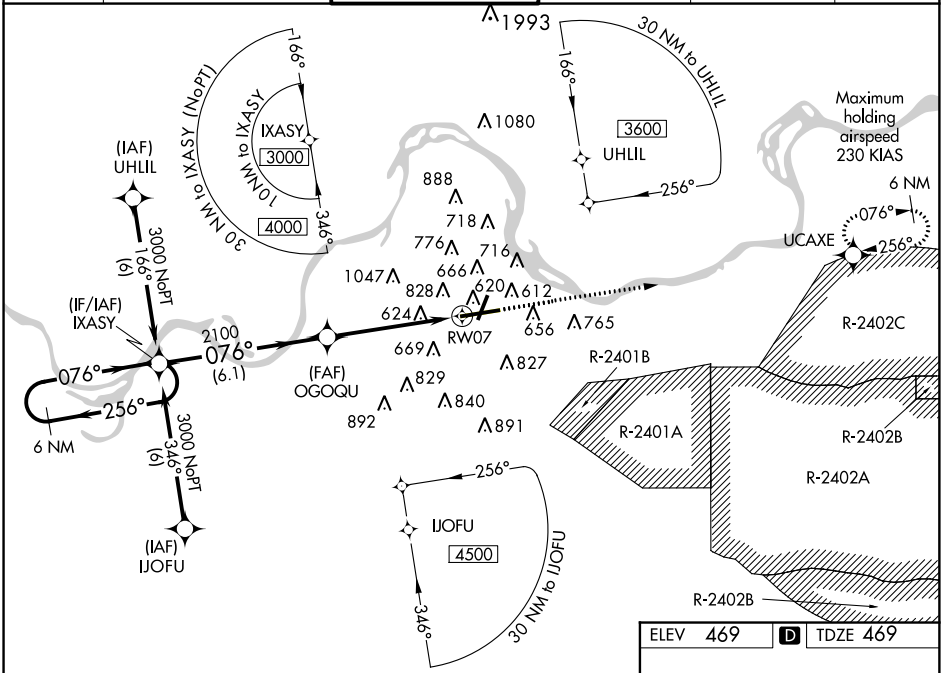

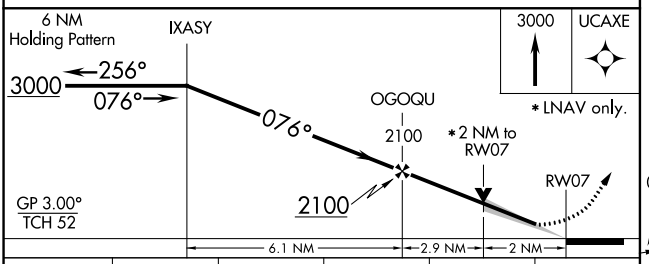

CATEGORY	A	B	C	D	E
LPV DA	669-½ 200 (200-½)				
LNAV/VNAV DA	1085-1¾ 616 (700-1¾)				
LNAV MDA	1140-½ 671 (700-½)		1140-1½ 671 (700-1½)	1140-1¾ 671 (700-1¾)	1140-2 671 (700-2)
CIRCLING	1140-1 671 (700-1)		1140-2 671 (700-2)	1140-2¼ 671 (700-2¼)	1200-2½ 731 (800-2½)

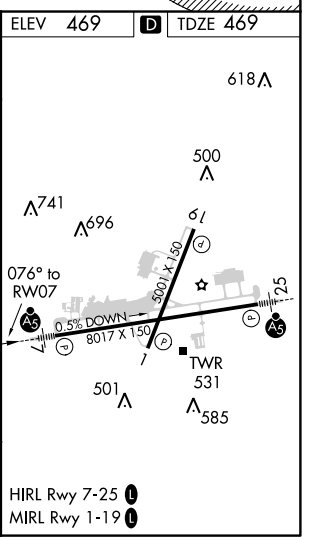

SC-1, 03 JAN 2019 to 31 JAN 2019
SC-1, 03 JAN 2019 to 31 JAN 2019