ILS or LOC RWY 26L

MC CARRAN INTL (LAS)

LOC/DME I-RLE	APP CRS	Rwy Idg 26L / TDZE / Apt Elev	Rwy Idg 26R / TDZE / Apt Elev
111.5 Chan 52	259°	10525 / 2069 / 2181	12757 / 2067 / 2181

Inop table does not apply to S-ILS Rwy 26L and Sidestep Rwy 26R. For inop ALS, increase S-LOC 26L Cat C/D/E visibility to 1⅜ SM.

MALSF Rwy 26L | MALS Rwy 26R

MISSED APPROACH: Climb to 3100 then climbing right turn to 7000 direct BLD VORTAC and hold, continue climb-in-hold to 7000.

D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 125.6 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1R/19L	118.0	

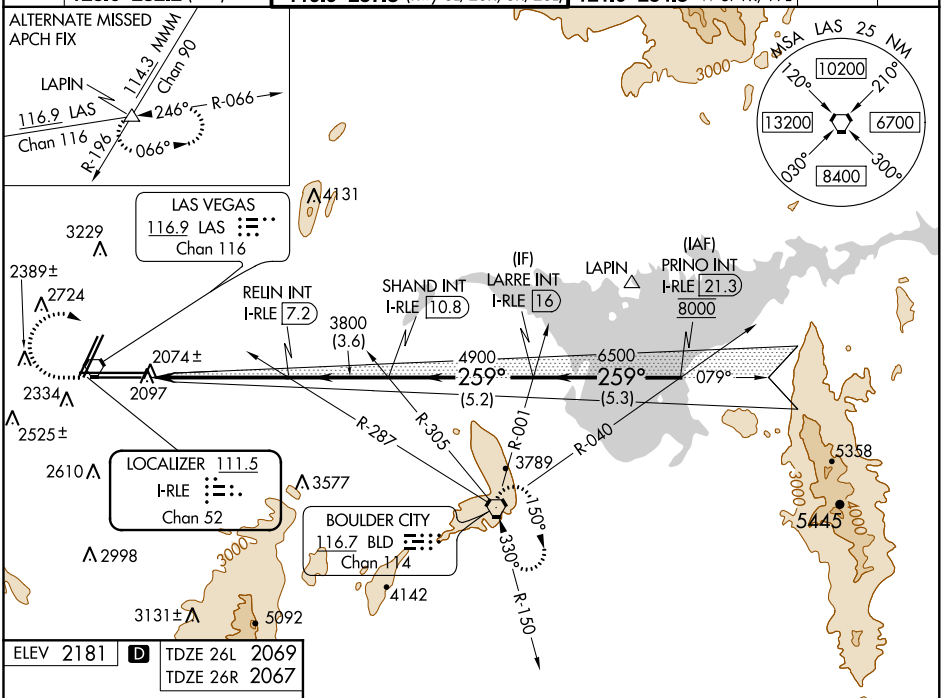

ELEV 2181	D	TDZE 26L 2069 TDZE 26R 2067



REIL Rwys 1R, 8R, 19L and 19R
MIRL Rwys 1R-19L
HIRL Rwys 1L-19R, 8L-26R and 8R-26L

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

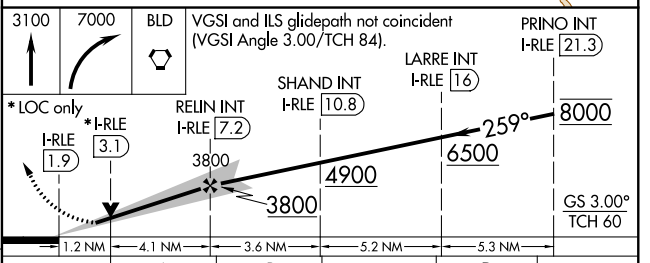

CATEGORY	A	B	C	D	E
S-ILS 26L	2269-¾ 200 (100-¾)				
S-LOC 26L	2520-¾ 451 (400-¾)		2520-1 451 (400-1)		
SIDESTEP 26R	2560-1 493 (400-1)		2560-1½ 493 (400-1½)	2560-2 493 (400-2)	
C CIRCLING	3020-1¼ 839 (900-1¼)	3040-1¼ 859 (900-1¼)	3100-2¾ 919 (1000-2¾)	3540-3 1359 (1400-3)	

SW-4, 03 JAN 2019 to 31 JAN 2019
SW-4, 03 JAN 2019 to 31 JAN 2019