


|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>61110</b><br><b>W32A</b> | APP CRS<br><b>319°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8102</b><br><b>750</b><br><b>755</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 32R


UNIVERSITY OF ILLINOIS-WILLARD (CMI)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19° C (-2° F) or above 54° C (130° F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Rantoul altimeter setting. When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet, all MDA 60 feet; increase LNAV Cat C/D visibility to RVR 5500. For inoperative MALS, when using local or Rantoul altimeter setting, increase LNAV Cat C/D visibility to 1/2 miles.



**MALS** 

**MISSED APPROACH:** Climb to 2800 direct HIPUB and on track 287° to LODGE and hold.

|                       |  |  |                         |                           |                         |
|-----------------------|--|--|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>124.85</b> | CHAMPAIGN APP CON *<br><b>121.35 285.65</b> (316°-135°)<br><b>132.85 290.225</b> (136°-315°) | CHAMPAIGN TOWER *<br><b>120.4 (CTAF) 0 229.4</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>128.75</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--|--|-------------------------|---------------------------|-------------------------|

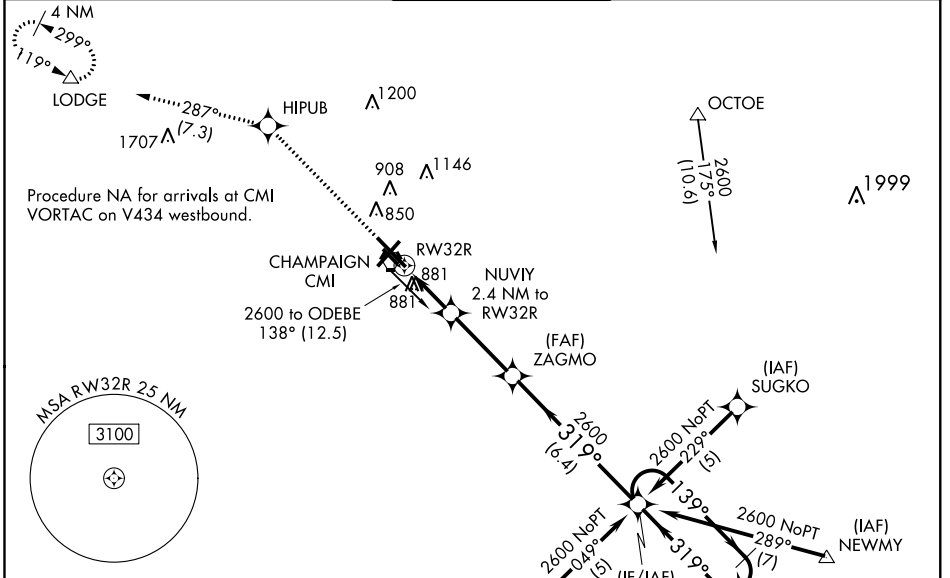

|          |          |          |
|----------|----------|----------|
| ELEV 755 | <b>D</b> | TDZE 750 |
|----------|----------|----------|

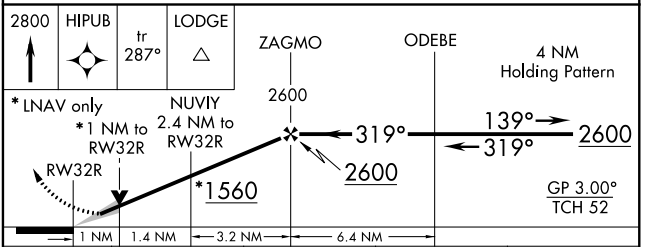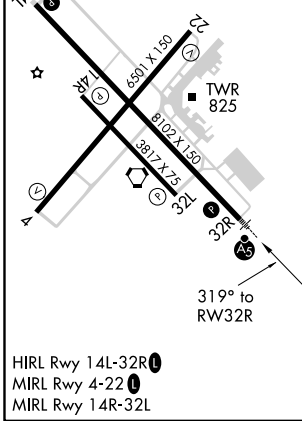

| CATEGORY          | A       | B             | C                             | D                             |
|-------------------|---------|---------------|-------------------------------|-------------------------------|
| LPV DA            |         | 1000/24       | 250 (300-1/2)                 |                               |
| LNAV/VNAV DA      |         | 1159/50       | 409 (500-1)                   |                               |
| LNAV MDA          | 1200/24 | 450 (500-1/2) | 1200/45                       | 450 (500-3/4)                 |
| <b>C</b> CIRCLING | 1240-1  | 485 (500-1)   | 1500-2 1/4<br>745 (800-2 1/4) | 1500-2 1/2<br>745 (800-2 1/2) |

EC-3, 03 JAN 2019 to 31 JAN 2019

EC-3, 03 JAN 2019 to 31 JAN 2019