RNAV (GPS) RWY 2

GARY/CHICAGO INTL (GYY)

WAAS	APP CRS		
CH **69338**	**023°**	Rwy Idg	**3604**
W02A		TDZE	**591**
		Apt Elev	**597**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Chicago Midway Intl altimeter setting and increase LPV DA to 947 feet, LNAV/VNAV DA to 977 feet, all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility ⅛ mile, and Circling Cat C and D visibility ¼ mile. Baro-VNAV NA when using Chicago Midway Intl altimeter setting.

MISSED APPROACH: Climb to 2000 then climbing right turn to 2800 direct KILPY and hold.

ATIS	CHICAGO APP CON	GARY TOWER ★	GND CON
134.575	**133.1 285.6**	**125.6** (CTAF) L	**121.9**

RADAR REQUIRED

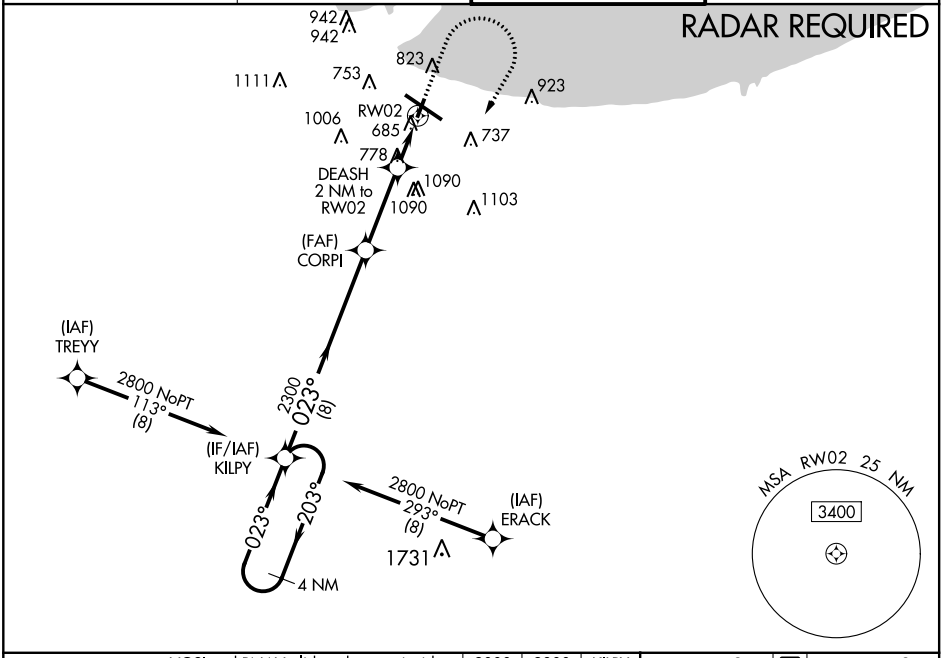

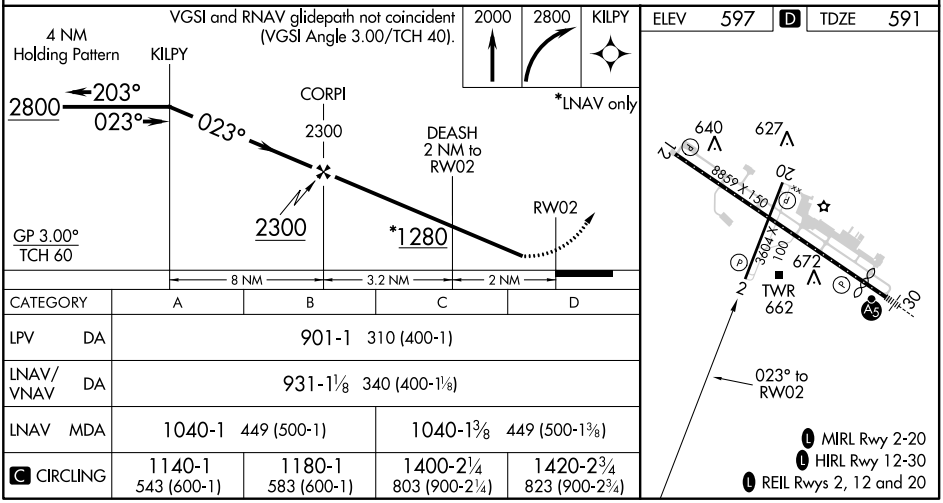

CATEGORY	A	B	C	D
LPV DA	901-1 310 (400-1)			
LNAV/VNAV DA	931-1⅛ 340 (400-1⅛)			
LNAV MDA	1040-1 449 (500-1)		1040-1⅜ 449 (500-1⅜)	
C CIRCLING	1140-1 543 (600-1)	1180-1 583 (600-1)	1400-2¼ 803 (900-2¼)	1420-2¾ 823 (900-2¾)

EC-2, 03 JAN 2019 to 31 JAN 2019
EC-2, 03 JAN 2019 to 31 JAN 2019