

WAAS CH <b>45720</b> <b>W27A</b>	APP CRS <b>272°</b>	Rwy Idg TDZE Apt Elev	<b>5004</b> <b>903</b> <b>905</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 27L

OHIO STATE UNIVERSITY (OSU)



**⚠** Baro-VNAV NA when using Port Columbus altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38°C (100°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Port Columbus altimeter setting and increase all DA 35 feet and all MDA 40 feet, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/8 mile.

**MISSED APPROACH:**  
Climb to 3200 direct GLYBU and hold.

ATIS <b>121.35</b>	COLUMBUS APP CON <b>125.95 317.775</b>	STATE TOWER ★ <b>118.8 (CTAF) 254.325</b>	GND CON <b>121.7</b>	CLNC DEL <b>121.7</b>	UNICOM <b>122.95</b>
-----------------------	---	--	-------------------------	--------------------------	-------------------------

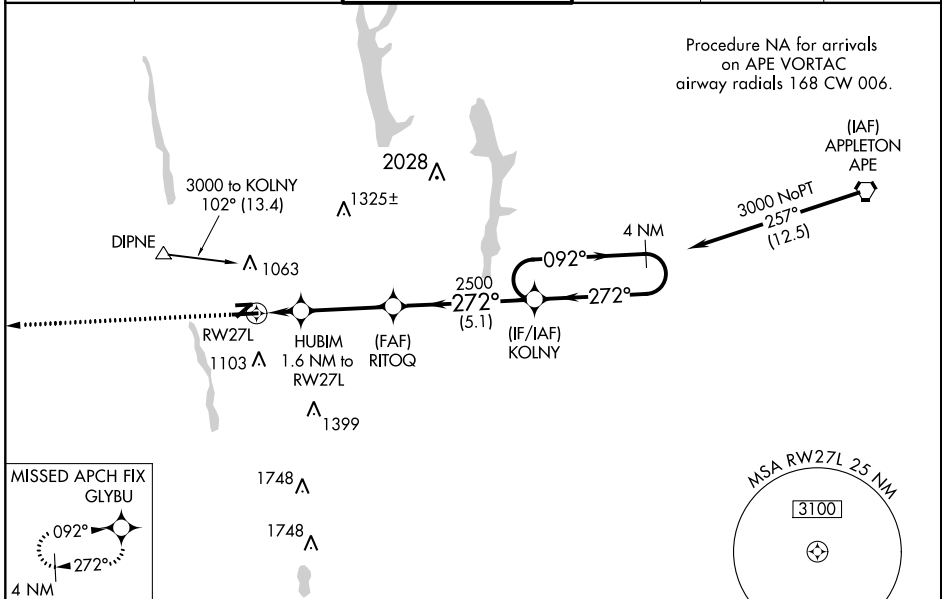

ELEV 905	<b>D</b>	TDZE 903
----------	----------	----------

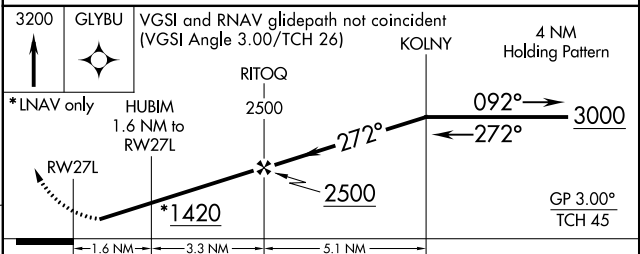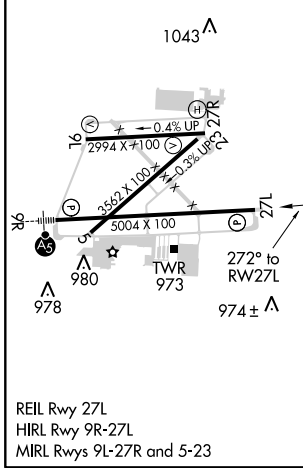

CATEGORY	A	B	C	D
LPV DA		1153-1	250 (300-1)	
LNAV/VNAV DA		1199-1	296 (300-1)	
LNAV MDA	1280-1	377 (400-1)	1280-1½	377 (400-1½)
CIRCLING	1380-1	475 (500-1)	1380-1½	1460-2 555 (600-2)

EC-2, 03 JAN 2019 to 31 JAN 2019

EC-2, 03 JAN 2019 to 31 JAN 2019