

LOC/DME I-EKY 111.75 Chan 54 (Y)	APP CRS 053°	Rwy Idg TDZE Apt Elev	6007 700 700
---	------------------------	-----------------------------	---



ILS or LOC RWY 5

BESSEMER (EKY)

NA When local altimeter setting not received, use Alabaster altimeter setting and increase all DA 41 feet, increase all MDA 60 feet and increase S-LOC 5 Cat C and D visibility 1/4 mile. Increase JURAM Fix S-LOC Cat C and D visibility 1/4 mile. VDP NA with Alabaster altimeter setting.

MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct OKW VORTAC and hold.

AWOS-3PT 118.825	BIRMINGHAM APP CON 124.9 351.85	CLNC DEL 123.75	UNICOM 123.0 (CTAF)
----------------------------	---	---------------------------	-------------------------------

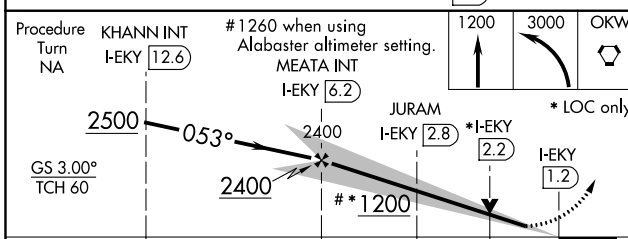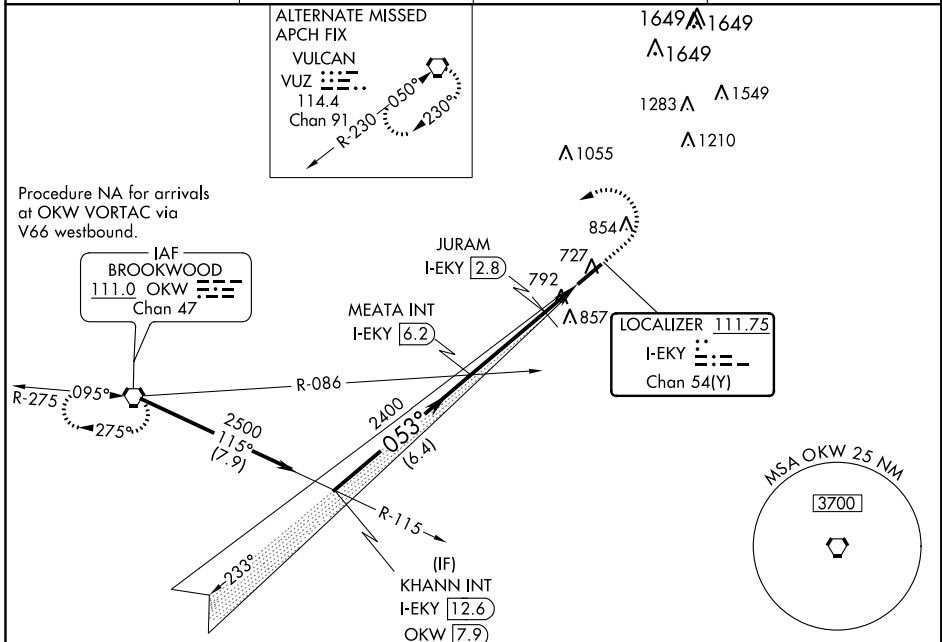

ELEV 700	TDZE 700
HIRL Rwy 5-23	
REIL Rwy 5 and 23	
FAF to MAP 5.1 NM	
Knots	60 90 120 150 180
Min:Sec	5:06 3:24 2:33 2:02 1:42

CATEGORY	A	B	C	D
S-ILS 5	900-3/4		200 (200-3/4)	
S-LOC 5	1200-1	500 (500-1)	1200-1 1/4 500 (500-1 1/4)	1200-1 1/2 500 (500-1 1/2)
CIRCLING	1200-1	500 (500-1)	1220-1 1/2 520 (600-1 1/2)	1260-2 560 (600-2)
JURAM FIX MINIMUMS				
S-LOC 5	1100-1		400 (400-1)	1100-1 1/4 400 (400-1 1/4)
CIRCLING	1200-1	500 (500-1)	1220-1 1/2 520 (600-1 1/2)	1260-2 560 (600-2)

SE-4, 03 JAN 2019 to 31 JAN 2019

SE-4, 03 JAN 2019 to 31 JAN 2019