BUCKEYE FOUR DEPARTURE
(BXK4.BXK) 25JUN15
PHOENIX, ARIZONA
PHOENIX SKY HARBOR INTL (PHX)

TOP ALTITUDE: 8000

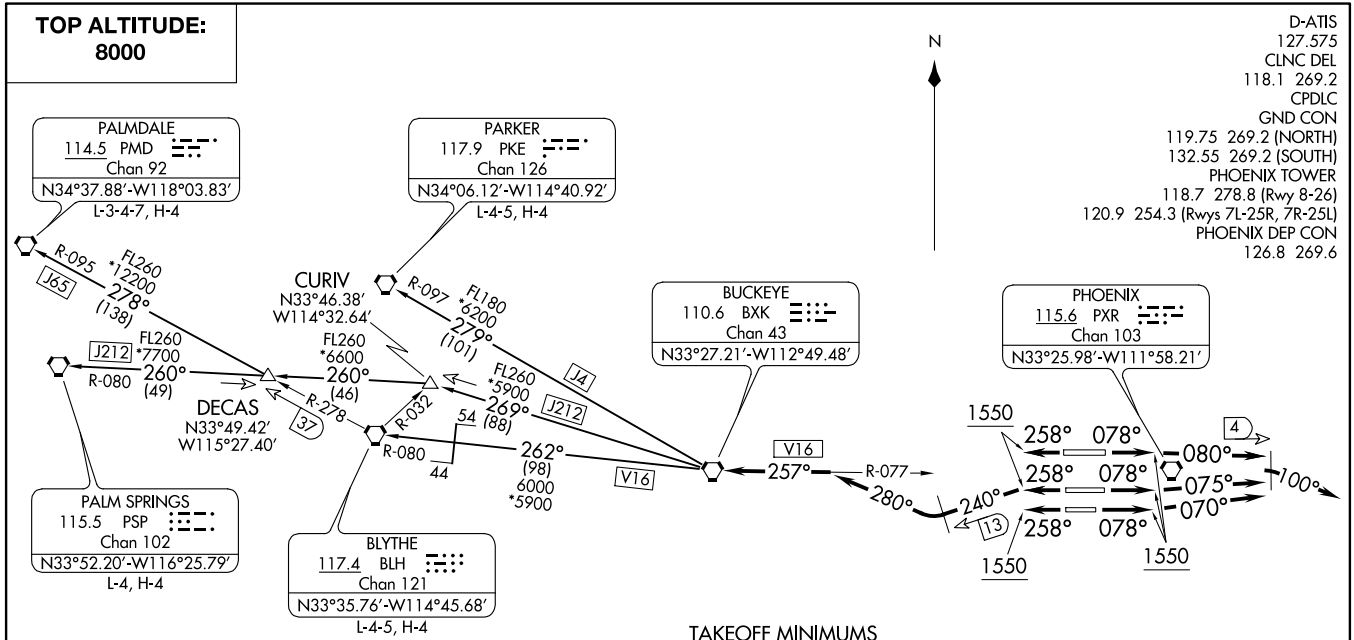

TAKEOFF MINIMUMS

Rwys 7L/7R/8: Standard with minimum climb of 300' per NM to 8000.
Rwys 25L/25R/26: Standard with minimum climb of 350' per NM to 8000.

NOTE: Restricted to turbojet and turboprop aircraft only.
NOTE: RADAR and DME required.
NOTE: Aircraft requesting FL 220 and below must file BLYTHE TRANSITION.
NOTE: Turbojets landing LAX, file PARKER TRANSITION.
NOTE: Aircraft landing other than LAX and turboprops landing at LAX:
Requesting FL240 and above, file PALMDALE or PALM SPRINGS TRANSITION.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

(BXK4.BXK) 18312
BUCKEYE FOUR DEPARTURE
AL-322 (FAA)
PHOENIX SKY HARBOR INTL (PHX)
PHOENIX, ARIZONA