LOC I-TVC	APP CRS	Rwy Idg	7016
110.7	279°	TDZE	616
		Apt Elev	624

ILS or LOC RWY 28
CHERRY CAPITAL (TVC)

T A -20°C

AYATA fix minimums: For inop MALSR, increase S-LOC 28 Cat C, D visibility to 2 miles. AYATA fix minimums: For inop MALSR when using Bellaire altimeter setting, increase S-LOC 28 Cat C, D visibility to 2½ miles. Circling to Rwy 18 NA at night. When local altimeter setting not received, use Bellaire altimeter setting and increase all DA 51 feet and all MDA 60 feet, increase S-LOC 28 Cat A and Circling Cat C visibility ¼ mile; increase AYATA fix minimums S-LOC 28 Cats C, D visibility ⅛ mile and Circling Cat C visibility ¼ mile.

MALSR

MISSED APPROACH: Climb to1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.

ATIS	MINNEAPOLIS CENTER	TRAVERSE CITY TOWER ★	GND CON	UNICOM
119.175	132.9 338.3	124.2 (CTAF) L 348.6	121.8 348.6	122.95

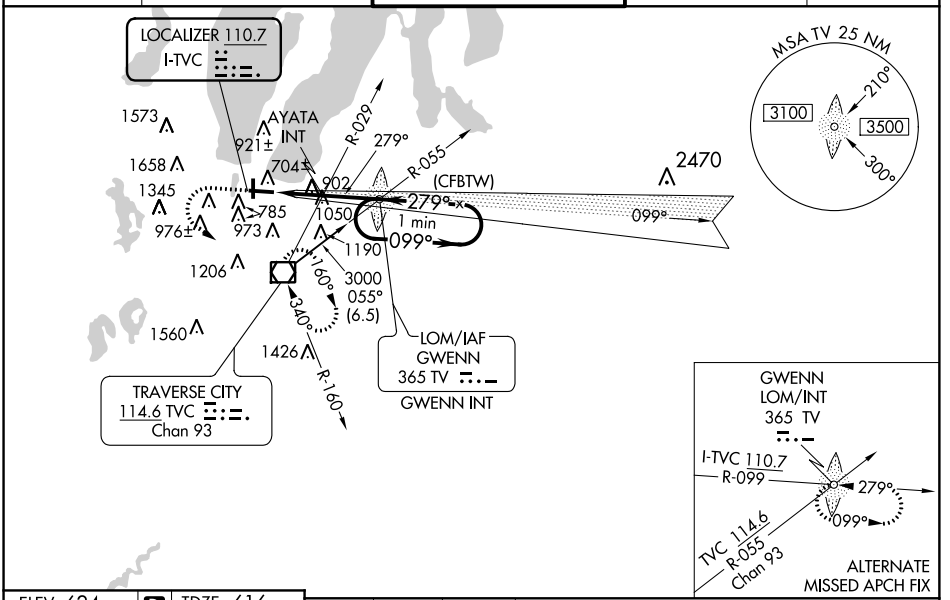

ELEV 624 D TDZE 616



HIRL Rwy 10-28 L
MIRL Rwy 18-36 L
REIL Rwy 36 L

FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

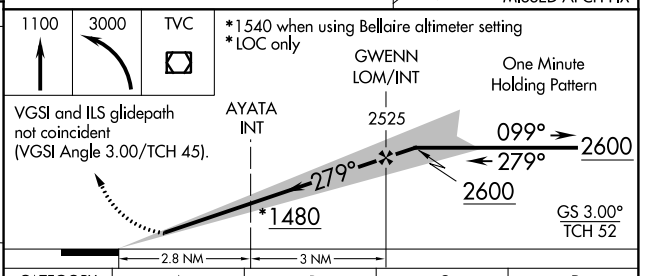

CATEGORY	A	B	C	D
S-ILS 28	816-½ 200 (200-½)			
S-LOC 28	1480-¾ 864 (900-¾)		1480-2 864 (900-2)	
C CIRCLING	1480-1¼ 856 (900-1¼)		1500-2½ 876 (900-2½)	1720-3 1096 (1100-3)
AYATA FIX MINIMUMS				
S-LOC 28	1360-½ 744 (800-½)	1360-¾ 744 (800-¾)	1360-1¾ 744 (800-1¾)	
C CIRCLING	1360-1 736 (800-1)	1360-1¼ 736 (800-1¼)	1500-2½ 876 (900-2½)	1720-3 1096 (1100-3)

EC-1, 31 JAN 2019 to 28 FEB 2019
EC-1, 31 JAN 2019 to 28 FEB 2019