RNAV (GPS) RWY 9L

GRAND FORKS INTL (GFK)

WAAS	APP CRS	Rwy Idg	4206
CH 58104	084°	TDZE	843
W09A		Apt Elev	845

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP- 0.3 NA. When local altimeter setting not received, use Crookston altimeter setting and increase all DA 62 feet and all MDA 80 feet, increase LNAV/VNAV all Cats and LNAV Cat C/D visibilities ¼ mile. Baro-VNAV and VDP NA when using Crookston altimeter setting.

MISSED APPROACH: Climb to 2800 direct URBAH and hold.

ATIS	GRAND FORKS APP CON	GRAND FORKS TOWER★	GND CON	CLNC DEL	UNICOM
119.4	118.1 318.1	118.4 (CTAF) L 350.35	124.575	135.725	122.95

Procedure NA for arrivals at GFK VOR/DME via V55 northeast bound.

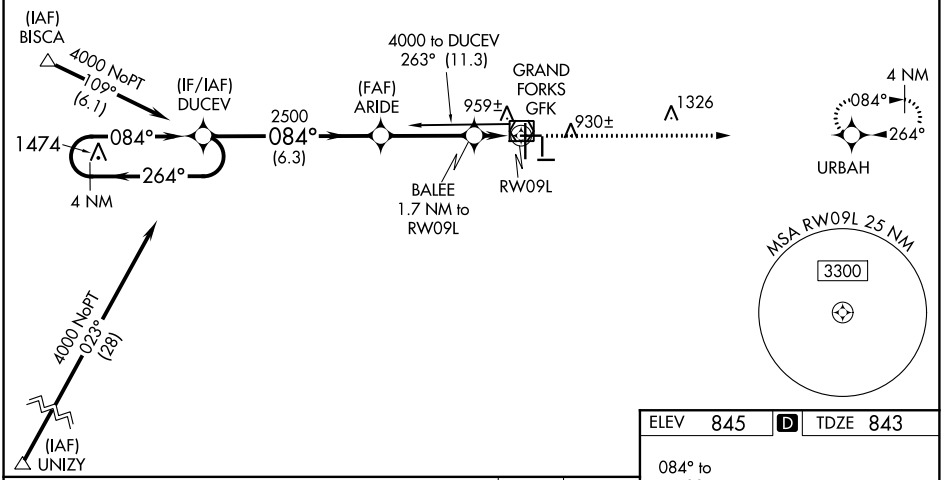

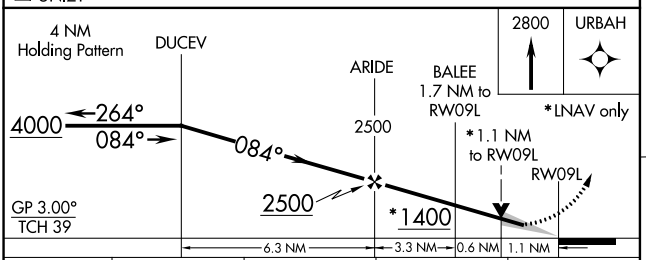

CATEGORY	A	B	C	D
LPV DA	1093-1 250 (300-1)			
LNAV/VNAV DA	1238-1½ 395 (400-1½)			
LNAV MDA	1220-1 377 (400-1)			1220-1¼ 377 (400-1¼)
CIRCLING	1280-1 435 (500-1)	1300-1 455 (500-1)	1300-1½ 455 (500-1½)	1400-2 555 (600-2)

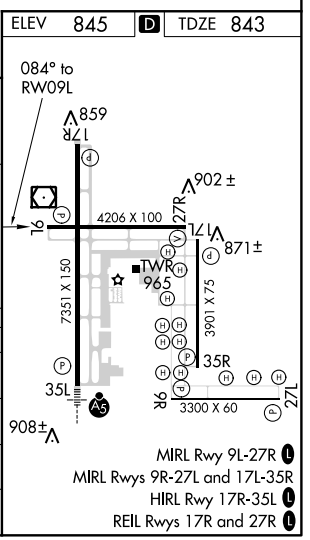

NC-1, 31 JAN 2019 to 28 FEB 2019
NC-1, 31 JAN 2019 to 28 FEB 2019