WAAS	APP CRS	Rwy Idg	7000
CH 61213	313°	TDZE	1020
W31A		Apt Elev	1031

RNAV (GPS) RWY 31

ST. CLOUD RGNL (STC)

T A DME/DME RNP-0.3 NA. When local altimeter setting not received, use Little Falls altimeter setting and increase all DA 76 feet, and all MDA 80 feet; increase LNAV/VNAV all Cats visibility ¼ SM and LNAV Cat C/D visibility ¼ SM. For inop ALS when using Little Falls altimeter setting, increase LPV all Cats visibility to ⅞ SM and LNAV Cat C/D visibility to 1⅜ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). Baro-VNAV and VDP NA when using Little Falls altimeter setting.

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct WELOK and hold.

ATIS	MINNEAPOLIS CENTER	ST. CLOUD TOWER ★	GND CON	PRINCETON RADIO	UNICOM
119.375	121.05 397.9	118.25 (CTAF) L	123.75	122.5	123.5

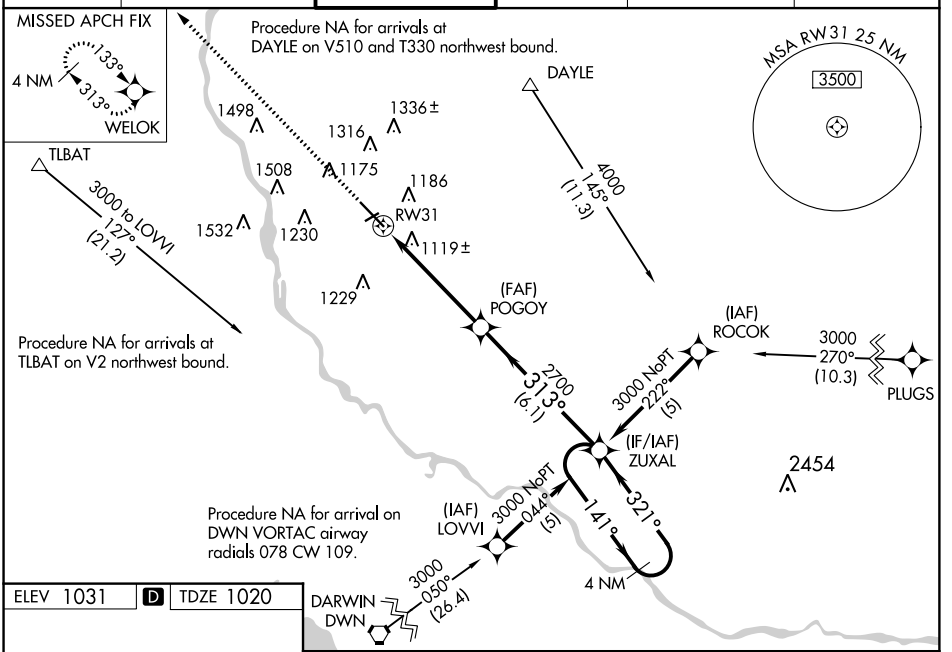

ELEV 1031 D TDZE 1020

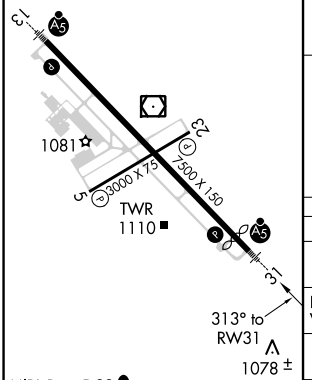

MIRL Rwy 5-23 L
HIRL Rwy 13-31 L

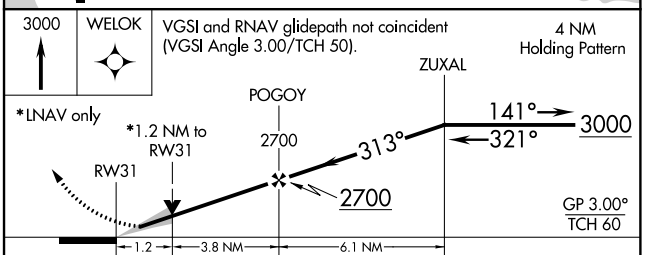

CATEGORY	A	B	C	D
LPV DA	1220-½ 200 (200-½)			
LNAV/VNAV DA	1379-¾ 359 (400-¾)			
LNAV MDA	1460-½ 440 (500-½)		1460-¾ 440 (500-¾)	
CIRCLING	1500-1 469 (500-1)		1500-1½ 469 (500-1½)	1620-2 589 (600-2)

NC-1, 31 JAN 2019 to 28 FEB 2019
NC-1, 31 JAN 2019 to 28 FEB 2019