LOC I-MHK	APP CRS	Rwy Idg	7000
111.3	036°	TDZE	1056
		Apt Elev	1066

ILS or LOC RWY 3
MANHATTAN RGNL (MHK)

T A For inop MALSR when using Marshall AAF altimeter setting, increase S-ILS 3 all Cats visibility to 1 ¼ mile. Circling NA west of Rwy 3-21. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Marshall AAF altimeter setting and increase all DA 16 feet and all MDA 20 feet. For inop MALSR, increase S-LOC 3 Cats A/B visibility ¼ mile. Inop table does not apply to S-ILS 3. DME Required.

MALSR A-5

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 via MHK VOR/DME R-143 to ALMAS INT/MHK 7.7 DME and hold.

ASOS	MARSHALL GCA ★	MANHATTAN TOWER ★	GND CON
119.075	121.25 254.35	118.55 (CTAF) L	121.85

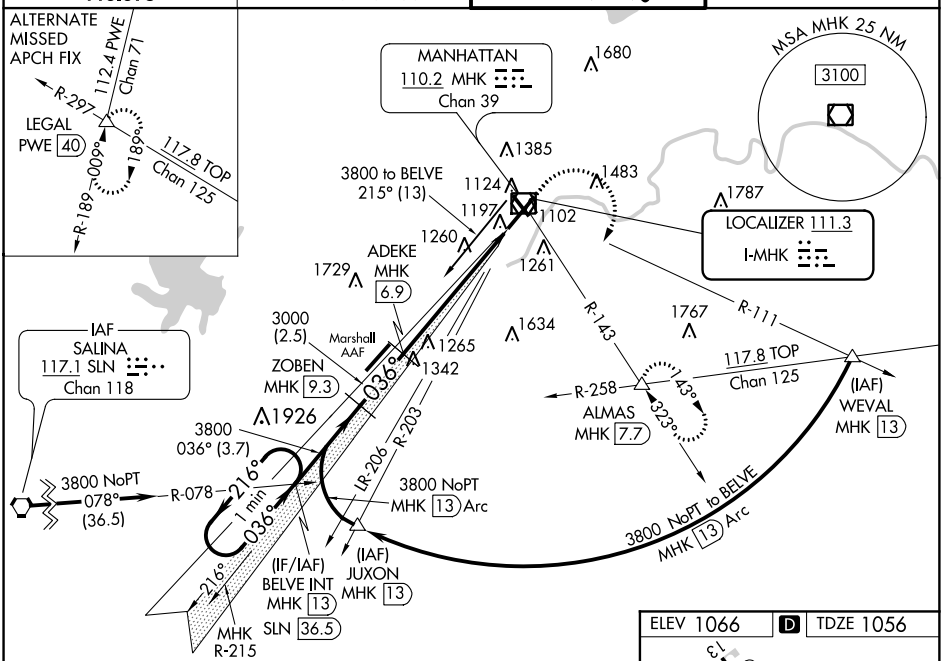

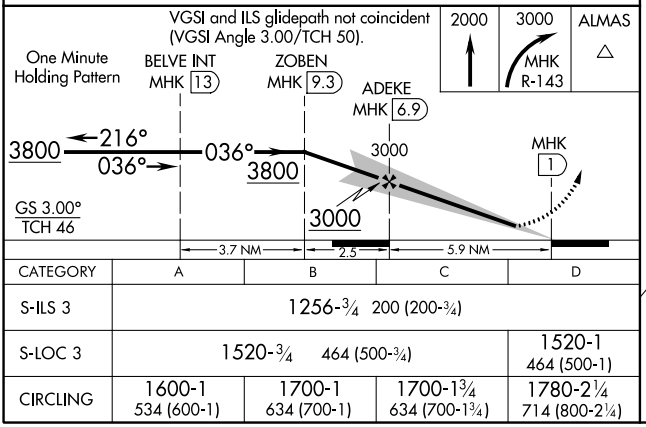

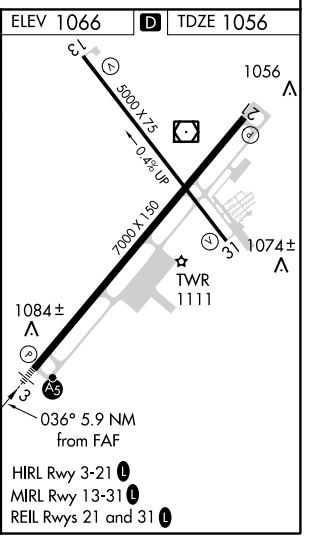

CATEGORY	A	B	C	D
S-ILS 3	1256-¾ 200 (200-¾)			
S-LOC 3	1520-¾ 464 (500-¾)			1520-1 464 (500-1)
CIRCLING	1600-1 534 (600-1)	1700-1 634 (700-1)	1700-1¾ 634 (700-1¾)	1780-2¼ 714 (800-2¼)

NC-2, 23 MAY 2019 to 20 JUN 2019
NC-2, 23 MAY 2019 to 20 JUN 2019