


LOM RU 275	APP CRS 202°	Rwy Idg TDZE Apt Elev	5501 772 772
----------------------	------------------------	-----------------------------	---




NDB RWY 20
MID-CAROLINA RGNL (RUQ)

▼ When local altimeter setting not received, use Lexington altimeter setting and increase all MDA 40 feet, increase S-20 Cats C and D, and Circling Cat C visibility 1/8 SM and Circling Cat D 1/4 SM. For inop ALS, increase Cat D visibility to 1 7/8 SM. For inop ALS when using Lexington altimeter setting increase Cat D visibility to 2 SM.

▲NA

MALSR  **MISSED APPROACH:** Climb to 1800 then climbing right turn to 2500 direct ROVDY LOM and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	CLNC DEL 127.35	UNICOM 122.725 (CTAF) 
--------------------------	---	---------------------------	---

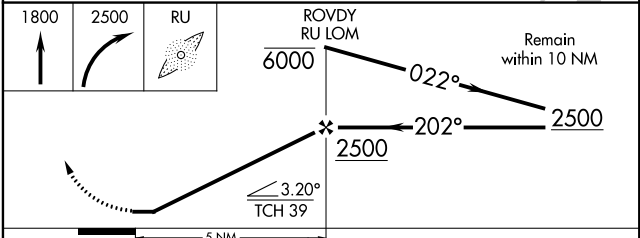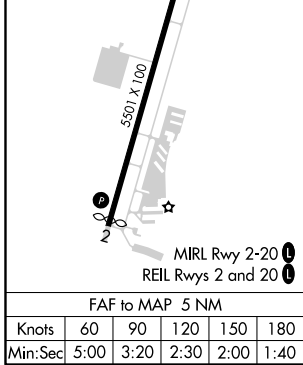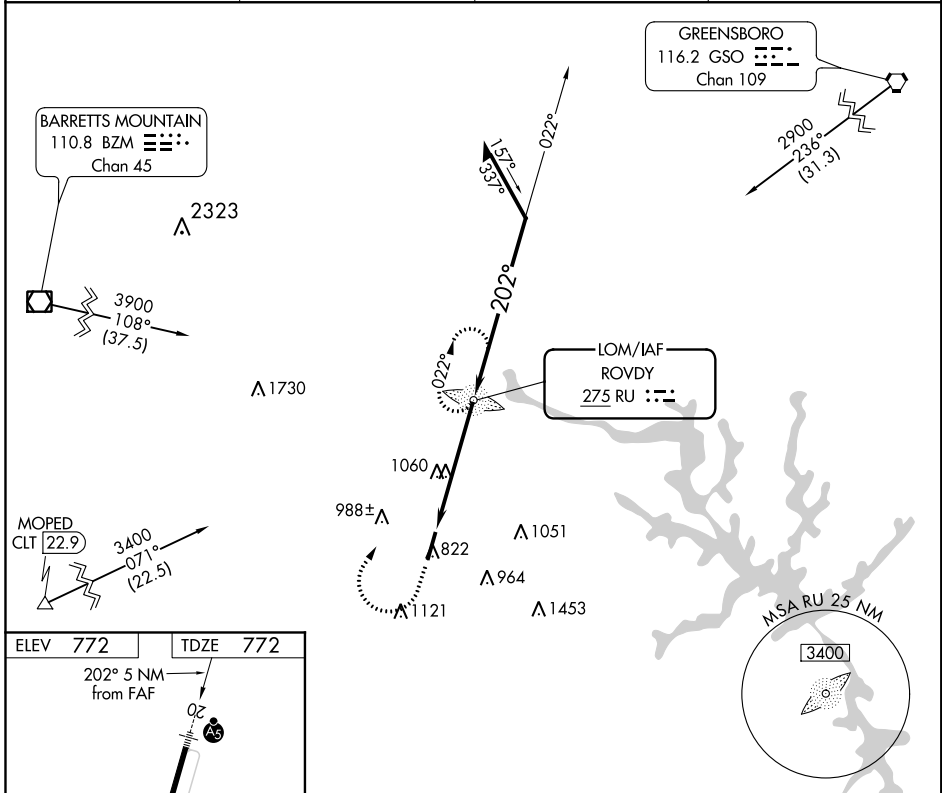

CATEGORY	A	B	C	D
S-20	1420-3/4 648 (700-3/4)		1420-1 3/8 648 (700-1 1/8)	
CIRCLING	1420-1 648 (700-1)		1420-1 7/8 648 (700-1 1/8)	1420-2 648 (700-2)

SE-2, 23 MAY 2019 to 20 JUN 2019

SE-2, 23 MAY 2019 to 20 JUN 2019