WAAS	APP CRS	Rwy Idg	5001
CH 45627	161°	TDZE	643
W16A		Apt Elev	647

RNAV (GPS) RWY 16

CHICAGO EXECUTIVE (PWK)

Circling to Rwy 6, 12, 24, 30, 34 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). Rwy 16 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Chicago O'Hare Intl altimeter setting and increase all DA 22 feet and all MDA 40 feet and increase LNAV Cats C and D visibility ¼ mile, and Circling Cat C visibility ⅛ mile. VDP and Baro-VNAV NA with Chicago O'Hare Intl altimeter setting.

MISSED APPROACH: Climb to 1200 then climbing left turn to 2100 direct DEERE and hold.

ATIS	CHICAGO APP CON	EXECUTIVE TOWER ★	GND CON	CLNC DEL	UNICOM
124.2	120.55 306.925	119.9 (CTAF) L	121.7	124.7 (when tower closed)	122.95

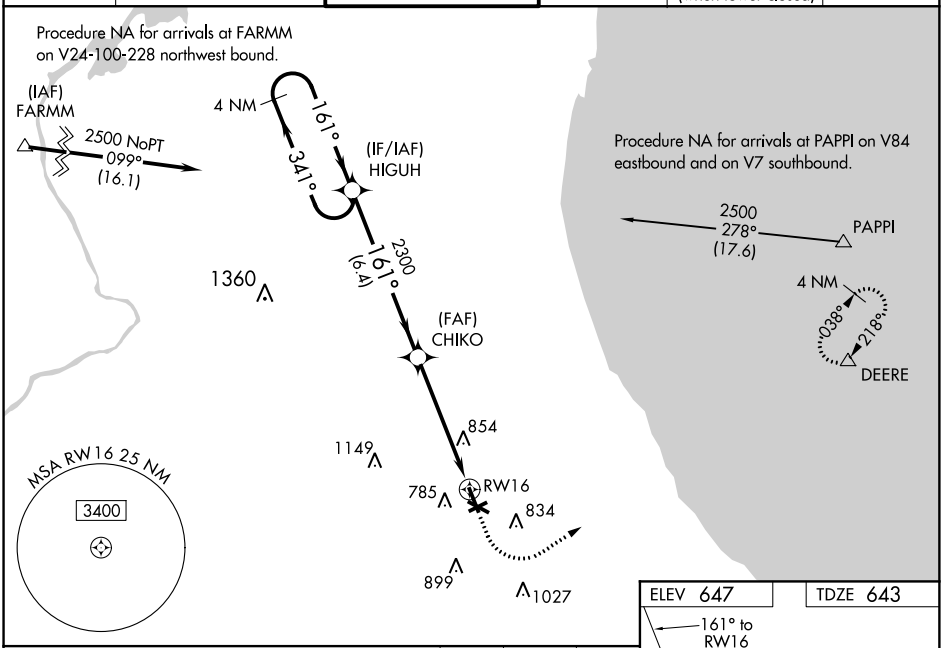

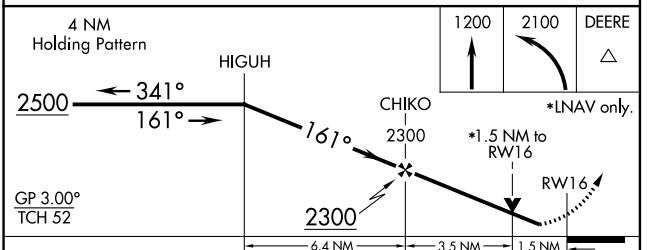

CATEGORY	A	B	C	D
LPV DA	905-1 262 (300-1)			
LNAV/VNAV DA	1088-1½ 445 (500-1½)			
LNAV MDA	1160-1 517 (600-1)		1160-1⅜ 517 (600-1⅜)	
CIRCLING	1160-1 513 (600-1)		1160-1½ 513 (600-1½)	1200-2 553 (600-2)

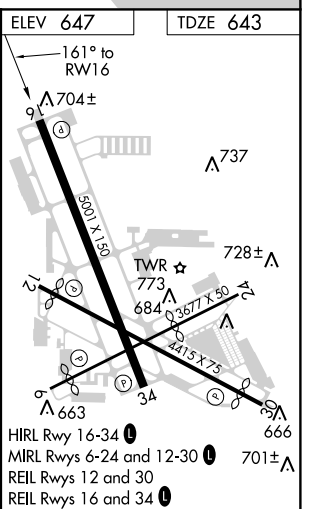

EC-3, 20 JUN 2019 to 18 JUL 2019
EC-3, 20 JUN 2019 to 18 JUL 2019