


|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>49102</b><br><b>W28A</b> | APP CRS<br><b>277°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5101</b><br><b>2111</b><br><b>2124</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 28

WELLSVILLE MUNI AIRPORT, TARANTINE FIELD (E.L.Z)

|   |   |                               |   |
|---|---|-------------------------------|---|
| RNP APCH.   |   | MALS                          | MISSED APPROACH: Climb to 4900 direct NEVGE and hold, continue climb-in-hold to 4900. |
| ▽ Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, procedure NA below -22°C or above 54°C. |   |                               |   |
| ASOS<br><b>119.275</b>  | CLEVELAND CENTER<br><b>124.325 353.85</b> | UNICOM<br><b>123.0</b> (CTAF) |   |

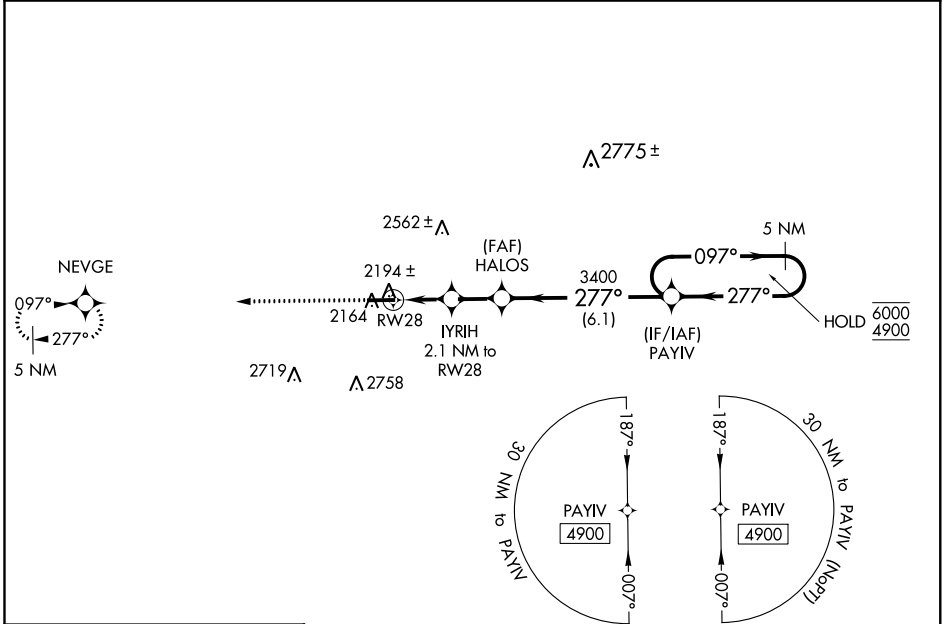

NE-2, 20 JUN 2019 to 18 JUL 2019

NE-2, 20 JUN 2019 to 18 JUL 2019

|           |          |           |
|-----------|----------|-----------|
| ELEV 2124 | <b>D</b> | TDZE 2111 |
|-----------|----------|-----------|

|                   |                       |                       |                               |                        |       |                            |
|-------------------|-----------------------|-----------------------|-------------------------------|------------------------|-------|----------------------------|
|                   | 4900                  | NEVGE                 | 5 NM Holding Pattern          |                        |       |                            |
|                   | *LNAV only            |                       | YIRH 2.1 NM to RWY 28         | HALOS 3400             | PAYIV | 097° → 6000<br>← 277° 4900 |
| *1 NM to RWY 28   |                       | *2820                 | 3400                          | GP 3.02°<br>TCH 52     |       |                            |
| 1 NM              |                       | 1.1 NM                | 1.8 NM                        | 6.1 NM                 |       |                            |
| CATEGORY          | A                     | B                     | C                             | D                      |       |                            |
| LPV DA            | 2311-3/4              |                       | 200 (200-3/4)                 |                        |       |                            |
| LNAV/VNAV DA      | 2376-3/4              |                       | 265 (300-3/4)                 |                        |       |                            |
| LNAV MDA          | 2460-3/4              |                       | 349 (400-3/4)                 |                        |       |                            |
| <b>C</b> CIRCLING | 2640-1<br>516 (600-1) | 2660-1<br>536 (600-1) | 2880-2 1/4<br>756 (800-2 1/4) | 3060-3<br>936 (1000-3) |       |                            |