RNAV (GPS) RWY 22

ELLINGTON (EFD)

WAAS	APP CRS	Rwy Idg	8001
CH 61111	219°	TDZE	31
W22A		Apt Elev	33

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA west of Rwy 17R-35L. For inop MALSR, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 5000 and LNAV Cats C, D and E visibility to RVR 5000.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 3100 direct WATFO and hold.

ATIS	HOUSTON APP CON	ELLINGTON TOWER	GND CON
135.575 269.9	134.45 284.0	126.05 253.5	121.6 275.8

RADAR REQUIRED

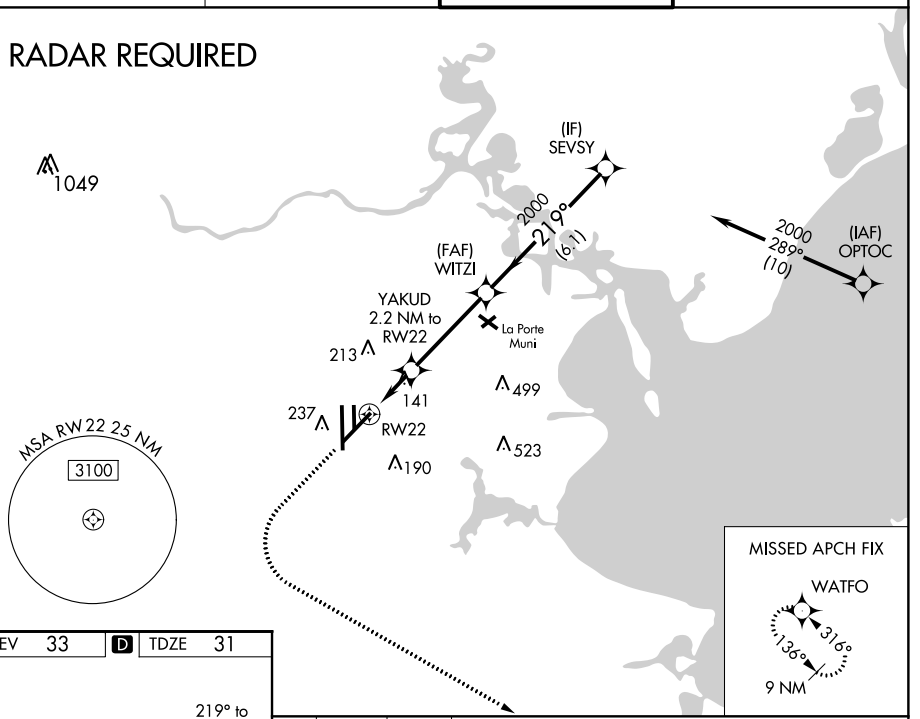

ELEV 33 | D | TDZ 31



HIRL Rwys 4-22 and 17R-35L
TDZ/CL Rwys 17R, 22 and 35L

500 | 3100 | WATFO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).

*LNAV only.

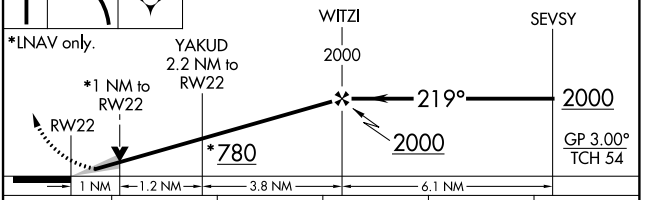

CATEGORY	A	B	C	D	E
LPV DA	231/18 200 (200-½)				
LNAV/VNAV DA	341/24 310 (400-½)				
LNAV MDA	400/24 369 (400-½)		400/35 369 (400-⅝)		
CIRCLING	500-1 467 (500-1)		500-1½ 467 (500-1½)	600-2 567 (600-2)	660-2¼ 627 (700-2¼)

SC-5, 18 JUL 2019 to 15 AUG 2019
SC-5, 18 JUL 2019 to 15 AUG 2019