
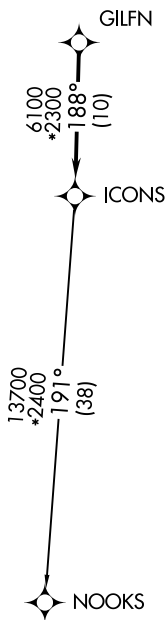


ICONS FOUR DEPARTURE (RNAV)

ATIS*
133.675
CHARLOTTE CLNC DEL
118.55
GND CON
121.85
CONCORD TOWER*
134.65 (CTAF)
UNICOM
122.95
CHARLOTTE DEP CON
128.325 307.8

**TOP ALTITUDE:
3000**



TAKEOFF MINIMUMS

Rwy 2: Standard.
Rwy 20: Standard with minimum climb
of 320' per NM to 2400.

- NOTE: For turbojets only.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: RADAR required.
- NOTE: If unable to accept climb rates,
advise ATC on initial contact.
- NOTE: Upon reaching 10000 MSL,
accelerate to and maintain 280K,
if unable advise ATC.
- NOTE: Transponder code will be issued
via PDC or Charlotte CLNC DEL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 2: Climb heading 016° to 2200, thence. . . .
TAKEOFF RWY 20: Climbing left turn heading 150° to 2400, thence. . . .

. . . .on heading as assigned by ATC, expect RADAR vectors to GILFN, then on track 188° to ICONS. Then on NOOKS transition. Maintain 3000, expect filed altitude within 10 minutes after departure.

NOOKS TRANSITION (ICONS4.NOOKS)

SE-2: 18 JUL 2019 to 15 AUG 2019

SE-2: 18 JUL 2019 to 15 AUG 2019

ICONS FOUR DEPARTURE (RNAV)