


WEAZL FOUR DEPARTURE (RNAV)

TOP ALTITUDE:
3000


- ATIS ★
- 133.675
- CLNC DEL
- 118.55
- CHARLOTTE CLNC DEL
- 127.25 (when tower closed)
- GND CON
- 121.85
- CONCORD TOWER ★
- 134.65 (CTAF)
- UNICOM
- 122.95
- CHARLOTTE DEP CON
- 128.325 307.8

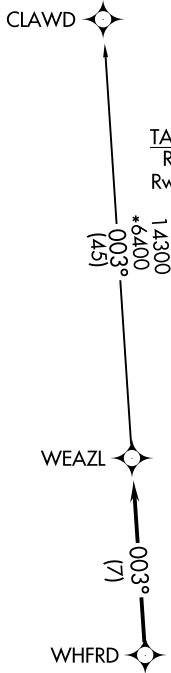

TAKEOFF MINIMUMS

- Rwy 2: Standard.
- Rwy 20: Standard with minimum climb of 320' per NM to 2400.

- NOTE: For turbojets only.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: RADAR required.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 2: Climb heading 016° to 2200, thence...

TAKEOFF RWY 20: Climbing left turn heading 150° to 2400, thence. . . .

. . . on heading assigned by ATC, expect RADAR vectors to WHFRD, then on track 003° to WEAZL, then on CLAWD transition. Maintain 3000, expect clearance to filed altitude within 10 minutes after departure.

CLAWD TRANSITION (WEAZL4.CLAWD)

SE-2: 18 JUL 2019 to 15 AUG 2019

SE-2: 18 JUL 2019 to 15 AUG 2019