


WAAS CH 61299 W28A	APP CRS 275°	Rwy Idg TDZE 998 Apt Elev 1026	9000
--	------------------------	--	-------------



RNAV (GPS) Y RWY 28

HARTSFIELD-JACKSON ATLANTA INTL (ATL)

<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwys 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.</p>					<p>ALSIF-2</p>	<p>MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.</p>	
D-ATIS ARR 119.65	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER			ALL RWYS	GND CON	ALL RWYS
DEP 125.55	127.9 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	10-28
		119.1 125.325	123.85	119.3	119.5 254.4	121.9	121.75 121.65 254.4

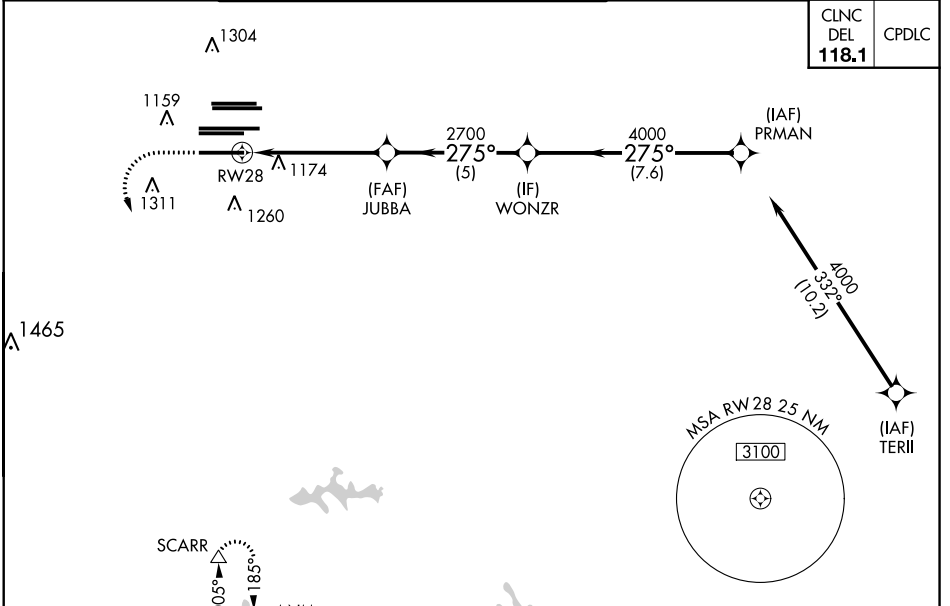

RADAR REQUIRED

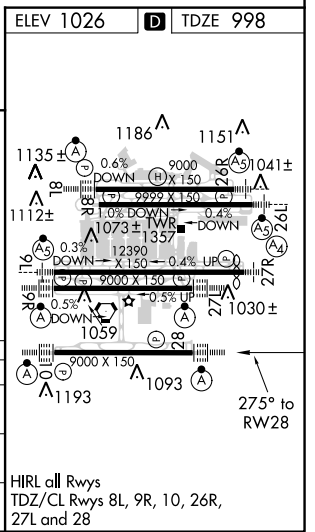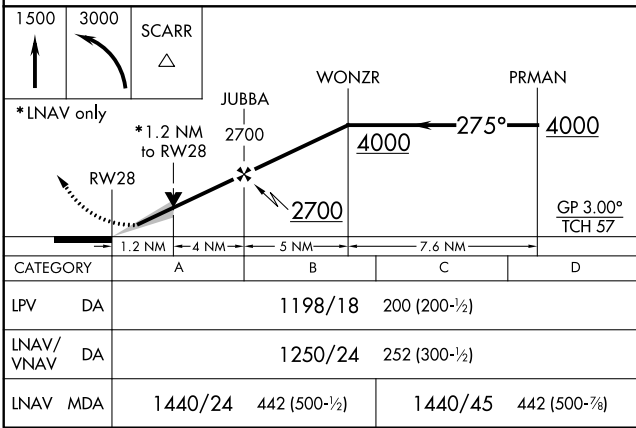

SE-4, 15 AUG 2019 to 12 SEP 2019

SE-4, 15 AUG 2019 to 12 SEP 2019