BLZZR FOUR DEPARTURE (RNAV)

(BLZZR4.BLZZR) 120CT17

GENERAL EDWARD LAWRENCE LOGAN INTL (BOS)

BOSTON, MASSACHUSETTS

D-ATIS
135.0
CLNC DEL
121.65 257.8
CPDLC
GND CON
121.9
BOSTON TOWER
128.8 257.8
BOSTON DEP CON
133.0

TAKEOFF MINIMUMS:
Rwys 4L, 14, 15L, 32, 33R: NA-ATC.
Rwy 4R: Standard with minimum climb of 500′ per NM to 3600.
Rwy 9: Standard with minimum climb of 500′ per NM to 4000.
Rwy 15R: Standard with minimum climb of 500′ per NM to 520.
Rwy 22L: 300-1 with minimum climb of 500′ per NM to 520, or standard with minimum climb of 500′ per NM to 520 if tower reports no tall vessels in the departure area.
Rwy 22R: Standard with minimum climb of 500′ per NM to 520.
Rwy 27: Standard with a minimum climb of 500′ per NM to 1300.
Rwy 33L: Standard with a minimum climb of 500′ per NM to 520.

NOTE: Departure hdg/RNAV tracks/vectors are predicated on avoiding noise sensitive areas. Flight crew awareness and compliance is important in minimizing noise impacts on surrounding communities.
NOTE: Rwy 15R, 22L, 22R: Do not exceed 210K until 520′ MSL.

TOP ALTITUDE: 5000

NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required for non-GPS equipped aircraft.
NOTE: RNAV 1.
NOTE: For Turbojets only.
NOTE: At/Below 250K until BRRRO.
NOTE: At/Below 290K until HEWMO.

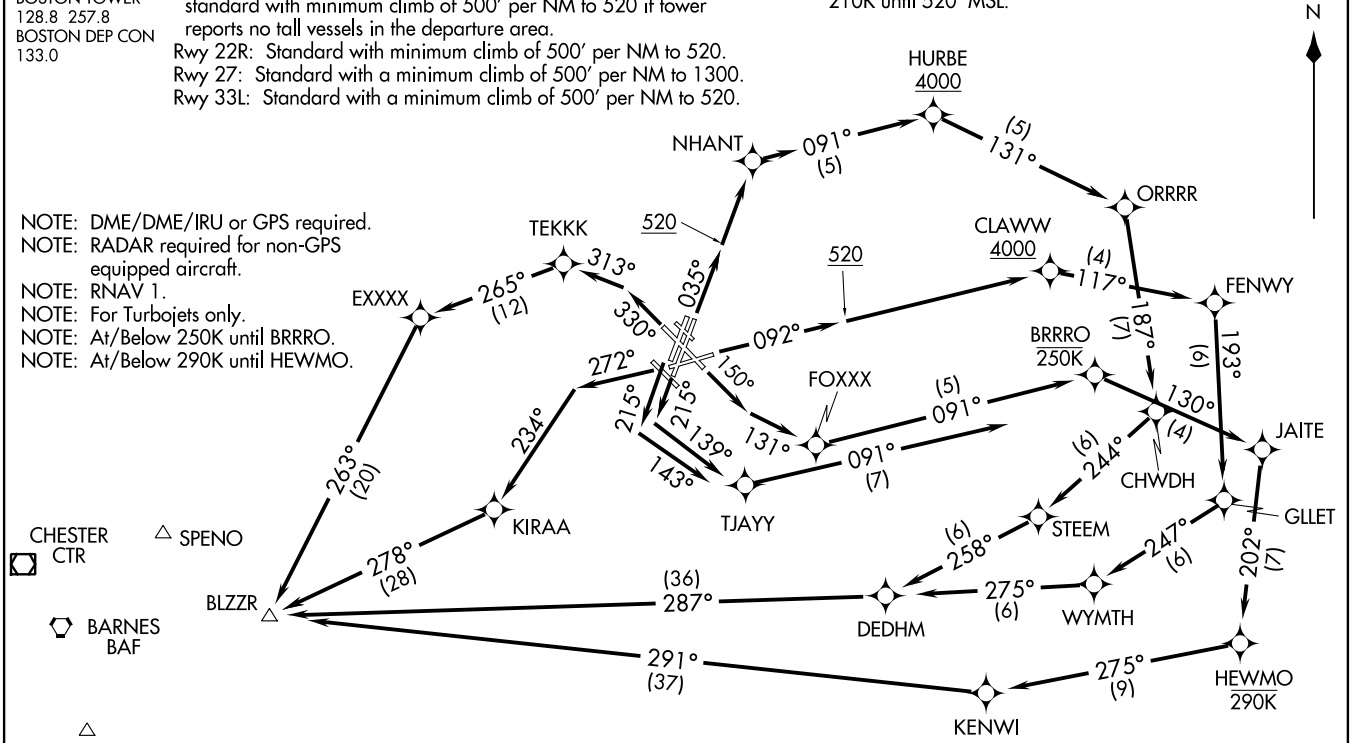

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

(BLZZR4.BLZZR) 17285

BLZZR FOUR DEPARTURE (RNAV)

GENERAL EDWARD LAWRENCE LOGAN INTL (BOS)

AL-58 (FAA)

BOSTON, MASSACHUSETTS