

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 56516 W26A | APP CRS 260° | Rwy Idg TDZE Apt Elev | 6348 1682 1716 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 26

MINOT INTL (MOT)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Baro-VNAV NA when using Minot AFB altimeter setting. VDP NA with Minot AFB altimeter setting. When local altimeter setting not received, use Minot AFB altimeter setting and increase all DA 30 feet and all MDA 40 feet; increase Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3900 direct GEBVE and hold.

| | | | | |
|------------------------|---------------------------------------|---|-------------------------|-------------------------|
| ASOS 118.725 | MINOT APP CON * 119.6 363.8 | MAGIC CITY TOWER * 118.2 (CTAF) 0 251.125 | GND CON 121.9 | UNICOM 122.95 |
|------------------------|---------------------------------------|---|-------------------------|-------------------------|

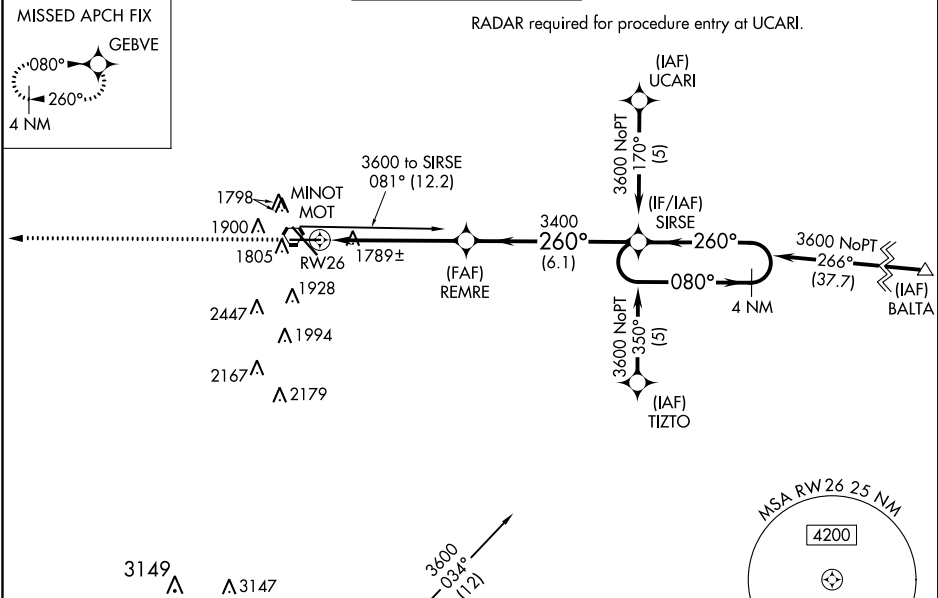

| | | |
|-----------|----------|-----------|
| ELEV 1716 | D | TDZE 1682 |
|-----------|----------|-----------|

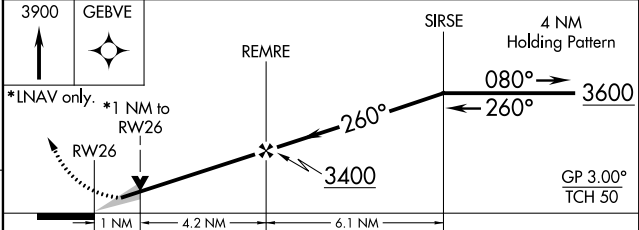

| CATEGORY | A | B | C | D |
|--------------|--------|-------------|-------------------------|-------------------------|
| LPV DA | | 1932-1 | 250 (300-1) | |
| LNAV/VNAV DA | | 1932-1 | 250 (300-1) | |
| LNAV MDA | | 2040-1 | 358 (400-1) | 2040-1½ 358 (400-1½) |
| CIRCLING | 2200-1 | 484 (500-1) | 2280-1½ 564 (600-1½) | 2280-2 564 (600-2) |

NC-1, 15 AUG 2019 to 12 SEP 2019

NC-1, 15 AUG 2019 to 12 SEP 2019