

| | | | |
|---------------------------------|------------------------|---|-------------|
| WAAS CH 69435 W15A | APP CRS 149° | Rwy Idg TDZE 166 Apt Elev 166 | 8014 |
|---------------------------------|------------------------|---|-------------|


RNAV (GPS) RWY 15

CRAIG FIELD (SEM)



▼ Baro-VNAV NA when using Montgomery altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Montgomery altimeter setting. When local altimeter setting not received, use Montgomery altimeter setting and increase all DA 78 feet, all MDA 80 feet, LPV all Cats visibility 3/8 mile, LNAV/VNAV all Cats visibility and LNAV Cats C and D visibility 1/4 mile, Circling Cat C visibility 1/2 mile and Cat D visibility 1/4 mile.

▲ MISSED APPROACH: Climb to 3100 direct CADIP and hold.

| | | |
|---------------------------|--|---------------------------------|
| AWOS-3PT 119.15 | MONTGOMERY APP CON ★ 124.0 363,025 | UNICOM 122.7 (CTAF) 0 |
|---------------------------|--|---------------------------------|

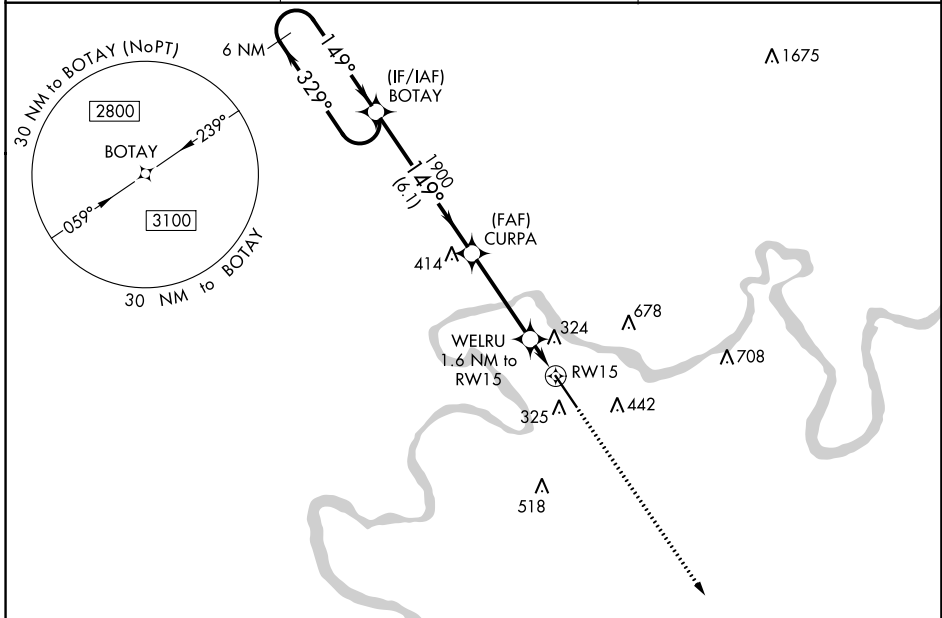

| | |
|----------|----------|
| ELEV 166 | TDZE 166 |
|----------|----------|

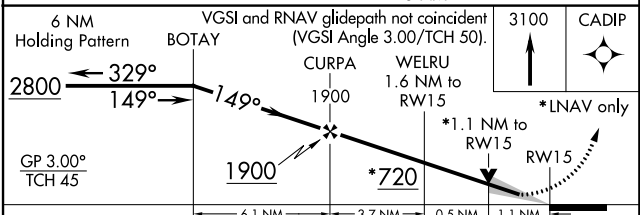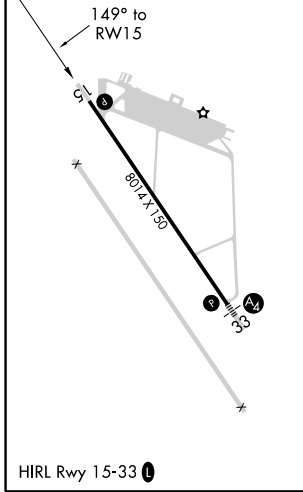

| CATEGORY | A | B | C | D |
|-------------------|----------------------|----------------------|------------------------------|-------------------------------|
| LPV DA | | 416-3/4 | 250 (300-3/4) | |
| LNAV/VNAV DA | | 569-1 3/8 | 403 (500-1 3/8) | |
| LNAV MDA | 560-1 | 394 (400-1) | 560-1 1/8 | 394 (400-1 1/8) |
| C CIRCLING | 660-1 494 (500-1) | 760-1 594 (600-1) | 760-1 1/2 594 (600-1 1/2) | 1040-2 3/4 874 (900-2 3/4) |