


LOC I-CVN <b>108.9</b>	APP CRS <b>037°</b>	Rwy Idg <b>7200</b>
		TDZE <b>4205</b>
		Apt Elev <b>4216</b>

# ILS or LOC RWY 4


CLOVIS MUNI (CVN)

**NA** When local altimeter setting not received, use Cannon AFB altimeter setting and increase all DA and MDA 40 feet. For inop MALSR, increase S-LOC 4 Cat C/D visibility to 1 1/8 mile. For inop MALSR when using Cannon AFB, increase S-LOC 4 Cat C/D visibility to 1 1/8 mile.

**MALSR** 


**MISSED APPROACH:** Climb to 4700 then climbing right turn to 6000 direct TXO VORTAC and hold.

AWOS-3PT <b>135.375</b>	CANNON APP CON <b>118.425 352.1</b>	CLNC DEL <b>119.0</b>	UNICOM <b>122.8 (CTAF)</b>
----------------------------	--	--------------------------	-------------------------------

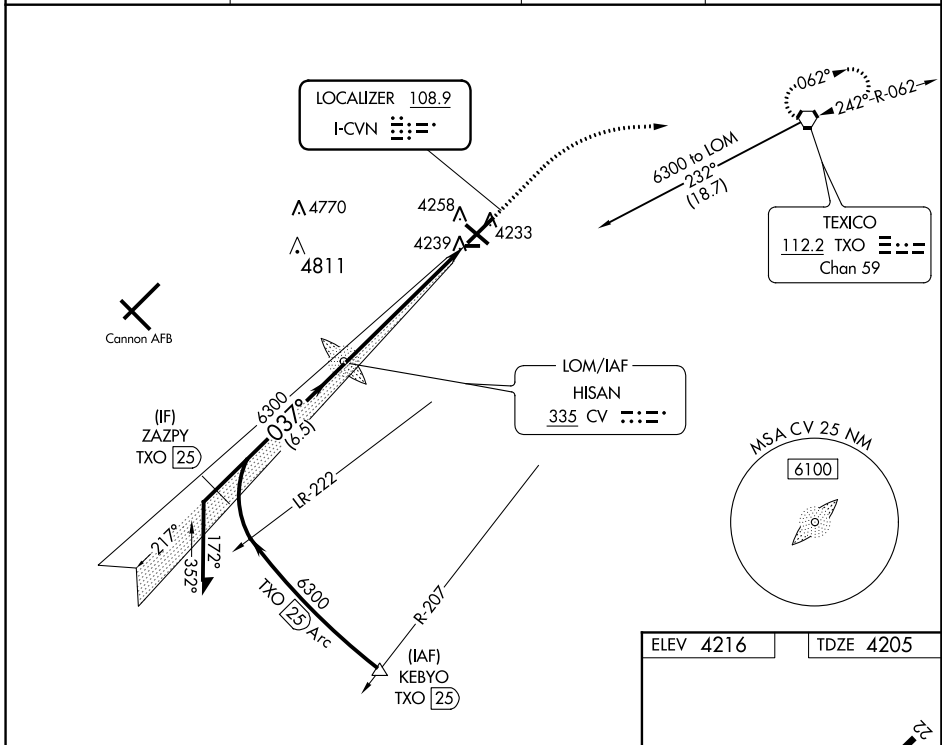

SW-1, 10 OCT 2019 to 07 NOV 2019

SW-1, 10 OCT 2019 to 07 NOV 2019

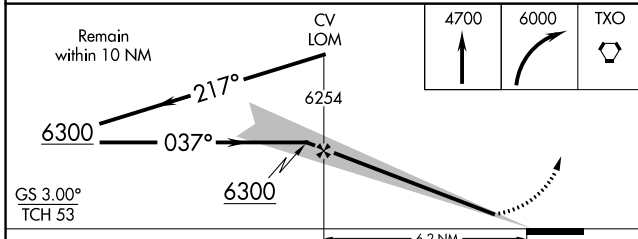

ELEV 4216	TDZE 4205
-----------	-----------

REIL Rwy 12 and 30  
MIRL Rwy 4-22 and 12-30

FAF to MAP 6.2 NM

Knots	60	90	120	150	180
Min:Sec	6:12	4:08	3:06	2:29	2:04

CATEGORY	A	B	C	D
S-ILS 4		4405-1/2	200 (200-1/2)	
S-LOC 4	4680-1/2	475 (500-1/2)	4680-1	475 (500-1)
<b>C</b> CIRCLING	4680-1	464 (500-1)	4700-1 1/2 484 (500-1 1/2)	4820-2 604 (700-2)