WAAS	APP CRS	Rwy Idg	5201
CH 70504	356°	TDZE	1277
W36A		Apt Elev	1277

RNAV (GPS) RWY 36
WELLINGTON MUNI (EGT)

RNP APCH.

T A NA Baro-VNAV and VDP NA when using Wichita Dwight D Eisenhower National altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Wichita Dwight D Eisenhower National altimeter setting: increase LPV DA to 1581 feet and all visibilites ⅛ SM; increase LNAV/VNAV DA to 1674 feet and all visibilites ⅛ SM; increase all MDAs 60 feet and Circling Cats C/D visibility ¼SM.

MISSED APPROACH: Climb to 3000 direct TANUC and hold.

AWOS-3	WICHITA APP CON	UNICOM
118.875	134.85	122.8 (CTAF) L

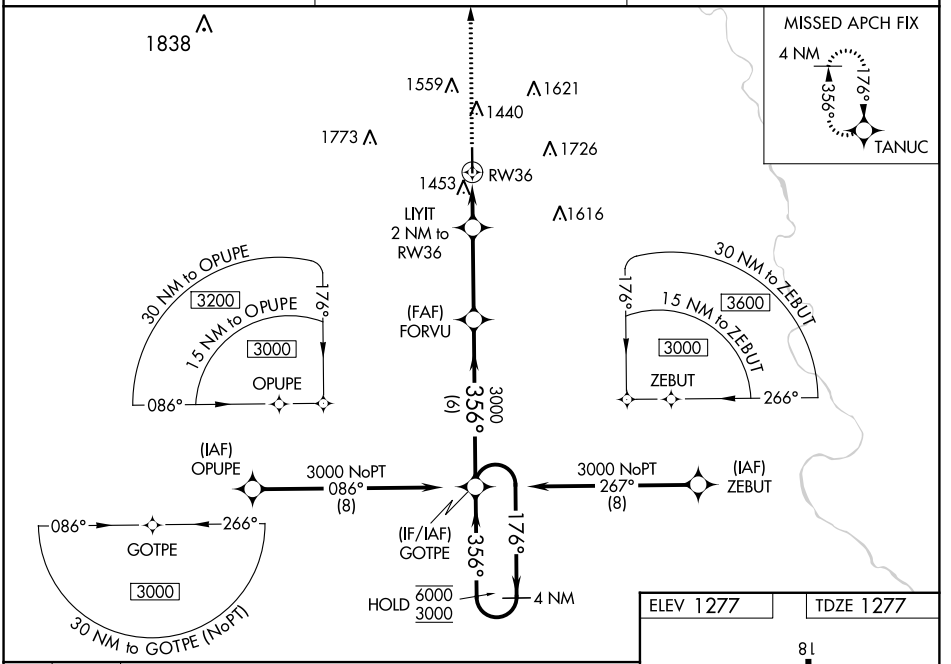

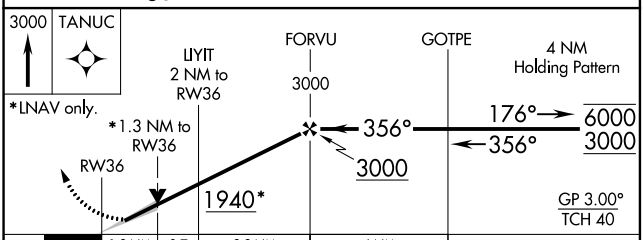

CATEGORY	A	B	C	D
LPV DA	1527-¾	250 (300-¾)		
LNAV/VNAV DA	1614-1	337 (400-1)		
LNAV MDA	1720-1	443 (500-1)	1720-1⅜	443 (500-1⅜)
C CIRCLING	1760-1	483 (500-1)	2040-2¼ 763 (800-2¼)	2140-2¾ 863 (900-2¾)

ELEV 1277 TDZE 1277

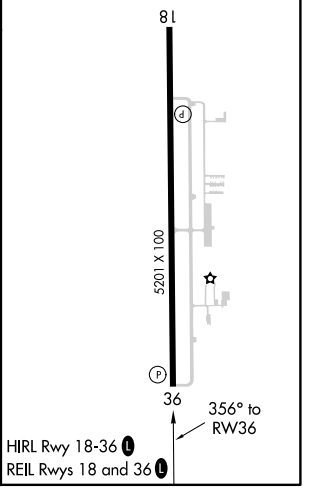

HIRL Rwy 18-36 L
REIL Rwys 18 and 36 L

NC-2, 10 OCT 2019 to 07 NOV 2019
NC-2, 10 OCT 2019 to 07 NOV 2019