


# BNDIA TWO DEPARTURE (RNAV)

**TOP ALTITUDE:  
ASSIGNED BY ATC**

D-ATIS	124.4
CLNC DEL	125.5 263.0
CPDLC	GND CON
AUSTIN TOWER	121.9 348.6
AUSTIN DEP CON	121.0 281.5
AUSTIN DEP CON	119.0 370.85



NOTE: RADAR required.  
 NOTE: DME/DME/IRU or GPS required.  
 NOTE: RNAV-1.

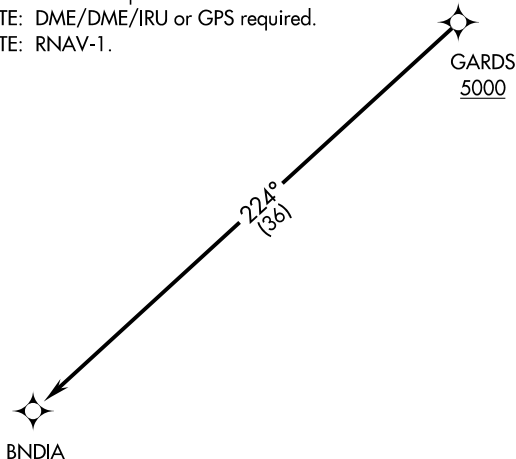

**TAKEOFF MINIMUMS:**  
 Rwy 17L/R: Standard.  
 Rwy 35L/R: Standard with minimum  
 climb of 240' per NM to 2600.

NOTE: Chart not to scale.



## DEPARTURE ROUTE DESCRIPTION

**RWYS 17L/R:** Climb heading 175° or as assigned by ATC for RADAR vectors to cross GARDS at or above 5000, thence . . . .

**RWYS 35L/R:** Climb heading 355° or as assigned by ATC for RADAR vectors to cross GARDS at or above 5000, thence . . . .

. . . . on track 224° to BNDIA. Maintain altitude assigned by ATC. Expect filed altitude 10 minutes after departure.