

WAAS CH <b>69216</b> <b>W30A</b>	APP CRS <b>296°</b>	Rwy Idg TDZE Apt Elev	<b>6750</b> <b>12</b> <b>15</b>
--	------------------------	-----------------------------	---------------------------------------

# RNAV (GPS) RWY 30

JACK BROOKS RGNL (BPT)




RNP APCH.

RADAR required.

**Baro-VNAV NA** when using Orange County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). Rwy 30 helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Orange County altimeter setting: increase LPV DA to 295 feet; increase LNAV/VNAV DA to 436 feet; increase all MDAs 40 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ SM and LNAV Cat E visibility ¼ SM.

**MISSED APPROACH:** Climb to 3000 direct GIDDY and hold.

ATIS <b>126.3</b>	HOUSTON APP CON <b>121.3 377.1</b>	<b>BEAUMONT TOWER*</b> <b>119.5 (CTAF) 0</b>	GND CON <b>124.85</b>	CLNC DEL <b>118.3</b>	UNICOM <b>122.95</b>
----------------------	---------------------------------------	---	--------------------------	--------------------------	-------------------------

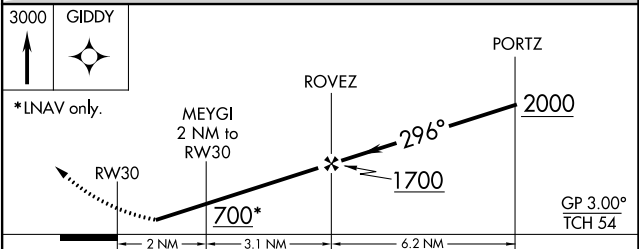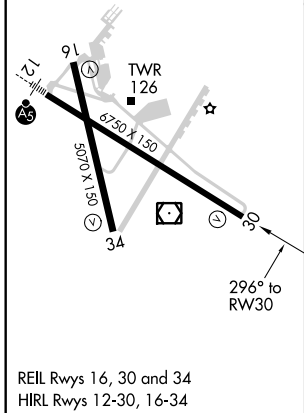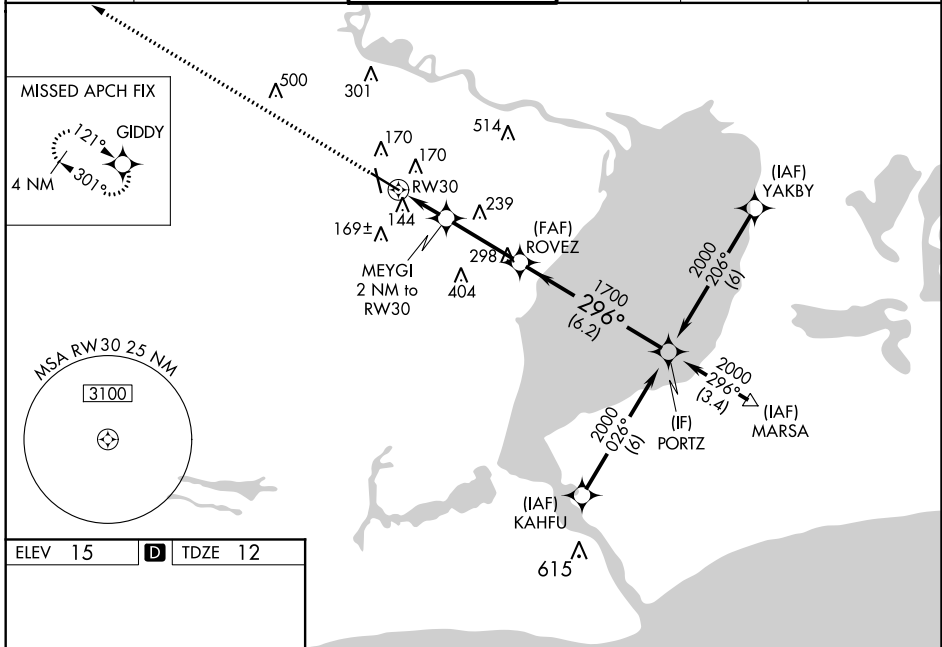

CATEGORY	A	B	C	D	E
LPV DA	263-¾		251 (300-¾)		
LNAV/VNAV DA	404-1¼		392 (400-1¼)		404-1½ 392 (400-1½)
LNAV MDA	540-1	528 (600-1)	540-1½ 528 (600-1½)	540-1¾	528 (600-1¾)

SC-5, 30 JAN 2020 to 27 FEB 2020

SC-5, 30 JAN 2020 to 27 FEB 2020