

| | | |
|----------------------------|------------------------|-------------------------|
| LOC I-PWA 110.15 | APP CRS 175° | Rwy Idg 6844 |
| | | TDZE 1291 |
| | | Apt Elev 1300 |



ILS or LOC RWY 17L

WILEY POST (PWA)

⚠ When local altimeter setting not received, use Will Rogers World altimeter setting and increase all DA 21 feet and all MDA 40 feet and increase S-LOC 17L Cat C visibility ¼ mile.

MALSR MISSED APPROACH: Climb to 1800 then climbing left turn to 3000 direct IRW VORTAC and hold.

| | | | | |
|------------------------|--|---|-------------------------|-------------------------|
| ATIS 128.725 | OKE CITY APP CON 124.6 266.8 | WILEY POST TOWER ★ 126.9 (CTAF) 306.9 | GND CON 121.7 | UNICOM 122.95 |
|------------------------|--|---|-------------------------|-------------------------|

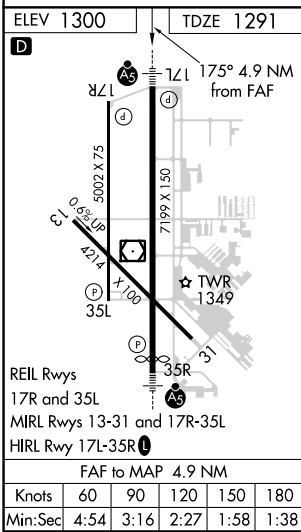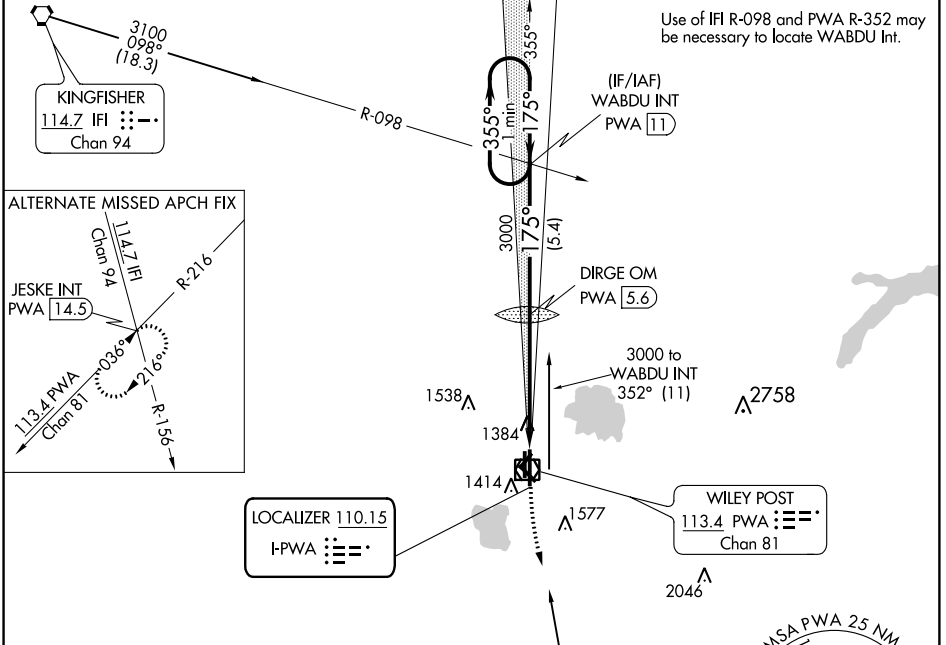

| | | | | | | |
|--------------------|----------------------------|--------|--------------------|--------|-----------------------|-----|
| WABDU INT PWA (11) | One Minute Holding Pattern | | DIRGE OM PWA (5.6) | 1800 | 3000 | IRW |
| | 3000 ← 355° | 175° → | | | | |
| GS 3.00° TCH 54 | | 3000 | | | | |
| | | 5.4 NM | | 4.9 NM | | |
| CATEGORY | A | B | C | D | | |
| S-ILS 17L | 1491-½ | | 200 (200-½) | | | |
| S-LOC 17L | 1660-½ | | 369 (400-½) | | 1660-¾ 369 (400-¾) | |
| CIRCLING | 1780-1 | | 480 (500-1) | | 1880-1½ | |
| | | | | | 580 (600-1½) | |
| | | | | | 1880-2 | |
| | | | | | 580 (600-2) | |

SC-1, 30 JAN 2020 to 27 FEB 2020

SC-1, 30 JAN 2020 to 27 FEB 2020