ILS or LOC RWY 32

SOUTHERN WISCONSIN RGNL (JVL)

LOC/DME I-REE	APP CRS	Rwy Idg	7302
111.35	316°	TDZE	806
Chan 50 (Y)		Apt Elev	808

▼ Circling to Rwy 18 NA at night. When local altimeter setting not received, use Rockford Intl altimeter setting and increase DA to 1075, increase all MDA 80 feet. Increase FOGAS FIX minimums S-LOC 32 Cats C and D visibility ¼ mile. For inoperative MALSR when using Rockford Intl altimeter setting, increase S-ILS-32 all Cats visibility to 1 mile. VDP NA when using Rockford Intl altimeter setting.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 3100 via heading 100° and I-REE SE course to TIRRO INT/13.1 DME and hold.

ATIS	ROCKFORD APP CON	JANESVILLE TOWER ★	GND CON	CLNC DEL	UNICOM
128.25	121.0 327.0	118.8 (CTAF) L 225.4	121.65	121.65	122.95

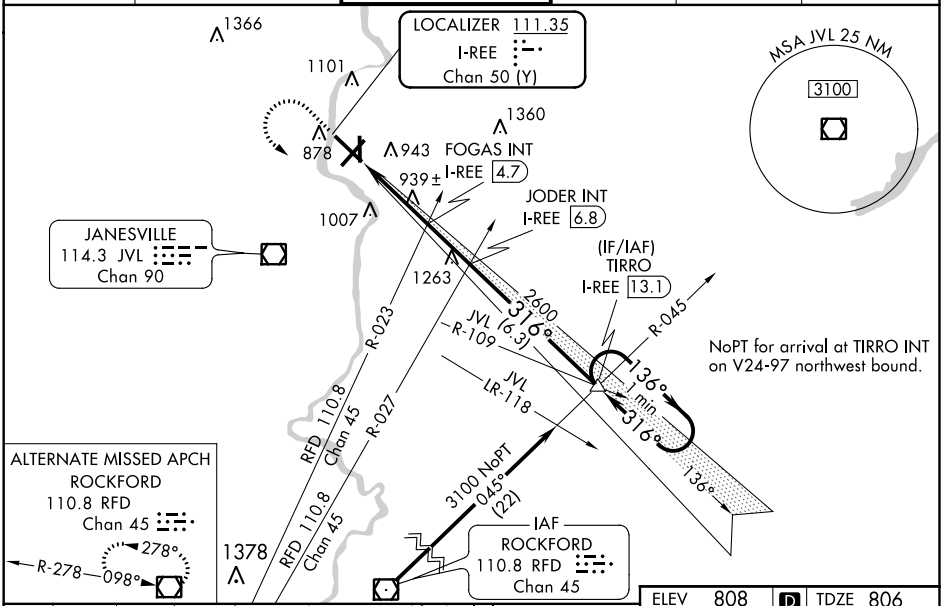

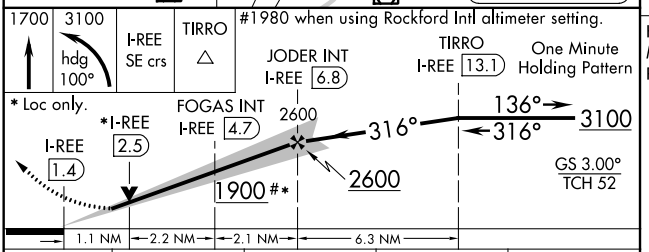

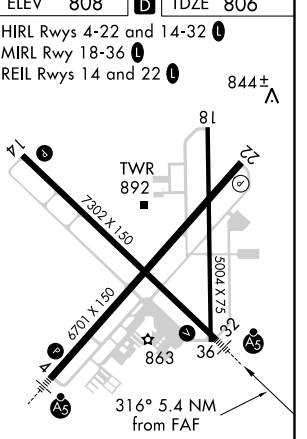

CATEGORY	A	B	C	D
S-ILS 32	1006-½ 200 (200-½)			
S-LOC 32	1900-¾ 1094 (1100-¾)	1900-1 1094 (1100-1)	1900-2½ 1094 (1100-2½)	
CIRCLING	1900-1¼ 1092 (1100-1¼)	1900-1½ 1092 (1100-1½)	1900-3 1092 (1100-3)	
FOGAS FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 32	1200-½ 394 (400-½)			1200-¾ 394 (400-¾)
CIRCLING	1260-1 452 (500-1)		1280-1½ 472 (500-1½)	1420-2 612 (700-2)

FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

EC-3, 27 FEB 2020 to 26 MAR 2020
EC-3, 27 FEB 2020 to 26 MAR 2020