RNAV (GPS) RWY 36

PERRY-HOUSTON COUNTY (PXE)

WAAS	APP CRS	Rwy Idg	4999
CH 86805	002°	TDZE	417
W36A		Apt Elev	418

NA — Baro-VNAV NA when using Macon altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Macon altimeter setting. When local altimeter setting not received use Macon altimeter setting and increase all DA 38 feet and all MDA 40 feet. For inoperative MALSR, increase LNAV all Cats visibility ¼ mile. For inoperative MALSR, when using Macon altimeter setting, increase LNAV Cat C visibility to 1¼.

MALSR

MISSED APPROACH: Climb to 2500 direct FEPSI and on track 332° to ROBBS and hold.

AWOS-3	ATLANTA APP CON ★	UNICOM
123.825	124.2 279.6	122.725 (CTAF) L

MISSED APCH FIX
4 NM
269°
089°
ROBBS

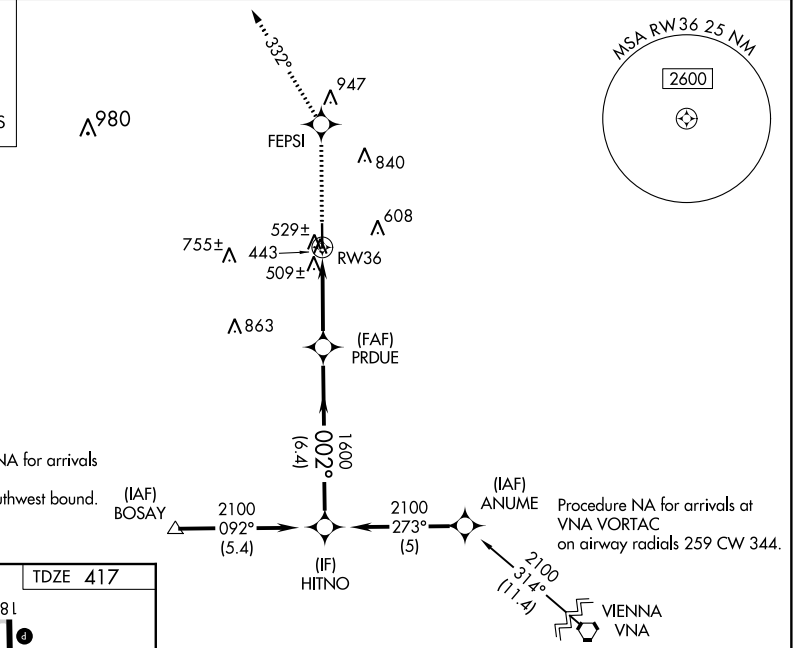

ELEV 418 TDZE 417

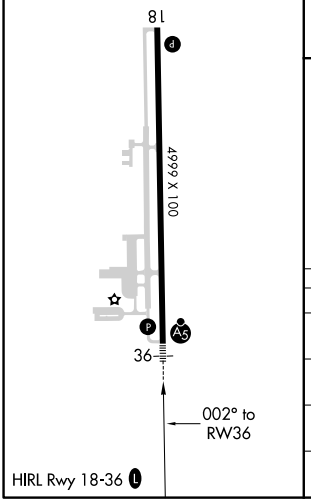

Procedure Turn NA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).

2500 | FEPSI | tr 332° | ROBBS

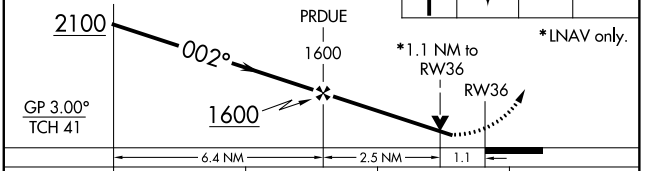

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	745-¾ 328 (400-¾)			
LNAV/VNAV DA	806-1 389 (400-1)			
LNAV MDA	780-¾ 363 (400-¾)			780-1 363 (400-1)
CIRCLING	860-1 442 (500-1)	880-1 462 (500-1)	960-1½ 542 (600-1½)	980-2 562 (600-2)

SE-4, 26 MAR 2020 to 23 APR 2020
SE-4, 26 MAR 2020 to 23 APR 2020