APP CRS	Rwy Idg	7110
211°	TDZE	404
	Apt Elev	410

RNAV (RNP) Z RWY 21R

TRI-CITIES (PSC)

For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 54°C (130°F). GPS required. RF required. For inoperative MALSR, increase RNP 0.11 all Cats visibility to RVR 5700 and RNP 0.30 all Cats visibility to 1⅜ mile.

MALSR

MISSED APPROACH: Climb to 5200 on track 211° to KARTE, right turn to DAMSE, and on track 332° to PAIDS and hold.

ATIS	CHINOOK APP CON★	TRI-CITIES TOWER★	GND CON	CLNC DEL	UNICOM
125.65	128.75 377.2	135.3 (CTAF) L 323.3	121.8	120.0	122.95

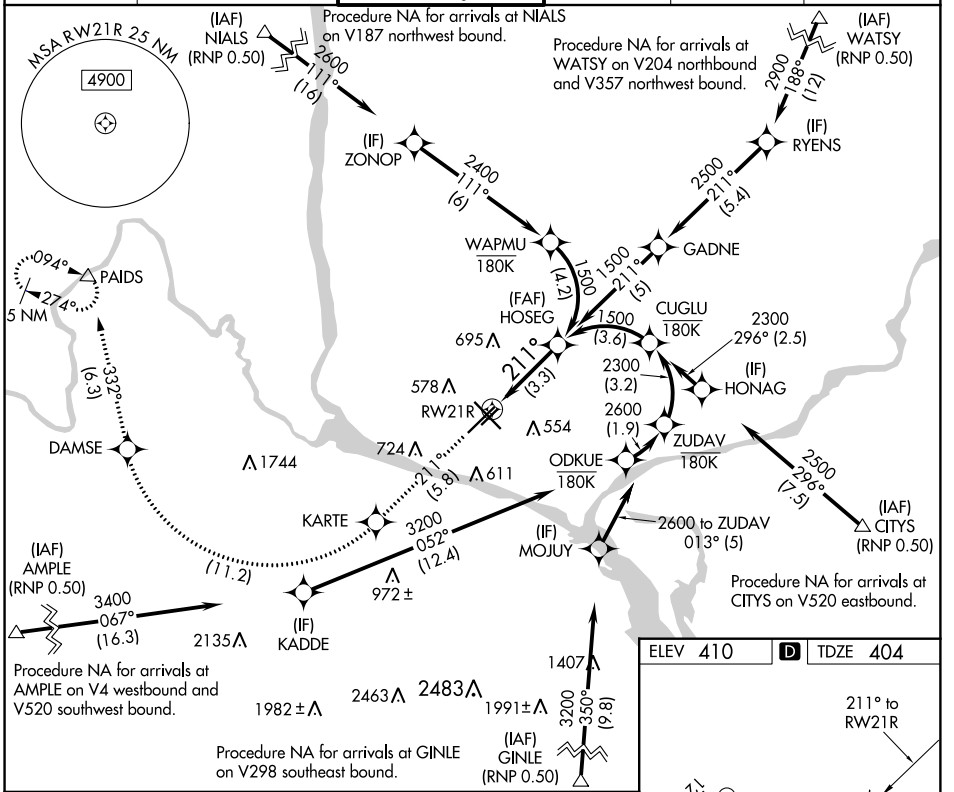

5200 tr 211°	KARTE		DAMSE	tr 332°	PAIDS

See planview for multiple IF locations.

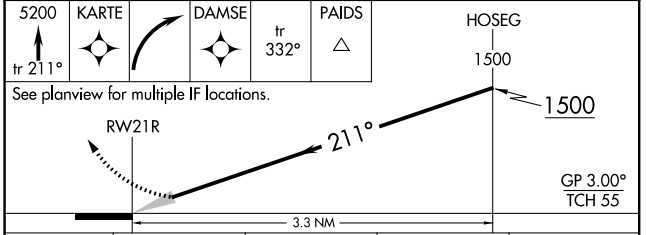

CATEGORY	A	B	C	D
RNP 0.11 DA	754/33	350 (400-⅝)		
RNP 0.30 DA	832/48	428 (500-1)		

AUTHORIZATION REQUIRED

ELEV 410 D TDZE 404

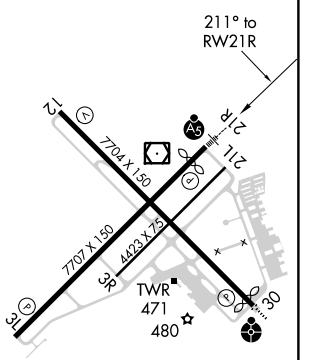

REIL Rwys 3L and 12
MIRL Rwy 12-30 L
HIRL Rwy 3L-21R L

NW-1, 21 MAY 2020 to 18 JUN 2020
NW-1, 21 MAY 2020 to 18 JUN 2020