

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 90220 W23A | APP CRS 235° | Rwy Idg TDZE Apt Elev | 8204 1226 1228 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 23


AKRON-CANTON RGNL (CAK)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.





MISSED APPROACH: Climb to 3000 direct CICEE and on track 147° to BSV VOR/DME and hold.

| | | | | |
|-----------------------|---|---|-------------------------------|---------------------------|
| ATIS 121.05 | CLEVELAND APP CON* 125.5 269.25 | AKRON-CANTON TOWER 134.75 279.575 | GND CON 121.7 348.6 | CLNC DEL 132.05 |
|-----------------------|---|---|-------------------------------|---------------------------|

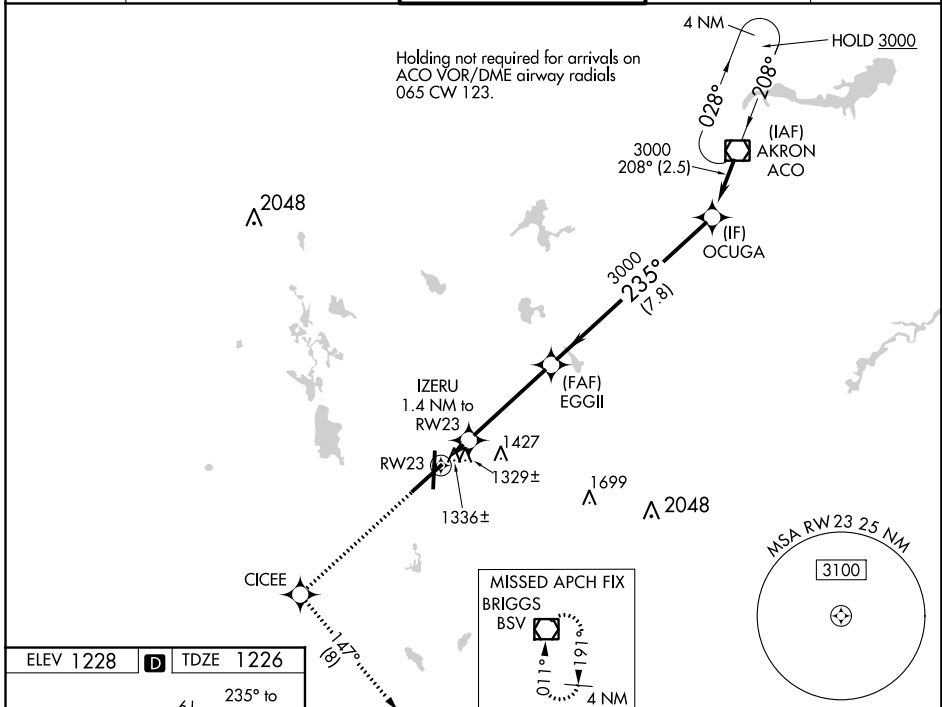

| | | |
|-----------|----------|-----------|
| ELEV 1228 | D | TDZE 1226 |
|-----------|----------|-----------|

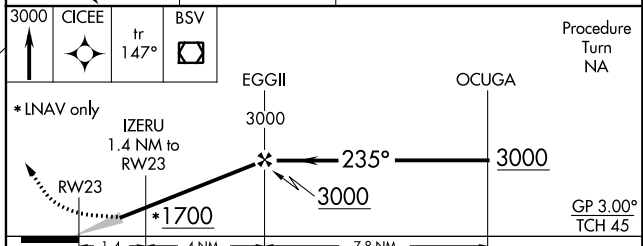

| CATEGORY | A | B | C | D |
|--------------|-----------------------|----------------------|---------------------|---|
| LPV DA | **1426/24 200 (200-½) | | | |
| LNAV/VNAV DA | 1691/60 465 (500-1¼) | | | |
| LNAV MDA | 1640/24 414 (500-½) | 1640/40 414 (500-¾) | 1640/50 414 (500-1) | |
| CIRCLING | 1760-1 532 (600-1) | 1760-1½ 532 (600-1½) | 1780-2 552 (600-2) | |

EC-2, 21 MAY 2020 to 18 JUN 2020

EC-2, 21 MAY 2020 to 18 JUN 2020