RNAV (RNP) Z RWY 17L

AUSTIN-BERGSTROM INTL (AUS)

APP CRS	Rwy Idg	9000
175°	TDZE	492
	Apt Elev	542

For uncompensated Baro-VNAV systems, procedure NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. For inop ALS, increase RNP 0.30 all Cats visibility to 1¼ SM.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct HOOKK and hold.

D-ATIS	AUSTIN APP CON	AUSTIN TOWER	GND CON	CLNC DEL	CPDLC
124.4	127.225 317.65 (EAST) 120.875 270.25 (SOUTH) 119.0 370.85 (WEST)	121.0 281.5	121.9 348.6	125.5 263.0	

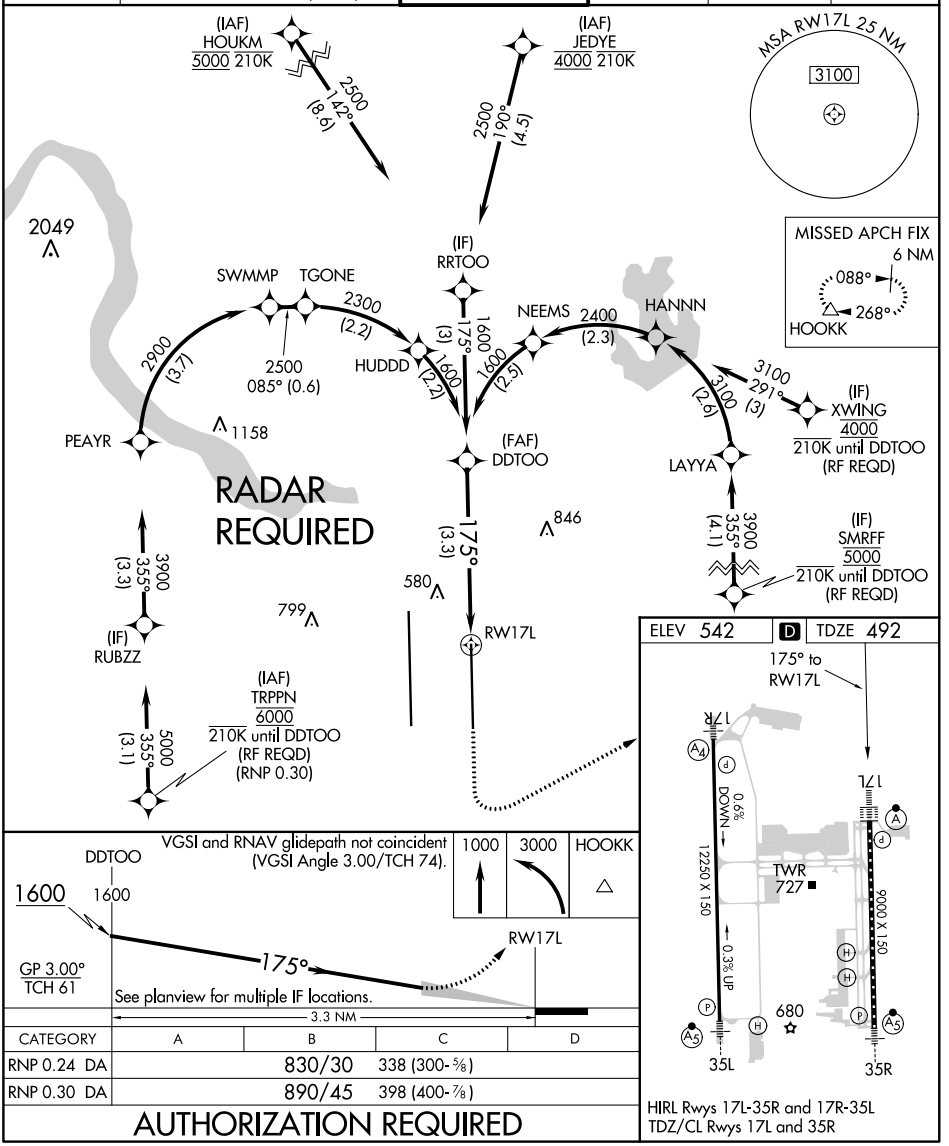

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

1000	3000	HOOKK
		△

CATEGORY	A	B	C	D
RNP 0.24 DA		830/30	338 (300-⅝)	
RNP 0.30 DA		890/45	398 (400-⅞)	

AUTHORIZATION REQUIRED

SC-3, 18 JUN 2020 to 16 JUL 2020
SC-3, 18 JUN 2020 to 16 JUL 2020