

WAAS CH <b>78437</b> <b>W35B</b>	APP CRS <b>355°</b>	Rwy ldg TDZE Apt Elev	<b>5001</b> <b>1275</b> <b>1300</b>
--	------------------------	-----------------------------	---



# RNAV (GPS) RWY 35L

WILEY POST (PWA)



**ASR** DME/DME RNP-0.3 NA. VDP NA when using Will Rogers World altimeter setting. When local altimeter setting not received, use Will Rogers World altimeter setting and increase all MDA 40 feet; increase LP Cat C/D visibility 1/8 mile and Circling Cat C 1/4 mile.

**MISSED APPROACH:** Climb to 1700 then climbing left turn to 3400 direct IFI VORTAC and hold.

ATIS <b>128.725</b>	OKE CITY APP CON <b>124.6 266.8</b>	WILEY POST TOWER ★ <b>126.9(CTAF) 306.9</b>	GND CON <b>121.7</b>	UNICOM <b>122.95</b>
------------------------	--	--	-------------------------	-------------------------

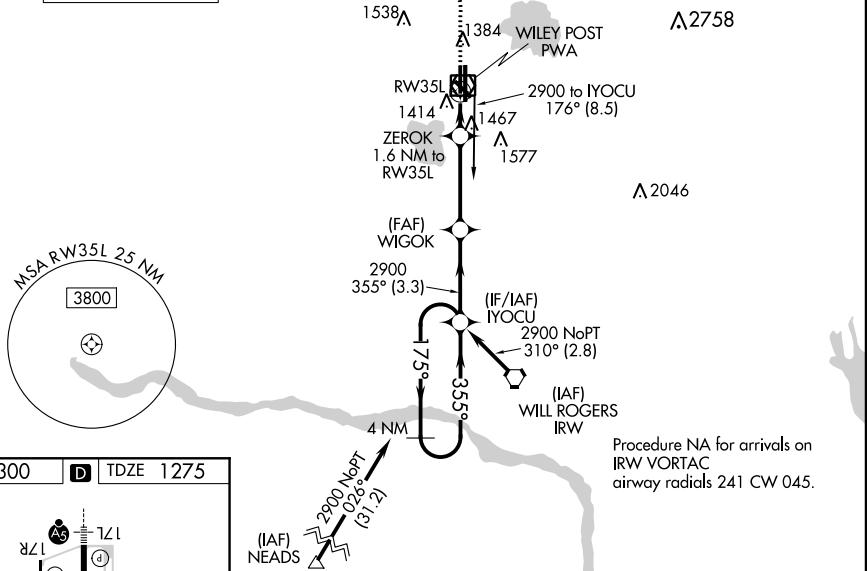

ELEV 1300	<b>D</b>	TDZE 1275
-----------	----------	-----------

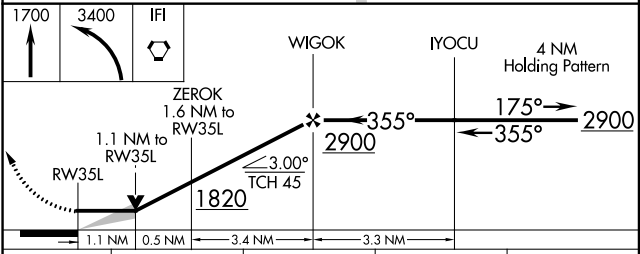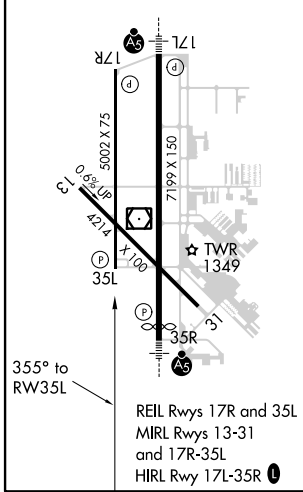

CATEGORY		A	B	C	D
LP	MDA	1660-1	385 (400-1)	1660-1/8	385 (400-1/8)
LN	MDA	1720-1	445 (500-1)	1720-1/8	445 (500-1/8)
<b>C</b>	CIRCLING	1780-1	480 (500-1)	1880-1/2 580 (600-1/2)	1880-2 580 (600-2)

SC-1, 16 JUL 2020 to 13 AUG 2020

SC-1, 16 JUL 2020 to 13 AUG 2020