

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>69338</b><br><b>W02A</b> | APP CRS<br><b>023°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>3604</b><br><b>591</b><br><b>597</b> |
|--|------------------------|-----------------------------|---|



# RNAV (GPS) RWY 2

GARY/CHICAGO INTL (GYY)


**▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 54°C (130°F).  
**▲** DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Chicago Midway Intl altimeter setting and increase LPV DA to 947 feet, LNAV/VNAV DA to 977 feet, all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1/8 mile, and Circling Cat C and D visibility 1/4 mile. Baro-VNAV NA when using Chicago Midway Intl altimeter setting.

**MISSED APPROACH:**  
Climb to 2000 then climbing right turn to 2800 direct KILPY and hold.

|                        |                                       |                                       |                         |
|------------------------|---------------------------------------|---------------------------------------|-------------------------|
| ATIS<br><b>134.575</b> | CHICAGO APP CON<br><b>133.1 285.6</b> | GARY TOWER ★<br><b>125.6 (CTAF) 0</b> | GND CON<br><b>121.9</b> |
|------------------------|---------------------------------------|---------------------------------------|-------------------------|

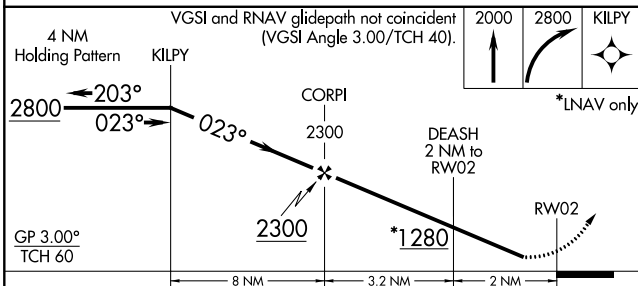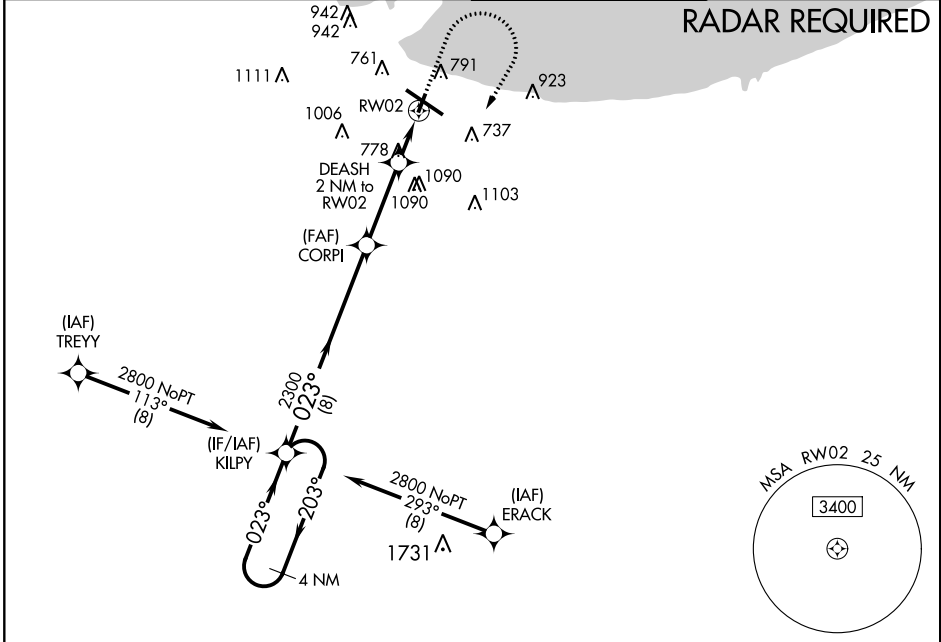

| CATEGORY          | A                         | B                          | C                          | D                          |
|-------------------|---------------------------|----------------------------|----------------------------|----------------------------|
| LPV DA            | 901-1 310 (400-1)         |                            |                            |                            |
| LNAV/VNAV DA      | 931-1 1/8 340 (400-1 1/8) |                            |                            |                            |
| LNAV MDA          | 1040-1 449 (500-1)        | 1040-1 3/8 449 (500-1 3/8) |                            |                            |
| <b>C</b> CIRCLING | 1140-1 543 (600-1)        | 1180-1 583 (600-1)         | 1400-2 1/4 803 (900-2 1/4) | 1420-2 3/4 823 (900-2 3/4) |

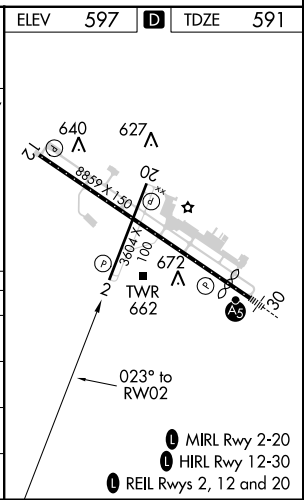

EC-2, 16 JUL 2020 to 13 AUG 2020

EC-2, 16 JUL 2020 to 13 AUG 2020