

LOC I-BFD 108.3	APP CRS 325°	Rwy Idg TDZE Apt Elev	6306 2120 2143
---------------------------	------------------------	-----------------------------	---


ILS or LOC RWY 32

BRADFORD RGNL (BFD)



NA Inop table does not apply to S-ILS 32 and S-LOC 32 Cats A/B. For inop MALSR, increase S-LOC 32 Cats C/D visibility to 1½ mile. When local altimeter setting not received, use St. Marys altimeter setting and increase DA to 2455 feet and all MDA 100 feet. For inop MALSR, when using St. Marys altimeter setting, increase S-ILS 32 all Cats visibility to 1½ mile and S-LOC 32 Cats C/D visibility to 1½ mile.

MALSR MISSED APPROACH: Climb to 4000 then right turn direct BFD VOR/DME and hold.

ASOS 133.825	CLEVELAND CENTER 124.325 353.85	UNICOM 123.075 (CTAF)
------------------------	---	---------------------------------

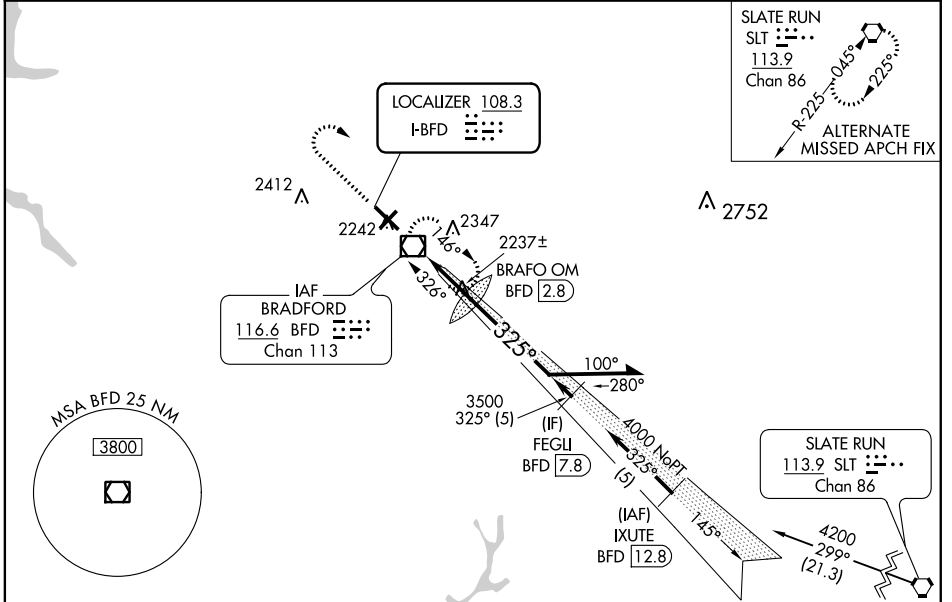

ELEV 2143	D	TDZE 2120
-----------	----------	-----------

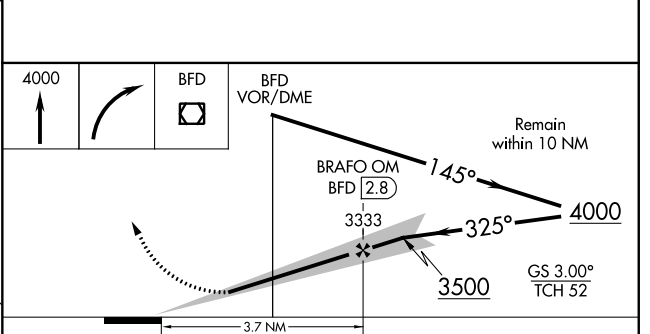

CATEGORY	A	B	C	D
S-ILS 32		2370-1	250 (300-1)	
S-LOC 32		2520-1	400 (400-1)	
CIRCLING	2620-1	477 (500-1)	2620-1½ 477 (500-1½)	2700-2 557 (600-2)

NE-4, 16 JUL 2020 to 13 AUG 2020

NE-4, 16 JUL 2020 to 13 AUG 2020