WAAS CH 86915 W07A	APP CRS 071°	Rwy ldg 5900 TDZE 52 Apt Elev 52

RNAV (GPS) RWY 7

WILEY POST-WILL ROGERS MEMORIAL (BRW)(PABR)

-42°C

DME/DME RNP- 0.3 NA. Inoperative table does not apply to LPV all Cats. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to RVR 4500. When local altimeter setting not received, use Atqasuk altimeter setting, increase all DA 124 feet, LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile, increase all MDA 140 feet and LNAV Cat C/D visibilities ½ mile, and Circling Cat C/D visibilities ¼ mile. For inoperative MALSR when using Atqasuk altimeter setting, increase LNAV/VNAV all Cats and LNAV Cat C/D visibilities to 1⅜ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (118°F). VDP and Baro-VNAV NA when using Atqasuk altimeter setting. Circling NA for Cat A north of Rwy 7-25.

MALSR

MISSED APPROACH: Climb to 2000 direct ASUKY and hold.

AFIS	ANCHORAGE CENTER	BARROW RADIO
132.15	135.3 239.25	123.6 (CTAF) L

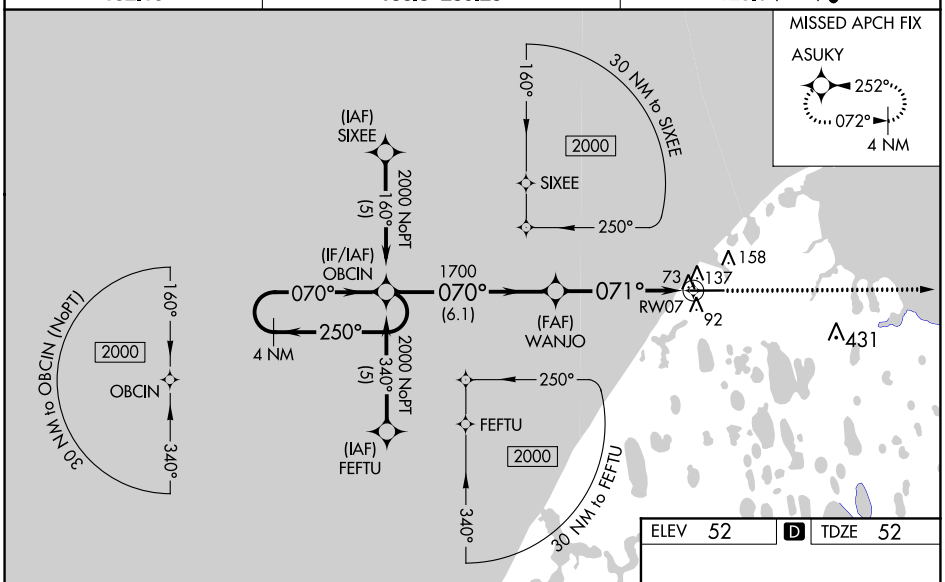

ELEV 52	D	TDZE 52

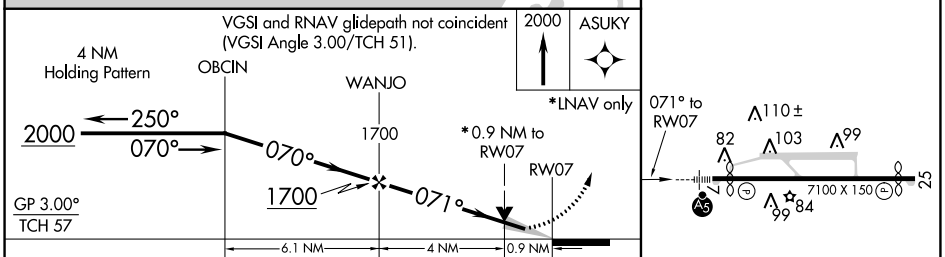

CATEGORY	A	B	C	D
LPV DA	302/40 250 (300-¾)			
LNAV/VNAV DA	350/40 298 (300-¾)			
LNAV MDA	400/40 348 (400-¾)			
CIRCLING	420-1 368 (400-1)	520-1 468 (500-1)	520-1½ 468 (500-1½)	620-2 568 (600-2)

REIL Rwy 25 L
HIRL Rwy 7-25 L

AK, 16 JUL 2020 to 10 SEP 2020

AK, 16 JUL 2020 to 10 SEP 2020