WAAS CH 48809 W29A	APP CRS 288°	Rwy ldg 5001 TDZE 790 Apt Elev 790

RNAV (GPS) RWY 29
FULTON COUNTY (RCR)

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47° (116°F). When local altimeter setting not received, use Goshen altimeter setting and increase all DA 81 feet and all MDA 100 feet, increase LPV all Cats, LNAV Cats C and D, Circling Cat C visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile. Baro-VNAV and VDP NA when using Goshen altimeter setting.

NA

MISSED APPROACH: Climb to 3000 direct KOMEC and hold.

AWOS-3	SOUTH BEND APP CON★	UNICOM
118.775	132.05 257.8	122.7 (CTAF) L

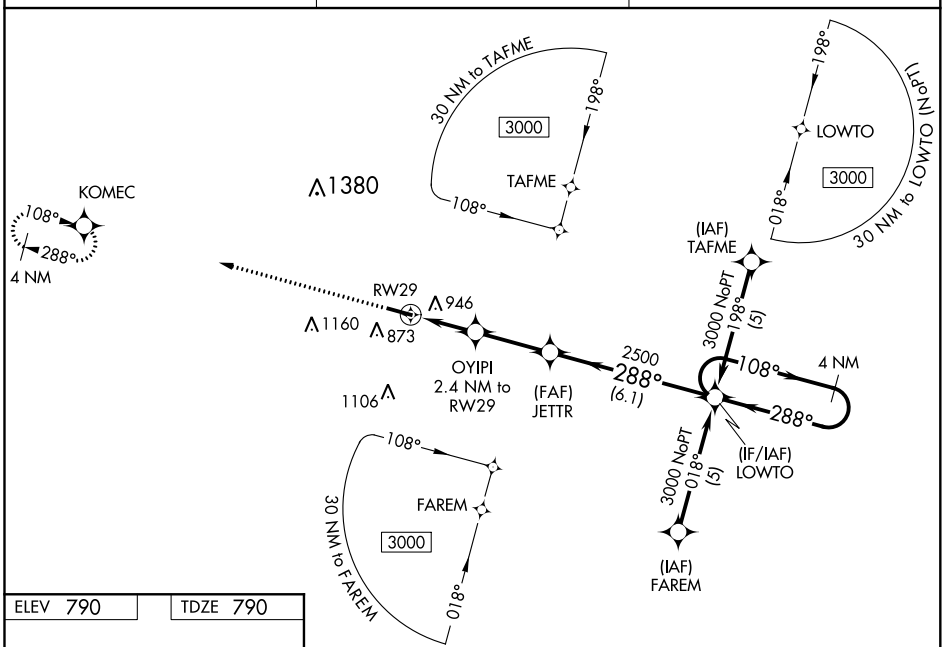

ELEV 790	TDZE 790

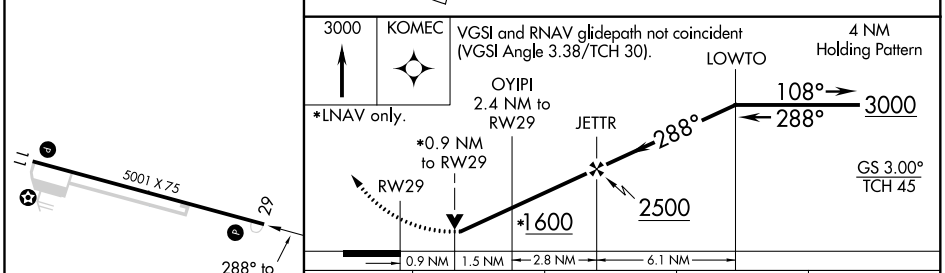

CATEGORY	A	B	C	D
LPV DA	1127-1¼ 337 (400- 1¼)			
LNAV/VNAV DA	1244-1½ 454 (500- 1½)			
LNAV MDA	1200-1 410 (500-1)		1200-1¼ 410 (500-1¼)	
CIRCLING	1280-1 490 (500-1)	1360-1 570 (600-1)	1360-1½ 570 (500-1½)	1360-2 570 (600-2)

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L

EC-2, 16 JUL 2020 to 13 AUG 2020
EC-2, 16 JUL 2020 to 13 AUG 2020