

APP CRS	Rwy Idg	9000
275°	TDZE	998
	Apt Elev	1026

RNAV (RNP) Z RWY 28


HARTSFIELD-JACKSON ATLANTA INTL (ATL)

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrival from RODNN NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4000 and RNP 0.30 DA all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA	ATLANTA TOWER				ALL	GND CON	ALL
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L) (9L-27R,9R-27L) 10-28
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9 121.75 121.65 254.4


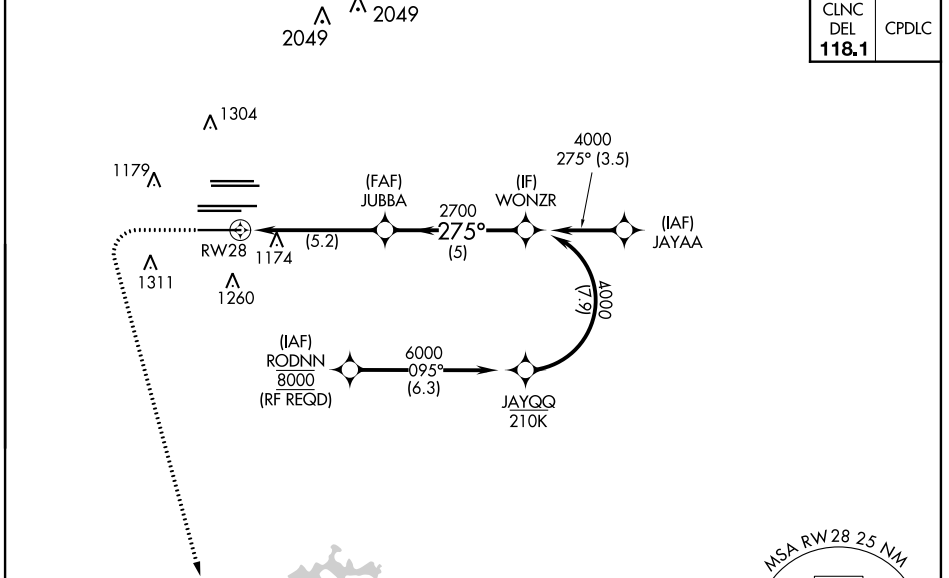


SE-4, 10 SEP 2020 to 08 OCT 2020

SE-4, 10 SEP 2020 to 08 OCT 2020

ELEV 1026 **D** TDZE 998

HIRL all Rwy
TDZ/CL Rwy 8L, 9R, 10, 26R,
27L and 28



1500	3000	SCARR	
↑	↖	△	
RW28		JUBBA 2700	WONZR 4000
↖ 275°		↖ 2700	GP 3.00° TCH 57
5.2 NM		5 NM	
CATEGORY	A	B	C D
RNP 0.11 DA		1248/24	250 (300-½)
RNP 0.30 DA		1295/24	297 (300-½)
AUTHORIZATION REQUIRED			