

WAAS CH 77825 W04A	APP CRS 044°	Rwy Idg TDZE Apt Elev	6001 279 279
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 4

WALNUT RIDGE RGNL (A.R.G)


⚠ Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1/4 mile and LNAV Cat C and D visibility 1/8 mile.

MALSF
 **MISSED APPROACH:**
 Climb to 2700 direct ESEGE and hold.

AWOS-3PT 135.925	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

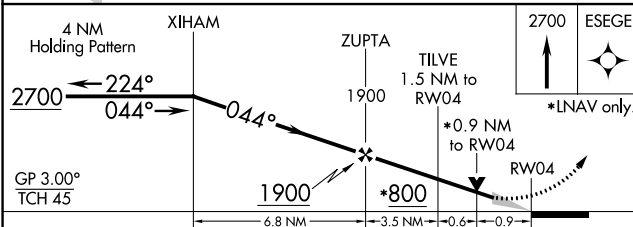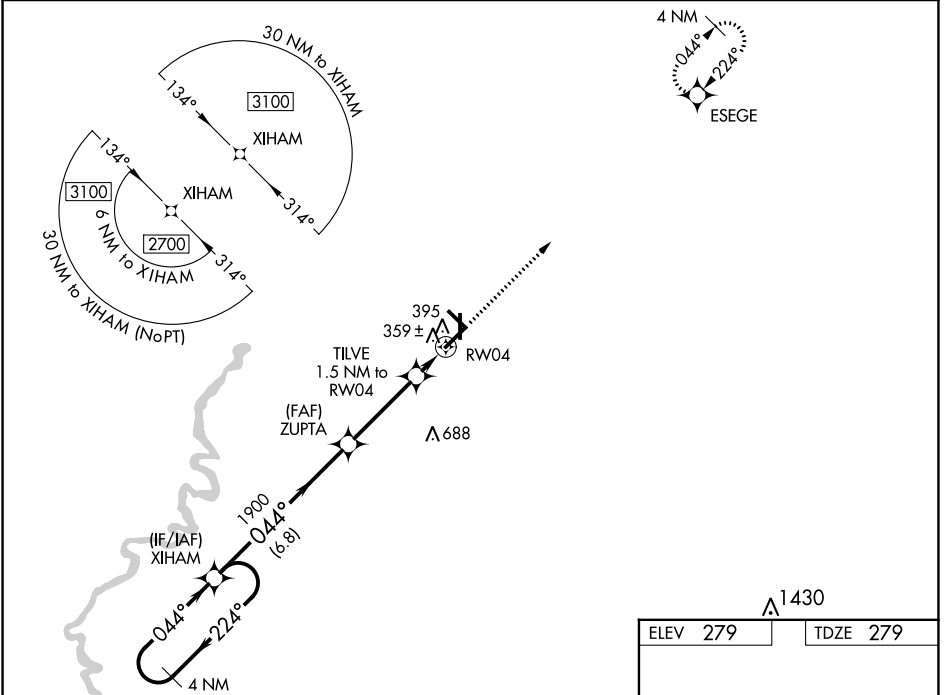

CATEGORY	A	B	C	D
LPV DA		529-3/4	250 (300-3/4)	
LNAV/VNAV DA		529-3/4	250 (300-3/4)	
LNAV MDA		620-1	341 (400-1)	
CIRCLING	760-1	481 (500-1)	760-1 1/2 481 (500-1 1/2)	840-2 561 (600-2)

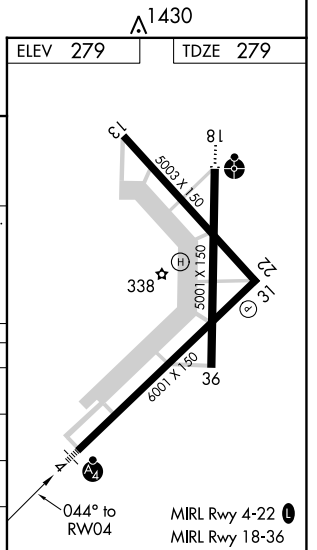

SC-1, 10 SEP 2020 to 08 OCT 2020

SC-1, 10 SEP 2020 to 08 OCT 2020